Service
Service
Service

7638

ServiceManual

Contents **Page**

Published by Philips Consumer Electronics Subject to modification 2004 Dec 08

IMPORTANT SAFETY NOTICE

Proper service and repair is important to the safe, reliable operation of all Philips Consumer Electronics Company** Equipment. The service procedures recommended by Philips and described in this service manual are effective methods of performing service operations. Some of these service operations require the use of tools specially designed for the purpose. The special tools should be used when and as recommended.

It is important to note that this manual contains various **CAUTIONS** and **NOTICES** which should be carefully read in order to minimize the risk of personal injury to service personnel. The possibility exists that improper service methods may damage the equipment. It also is important to understand that these **CAUTIONS** and **NOTICES ARE NOT EXHAUSTIVE**. Philips could not possibly know, evaluate and advise the service trade of all conceivable ways in which service might be done, or of the possible hazardous consequences of each way. Consequently, Philips has not undertaken any such broad evaluation. Accordingly, a servicer who uses a service procedure or tool which is not recommended by Philips must first satisfy himself thoroughly that neither his safety nor the safe operation of the equipment will be jeopardized by the service method selected.

** Hereafter throughout this manual, Philips Consumer Electronics Company will be referred to as Philips.

WARNING

Critical components having special safety characteristics are identified with a ⚠ or "S" by the Ref. No. in the parts list and enclosed within a broken line* (where several critical components are grouped in one area) along with the safety symbol ⚠ on the schematics or exploded views. Use of substitute replacement parts which do not have the same specified safety characteristics may create shock, fire, or other hazards. Under no circumstances should the original design be modified or altered without written permission from Philips. Philips assumes no liability, express or implied, arising out of any unauthorized modification of design. Servicer assumes all liability.

*** Broken Line ____ _ ____ _ ____ _ ____**

FIRE AND SHOCK HAZARD

1. Be sure all components are positioned in such a way as to avoid the possibility of adjacent component shorts. This is especially important on those chassis which are transported to and from the service shop.

2. Never release a repaired unit unless all protective devices such as insulators, barriers, covers, strain reliefs, and other hardware have been installed in accordance with the original design.

3. Soldering and wiring must be inspected to locate possible cold solder joints, solder splashes, sharp solder points, frayed leads, pinched leads, or damaged insulation (including the ac cord). Be certain to remove loose solder balls and all other loose foreign particles.

4. Check across-the-line components and other components for physical evidence of damage or deterioration and replace if necessary. Follow original layout, lead length, and dress.

5. No lead or component should touch a receiving tube or a resistor rated at 1 watt or more. Lead tension around protruding metal surfaces or edges must be avoided.

6. Critical components having special safety characteristics are identified with an **'S'** by the Ref. No. in the parts list and enclosed within a broken line* (where several critical components are grouped in one area) along with the safety symbol ⚠ on the schematic diagrams and /or exploded views.

7. When servicing any unit, always use a separate isolation transformer for the chassis. Failure to use a separate isolation transformer may expose you to possible shock hazard, and may cause damage to servicing instruments.

8. Many electronic products use a polarized ac line cord (one wide pin on the plug). Defeating this safety feature may create a potential hazard to the servicer and the user. Extension cords which do not incorporate the polarizing feature should never be used.

9. After reassembly of the unit, always perform an ac leakage test or resistance test from the line cord to all exposed metal parts of the cabinet. Also, check all metal control shafts (with knobs removed), antenna terminals, handles, screws, etc., to be sure the unit may be safely operated without danger of electrical shock.

*** Broken line ____ _ ____ _ ____ _ ____**

LEAKAGE CURRENT COLD CHECK

1. Unplug the ac line cord and connect a jumper between the two prongs of the plug.

2. Turn on the power switch.

3. Measure the resistance value between the jumpered ac plug and all exposed cabinet parts of the receiver, such as screw heads, antennas, and control shafts. When the exposed metallic part has a return path to the chassis, the reading should be between 1 megohm and 5.2 megohms. When the exposed metal does not have a return path to the chassis, the reading must be infinity. Remove the jumper from the ac line cord.

LEAKAGE CURRENT HOT CHECK

1. Do not use an isolation transformer for this test. Plug the completely reassembled receiver directly into the ac outlet.

2. Connect a 1.5k, 10W resistor paralleled by a 0.15uF. capacitor between each exposed metallic cabinet part and a good earth ground such as a water pipe, as shown below.


3. Use an ac voltmeter with at least 5000 ohms/volt sensitivity to measure the potential across the resistor.

4. The potential at any point should not exceed 0.75 volts. A leakage current tester may be used to make this test; leakage current must not exceed 0.5mA. If a measurement is outside of the specified limits, there is a possibility of shock hazard. The receiver should be repaired and rechecked before returning it to the customer.

5. Repeat the above procedure with the ac plug reversed. (Note: An ac adapter is necessary when a polarized plug is used. Do not defeat the polarizing feature of the plug.)

OR

With the instrument completely reassembled, plug the ac line cord directly into a 120Vac outlet. (Do not use an isolation transformer during this test.) Use a leakage current tester or a metering system that complies with American National Standards Institute (ANSI) C101.1 Leakage Current for Appliances and Underwriters Laboratories (UL) 1410, (50.7). With the instrument ac switch first in the on position and then in the off position, measure from a known earth ground (metal water pipe, conduit, etc.) to all exposed metal parts of the instrument (antennas, handle brackets, metal cabinet, screw heads, metallic overlays, control shafts, etc.), especially any exposed metal parts that offer an electrical return path to the chassis. Any current measured must not exceed 0.5mA. Reverse the instrument power cord plug in the outlet and repeat the test. See the graphic below.

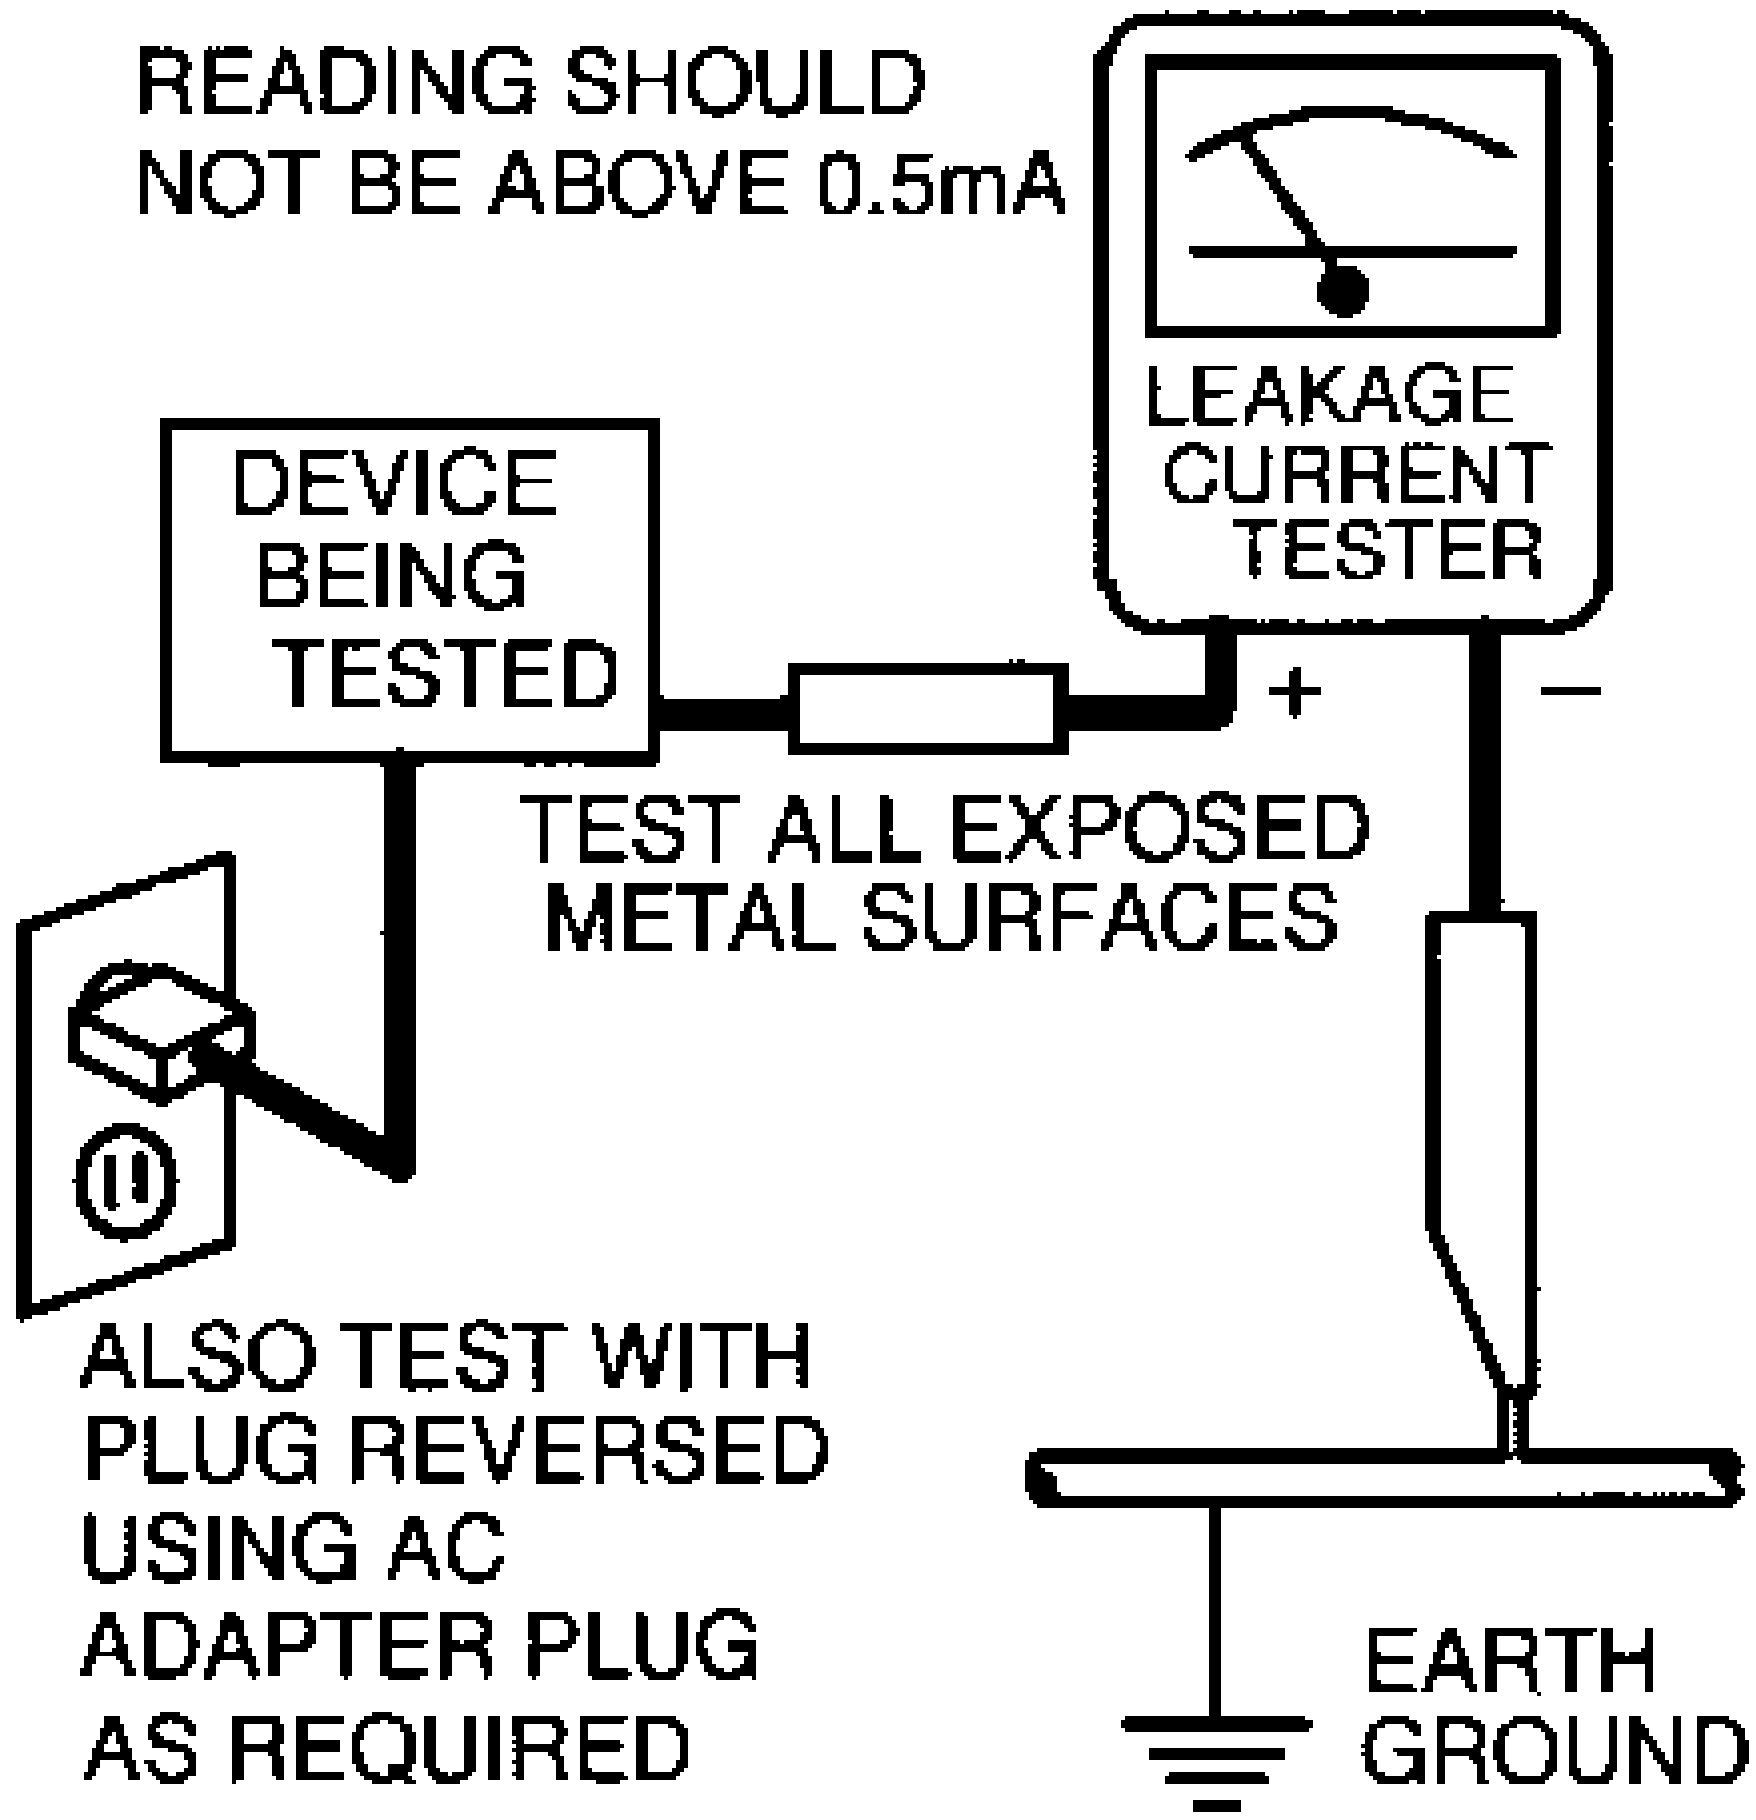
READING SHOULD
NOT BE ABOVE 0.5mA
LEAKAGE
CURRENT
TESTER
DEVICE
BEING
TESTED
+
–
TEST ALL EXPOSED
METAL SURFACES
ALSO TEST WITH
PLUG REVERSED
USING AC
ADAPTER PLUG
AS REQUIRED
EARTH
GROUND

TV SAFETY NOTES

SAFETY CHECKS

After the original service problem has been corrected, a complete safety check should be made. Be sure to check over the entire set, not just the areas where you have worked. Some previous servicer may have left an unsafe condition, which could be unknowingly passed on to your customer. Be sure to check all of the following:

Fire and Shock Hazard
Implosion
X-Radiation
Leakage Current Cold Check
Leakage Current Hot Check
Picture Tube Replacement
Parts Replacement

WARNING: Before removing the CRT anode cap, turn the unit OFF and short the HIGH VOLTAGE to the CRT DAG ground.

SERVICE NOTE: The CRT DAG is not at chassis ground.

IMPLOSION

1. All picture tubes used in current model receivers are equipped with an integral implosion system. Care should always be used, and safety glasses worn, whenever handling any picture tube. Avoid scratching or otherwise damaging the picture tube during installation.

2. Use only replacement tubes specified by the manufacturer.

X-RADIATION

1. Be sure procedures and instructions to all your service personnel cover the subject of X-radiation. Potential sources of X-rays in TV receivers are the picture tube and the high voltage circuits. The basic precaution which must be exercised is to keep the high voltage at the factory recommended level.

2. To avoid possible exposure to X-radiation and electrical shock, only the manufacturer's specified anode connectors must be used.

3. It is essential that the service technician has an accurate HV meter available at all times. The calibration of this meter should be checked periodically against a reference standard.

4. When the HV circuitry is operating properly there is no possibility of an X-radiation problem. High voltage should always be kept at the manufacturer's rated value - no higher - for optimum performance. Every time a color set is serviced, the brightness should be run up and down while monitoring the HV with a meter to be certain that the HV is regulated correctly and does not exceed the specified value. We suggest that you and your technicians review test procedures so that HV and HV regulation are always checked as a standard servicing procedure, and the reason for this prudent routine is clearly understood by everyone. It is important to use an accurate and reliable HV meter. It is recommended that the HV reading be recorded on each customer's invoice, which will demonstrate a proper concern for the customer's safety.

5. When troubleshooting and making test measurements in a receiver with a problem of excessive high voltage, reduce the line voltage by means of a Variac to bring the HV into acceptable limits while troubleshooting. Do not operate the chassis longer than necessary to locate the cause of the excessive HV.

6. New picture tubes are specifically designed to withstand higher operating voltages without creating undesirable X-radiation. It is strongly recommended that any shop test fixture which is to be used with the new higher voltage chassis be equipped with one of the new type tubes designed for this service. Addition of a permanently connected HV meter to the shop test fixture is advisable. The CRT types used in these new sets should never be replaced with any other types, as this may result in excessive X-radiation.

7. It is essential to use the specified picture tube to avoid a possible X-radiation problem.

8. Most TV receivers contain some type of emergency "Hold Down" circuit to prevent HV from rising to excessive levels in the presence of a failure mode. These various circuits should be understood by all technicians servicing them, especially since many hold down circuits are inoperative as long as the receiver performs normally.

PICTURE TUBE REPLACEMENT

The primary source of X-radiation in this television receiver is the picture tube. The picture tube utilized in this chassis is specially constructed to limit X-radiation emissions. For continued X-radiation protection, the replacement tube must be the same type as the original, including suffix letter, or a Philips approved type.

PARTS REPLACEMENT

Many electrical and mechanical parts in Philips television sets have special safety related characteristics. These characteristics are often not evident from visual inspection nor can the protection afforded by them necessarily be obtained by using replacement components rated for higher voltage, wattage, etc. The use of a substitute part which does not have the same safety characteristics as the Philips recommended replacement part shown in this service manual may create shock, fire, or other hazards.

PRODUCT SAFETY GUIDELINES FOR ALL PRODUCTS

CAUTION: Do not modify any circuit. Service work should be performed only after you are thoroughly familiar with all of the following safety checks. Risk of potential hazards and injury to the user increases if safety checks are not adhered to.

USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING.

PREVENTION OF ELECTROSTATIC DISCHARGE (ESD)

Some semiconductor solid state devices can be damaged easily by static electricity. Such components commonly are called Electrostatically Sensitive (ES) Devices, Examples of typical ES devices are integrated circuits and some field-effect transistors and semiconductor "chip" components. The following techniques should be used to help reduce the incidence of component damage caused by electrostatic discharge (ESD).

1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any ESD on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging ESD wrist strap, which should be removed for potential shock reasons prior to applying power to the unit under test.

2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as aluminum foil, to prevent electrostatic charge buildup or exposure of the assembly.

3. Use only a grounded-tip soldering iron to solder or unsolder ES devices.

4. Use only an anti-static solder removal device. Some solder removal devices not classified as "antistatic (ESD protected)" can generate an electrical charge sufficient to damage ES devices.

5. Do not use Freon propelled chemicals. These can generate electrical charges sufficient to damage ES devices.

6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it (most replacement ES devices are packaged with leads electrically shorted together by conductive foam, aluminum foil or comparable conductive material).

7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.

CAUTION: Be sure no power is applied to the chassis or circuit and observe all other safety precautions.

8. Minimize bodily motions when handling unpackaged replacement ES devices. (Otherwise harmless motion such as the brushing together of your clothes fabric or the lifting of your feet from a carpeted floor can generate static electricity (ESD) sufficient to damage an ES device.)

NOTE to CATV system Installer:
This reminder is provided to call the CATV system installer's attention to article 820-22 of the NEC that provides guidelines for proper grounding and, in particular, specifies that the cable ground shall be connected to the grounding system of the building, as close to the point of cable entry as practical.

PRACTICAL SERVICE PRECAUTIONS

IT MAKES SENSE TO AVOID EXPOSURE TO ELECTRICAL SHOCK. While some sources are expected to have a possible dangerous impact, others of quite high potential are of limited current and are sometimes held in less regard.

ALWAYS RESPECT VOLTAGES. While some may not be dangerous in themselves, they can cause unexpected reactions – reactions that are best avoided. Before reaching into the powered color TV set, it is best to test the high voltage insulation. It is easy to do, and is just a good service precaution.

BEFORE POWERING UP THE TV WITH THE BACK OFF (or on a test fixture), attach a clip lead to the CRT DAG ground and to a screwdriver blade that has a well insulated handle. After the TV is powered on and high voltage has developed, probe the anode lead with the blade, starting at the bottom of the High Voltage Transformer (flyback – IFT). Move the blade to within two inches of the connector of the CRT. **IF THERE IS AN ARC, YOU FOUND IT THE EASY WAY, WITHOUT GETTING A SHOCK!** If there is an arc to the screwdriver blade, replace the High Voltage Transformer or the lead, (if removable) whichever is causing the problem.

PICTURE TUBE REPLACEMENT PROCEDURE

Note:
- a. Two (2) people are required to handle this picture tube.
- b. Safety Glasses must be worn during this procedure or whenever directly handling a picture tube.
- c. Take care in each step not to damage the CRT or the cabinet.

1. Remove the Chassis and the CRT Socket Board Module from the cabinet.
2. A furniture pad or blanket should be positioned on the floor to support only the CRT Face. This pad or blanket should be high enough to keep the CRT Face approximately 12 to 14 inches off the floor.
3. Using two people, place the cabinet in a front down position with the CRT Face on the pad or blanket.
4. Place padded blocks under each corner of the cabinet to keep it from rocking.
5. Remove the four screws, at the corners of the CRT.
6. With two people lowering the cabinet to the floor, leave the CRT elevated by the pad or blanket.

Note: Take care not to grasp the neck of the CRT during this procedure, as it is extremely fragile.

7. Two (2) people may then lift the CRT from the cabinet.
8. Remove the degaussing coil from the defective CRT and mount on the replacement. Take care to maintain the exact shape and fit.

To install the new CRT, reverse steps 1 to 7.

Technical Specifications and Connections

Note: Described specifications are valid for the *whole* product range.

Technical Specifications

Reception

Feature	Data
Tuning system	: PLL
Color systems	: NTSC M/N
Sound systems	: BTSC non-DBX
	: BTSC DBX
Channel selections	: 181, full cable
IF picture carrier	: 45.75 MHz
Aerial input	: 75 Ohm, F-type
A/V Connections	: NTSC M/N

Miscellaneous

Audio output:

Feature	Data
Stereo versions	: 2 x 1 W
	: 2 x 3 W
	: 2 x 5 W
	: 2 x 10 W
Mono versions	: 1 x 1 W
	: 1 x 3 W
	: 1 x 4 W
	: 2 x 2 W

Power supply:

Feature	Data
Mains voltage range	: 90 - 140 VAC
Mains frequency	: 60 Hz

Ambient conditions:

Feature	Data
Temperature range	: +5 to +45 deg. C
Maximum humidity	: 90 % R.H.

Power consumption:

Feature	Data
Normal operation	: from 81 W (20”)
	: to 145 W (32”)
Standby	: < 3 W

Connections

Front or Top Control / Front or Side Connections

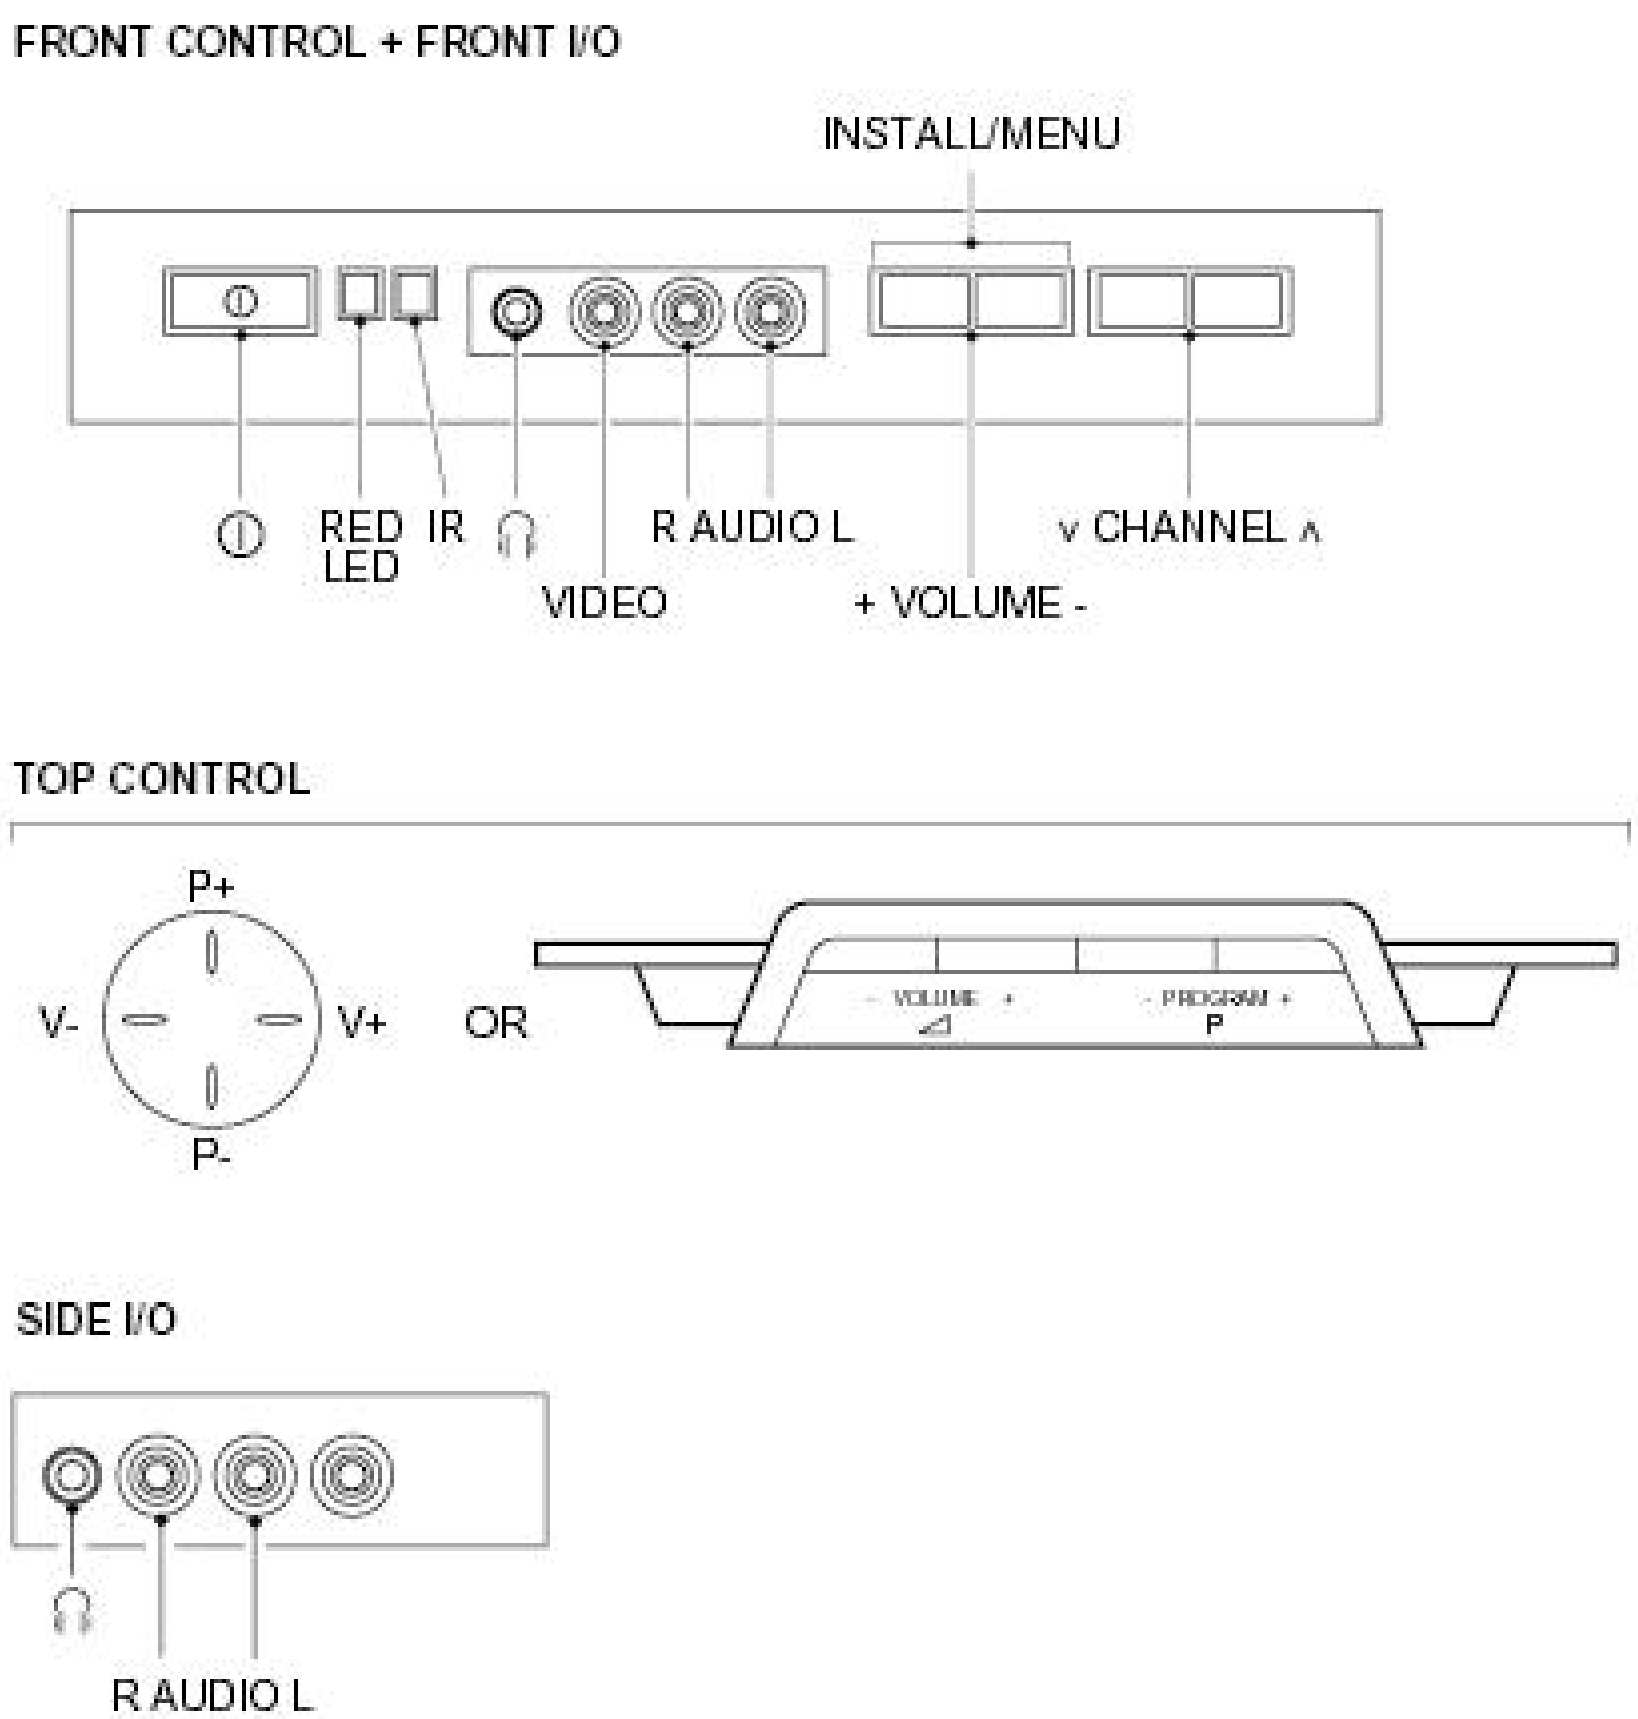


Figure: Front/Top control and Side I/O

Audio / Video In

Connector	Kind	Value	Symbol
1	Video	1 Vpp / 75 Ohm	
2	Audio - L	0.2 Vrms / 10 kOhm	
3	Audio - R	0.2 Vrms / 10 kOhm	
4	Headphone (3.5 mm)	8 - 600 Ohm / 4 mW	

Rear Connections

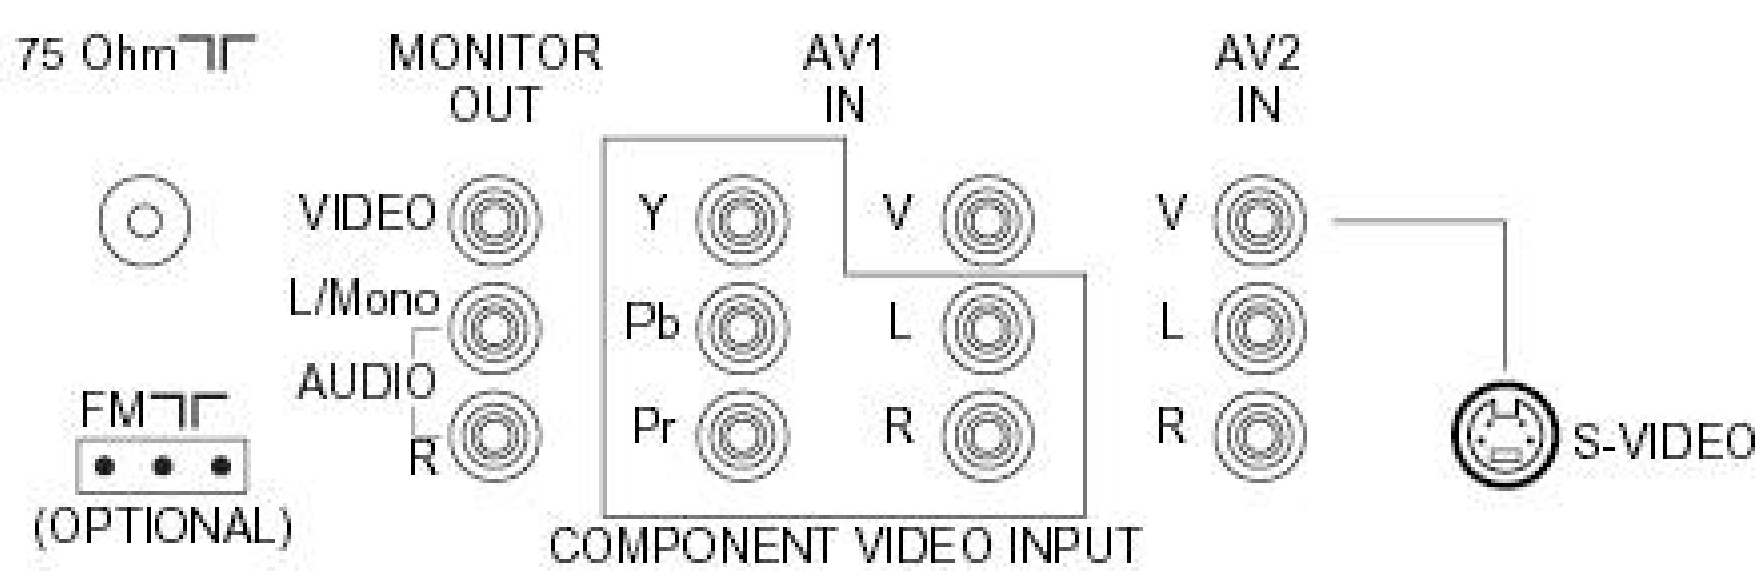


Figure: Rear connections

Monitor Out

Connector	Kind	Value	Symbol
1	Video (CVBS)	1 Vpp / 75 Ohm	
2	Audio - L	0.5 Vrms / 1 kOhm	
3	Audio - R	0.5 Vrms / 1 kOhm	


YUV In

Connector	Kind	Value	Symbol
1	Y	0.7 Vpp / 75 Ohm	
2	U	0.7 Vpp / 75 Ohm	
3	V	0.7 Vpp / 75 Ohm	

AV1 In

Connector	Kind	Value	Symbol
1	Video (CVBS)	1 Vpp / 75 Ohm	
2	Audio - L	0.5 Vrms / 10 kOhm	
3	Audio - R	0.5 Vrms / 10 kOhm	

AV2 In

Connector	Kind	Value	Symbol
1	Video (CVBS)	1 Vpp / 75 Ohm	
2	Audio - L	0.5 Vrms / 10 kOhm	
3	Audio - R	0.5 Vrms / 10 kOhm	

AV2 In (SVHS)

Connector	Kind	Value	Symbol
1	Ground	GND	
2	Ground	GND	
3	Y	1 Vpp / 75 Ohm	
4	C	0.3 Vpp / 75 Ohm	

Mechanical Instructions

Index of this chapter:

1. Set Disassembly
2. Service Positions
3. Assembly/Board Removal
4. Set Re-assembly

Note: Figures below may deviate slightly from the actual product, due to different set designs.

Set Disassembly

1. Remove all screws from the back cover (do not forget the screws that hold the rear connection panel).
2. Pull the back cover backward to remove it.

Service Positions

There are 2 service positions possible.

Family Board without bracket (with integrated 'control').

1. Disconnect the strain relief of the AC power cord.
2. Remove the mono carrier, by pushing the two center clips outward [1]. At the same time pull the panel away from the CRT [2].
3. Disconnect the degaussing coil by removing the cable from (red) connector 0212.
4. Turn the panel 90 degrees counter clockwise [3].
5. Flip the panel 90 degrees [4], with the components toward the CRT.
6. Turn the panel with its rear connections toward the CRT [5].
7. Slide the metal heatsink (near the mains transformer 5520) underneath the right chassis bracket. This secures the panel [6].

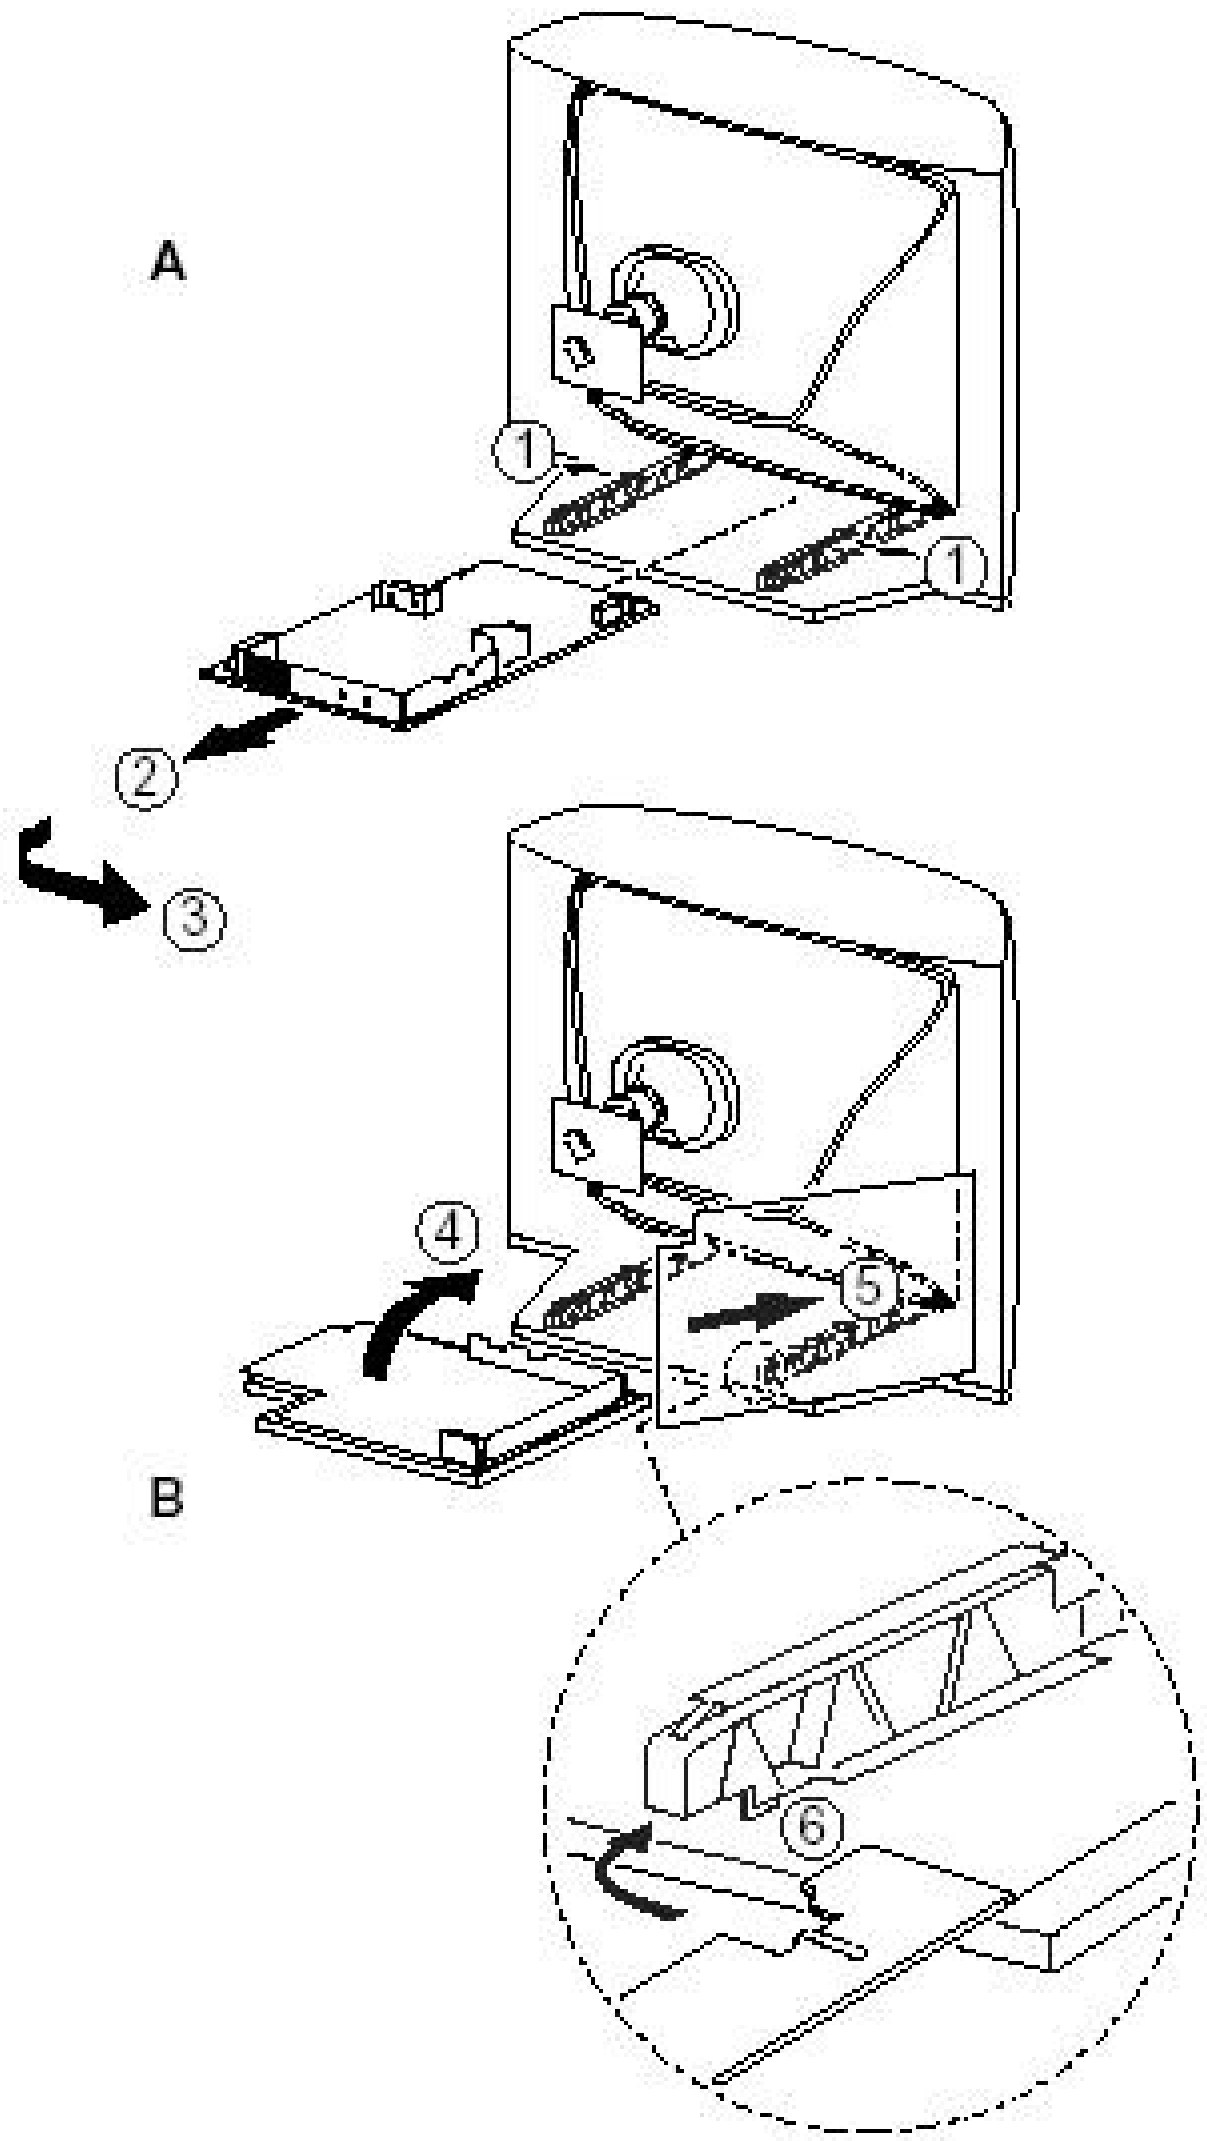


Figure: Service position (1)

Family Board with bracket (with separate 'control').

1. Disconnect the strain relief of the AC power cord.
2. Disconnect the degaussing coil by removing the cable from (red) connector 0212 [1].
3. Remove the panel bracket from the bottom tray, by pulling it backward [2].
4. Turn the chassis tray 90 degrees counter clockwise.
5. Move the panel to the left and flip it 90 degrees [3], with the components toward the CRT.
6. Turn the panel with the rear jack panel toward the CRT.
7. Place the hook of the tray in the hole in the cabinet bottom [4] and slide the panel backward to lock it in the service position.

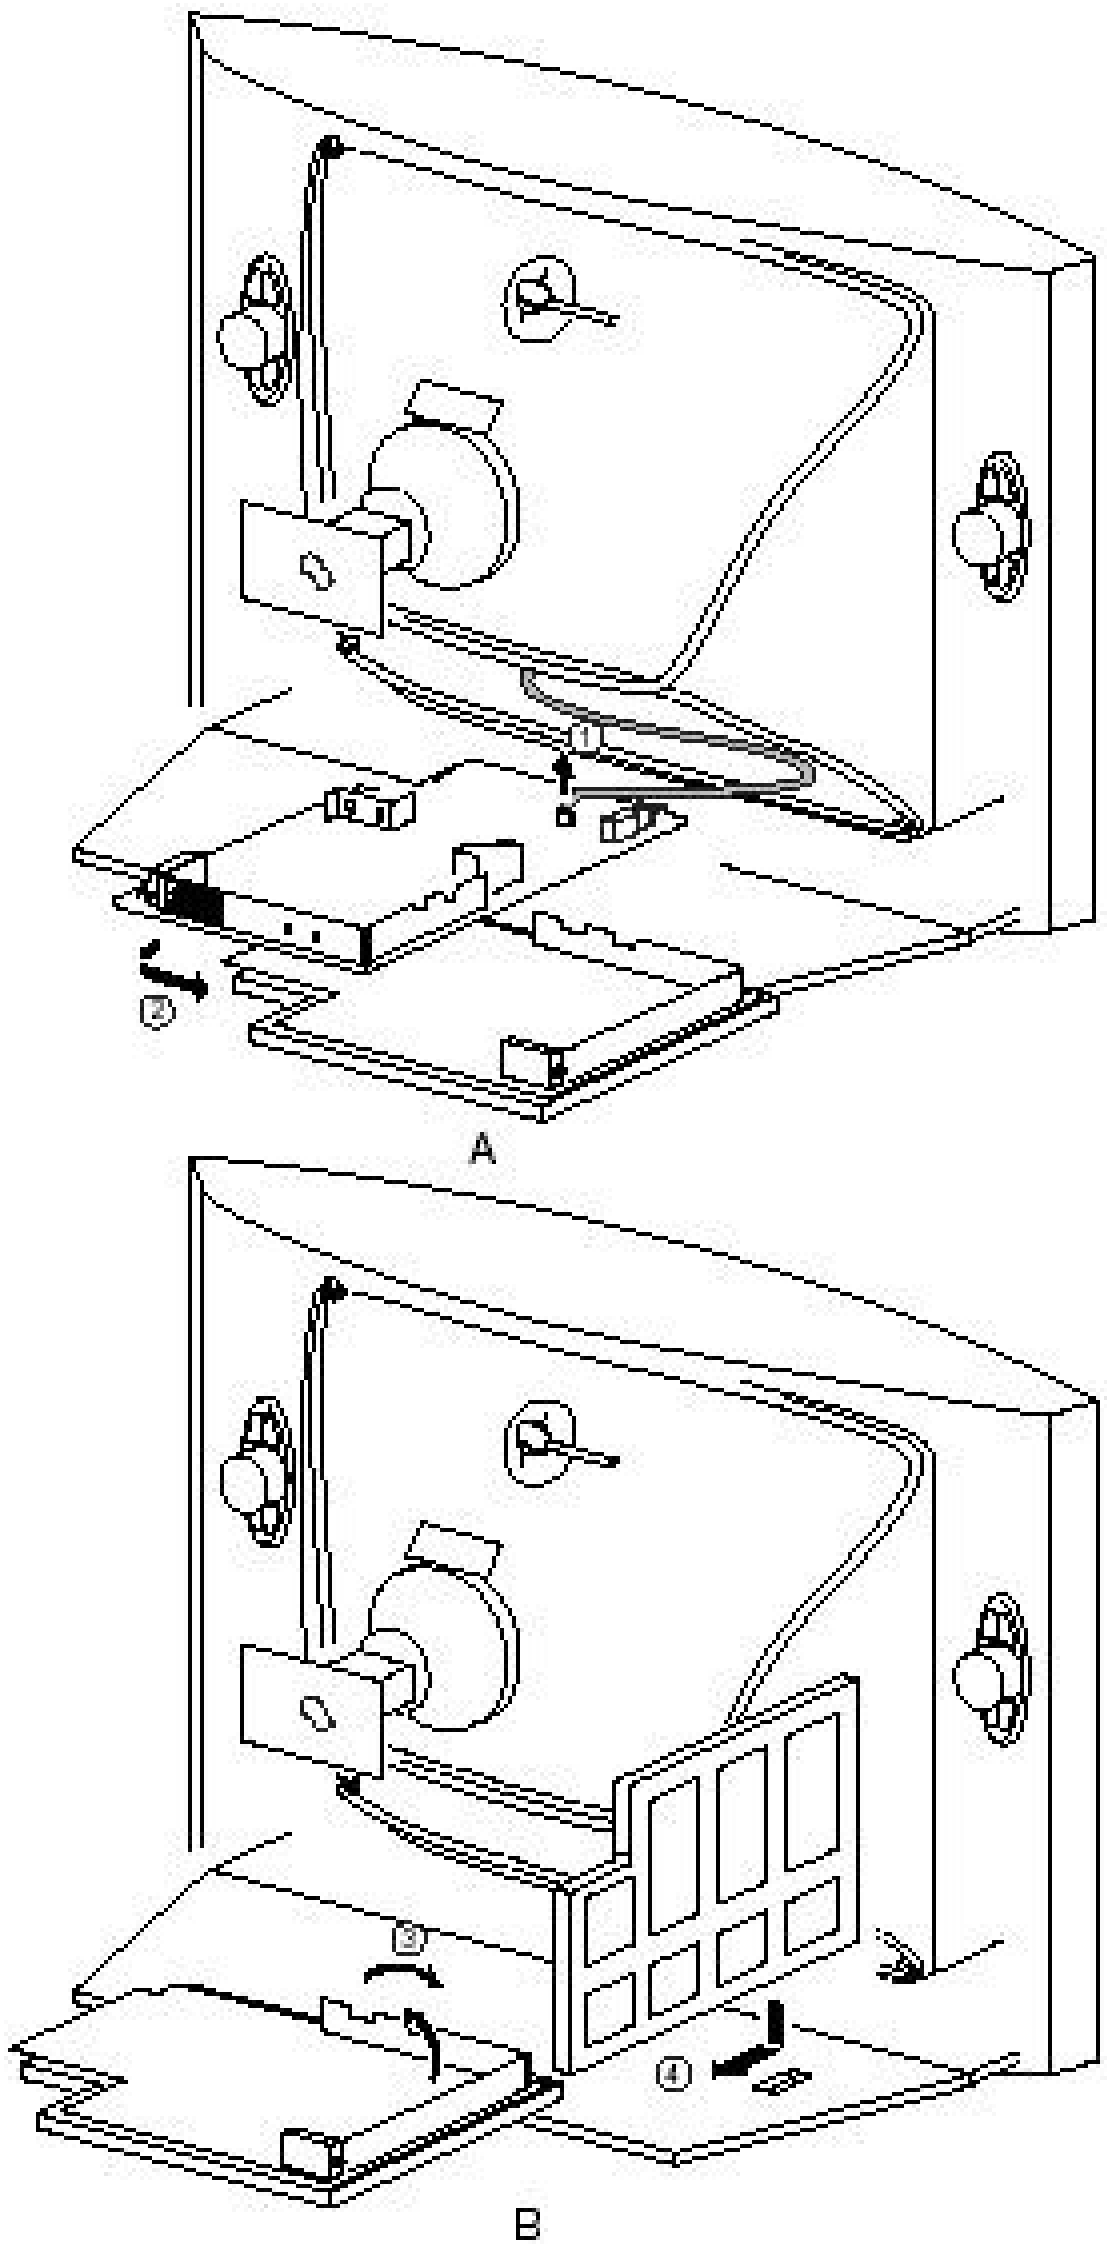


Figure: Service position (2)

Assembly/Board Removal

Comb Filter Assembly/Board (if present)

You can remove the Comb Filter panel from the family board by disconnecting it from connector 1810 (located at the top of the AC power transformer 5520).

Top Control Assembly/Board (if present)

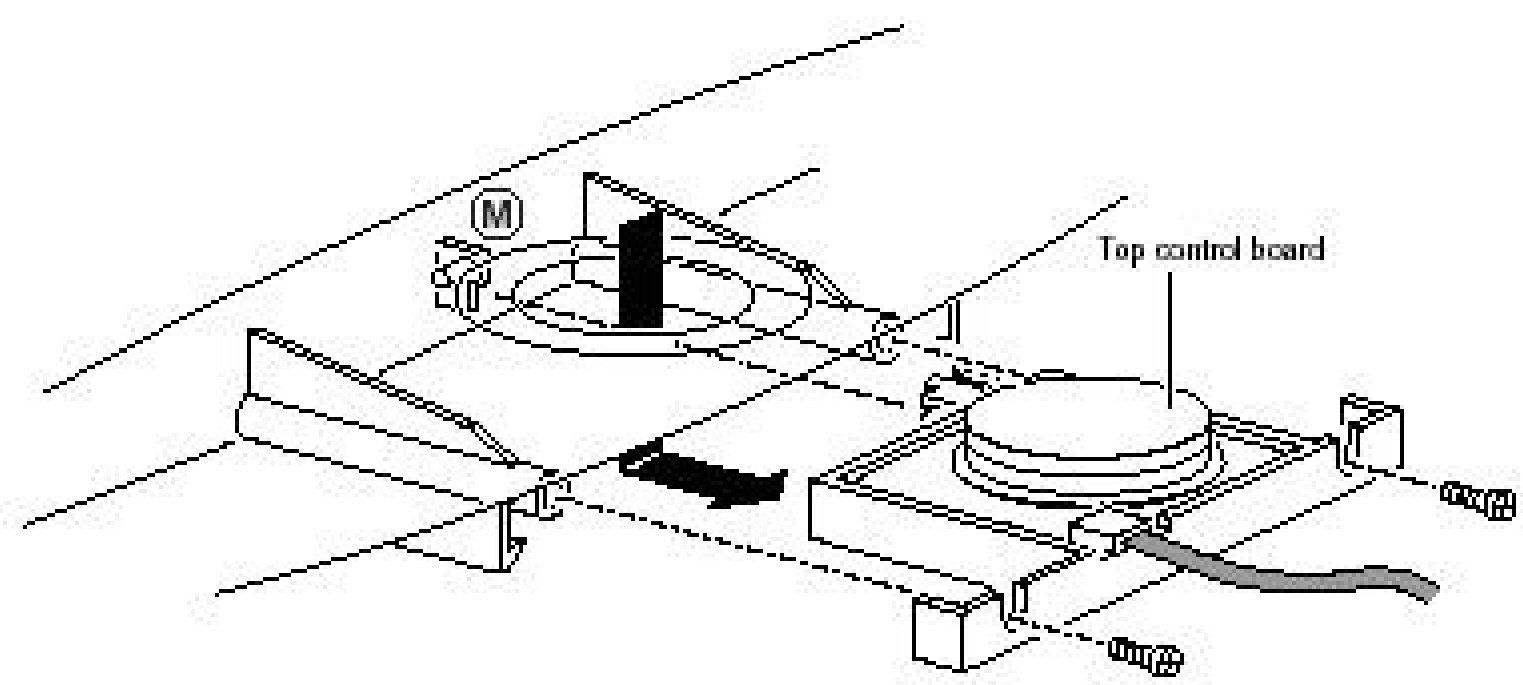


Figure: Top control removal

1. Remove the two screws (if present).
2. Pull the module down and backward (release it from the front hinge [M]).
3. Lift the board from its bracket while releasing the two fixation clamps. The board hinges on the other side.

Front Interface Assembly/Board (if present)

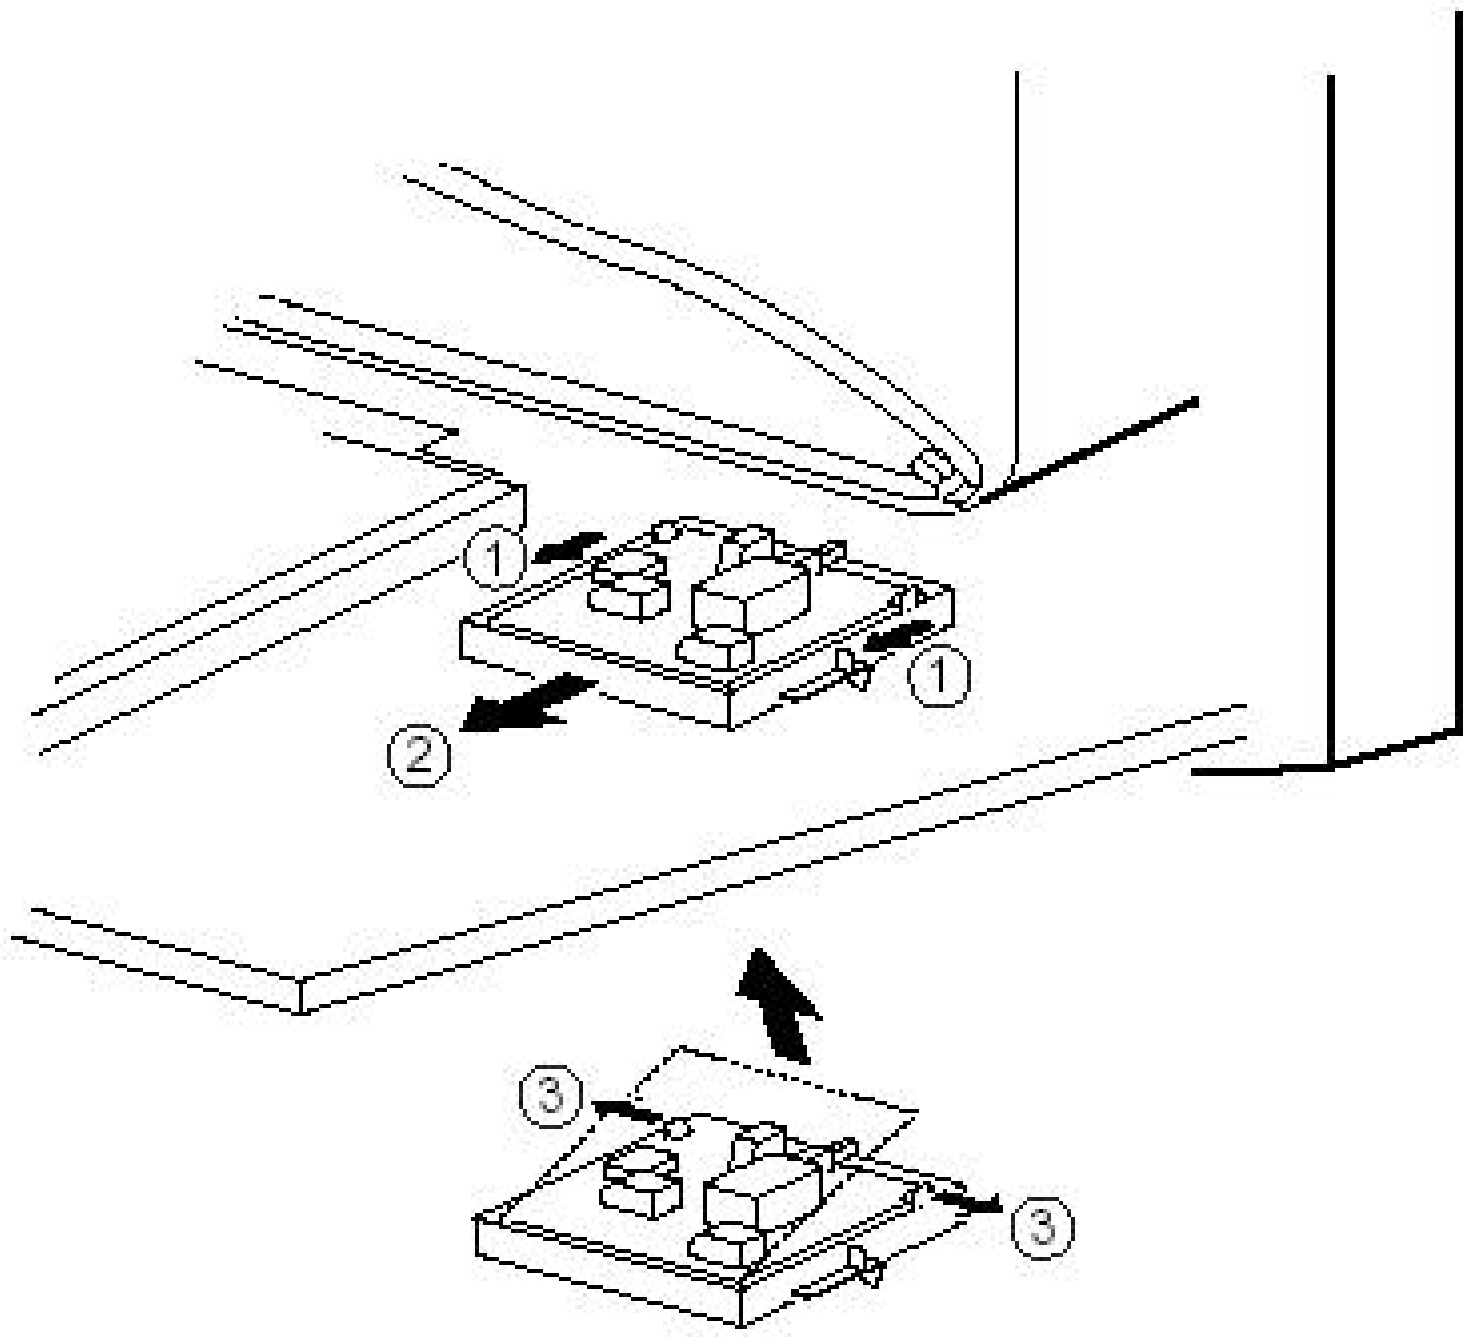


Figure: Front interface removal

1. You can remove the complete module from the bottom plate, by pulling the two clamps upward [1[while sliding the module away from the CRT [2].
2. Release the 2 clamps [3] at the side of the bracket, and lift the board out of the bracket (it hinges at one side).

DAF Assembly/Board (if present)

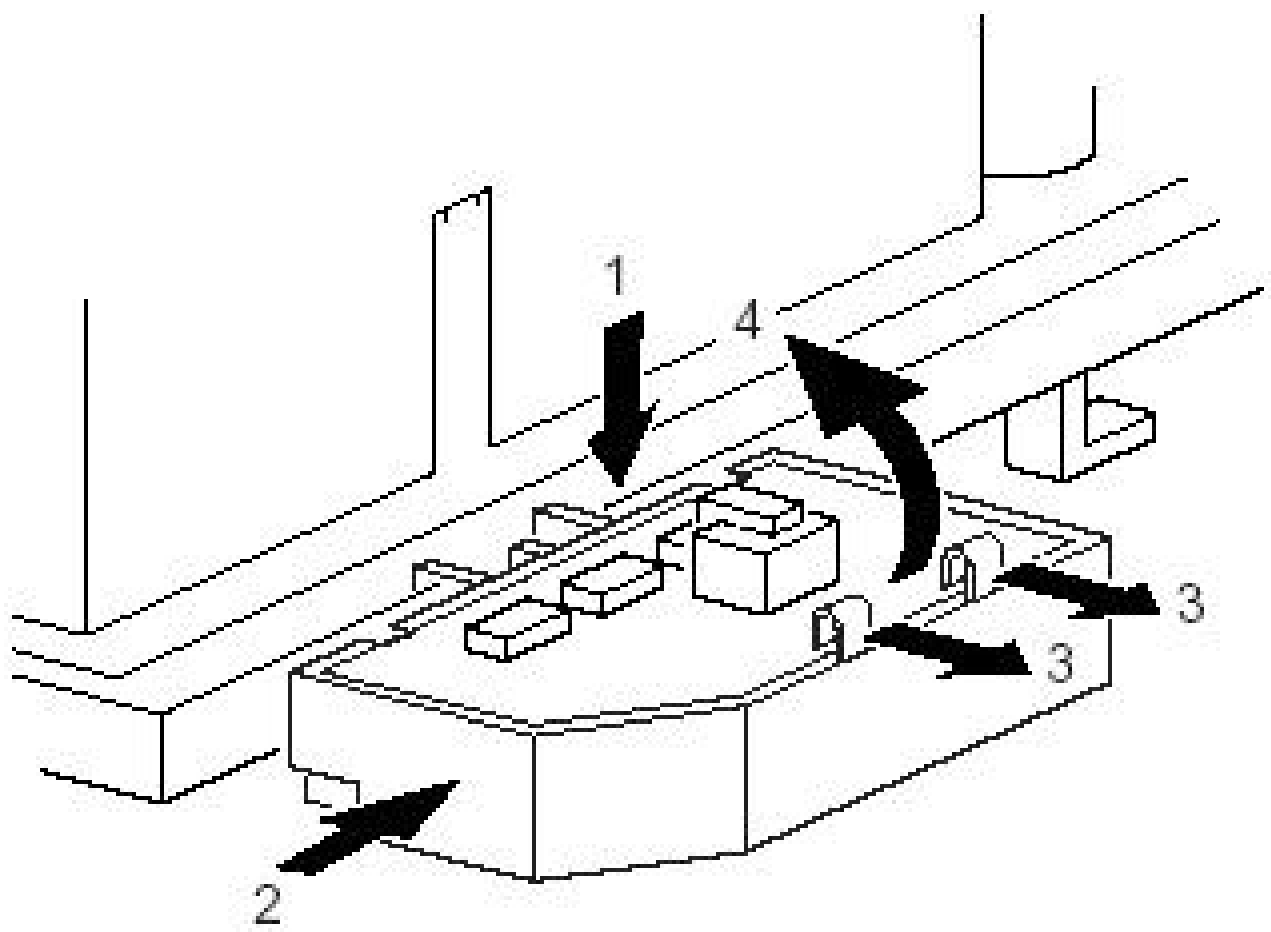


Figure: DAF panel removal

1. You can remove the complete module from the family board bracket, by pressing the clamp downward [1] while sliding the module toward the CRT [2].
2. Release the 2 clamps [3] to lift the board out of the bracket [4].

Side Jack Panel Assembly/Board (if present)

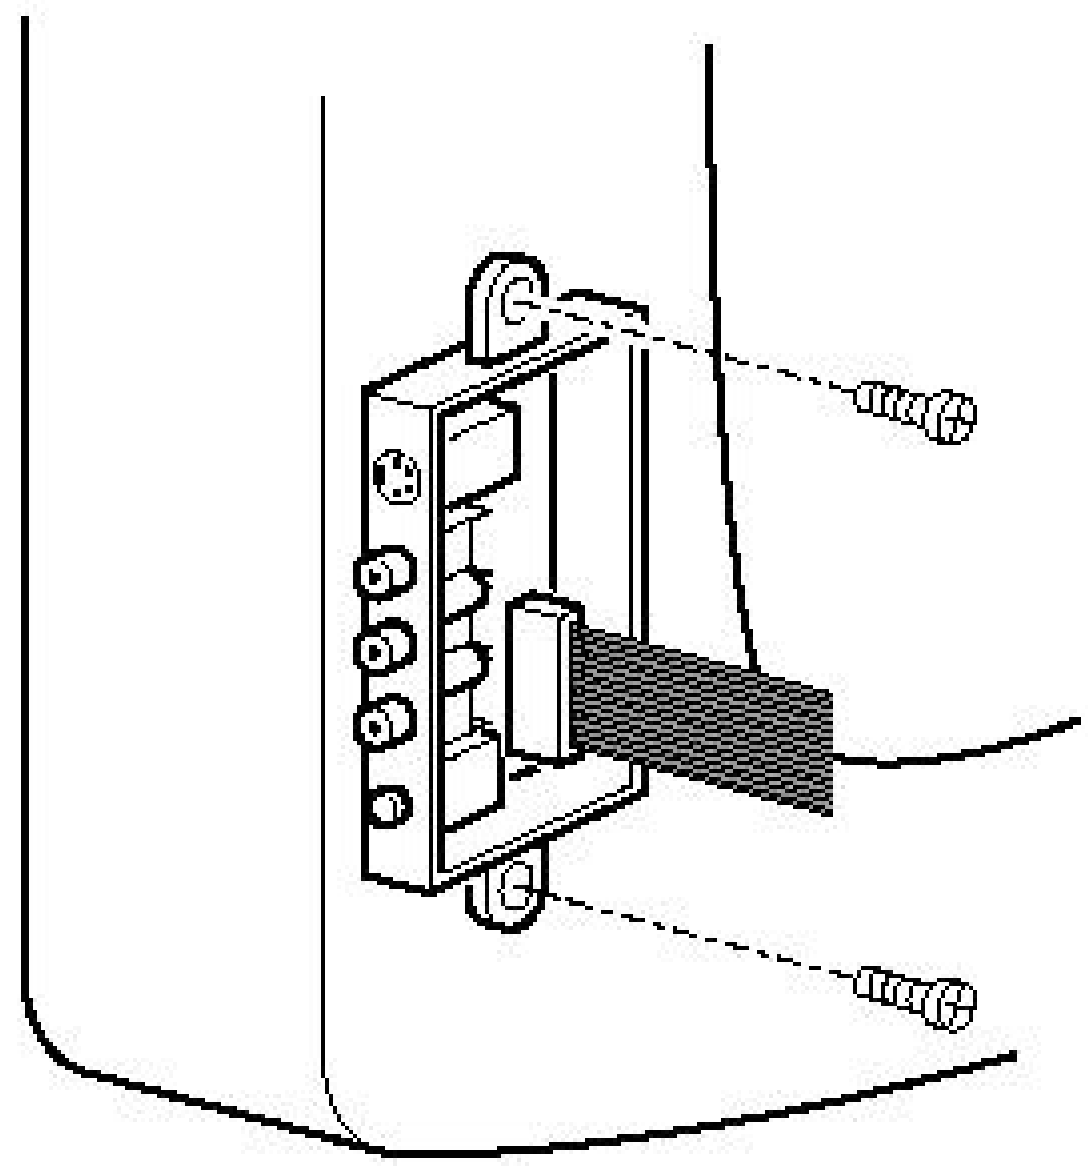


Figure: Side jack panel removal

1. You can remove the complete side jack panel assembly by removing the 2 screws.
2. Release the 2 clamps to lift the board out of the bracket.

Set Re-assembly

Before replacing the back cover, check the following:

1. Be sure the AC power cord is mounted correctly in its guiding brackets.
2. Re-place the strain relief for the AC power cord into the cabinet.
3. Be sure all cables are returned to their original positions.

Service Modes, Error Codes and Fault Finding

Index:

1. Supporting Overviews
2. Test Points.
3. Service Modes.
4. Problems and Solving Tips (related to CSM).
5. ComPair.
6. Error Codes.
7. The Blinking LED Procedure.
8. Protections.
9. Repair Tips.

Supporting Overviews

- Block Diagram
- I2C and Supply Voltage Diagram
- Test point Overview Mono Carrier
- Test point Overview CRT panel

Test Points

The chassis is equipped with test points printed on the circuit board assemblies. These test points refer to the functional blocks:

Table: Test point overview

Test point	Circuit	Diagram
A1-A2-A3-....	Audio processing	A8, A9 / A11
C1-C2-C3-....	Control	A7
F1-F2-F3-....	Frame drive and output	A3
I1-I2-I3-....	Tuner & IF	A4
L1-L2-L3-...	Line drive and output	A2
P1-P2-P3-....	Power supply	A1
S1-S2-S3-....	Synchronization	A6
V1-V2-V3-....	Video processing	A5, B1

The numbering is in a logical sequence for diagnostics. Always start diagnosing within a functional block in the sequence of the relevant test points for that block.
Perform measurements under the following conditions:

- Television set in Service Default Alignment Mode.
- Video input: Color bar signal.
- Audio input: 3 kHz left channel, 1 kHz right channel.

Service Modes

Service Default Alignment Mode (SDAM) offers several features for the service technician, while the Customer Service Mode (CSM) is used for communication between the servicer and the customer.

The L01.1U AC chassis also offers the option of using ComPair, a hardware interface between a computer and the TV chassis. It offers the abilities of structured troubleshooting, error code reading, and software version readout for all L01.1U AC chassis.

Minimum requirements for ComPair: a Pentium processor, a Windows OS, and a CD-ROM drive (see also “ComPair” section).

Table: Software cluster overview

SW Cluster	SW name	UOC type	UOC Diversity	Special Features
L3LUS1	L01US2x.y	TDA9587	64K ROM Size	Stereo dBx, Comb Filter
L3LUN1	L01UN4x.y	TDA9588	64K ROM Size	Stereo non-dBx
L3LUN2	L01UN5x.y	TDA9577	55K ROM Size	Stereo non-dBx
Abbreviations in Software name: U = USA (NAFTA), M = Mono, N = Stereo non-dBx and S = Stereo dBx.				

Service Default Alignment Mode (SDAM)

Purpose

- To create a predefined setting for measurements to be made.
- To override software protections.
- To start the blinking LED procedure.
- To change option settings.
- To display / clear the error code buffer.
- To perform alignments.

Specifications

- Tuning frequency: 61.25 MHz (channel 3).
- Color system: NTSC M.
- All picture settings at 50% (brightness, color contrast, hue).
- Bass, treble and balance at 50 %; volume at 25 %.
- All service-unfriendly modes (if present) are disabled. The service unfriendly modes are:
    - Timer / Sleep timer.
    - Child / parental lock.
    - Blue mute.
    - Hotel / hospital mode.
    - Auto shut off (when no 'IDENT' video signal is received for 15 minutes).
    - Skipping of non-favorite presets / channels.
    - Auto-storage of personal presets.
    - Auto user menu time-out.
    - Auto Volume Leveling (AVL).
- Run timer (maximum four digits displayed)

- Software version
- Option settings
- Error buffer reading and erasing
- Software alignments

How to enter

To enter SDAM, use one of the following methods:

- Press the following key sequence on the remote control transmitter: **'0 6 2 5 9 6'** directly followed by the **'MENU'** button (do not allow the display to time out between entries while keying the sequence).
- Short jumper wires 9631 and 9641 on the family board (see Fig. 8-1) and apply AC power. Then press the power button (remove the short after start-up).
  Caution : Entering SDAM by shorting wires 9631 and 9641 will override the +8V-protection. Do this only for a short period. When doing this, the service-technician must know exactly what he is doing, as it could damage the television set.
- Or via ComPair (with the ComPair 'Tools' RC7150 Service Remote, it should be possible to enter SDAM via the ComPair interface).

After entering SDAM, the following screen is visible, with S in the upper right corner of the screen to indicate that the television is in Service Default Alignment Mode.

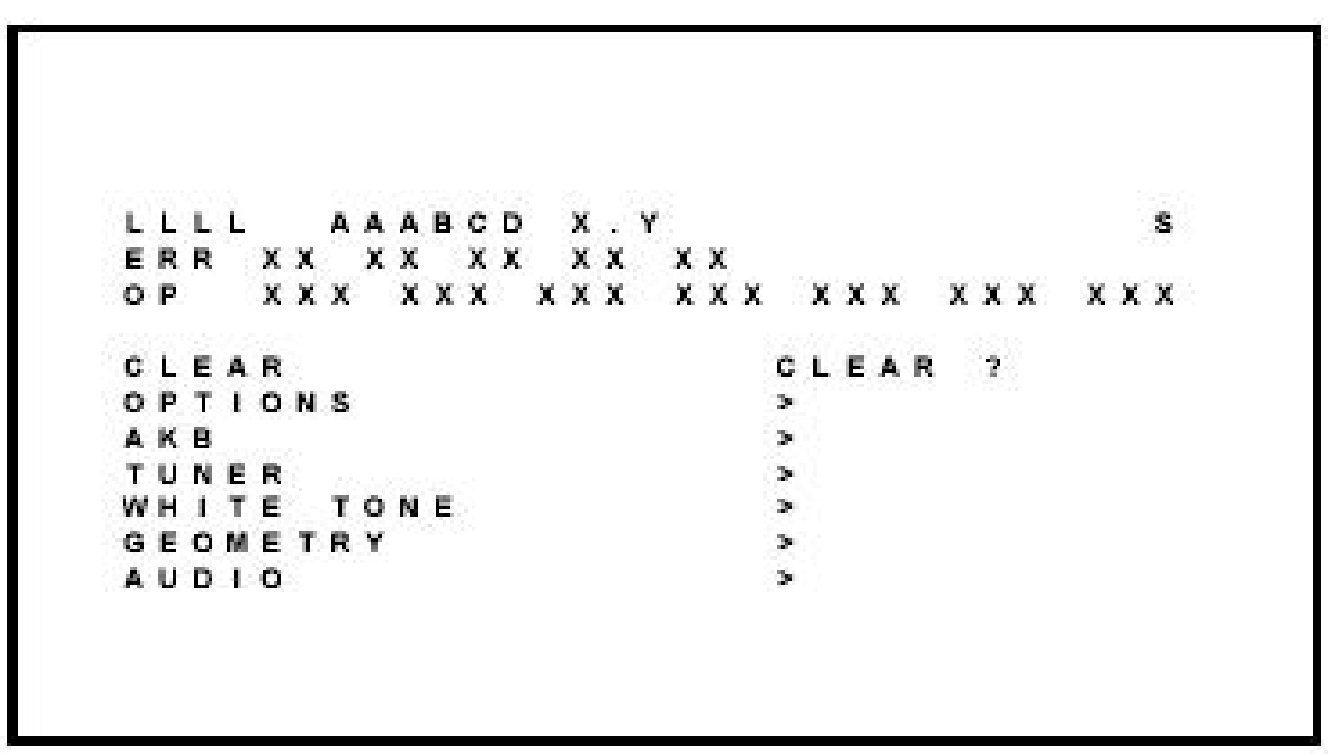


Figure: SDAM menu

Menu explanation

1. **LLLL.** This represents the run timer. The run timer counts normal operation hours, but does not count standby hours (maximum four digits displayed).
2. **AAABCD-X.Y.** This is the software identification of the main microprocessor:
   - **A** = the project name (L01).
   - **B** = the region: E= Europe, A= Asia Pacific, U= NAFTA, L= LATAM.
   - **C** = the software diversity:
     - **Europe:** T = 1 page TXT, F = Full TXT, V = Voice control
     - **LATAM and NAFTA:** N = Stereo non-dBx, S = Stereo dBx
     - **Asian Pacific:** T = TXT, N = non TXT, C = NTSC
     - **ALL regions:** M = mono, D = DVD, Q = Mk2
   - **D** = the language cluster number:
   - **X** = the main software version number (updated with a major change that is incompatible with previous versions)
   - **Y** = the sub software version number (updated with a minor change that is compatible with previous versions)
3. **S.** Indication of the service mode (S = SDAM = Service Default Alignment Mode).
4. **Error Buffer.** Shows all errors detected since the last time the buffer was erased. Five errors possible.
5. **Option Bytes.** Used to set the option bytes. See 'Options' in the Alignments section for a detailed description. Seven codes possible.
6. **Clear.** Erases the contents of the error buffer. Select the CLEAR menu item and press the MENU RIGHT key. The content of the error buffer is cleared.
7. **Options.** Used to set the option bits. See 'Options' in the Alignments section for a detailed description.
8. **AKB.** Used to disable (0) or enable (1) the 'black current loop' (AKB = Auto Kine Bias).
9. **Tuner.** Used to align the tuner. See 'Tuner' in the Alignments section for a detailed description.

10. **White Tone.** Used to align the white tone. See 'White Tone' in the Alignments section for a detailed description.
11. **Geometry.** Used to align the geometry settings of the television. See 'Geometry' in the Alignments section for a detailed description.
12. **Audio.** No audio alignment is necessary for this television set.

How to navigate

- In SDAM, select menu items with the MENU UP/DOWN keys on the remote control transmitter. The selected item will be highlighted. When not all menu items fit on the screen, use the MENU UP/DOWN keys to display the next / previous menu items.
- With the MENU LEFT/RIGHT keys, it is possible to:
  - Activate the selected menu item.
  - Change the value of the selected menu item.
  - Activate the selected submenu.
- In SDAM, when you press the MENU button, the set will switch to the normal user menus (with the SDAM mode still active in the background). To return to the SDAM menu press the STATUS/EXIT button.
- When you press the MENU key in while in an SDAM submenu, you will return to the previous menu.
- In SDAM, press the STATUS/EXIT button to toggle the OSD (except the S which indicates SDAM) on and off, to prevent the OSD from interfering with measurements.

How to store SDAM settings

To store settings changed in SDAM leave the top level SDAM menu by using the POWER button on the remote control transmitter or the television set.

How to exit

Switch the set to STANDBY by pressing the POWER button on the remote control transmitter or the television set.
If you turn the television set off by removing the AC power (i.e., unplugging the television) without using the POWER button, the television set will remain in SDAM when AC power is re-applied, and the error buffer is not cleared.

Customer Service Mode (CSM)

Purpose

The Customer Service Mode shows error codes and information on the TV operation settings. The servicer can instruct the customer to enter CSM by telephone and read off the information displayed. This helps the servicer to diagnose problems and failures in the TV set before making a service call.
The CSM is a read-only mode; therefore, modifications are not possible in this mode.

How to enter

To enter CSM, press the following key sequence on the remote control transmitter: '**1 2 3 6 5 4**' (do not allow the display to time out between entries while keying the sequence).

Upon entering the Customer Service Mode, the following screen will appear:



Figure: CSM menu

Menu explanation

1. Indication of the service mode (CSM = Customer Service Mode).
2. Reserved item.
3. Software identification of the main microprocessor (see 'Service Default Alignment Mode' for an explanation)
4. Reserved item for P3C call centers (**AKBS** stands for **A** dvanced **K** nowledge **B** ase **S** ystems).
5. Indicates the type of TV system or whether or not the television is receiving an 'IDENT' signal on the selected source. If no 'IDENT' signal is detected, the display will read 'NOT TUNED'
6. Displays the last five errors detected in the error code buffer.

How to exit

To exit CSM, use one of the following methods:

- Press the MENU, STATUS/EXIT, or POWER button on the remote control transmitter.
- Press the POWER button on the television set.

iTV/Commercial Model Service Modes

Unlike mainstream L01.1U AC models, commercial L01.1U AC models do not use the Service Default Alignment Mode. Commercial Models use the Service Default Mode (SDM) and Service Alignment Mode (SAM).

Service Alignment Mode (SAM) and Service Default Mode (SDM) offer several features for the service technician.

To enter the SAM and SDM modes in iTV/commercial models, you must use a Philips ITV commercial setup transmitter, such as the RC2573GR or the RG4172BK). Part numbers for two common Philips ITV setup remotes are:
RC2573GR : part number 4835 310 57554
RG4172BK : part number 3121 247 91041

Service Alignment Mode (SAM)

Purpose

- To perform (software) alignments.

Specifications

- Software alignments

How to enter

To enter SAM, you must use a Philips ITV commercial setup transmitter (such as the RC2573GR or the RG4172BK). Use the following method to enter SAM:

- First, place the setup remote in setup mode. To place the RG4172BK in setup mode, press TV SETUP; to place the RC2573GR in setup mode, set the switch

to the TV SETUP position. Then press the following key sequence on the remote control transmitter: **'0 6 2 5 9 6'** directly followed by the **'RECALL'** button (do not allow the display to time out between entries while keying the sequence).

After entering SAM, a special menu screen is visible, with SAM in the upper right corner of the screen to indicate that the television is in Service Alignment Mode.

SAM mode allows the servicer to perform all of the software alignments performed in the SDAM mode in mainstream models.

How to navigate in SAM

- In SAM, select menu items with the MENU UP/DOWN keys on the remote control transmitter. The selected item will be highlighted. When not all menu items fit on the screen, use the MENU UP/DOWN keys to display the next / previous menu items.
- With the MENU LEFT/RIGHT keys, it is possible to:
  - Activate the selected menu item.
  - Change the value of the selected menu item.
  - Activate the selected submenu.
- In SAM, when you press the MENU button, the set will switch to the normal user menus (with the SAM mode still active in the background). To return to the SAM menu press the RECALL button.
- When you press the MENU key in while in an SAM submenu, you will return to the previous menu.

How to store SAM settings

To store settings changed in SAM leave the top level SAM menu by using the POWER button on the remote control transmitter or the television set.

How to exit SAM

Switch the set to STANDBY by pressing the POWER button on the remote control transmitter or the television set.
If you turn the television set off by removing the AC power (i.e., unplugging the television) without using the POWER button, the television set will remain in SAM when AC power is reapplied.

Service Default Mode (SDM)

Purpose

- To create a predefined setting for measurements to be made.
- To override software protections.
- To start the blinking LED procedure.
- To change option settings.
- To display the error code buffer.

Specifications

- Tuning frequency: 61.25 MHz (channel 3).
- Color system: NTSC M.
- All picture settings at 50% (brightness, color contrast, hue).
- Bass, treble and balance at 50 %; volume at 25 %.

- All service-unfriendly modes (if present) are disabled. The service unfriendly modes are:
  - Timer / Sleep timer.
  - Child / parental lock.
  - Blue mute.
  - Auto shut off (when no 'IDENT' video signal is received for 15 minutes).
  - Skipping of non-favorite presets / channels.
  - Auto-storage of personal presets.
  - Auto user menu time-out.
  - Auto Volume Leveling (AVL).
- Run timer (maximum four digits displayed)
- Software version
- Option settings
- Error buffer reading

How to enter

To enter SDM, you must use a Philips ITV commercial setup transmitter (such as the RC2573GR or the RG4172BK). Use the following method to enter SDM:

- First, place the setup remote in setup mode. To place the the RG4172BK in setup mode, press TV SETUP; to place the the RC2573GR in setup mode, set the switch to the TV SETUP position. Then press the following key sequence on the remote control transmitter: **'0 6 2 5 9 6'** directly followed by the **'MENU'** button (do not allow the display to time out between entries while keying the sequence).

After entering SDM, a special menu screen is visible, with SDM in the upper right corner of the screen to indicate that the television is in Service Default Mode.

SDM mode allows the servicer to perform all of the alignments, except software alignments, which are performed in the SDAM mode in mainstream models. In commercial models, software alignments are performed in SAM mode.

How to navigate

- In SDM, select menu items with the MENU UP/DOWN keys on the remote control transmitter. The selected item will be highlighted. When not all menu items fit on the screen, use the MENU UP/DOWN keys to display the next / previous menu items.
- With the MENU LEFT/RIGHT keys, it is possible to:
  - Activate the selected menu item or option.
  - Change the value of the selected menu item or option byte.

- In SDM, when you press the MENU button, the set will switch to the normal user menus (with the SDM mode still active in the background). To return to the SDM menu press the RECALL button.
- In SDM, press the RECALL button to toggle the OSD (except the SDM which indicates the set is in SDM mode) on and off, to prevent the OSD from interfering with measurements.

How to store SDM settings

To store settings changed in SDM leave the top level SDM menu by using the POWER button on the remote control transmitter or the television set.

How to exit

Switch the set to STANDBY by pressing the POWER button on the remote control transmitter or the television set.
If you turn the television set off by removing the AC power (i.e., unplugging the television) without using the POWER button, the television set will remain in SDM when AC power is reapplied, and the error buffer is not cleared.

Problems and Solving Tips Related to CSM

Picture Problems

Note : The problems described below are all related to the TV settings. The procedures used to change the value (or status) of the different settings are described.

Picture too dark or too bright

If:

- The picture improves when you have press the AUTO PICTURE button on the remote control transmitter, or
- The picture improves when you enter the Customer Service Mode

Then:

3. Press the AUTO PICTURE button on the remote control transmitter repeatedly (if necessary) to choose PERSONAL picture mode.

4. Press the MENU button on the remote control transmitter. This brings up the normal user menu.
5. In the normal user menu, use the MENU UP/DOWN keys to highlight the PICTURE sub menu (if necessary).
6. Press the MENU LEFT/RIGHT keys to enter the PICTURE sub menu.
7. Use the MENU UP/DOWN keys (if necessary) to select BRIGHTNESS.
8. Press the MENU LEFT/RIGHT keys to increase or decrease the BRIGHTNESS value.
9. Use the MENU UP/DOWN keys to select PICTURE.
10. Press the MENU LEFT/RIGHT keys to increase or decrease the PICTURE value.
11. Press the MENU button on the remote control transmitter twice to exit the user menu.
12. The new PERSONAL preference values are automatically stored.

White line around picture elements and text

If:

The picture improves after you have pressed the AUTO PICTURE button on the remote control transmitter

Then:

13. Press the AUTO PICTURE button on the remote control transmitter repeatedly (if necessary) to choose PERSONAL picture mode.
14. Press the MENU button on the remote control transmitter. This brings up the normal user menu.
15. In the normal user menu, use the MENU UP/DOWN keys to highlight the PICTURE sub menu (if necessary).
16. Press the MENU LEFT/RIGHT keys to enter the PICTURE sub menu.

17. Use the MENU UP/DOWN keys to select SHARPNESS.
18. Press the MENU LEFT key to decrease the SHARPNESS value.
19. Press the MENU button on the remote control transmitter twice to exit the user menu.
20. The new PERSONAL preference value is automatically stored.

Snowy picture

To enter CSM, press the following key sequence on the remote control transmitter: '**123654**' (do not allow the display to time out between entries while keying the sequence).

Check CSM line 5. If this line reads 'Not Tuned,' check the following:

- Antenna not connected. Connect the antenna.
- No antenna signal or bad antenna signal. Connect a proper antenna signal.
- The tuner is faulty (in this case line 6, the Error Buffer line, will contain error number 10). Check the tuner and replace/repair the tuner if necessary.

Black and white picture

If:

- The picture improves after you have pressed the AUTO PICTURE button on the remote control transmitter

Then:

25. Press the AUTO PICTURE button on the remote control transmitter repeatedly (if necessary) to choose PERSONAL picture mode.
26. Press the MENU button on the remote control transmitter. This brings up the normal user menu.
27. In the normal user menu, use the MENU UP/DOWN keys to highlight the PICTURE sub menu (if necessary).
28. Press the MENU LEFT/RIGHT keys to enter the PICTURE sub menu.
29. Use the MENU UP/DOWN keys to select COLOR.
30. Press the MENU RIGHT key to increase the COLOR value.
31. Press the MENU button on the remote control transmitter twice to exit the user menu.
32. The new PERSONAL preference value is automatically stored.

Menu text not sharp enough

If:

- The picture improves after you have pressed the AUTO PICTURE button on the remote control transmitter.

Then:

34. Press the AUTO PICTURE button on the remote control transmitter repeatedly (if necessary) to choose PERSONAL picture mode.
35. Press the MENU button on the remote control transmitter. This brings up the normal user menu.
36. In the normal user menu, use the MENU UP/DOWN keys to highlight the PICTURE sub menu (if necessary).

37. Press the MENU LEFT/RIGHT keys to enter the PICTURE sub menu.
38. Use the MENU UP/DOWN keys to select PICTURE.
39. Press the MENU LEFT key to decrease the PICTURE value.
40. Press the MENU button on the remote control transmitter twice to exit the user menu.
41. The new PERSONAL preference value is automatically stored.

ComPair

Introduction

ComPair (Computer Aided Repair) is a service tool for Philips Consumer Electronics products. ComPair is a further development of the European DST (special remote control transmitter for Service), which allows faster and more accurate diagnostics. ComPair has three big advantages:

- ComPair helps you to get an understanding on how to repair the chassis in a short time, by guiding you systematically through the repair procedures.
- ComPair allows very detailed diagnostics (on I^2 C level) and is therefore capable of accurately indicating problem areas. You do not have to know anything about I^2 C commands yourself because ComPair takes care of this.
- ComPair speeds up the repair time since it can automatically communicate with the chassis (when the microprocessor is working) and all repair information is directly available. When ComPair is installed together with the Force electronic manual of the L01.1U AC chassis, schematics and CBAs are only a mouse-click away.

Specifications

ComPair consists of a Windows based faultfinding program and an interface box between PC and the product. The ComPair interface box is connected to the PC via a serial or RS232 cable.
In case of the L01 chassis, the ComPair interface box and the TV communicate via a bi-directional service cable via the service connector (connector 0267).

The ComPair faultfinding program is able to determine the problem of the television set. ComPair can gather diagnostic information in two ways:

- **Automatic** (by communication with the television): ComPair can automatically read the contents of the entire error buffer. Diagnosis is done on I^2 C level. ComPair can access the I^2 C bus of the television. ComPair can send and receive I^2 C commands to the microprocessor of the television. In this way, it is possible for ComPair to communicate (read and write) to devices on the I^2 C busses of the television set.
- **Manually** (by asking questions to the servicer): Automatic diagnosis is only possible if the microprocessor of the television is working correctly, and only to a certain extent. When this is not the case, ComPair will guide you through the faultfinding tree by asking you questions (for example; Does the screen give a picture? Click on the correct answer: YES / NO) and showing you examples (for example; Measure test-point I7 and click on the correct oscillogram you see on the oscilloscope). You can answer by clicking on a link (for example, text or a waveform picture) that will bring you to the next step in the faultfinding process.

By a combination of automatic diagnostics and an interactive question and answer procedure, ComPair will enable you to find most problems in a fast and effective way.

Beside fault finding, ComPair provides some **additional features** like:

- Uploading or downloading of presets.
- Management of preset lists.
- If both ComPair and the Force electronic service manual are installed, all the schematics and CBAs of the television set are available by clicking on the appropriate hyperlink.
- **Example:** *Measure the DC-voltage on capacitor C2568 (Schematic/Panel) at the family board.*
    - Click on the 'Panel' hyperlink to automatically show the CBA with a highlighted capacitor C2568.
    - Click on the 'Schematic' hyperlink to automatically show the electronic position of the highlighted capacitor.

How To Connect ComPair

51. First, install the ComPair Browser software on your PC (see the Quick Reference Card for installation instructions).
52. Connect the RS232 interface cable between a free serial (COM) port of your PC and the PC connector (marked with 'PC') of the ComPair interface.
53. Connect the AC power adapter to the supply connector (marked 'POWER 9V DC') on the ComPair interface.
54. Switch the ComPair interface 'off'.
55. Switch the television set 'off' (and remove the AC power).
56. Connect the ComPair interface cable between the connector on the rear side of the ComPair interface (marked 'I^2 C') and the ComPair connector on the family board (connector 0267).

57. Plug the AC power adapter in the AC power outlet and switch the ComPair interface ‘on’. The green and red LEDs light up together. The red LED turns off after approximately 1 second, while the green LED remains lit.
58. Start the ComPair program and read the 'introduction' chapter.

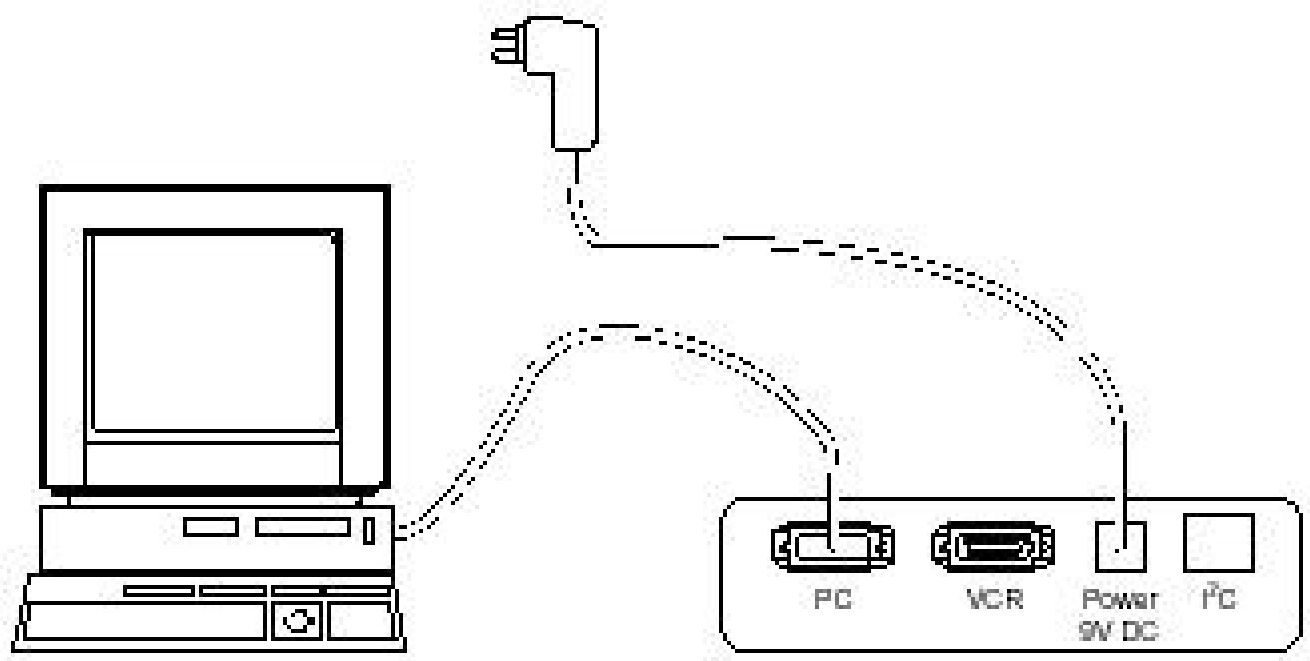


Figure: ComPair connection

How To Order

ComPair order codes **for NAFTA** :

- ComPair Software: ST4191.
- ComPair Interface Box: 4822 727 21631.
- AC Adapter: T405-ND.
- ComPair Quick Start Guide: ST4190.
- ComPair interface cable: 3122 785 90004.

Error Codes

The error code buffer contains all errors detected since the last time the buffer was erased. The buffer is written from left to right. When an error occurs that is not yet in the error code buffer, it is displayed at the left side and all other errors shift one position to the right.

How To Read The Error Buffer

You can read the error buffer in 3 ways:

- On screen via the SDAM (if you have a picture). **Examples:**
    - ERROR: 0 0 0 0 0 : No errors detected
    - ERROR: 6 0 0 0 0 : Error code 6 is the last and only detected error
    - ERROR: 9 6 0 0 0 : Error code 6 was detected first and error code 9 is the last detected (newest) error
- Via the blinking LED procedure (when you have no picture). See 'The Blinking LED Procedure'.
- Via ComPair.

How To Clear The Error Buffer

The error code buffer is cleared in the following cases:

- By using the CLEAR command in the SDAM menu:
    - To enter SDAM, press the following key sequence on the remote control transmitter: '062596' directly followed by the 'MENU' button (do not allow the display to time out between entries while keying the sequence).

    - Make sure the menu item CLEAR is highlighted. Use the MENU UP/DOWN buttons, if necessary.
    - Press the MENU RIGHT button to clear the error buffer. The text on the right side of the 'CLEAR' line will change from 'CLEAR?' to 'CLEARED'
  - If the contents of the error buffer have not changed for 50 hours, the error buffer resets automatically.

Note: If you exit SDAM by disconnecting the AC power from the television set, the error buffer is not reset.

Error Codes

In case of non-intermittent faults, write down the errors present in the error buffer and clear the error buffer before you begin the repair. This ensures that old error codes are no longer present.
If possible, check the entire contents of the error buffer. In some situations, an error code is only the result of another error and not the actual cause of the problem (for example, a fault in the protection detection circuitry can also lead to a protection).

Table: Error code overview

Error	Device	Error description	Check item	Diagram
0	-	No Error		
1	-	X-Ray Protection (USA)	2465, 7460	A2
2	-	Horizontal Protection	7460, 7461, 7462, 7463, 6467	A2
3	TDA8359TDA9302	Vertical Protection	7861, VlotAux +13v	A2, A3
4	MSP34X5TDA9853	MAP I 2 C identification error	7831, 7861	A9 or A11
5	TDA95XX	POR 3.3V / 8V Protection	7200, 7560, 7480	A1, A2. A5, A6, A7
6	I 2 C bus	General I 2 C bus error	7200, 3624, 3625	A7
7	-	Power Down (over current) prot.	-	-
8	-	E/W Protection (Large Screen)	7400, 3405, 3406, 3400	A2

Error	Device	Error description	Check item	Diagram
9	M24C08	NVM I 2 C identification error	7602, 3611, 3603, 3604	A7
10	Tuner	Tuner I 2 C identification error	1000, 7482	A2, A4
11	TDA6107/8	Black current loop protection	7330, RGB amps, CRT	B1, B2
12	M65669	MAP I 2 C identification error (USA)	7803	P
14	DVD Loader	DVD I 2 C identification error	DVD Interface module	DVD Loader

Note: Error 7 is not applicable.

The Blinking LED Procedure

Using this procedure, you can make the contents of the error buffer visible via the front LED. This is especially useful when there is no picture.

When the SDAM is entered, the LED will blink the contents of the error-buffer:

- 1-14 short blinks (indicates error number 1-14),
- When all the error-codes are displayed, the sequence finishes with an 'on' LED blink of 1.5 seconds,
- The sequence starts again.

Example of error buffer: **12 9 6 0 0**

After entering SDAM, the following occurs:

- 1 long 'on' blink of 5 seconds to start the sequence,
- 12 short blinks followed by a pause of 1.5 seconds,
- 9 short blinks followed by a pause of 1.5 seconds,
- 6 short blinks followed by a pause of 1.5 seconds,
- 1 long 'on' blink of 1.5 seconds to finish the sequence,
- The sequence starts again at 12 short blinks.

Protections

If a fault situation is detected, an error code will be generated; and, if necessary, the television set will go into protection mode. Blinking of the red LED at a frequency of 3 Hz indicates the protection mode. In some error cases, the microprocessor does not put the set in protection mode. The error codes of the error buffer and the blinking LED procedure can be read via the Service Default Alignment Menu (SDAM), or via ComPair.

To get a quick diagnosis the chassis has two service modes implemented:

- The Customer Service Mode (CSM).
- The Service Default Alignment Mode (SDAM).

For a detailed description, see the “Customer Service Mode” and “Service Default Alignment Mode” sections.

Repair Tips

Below some failure symptoms are given, followed by a repair tip.

- **Set is dead and makes hiccupping sound.** 'Main Power Supply' is available. Hiccupping stops when L5561 is de-soldered, meaning that problem is in the 'Main Power Supply' line. No output voltages at LOT, no horizontal deflection. Reason: line transistor 7460 is defective.
- **Set is dead, and makes no sound.** Check power supply IC 7520. Result: voltage at pins 1, 3, 4, 5 and 6 are about 180 V and pin 8 is 0 V. The reason why the voltage on these pins is so high is that the output driver (pin 6) has an open load. That is why MOSFET 7521 is not able to switch. Reason: feedback resistor 3523 is defective. **Caution** : Be careful measuring the gate of 7521: circuitry is very high ohmic and can easily be damaged!
- **Set is in hiccup mode and shuts down after 8 seconds.** The blinking LED (set is in SDAM mode) indicates error 5. As it is unlikely that the microprocessor 'POR' and '+8V protection' happen at the same time, measure the '+8V' supply. If this voltage is missing, check transistor 7480.
- **Set is in non-stop hiccup mode.** Set is in over-current mode; check the secondary sensing (opto coupler 7515) and the 'Main Power Supply' voltage. Signal 'Stdby_con' must be logic low under normal operation conditions and goes to high (3.3 V) under standby and fault conditions.
- **Set turns on, but without picture and sound.** The screen shows snow, but OSD and other menus are okay. Blinking LED procedure indicates error 11, so problem is expected in the tuner (part reference number 1000). Check presence of supply voltages. 'Vlotaux+5V' voltages at pin 5 and 7 are okay; 'VT_supply' at pin 9 is missing. Conclusion: resistor 3460 is defective.

- **Set turns on, but with a half screen at the bottom. Sound is okay.** Blinking LED (set is in SDAM mode) indicates error 3. Check 'Vlotaux+11V' and '+50V'. If they are okay, problem is expected in the vertical amplifier IC 7471. Use an oscilloscope to measure the waveform on pin 17 of the UOC. Also, measure the waveform at pin 1 of IC 7471. If the signal there is missing, a defective resistor R3244 caused the problem.

Alignments

Index of this chapter:

Note: The Service Default Alignment Mode (SDAM) is described in the "Service Modes, Error Codes and Fault Finding" section. SDAM menu navigation is performed by using the MENU UP, MENU DOWN, MENU LEFT, and MENU RIGHT keys of the remote control transmitter.

General Alignment Conditions

Perform all electrical adjustments under the following conditions:

- AC voltage and frequency: 110 V (± 10 %), 60 Hz (± 5 %).
- Connect the television set to the AC power via an isolation transformer.
- Allow the television set to warm up for approximately 20 minutes.
- Measure the voltages and waveforms in relation to chassis ground (with the exception of the voltages on the primary side of the power supply). Never use heatsinks as ground.
- Test probe: Ri > 10 MOhm; Ci < 2.5 pF.
- Use an isolated trimmer/screwdriver to perform the alignments.

Hardware Alignments

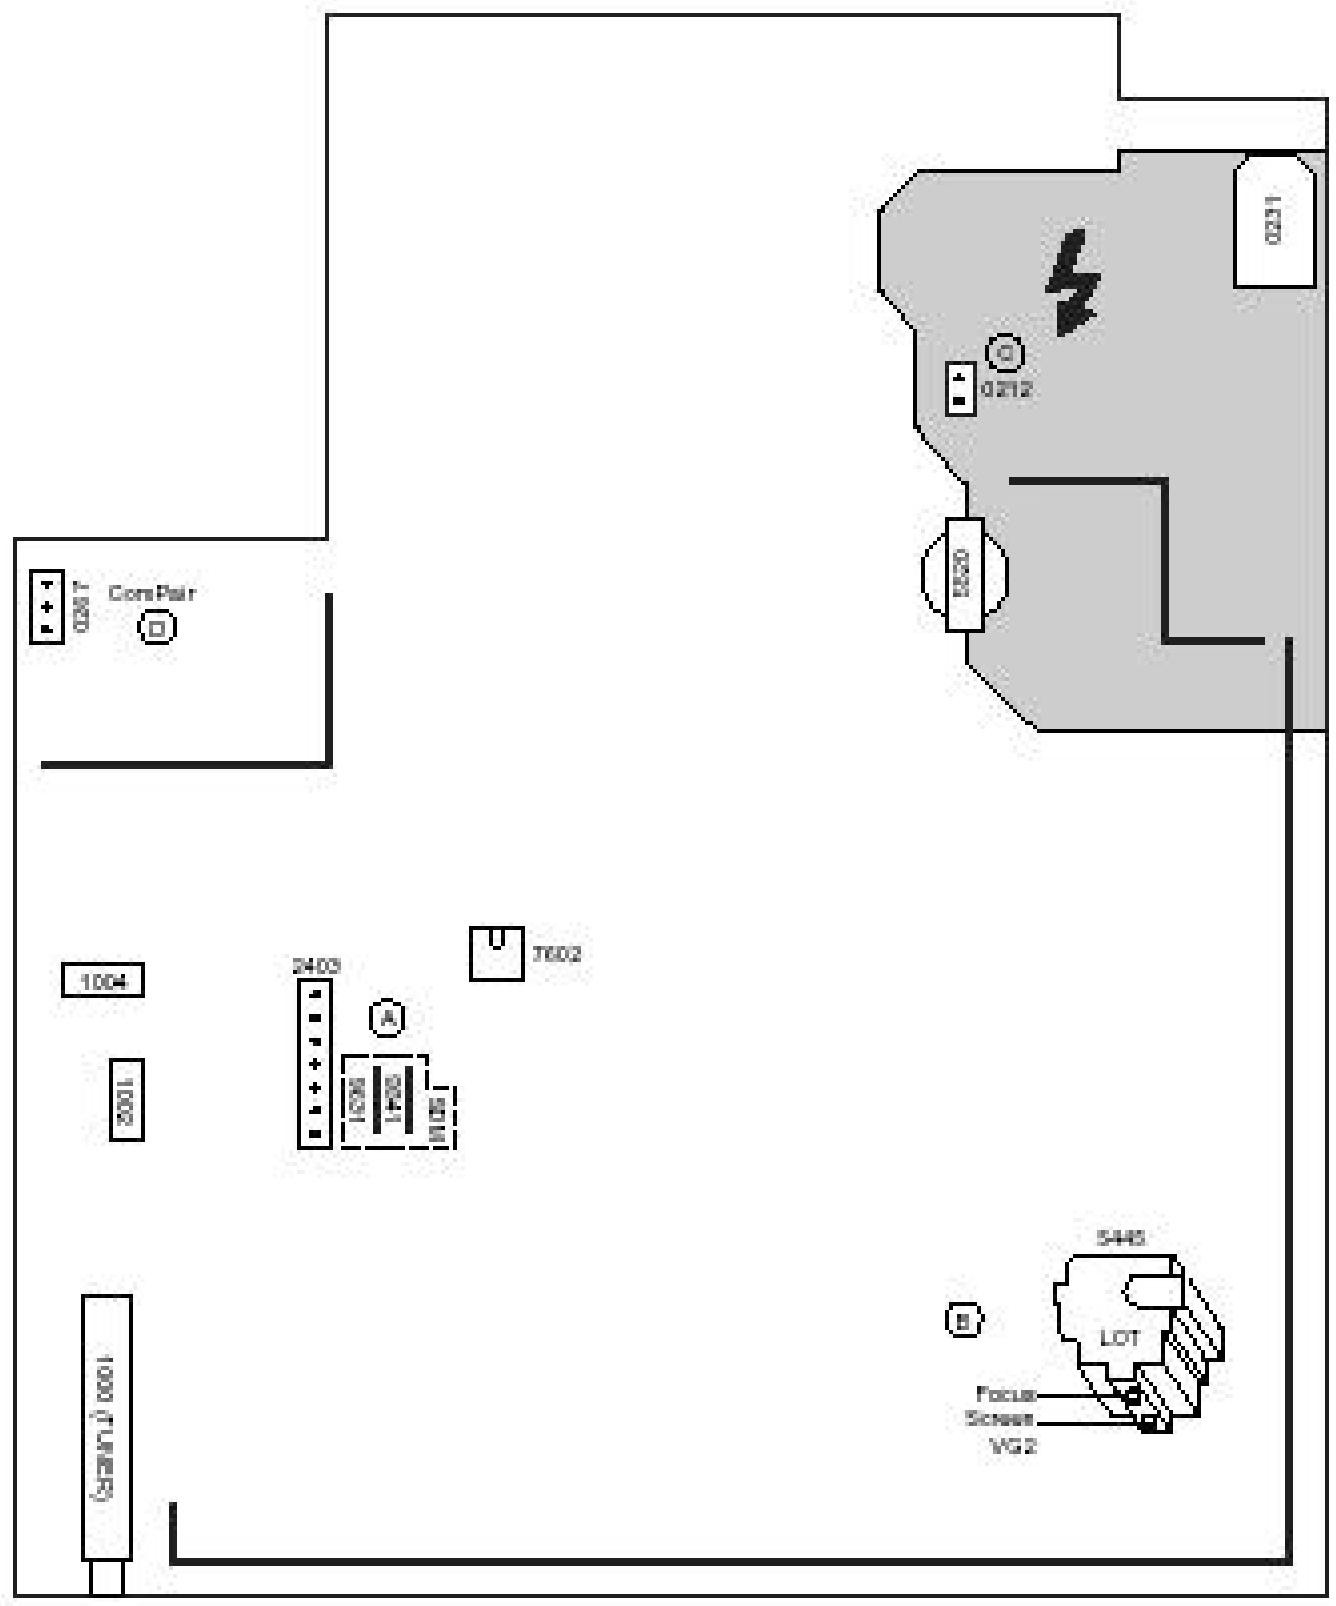


Figure: Family board (top view)

Vg2 Adjustment

1. To enter SDAM, press the following key sequence on the remote control transmitter: **0 6 2 5 9 6** directly followed by the **MENU** button (do not allow the display to time out between entries while keying the sequence).
2. Use the MENU UP/DOWN keys to highlight the WHITE TONE sub menu.
3. Press the MENU LEFT or MENU RIGHT key to enter the WHITE TONE sub menu.
4. In the WHITE TONE sub menu, press the MENU UP/DOWN keys to select NORMAL RED, NORMAL GREEN, or NORMAL BLUE.

5. Use the MENU LEFT/RIGHT keys to set the values of NORMAL RED, NORMAL GREEN and NORMAL BLUE to '40'.
6. Press the MENU button twice to enter the normal user menu.
7. In the normal user menu, use the MENU UP/DOWN keys to highlight the PICTURE sub menu (if necessary).
8. Press the MENU LEFT/RIGHT keys to enter the PICTURE sub menu.
9. Use the MENU UP/DOWN keys to select PICTURE. Be sure to record the current value of PICTURE.
10. Use the MENU LEFT/RIGHT keys to set the value of PICTURE to '0'.
11. Use the MENU UP/DOWN keys to select BRIGHTNESS. Be sure to record the current value of BRIGHTNESS.
12. Use the MENU LEFT/RIGHT keys to set the value of BRIGHTNESS to minimum (OSD just visible in a dark room).
13. Press the MENU button twice to return to the top level SDAM menu.
14. Press the STATUS/EXIT button to hide the SDAM onscreen display.
15. Connect the RF output of a video pattern generator to the antenna input.
16. Input a 'black picture' test pattern to the television set.
17. Set the oscilloscope to 50 V/div and the time base to 0.2 milliseconds (external triggering on the vertical pulse).
18. Ground the scope at the CRT panel and connect a 10:1 probe to one of the cathodes of the picture tube socket (see schematic diagram B).
19. Measure the' cut off pulse' during the first full line after the frame blanking (see Fig. 8-2). You will see two pulses, one being the 'cut off pulse' and the other being the 'white drive pulse'. Choose the one with the lowest value; this is the 'cut off pulse'.
20. Select the cathode with the highest VDC value for the alignment. Adjust the Vcutoff of this gun with the SCREEN potentiometer (see Fig. 8-1) on the LOT to the correct value (see table 8-1).
21. Press the STATUS/EXIT button to display the SDAM onscreen display.
22. Press the MENU button to enter the normal user menu.

23. In the normal user menu, use the MENU UP/DOWN keys to highlight the PICTURE sub menu (if necessary).
24. Press the MENU LEFT/RIGHT keys to enter the PICTURE sub menu.
25. Use the MENU UP/DOWN keys to select PICTURE.
26. Use the MENU LEFT/RIGHT keys to reset the value of PICTURE to the original value.
27. Use the MENU UP/DOWN keys to select BRIGHTNESS.
28. Use the MENU LEFT/RIGHT keys to reset the value of BRIGHTNESS to the original value.
29. Press the MENU button twice to return to the top level SDAM menu.
30. Use the POWER button on the remote control transmitter or the POWER button on the television set to turn off the television set. This will save the changes made in SDAM.

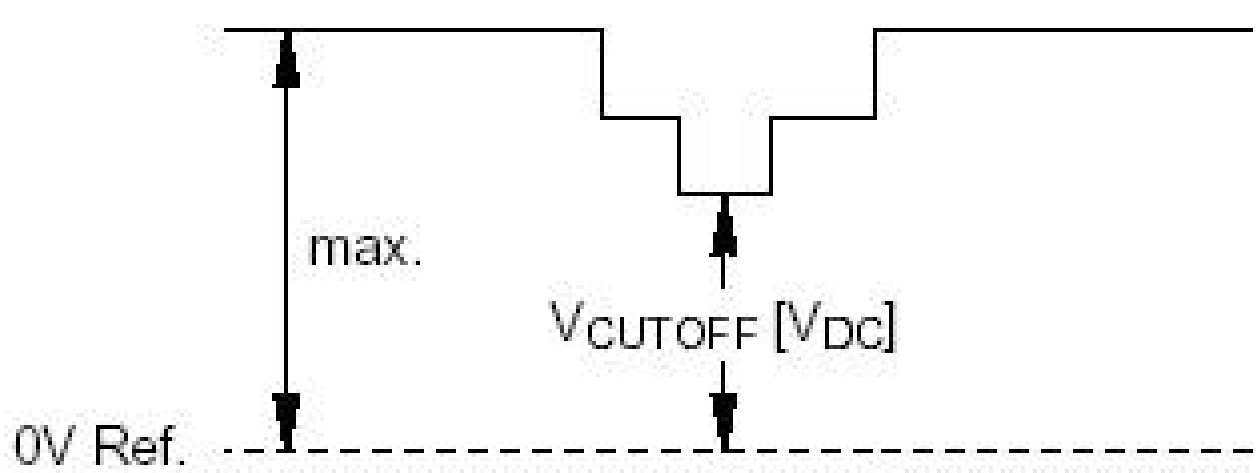


Figure: Vcutoff

Table: Vg2 cut-off point (Large Screen)

Screen Size (RF= Real Flat)	Cut-off point (V)
20RF Matsushita 20RF Samsung 20RF LG Philips 25V Curved Face 27V Curved Face	+145 V +/- 4 V
27RF 29RF LG Philips	+155 V +/- 4 V
20RF Philips 27RF Samsung 32RF 26 Wide Screen RF 30 Wide Screen RF	+160 V +/- 4 V

RF = Real Flat

V = (Visible) Diagonal Screen Measurement of Phosphor

Focusing

1. Connect the RF output of a video pattern generator to the antenna input.
2. Input a circle or crosshatch test pattern to the television set.
3. Press the AUTO PICTURE button on the remote control transmitter repeatedly to choose PERSONAL or MOVIES picture mode.
4. Adjust the FOCUS potentiometer (see Fig. 8-1) until the vertical lines near the left and right sides of the screen, and near the horizontal center of the screen, are at minimum width without visible haze.

Software Alignments and Settings

The following options are performed in the Service Default Alignment Mode (SDAM).
SDAM is described in the 'Service Modes, Error Codes and Fault Finding' section.
The following alignments are explained:

1. OPTIONS
2. TUNER
3. WHITE TONE
4. GEOMETRY
5. AUDIO

Options

Options are used to control the presence or absence of certain features and hardware.

How to change an Option Byte

An Option Byte represents a number of different options. Changing these bytes directly makes it possible to set all options very quickly. All options are controlled via seven option bytes.
Note: Each option byte controls several features of the television set; therefore, before changing option byte information, it is important to record the current option byte values. This ensures that the television features can be restored to the original settings, if necessary.

1. To enter SDAM, press the following key sequence on the remote control transmitter: **0 6 2 5 9 6** directly followed by the MENU button (do not allow the display to time out between entries while keying the sequence).

2. Use the MENU UP/DOWN keys to highlight the OPTIONS sub menu.
3. Press the MENU LEFT or MENU RIGHT key to enter the OPTIONS sub menu.
4. In the OPTIONS sub menu, press the MENU UP/DOWN keys to select 'OP 1' through 'OP 7'.
5. Use the number keys on the remote control transmitter to enter a new value for the selected option byte. The value must be entered as a three-digit value (for example, '4' would be entered as '0 0 4').
6. The selected value must be between '0' and '255'.
7. When all desired changes to the option bytes are made, press the MENU button to return to the top level SDAM menu. This will save changes to the option byte settings.
8. To ensure the option byte changes take effect: Turn the television set OFF by using the POWER button on the remote control transmitter or the local keyboard. Disconnect the television set from AC power for at least ten seconds. Reconnect the television set to AC power. Turn the television set ON by using the POWER button on the remote control transmitter or the local keyboard.

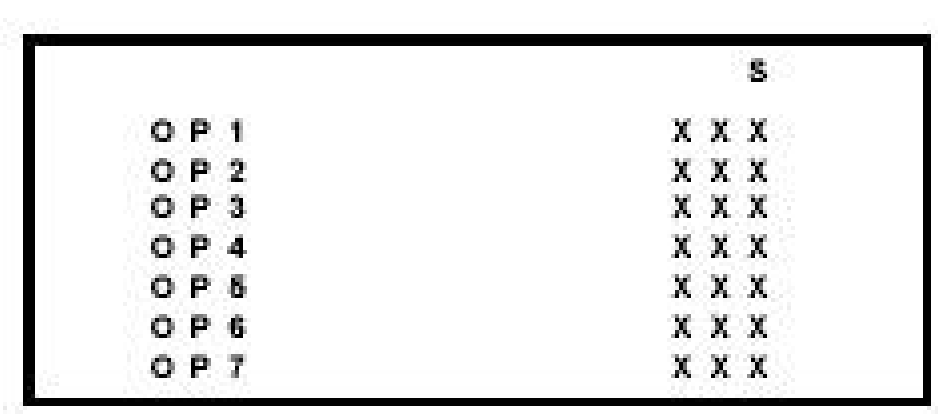


Figure: Options menu

How to change iTV Option Bytes

An Option Byte represents a number of different options. Changing these bytes directly makes it possible to set all options very quickly. All options are controlled via five option bytes.

Note: Each option byte controls several features of the television set; therefore, before changing option byte information, it is important to record the current option byte values. This ensures that the television features can be restored to the original settings, if necessary.

1. To enter SDM, you must use a Philips ITV commercial setup transmitter (such as the RC2573GR or the RG4172BK). Use the following method to enter SDM:

   First, place the setup remote in setup mode. To place the RG4172BK in setup mode, press TV SETUP; to place the RC2573GR in setup mode, set the switch to the TV SETUP position. Then press the following key sequence on the remote control transmitter: **'0 6 2 5 9 6'** directly followed by the **'MENU'** button (do not allow the display to time out between entries while keying the sequence).

2. Use the MENU UP/DOWN keys to scroll through the OPTIONS until you reach OB1 through OB5.
3. Use the number keys on the remote control transmitter to enter a new value for the selected option byte. The value must be entered as a three-digit value (for example, '4' would be entered as '0 0 4').
4. The selected value must be between '0' and '255'.
5. When all desired changes to the option bytes are made, press the MENU button to return to the top level SDM menu. This will save changes to the option byte settings.
6. To ensure the option byte changes take effect: Turn the television set OFF by using the POWER button on the remote control transmitter or the local keyboard. Disconnect the television set from AC power for at least ten seconds. Reconnect the television set to AC power. Turn the television set ON by using the POWER button on the remote control transmitter or the local keyboard.

Option Code Tables

Table: Option code settings

Model Number	OP1	OP2	OP3	OP4	OP5	OP6	OP7
20DV693R01	0	23	65	162	252	153	64
20DV693R02	0	23	65	162	252	153	80
20MS334R37	0	23	65	1	144	88	0
20PT633R/37	0	23	1	1	144	152	0
20PT643F/35R	64	23	65	1	236	152	0
20PT643R01	0	23	1	1	236	152	0
20PT653R/37	0	23	1	1	252	152	0
21PT6331/44R	16	23	65	1	144	152	0
21PT633R/85C	0	23	1	1	144	152	0
21PT6431/44R	16	23	65	1	236	152	0
21PT643R/85C	0	23	1	1	236	152	0
24PT633F/35R	64	23	193	1	252	152	0
24PT633R/37	0	23	129	1	252	152	0
25PT533S/37C	0	23	1	1	252	152	0
25PT633R/85C	0	23	129	1	252	152	0
27DV693R37A	0	23	209	162	252	153	64
27MS3404/17	0	23	65	1	252	152	0
27MS4504/17	0	23	193	1	252	152	0
27PT541S37A	0	23	65	1	252	152	0
27PT543F35A	64	23	65	1	252	152	0
27PT543S/37A	0	23	1	1	252	152	0

Model Number	OP1	OP2	OP3	OP4	OP5	OP6	OP7
27PT563S37A	0	23	65	162	252	153	80
27PT633R/37C	0	23	145	162	252	153	80
27PT643F35A	64	23	193	1	252	152	0
27PT643R/37C	0	23	193	1	252	152	0
27PT643R/37A	0	23	193	1	252	152	0
27PT643R/97A	0	23	193	1	252	152	0
27PT663R/37A	0	23	145	162	252	153	80
27PT663R/37C	0	23	145	162	252	153	80
29DV6931/85R	16	23	209	162	252	153	64
29PT543S/44A	0	23	1	1	252	152	0
29PT543S/85A	0	23	1	1	252	152	0
29PT563S/85A	0	23	1	162	252	153	80
29PT633R/85A	0	23	129	1	252	152	0
29PT633R/85C	0	23	129	1	252	152	0
29PT643R85A	16	23	193	1	252	152	0
29PT6631/44R	16	23	209	162	252	153	80
29PT663R/85A	0	23	145	162	252	153	80
29PT663R/85C	0	23	145	162	252	153	80
29PT663S85A	16	23	209	162	252	153	80
30DV693R37A	0	31	149	162	252	153	64
30DV693R37C	0	31	149	162	252	153	64
30PW633F35A	0	31	149	162	252	153	80
30PW633R37A	0	31	149	162	252	153	80
30PW633R37C	0	31	149	162	252	153	80

Model Number	OP1	OP2	OP3	OP4	OP5	OP6	OP7
32PT541S37G	0	23	193	1	252	152	0
32PT543S/37A	0	23	129	1	252	152	0
32PT543S/37G	0	23	129	1	252	152	0
32PT553S/37A	0	23	129	1	252	152	64
32PT553S/37G	0	23	129	1	252	152	64
32PT563S37A	0	23	193	162	252	153	80
32PT563S37G	0	23	193	162	252	153	80
32PT633R/37D	0	31	145	162	252	153	80
32PT663R/37A	0	31	145	162	252	153	80
MS3252S431	0	23	129	1	189	88	0
MS3652S427	0	23	129	1	189	88	0

Table: Option code settings for iTV/Commercial models

Model Number	OP1	OP2	OP3	OP4	OP5
25LT220L/17	212	16	2	65	168
25LT421L/17	196	252	3	33	172
25ST220L/17	212	16	2	67	8
27LT220L/17	212	16	2	65	168
27LT621L/17	198	252	3	33	172
27ST110P/35	212	16	2	67	8
27ST220L/17	212	16	2	67	8
27ST230P/35	212	16	2	67	8
27ST240P/35	212	16	2	67	8
27ST420L/17	196	220	3	35	12

Model Number	OP1	OP2	OP3	OP4	OP5
27ST421L/17	196	220	3	35	12
32LT621L/17	198	252	11	41	252
32ST220P/17	198	220	11	43	12
32ST230P/35	198	220	11	43	12
36ST220P/35	198	220	11	43	12
36ST230P/35	198	220	11	43	12

Tuner

Note: Described alignments are only necessary when the NVM (part reference number 7602) is replaced.

IF-PLL

This adjustment is auto-aligned. Therefore, no action is required.

AGC (AGC take over point)

1. Connect the RF output of a video pattern generator to the antenna input.
2. Input a color bar test pattern to the television set.
3. Set the amplitude of the video pattern generator to 10 mV and set the frequency to 61.25 MHz (channel 3).
4. Connect a DC multimeter to pin 1 of the tuner (item 1000 on the main chassis).
5. To enter SDAM, press the following key sequence on the remote control transmitter: **0 6 2 5 9 6** directly followed by the **MENU** button (do not allow the display to time out between entries while keying the sequence).

6. Use the MENU UP/DOWN keys to highlight the TUNER sub menu.
7. Press the MENU LEFT/RIGHT keys to enter the TUNER sub menu.
8. Use the MENU UP/DOWN keys to select AGC.
9. Use the MENU LEFT/RIGHT keys to adjust the AGC value (default value is 27) until the DC-voltage at pin 1 of the tuner lies between 3.8 V and 2.3 V.
10. Press the MENU button to return to the top level SDAM menu.
11. To ensure the AGC change takes effect:
    - Turn the television set 'off' by using the 'POWER' button on the remote control transmitter or the local keyboard.
    - Disconnect the television set from AC power for at least ten seconds.
    - Reconnect the television set to AC power.
    - Turn the television set 'on' by using the 'POWER' button on the remote control transmitter or the local keyboard.

SL (Slicing Level)

This adjustment sets the sync slicing level for non-standard signals. You must turn it 'on' to help correct picture instability in premium decoded cable channels.

- OFF: slicing level dependent on noise detector.
- ON: fixed slicing level of 70 %.

To adjust SL:

1. To enter SDAM, press the following key sequence on the remote control transmitter: **0 6 2 5 9 6** directly followed by the **MENU** button (do not allow the display to time out between entries while keying the sequence).
2. Use the MENU UP/DOWN keys to highlight the TUNER sub menu.
3. Press the MENU LEFT/RIGHT keys to enter the TUNER sub menu.

4. Use the MENU UP/DOWN keys to select SL.
5. Use the MENU LEFT/RIGHT keys to toggle SL 'Off' and 'On'.
6. Press the MENU button to return to the top level SDAM menu.
7. To ensure the SL setting is saved:
   - Turn the television set 'off' by using the 'POWER' button on the remote control transmitter or the local keyboard.
   - Disconnect the television set from AC power for at least ten seconds.
   - Reconnect the television set to AC power.
   - Turn the television set 'on' by using the 'POWER' button on the remote control transmitter or the local keyboard.

White Tone

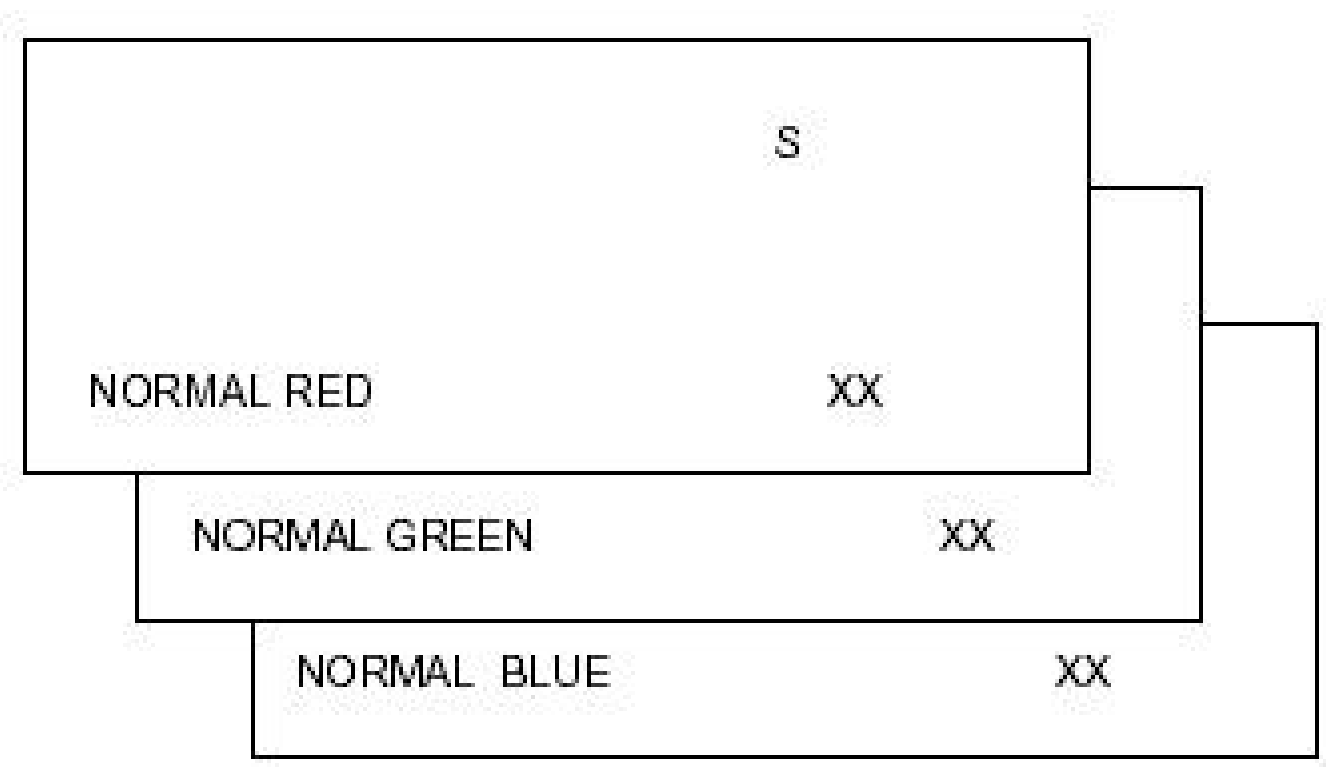


Figure: White tone alignment menu

The values of the 'black cut off level' can be adjusted in the 'WHITE TONE' sub menu. Normally, no alignment is needed for 'WHITE TONE', and the given default values are used.

Default settings:

NORMAL (color temperature = 9600 K):

- NORMAL RED = 40
- NORMAL GREEN = 40
- NORMAL BLUE = 40

To adjust NORMAL RED, NORMAL GREEN, and NORMAL BLUE:

1. To enter SDAM, press the following key sequence on the remote control transmitter: **0 6 2 5 9 6** directly followed by the **MENU** button (do not allow the display to time out between entries while keying the sequence).
2. Use the MENU UP/DOWN keys to highlight the WHITE TONE sub menu.
3. Press the MENU LEFT/RIGHT keys to enter the WHITE TONE sub menu.
4. Use the MENU UP/DOWN keys to select NORMAL RED, NORMAL GREEN, or NORMAL BLUE.
5. Use the MENU LEFT/RIGHT keys to adjust the value of NORMAL RED, NORMAL GREEN, or NORMAL BLUE.
6. When all desired changes to the WHITE TONE sub menu values are made, press the MENU button to return to the top level SDAM menu.
7. To ensure the WHITE TONE settings are saved:
    - Turn the television set 'off' by using the 'POWER' button on the remote control transmitter or the local keyboard.
    - Disconnect the television set from AC power for at least ten seconds.
    - Reconnect the television set to AC power.
    - Turn the television set 'on' by using the 'POWER' button on the remote control transmitter or the local keyboard.

Geometry

The geometry alignments menu contains several items for correct picture geometry alignment.

1. Connect the RF output of a video pattern generator to the antenna input.
2. Input a crosshatch test pattern to the television set.
3. Set the amplitude of the video pattern generator to at least 1 mV and set the frequency to 61.25 MHz (channel 3).
4. Press the AUTO PICTURE button on the remote control transmitter repeatedly to choose PERSONAL or MOVIES picture mode.
5. To enter SDAM, press the following key sequence on the remote control transmitter: **0 6 2 5 9 6** directly followed by the MENU button (do not allow the display to time out between entries while keying the sequence).
6. Use the MENU UP/DOWN keys to highlight the GEOMETRY sub menu.
7. Press the MENU LEFT/RIGHT keys to enter the GEOMETRY sub menu.
8. Use the MENU UP/DOWN keys to highlight either the HORIZONTAL sub menu or the VERTICAL sub menu.
9. Press the MENU LEFT/RIGHT keys to enter either the HORIZONTAL sub menu or the VERTICAL sub menu.
10. Use the MENU UP/DOWN keys to select items in the HORIZONTAL sub menu or the VERTICAL sub menu.
11. Use the MENU LEFT/RIGHT keys to adjust the values of items in the HORIZONTAL and VERTICAL sub menus.
12. When all desired changes to the HORIZONTAL and VERTICAL sub menu values are made, press the MENU button twice to return to the top level SDAM menu.
13. To ensure the GEOMETRY settings are saved:
    - Turn the television set 'off' by using the 'POWER' button on the remote control transmitter or the local keyboard.

- Disconnect the television set from AC power for at least ten seconds.
- Reconnect the television set to AC power.
- Turn the television set 'on' by using the 'POWER' button on the remote control transmitter or the local keyboard.

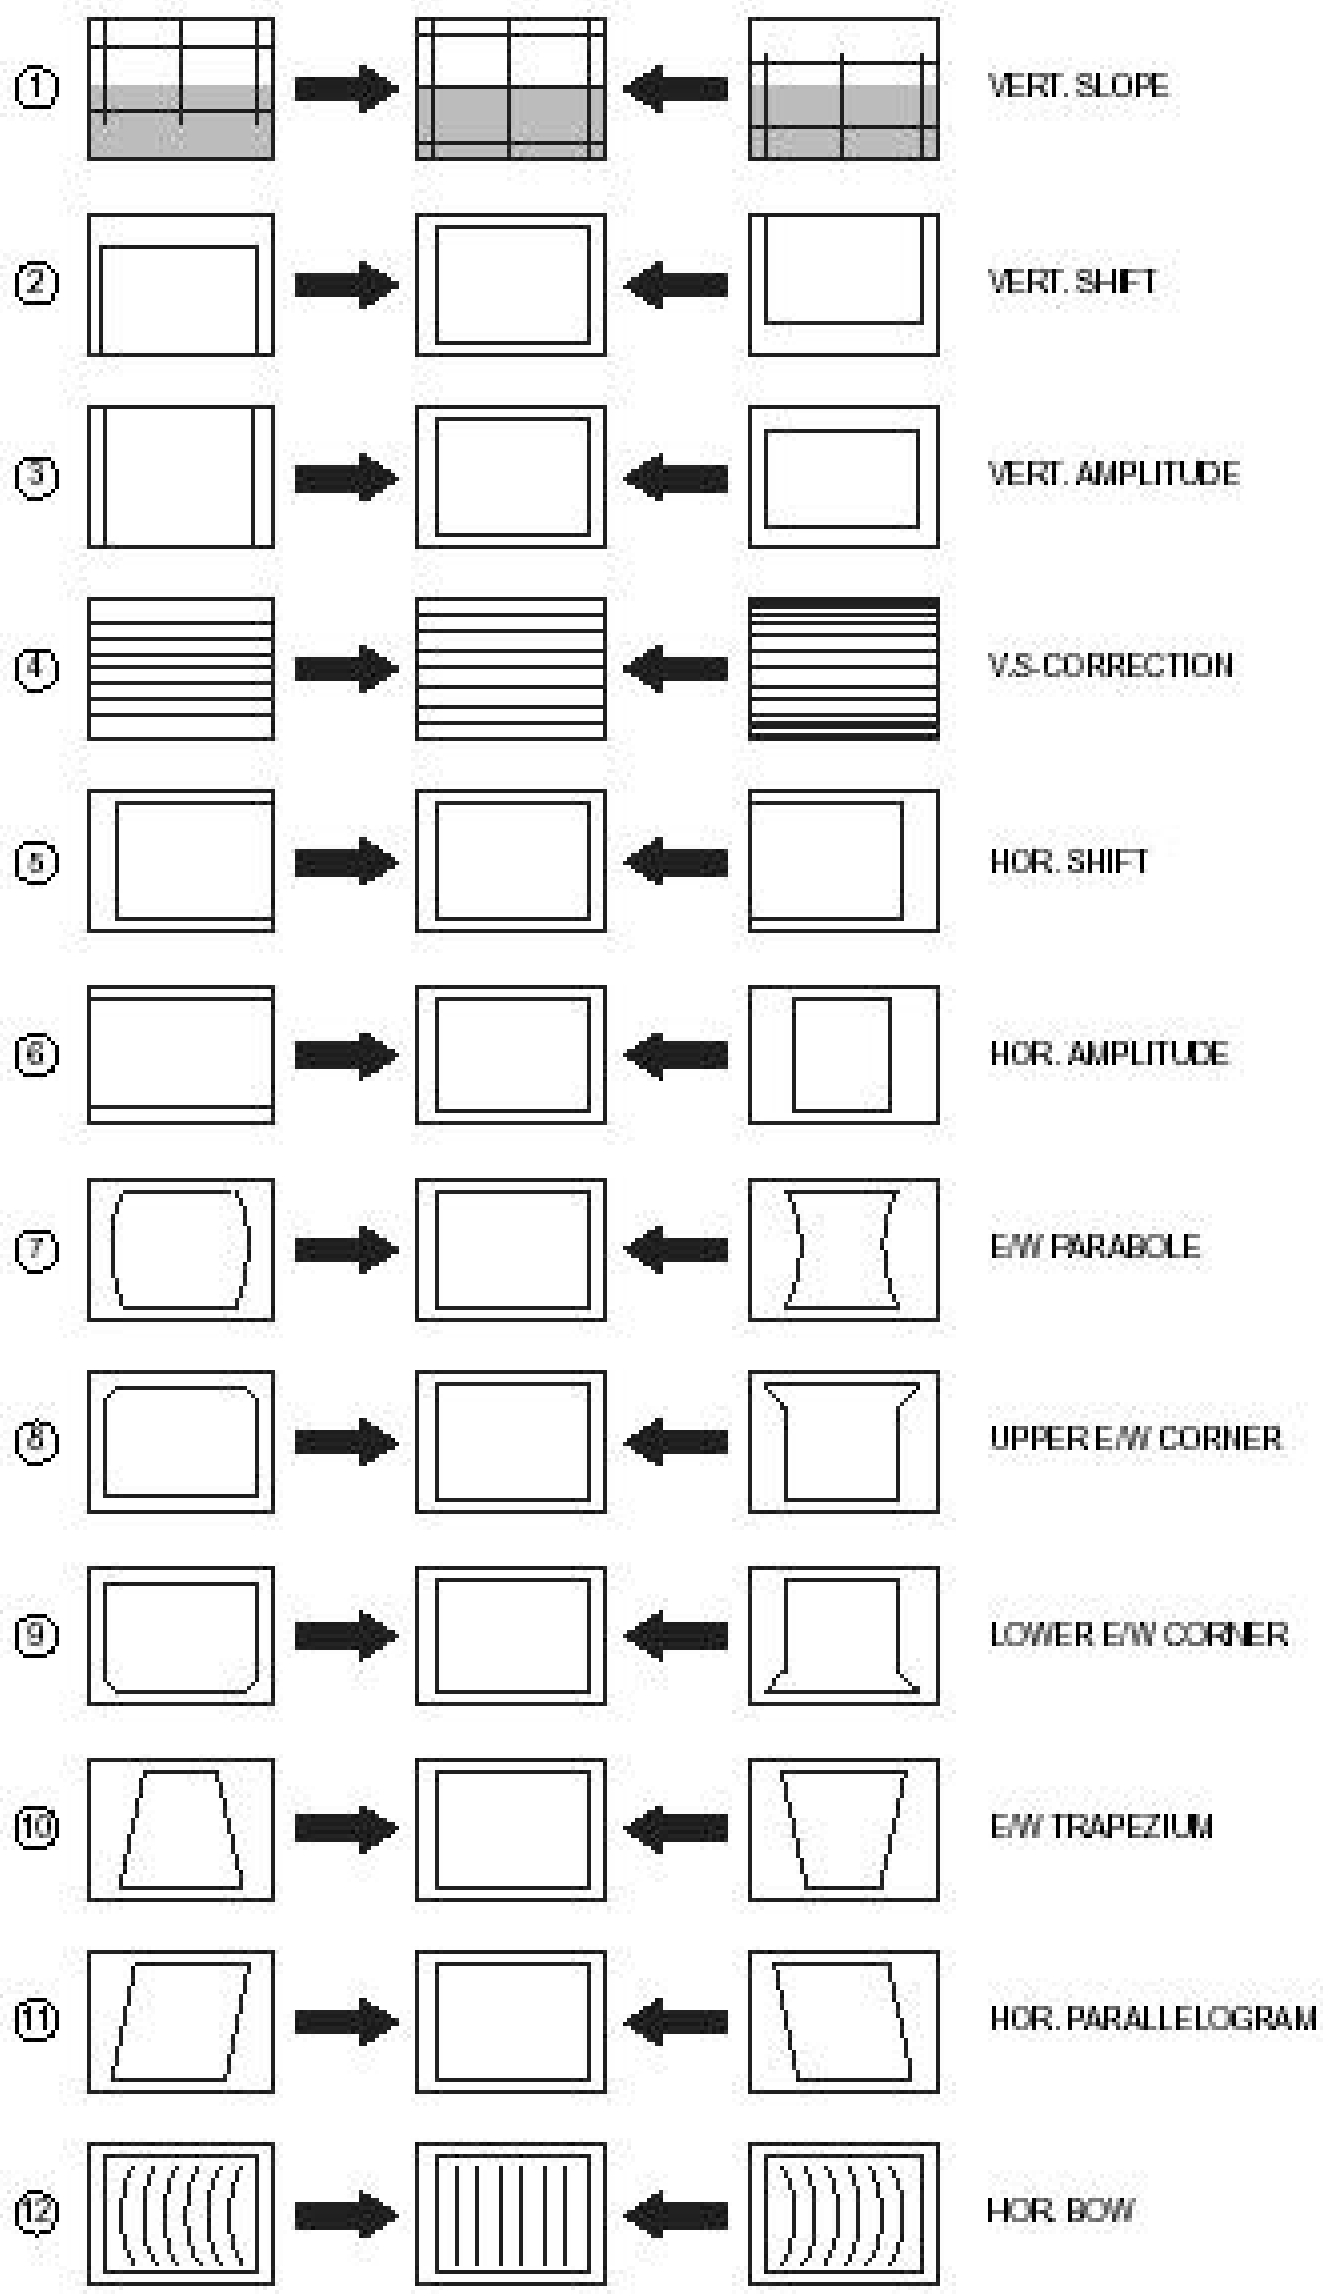


Figure: Geometry alignments

The following alignments can be performed in the GEOMETRY sub menu:

Horizontal Amplitude and Phase:

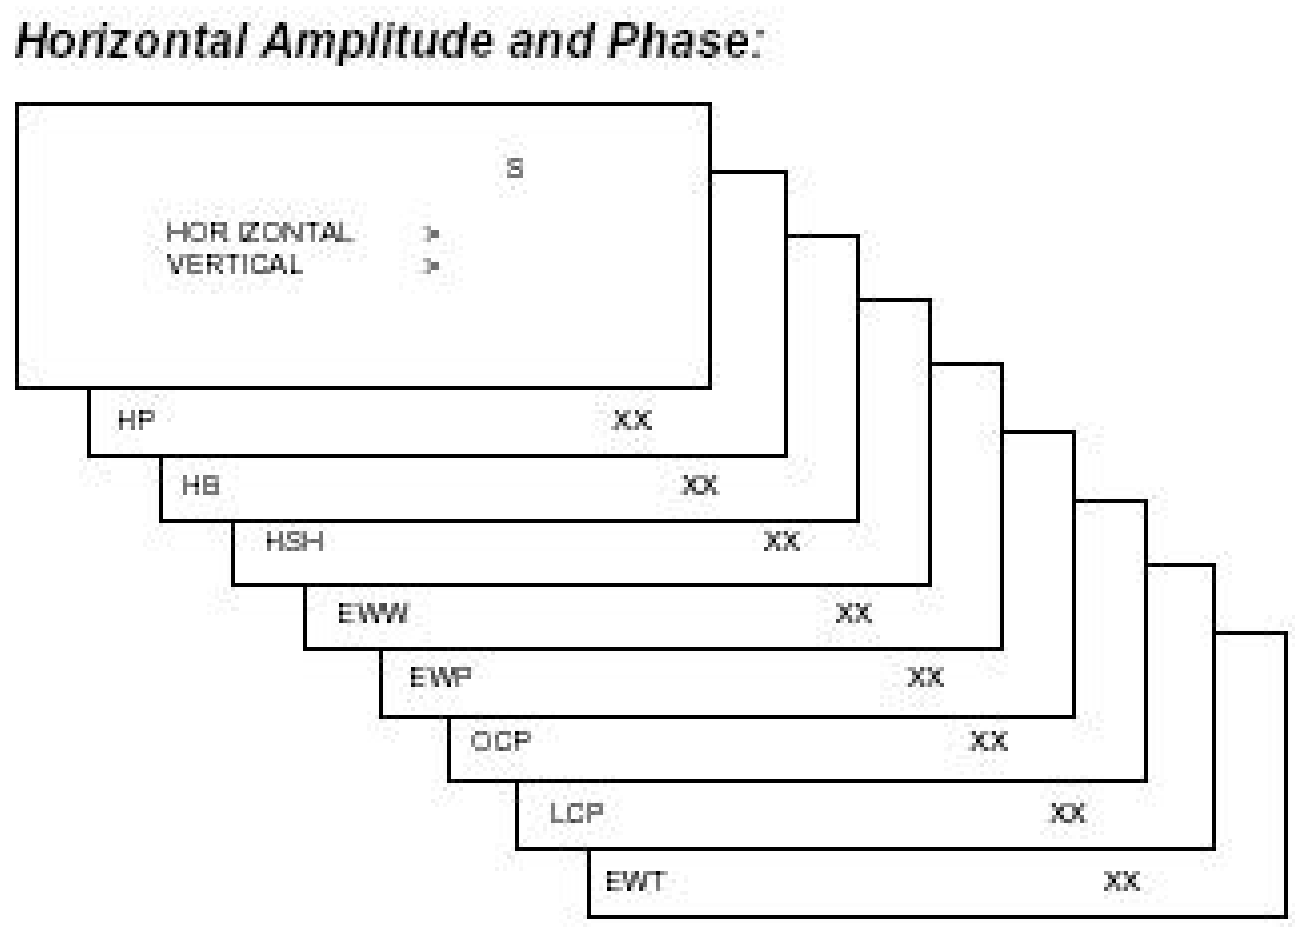


Figure: Horizontal alignment menu

- **Horizontal Shift (HSH).** Select Horizontal Shift to center the picture on the screen.
- **Horizontal Parallelogram (HP).** Set Horizontal Parallelogram to prevent the picture from slanting to one side.
- **Horizontal Bow (HB).** Set Horizontal Bow to prevent the top and bottom of picture from bending to the sides.
- **East West Width (EWW).** Select East-West Width and align the picture width until the complete test pattern is visible.
- **East West Parabola (EWP).** Select East-West Parabola and align the vertical sides until the sides are straightened.
- **Upper Corner Parabola (UCP).** Select Upper Corner Parabola to straighten the top of the vertical lines at the sides.
- **Lower Corner Parabola (LCP).** Select Lower Corner Parabola to straighten the bottom of the vertical lines at the sides.
- **East West Trapezium (EWT).** Align straight vertical lines in the middle of the screen.

Vertical Amplitude and Position:

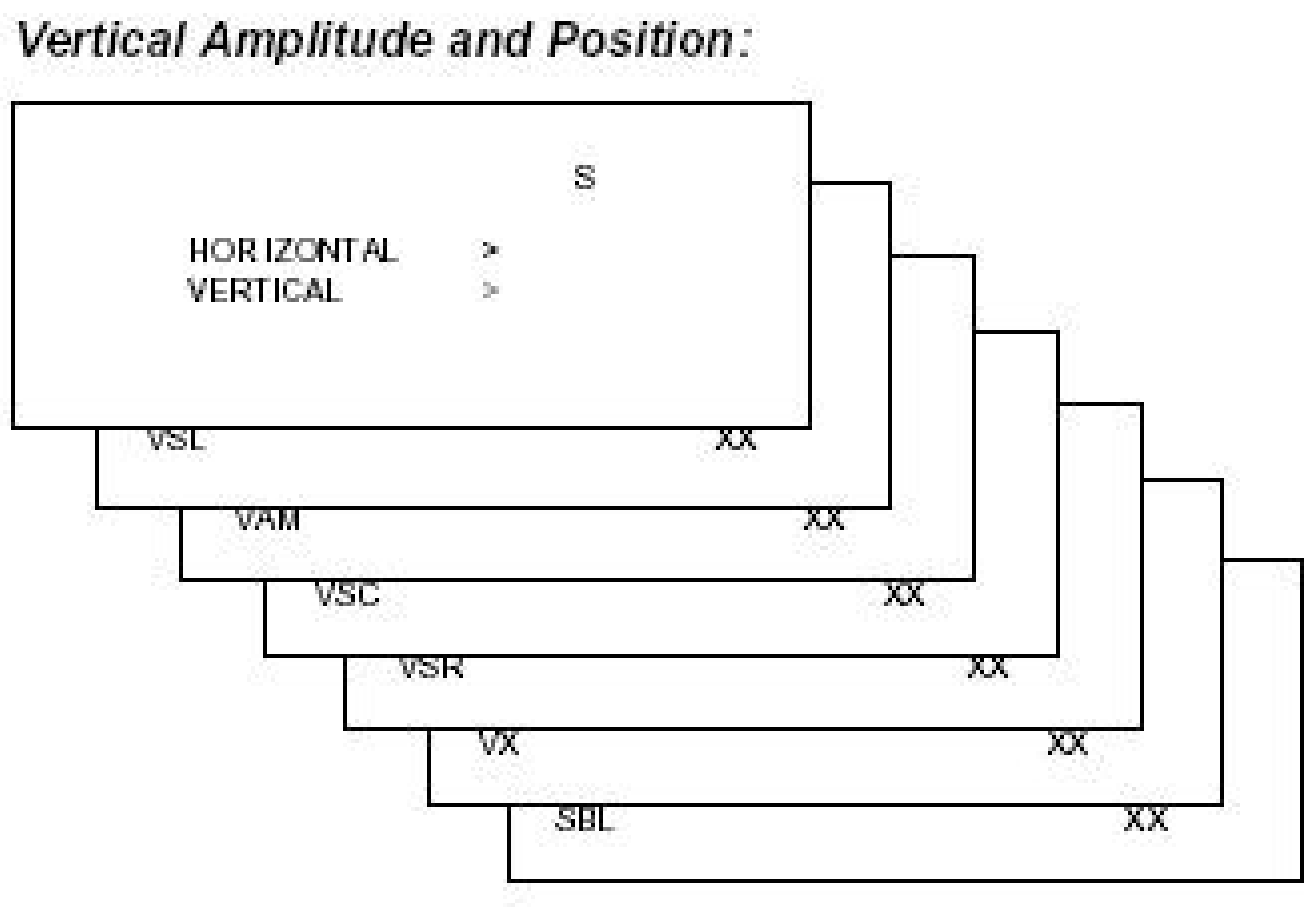


Figure: Vertical alignment menu

- **Vertical Amplitude (VAM).** Aligns the height of the picture (other vertical alignments are NOT compensated).
- **Vertical slope (VSL).** Aligns the picture so the proportions are the same at the top and bottom of the screen. This alignment must be performed first, before all other vertical alignments. Turning SBL 'on' will assist in performing this alignment.
- **Service blanking (SBL).** Turns the blanking of the lower half of the screen 'on' or 'off' (to be used in combination with the vertical slope alignment).
- **Vertical S-Correction (VSC).** Aligns the vertical linearity, so that the vertical intervals of the grid-patterns are the same over the entire height of the screen.
- **Vertical Shift (VSH).** Aligns the vertical center of the picture to the vertical center of the CRT. After performing this alignment, it may be necessary to perform the VAM alignment again.
- **Vertical Zoom (VX).** Adjusts the picture height.
- **Delta Horizontal Shift 60 Hz (H60).**
- **Delta Vertical Amplitude 60 Hz (V60).**

Methods of adjustment

1. Select Service Blanking (SBL) and set it to 1. The lower half of the picture will be blanked.
2. Press the MENU UP/DOWN buttons to select Vertical Slope (VSL).
3. Align VSL to start the blanking exactly at the horizontal white line at the center of the test circle (align the bottom of the screen so that castellations just disappear).
4. Press the MENU UP/DOWN buttons to select SBL and set it back to 0. The full picture reappears.
5. Select Vertical Amplitude (VAM) and align the picture height to approximately 13.0 - 13.1 blocks (align the top of the screen so that castellations just disappear).
6. Select Vertical Shift (VSH) and align for vertical centering of the picture on the screen.

Repeat the last two steps if necessary.

The table below lists the default GEOMETRY values for the different television sets.

Table: Default geometry values (Large Screen)

Parameter	20RF, 21RF, 25RF, 27RF, 29RF, 25", 28", 29"SF, 32V, 33"	25V	27V/29"	35V	28WS	32WS	28WSRF	32WSRF
HP Horizontal-Parallelogram	31	31	31	45	47	32	36	45
HB Horizontal-Bow	31	31	31	25	32	32	40	30
HSH Horizontal Shift	35	35	35	23	27	24	31	29
EWW East-West Width	34	-	-	45	36	39	40	33
EWP East-West Parabola	33	-	-	23	21	21	37	16
UCP Upper Corner Parabola	35	-	-	25	26	23	14	16

Parameter	20RF, 21RF, 25RF, 27RF, 29RF, 25", 28", 29"SF, 32V, 33"	25V	27V/29"	35V	28WS	32WS	28WSRF	32WSRF
LCP Lower Corner Parabola	35	-	-	31	30	30	25	23
EWT East-West Trapezium	35	-	-	24	28	26	18	27
VSL Vertical Slope	33	25	25	19	42	35	31	25
VAM Vertical Amplitude	26	32	32	31	30	23	23	30
VSC Vertical S-Correction	23	23	23	27	24	24	12	20
VSH Vertical Shift	31	28	28	26	18	23	36	34
VX Vertical Zoom	25	-	-	25	25	25	25	25

Audio

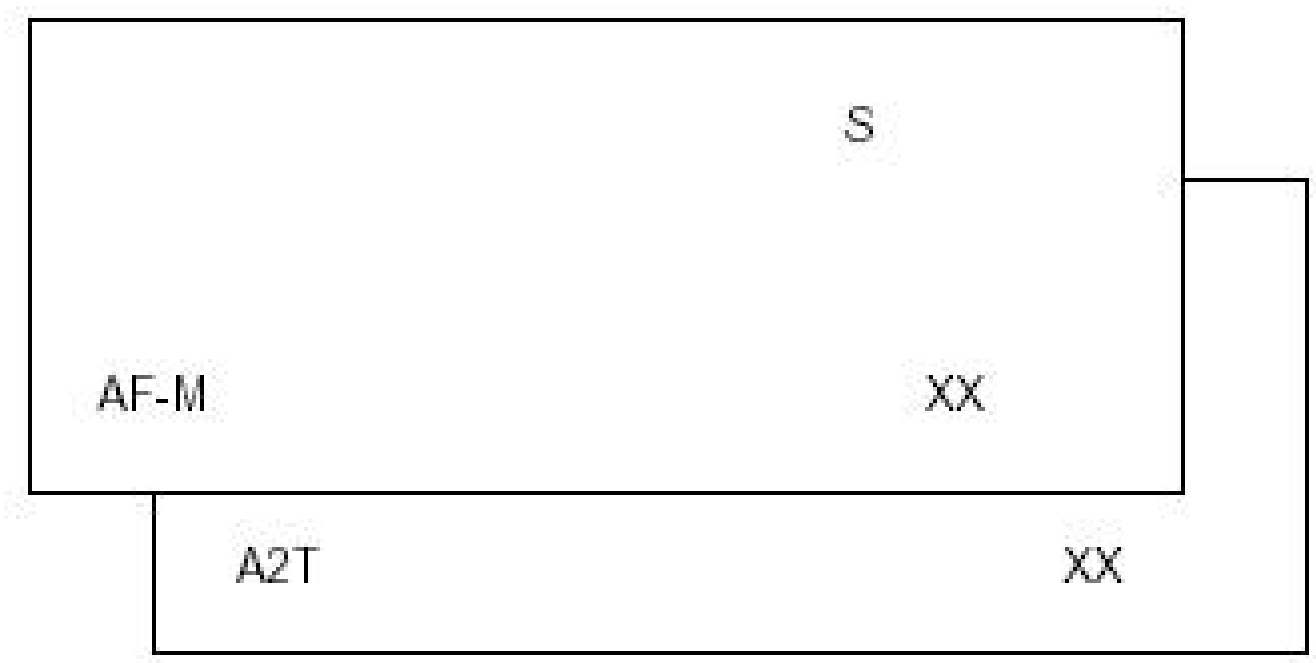


Figure: Audio alignment menu

No alignments are necessary for the AUDIO sub menu. Use the default values.

AF-M (NICAM threshold)

Default value is 300.

To adjust AF-M:

1. To enter SDAM, press the following key sequence on the remote control transmitter: **0 6 2 5 9 6** directly followed by the **MENU** button (do not allow the display to time out between entries while keying the sequence).
2. Use the MENU UP/DOWN keys to highlight the AUDIO sub menu.
3. Press the MENU LEFT/RIGHT keys to enter the AUDIO sub menu.
4. Use the MENU UP/DOWN keys to select AF-M.
5. Use the MENU LEFT/RIGHT keys to adjust the value of AF-M to 300.
6. Press the MENU button to return to the top level SDAM menu.
7. To ensure the AF-M setting is saved:

- Turn the television set 'off' by using the 'POWER' button on the remote control transmitter or the local keyboard.
- Disconnect the television set from AC power for at least ten seconds.
- Reconnect the television set to AC power.
- Turn the television set 'on' by using the 'POWER' button on the remote control transmitter or the local keyboard.

A2T (TV A2 Threshold)

Default value is 250.

To adjust A2T:

1. To enter SDAM, press the following key sequence on the remote control transmitter: **0 6 2 5 9 6** directly followed by the **MENU** button (do not allow the display to time out between entries while keying the sequence).
2. Use the MENU UP/DOWN keys to highlight the AUDIO sub menu.
3. Press the MENU LEFT/RIGHT keys to enter the AUDIO sub menu.
4. Use the MENU UP/DOWN keys to select A2T.
5. Use the MENU LEFT/RIGHT keys to adjust the value of A2T to 250.
6. Press the MENU button to return to the top level SDAM menu.
7. To ensure the A2T setting is saved:
    - Turn the television set 'off' by using the 'POWER' button on the remote control transmitter or the local keyboard.
    - Disconnect the television set from AC power for at least ten seconds.
    - Reconnect the television set to AC power.
    - Turn the television set 'on' by using the 'POWER' button on the remote control transmitter or the local keyboard.

Circuit Description

Index of this chapter:

1. Introduction
2. Audio Signal Processing
3. Video Signal Processing
4. Synchronization
5. Deflection
6. Power Supply
7. Control
8. Abbreviations
9. IC Data Sheets

Notes:

- For a good understanding of the following circuit descriptions, please use the Block diagram . Where necessary, you will find a separate drawing for clarification.
- Figures below can deviate slightly from the actual situation, due to different set executions.

Introduction

The 'L01.1U AC' chassis is a global TV chassis for the model year 2003 and is used for TV sets with screen sizes from 20" - 32" (large screen), in Super Flat, Real Flat, and Wide Screen executions. In comparison to its predecessor (the 'L01.1U AB'), the chassis has enhanced features like a 2D 3-line Comb-filter and 'Active Control'.
The standard architecture consists of a Mono Carrier, a Picture Tube panel, a Side I/O panel, and a Top Control panel.
The Mono Carrier consists primarily of conventional components with hardly any surface mounted devices.

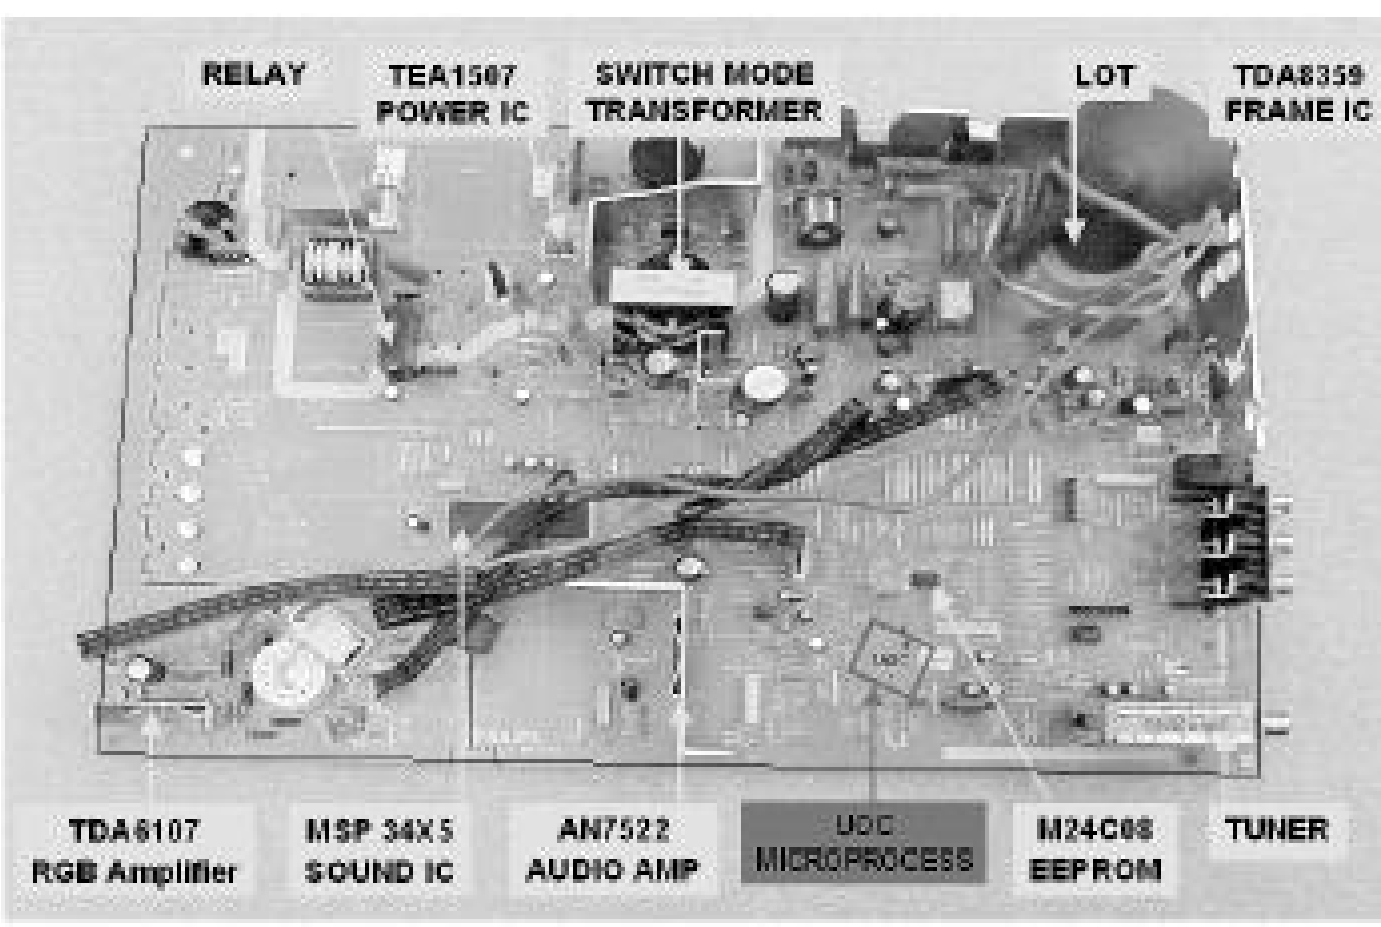


Figure: Mono Carrier component side

The functions for video processing, microprocessor (P), and teletext (TXT) decoder are combined in one IC (TDA958xH), the so-called Ultimate One Chip (UOC). This chip is (surface) mounted on the copper side of the LSP.

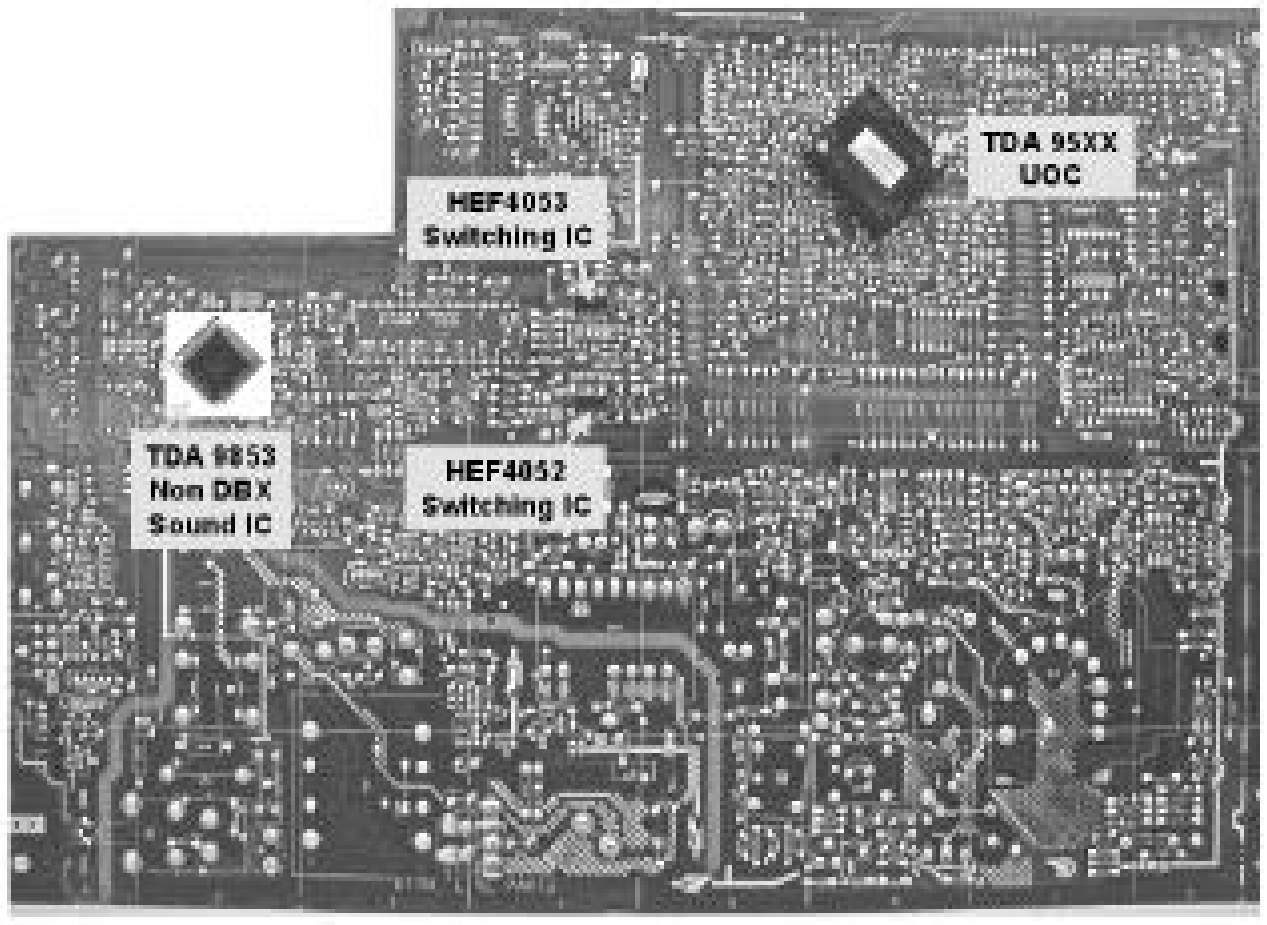


Figure: Mono Carrier solder side

The 'L01.1U AC' is divided into 2 basic systems, i.e. mono and stereo sound. While the audio processing for the mono sound is done in the audio block of the UOC, an external audio processing IC is used for stereo sets.

The tuning system features 181 channels with on-screen display. The main tuning system uses a tuner, a microcomputer, and a memory IC mounted on the Mono Carrier. The microcomputer communicates with the memory IC, the customer keyboard, remote receiver, tuner, signal processor IC and the audio output IC via the I^2 C bus. The memory IC retains the settings for favorite stations, customer-preferred settings, and service / factory data.
The on-screen graphics and closed caption decoding are done within the microprocessor, and then sent to the signal processor IC to be added to the main signal.

The chassis utilizes a Switching Mode Power Supply (SMPS) for the main voltage source. The chassis has a 'hot' ground reference on the primary side and a cold ground reference on the secondary side of the power supply and the rest of the chassis.

Audio Signal Processing

Stereo


In stereo sets, the signal goes via the SAW filter (position 1002/1003), to the audio demodulator part of the UOC IC 7200. The audio output on pin 33 goes to the stereo decoder 7831/ 7861. The switch inside this IC selects either the internal decoder or an external source.

There are two stereo decoders versions used:

1. A BTSC DBX stereo/SAP decoder (MSP34X5 at position 7831) for the highest specified sets, and
2. A BTSC non-DBX stereo decoder (TDA9853 at position 7861) for BTSC Economic.

The output is fed to the to the audio amplifier (AN7522 at position 7901). The volume level is controlled at this IC (pin 9) by a control line (Volume|Mute) from the microprocessor. The audio signal from 7901 is then send to the speaker and headphone output panel.

Stereo audio signal processing

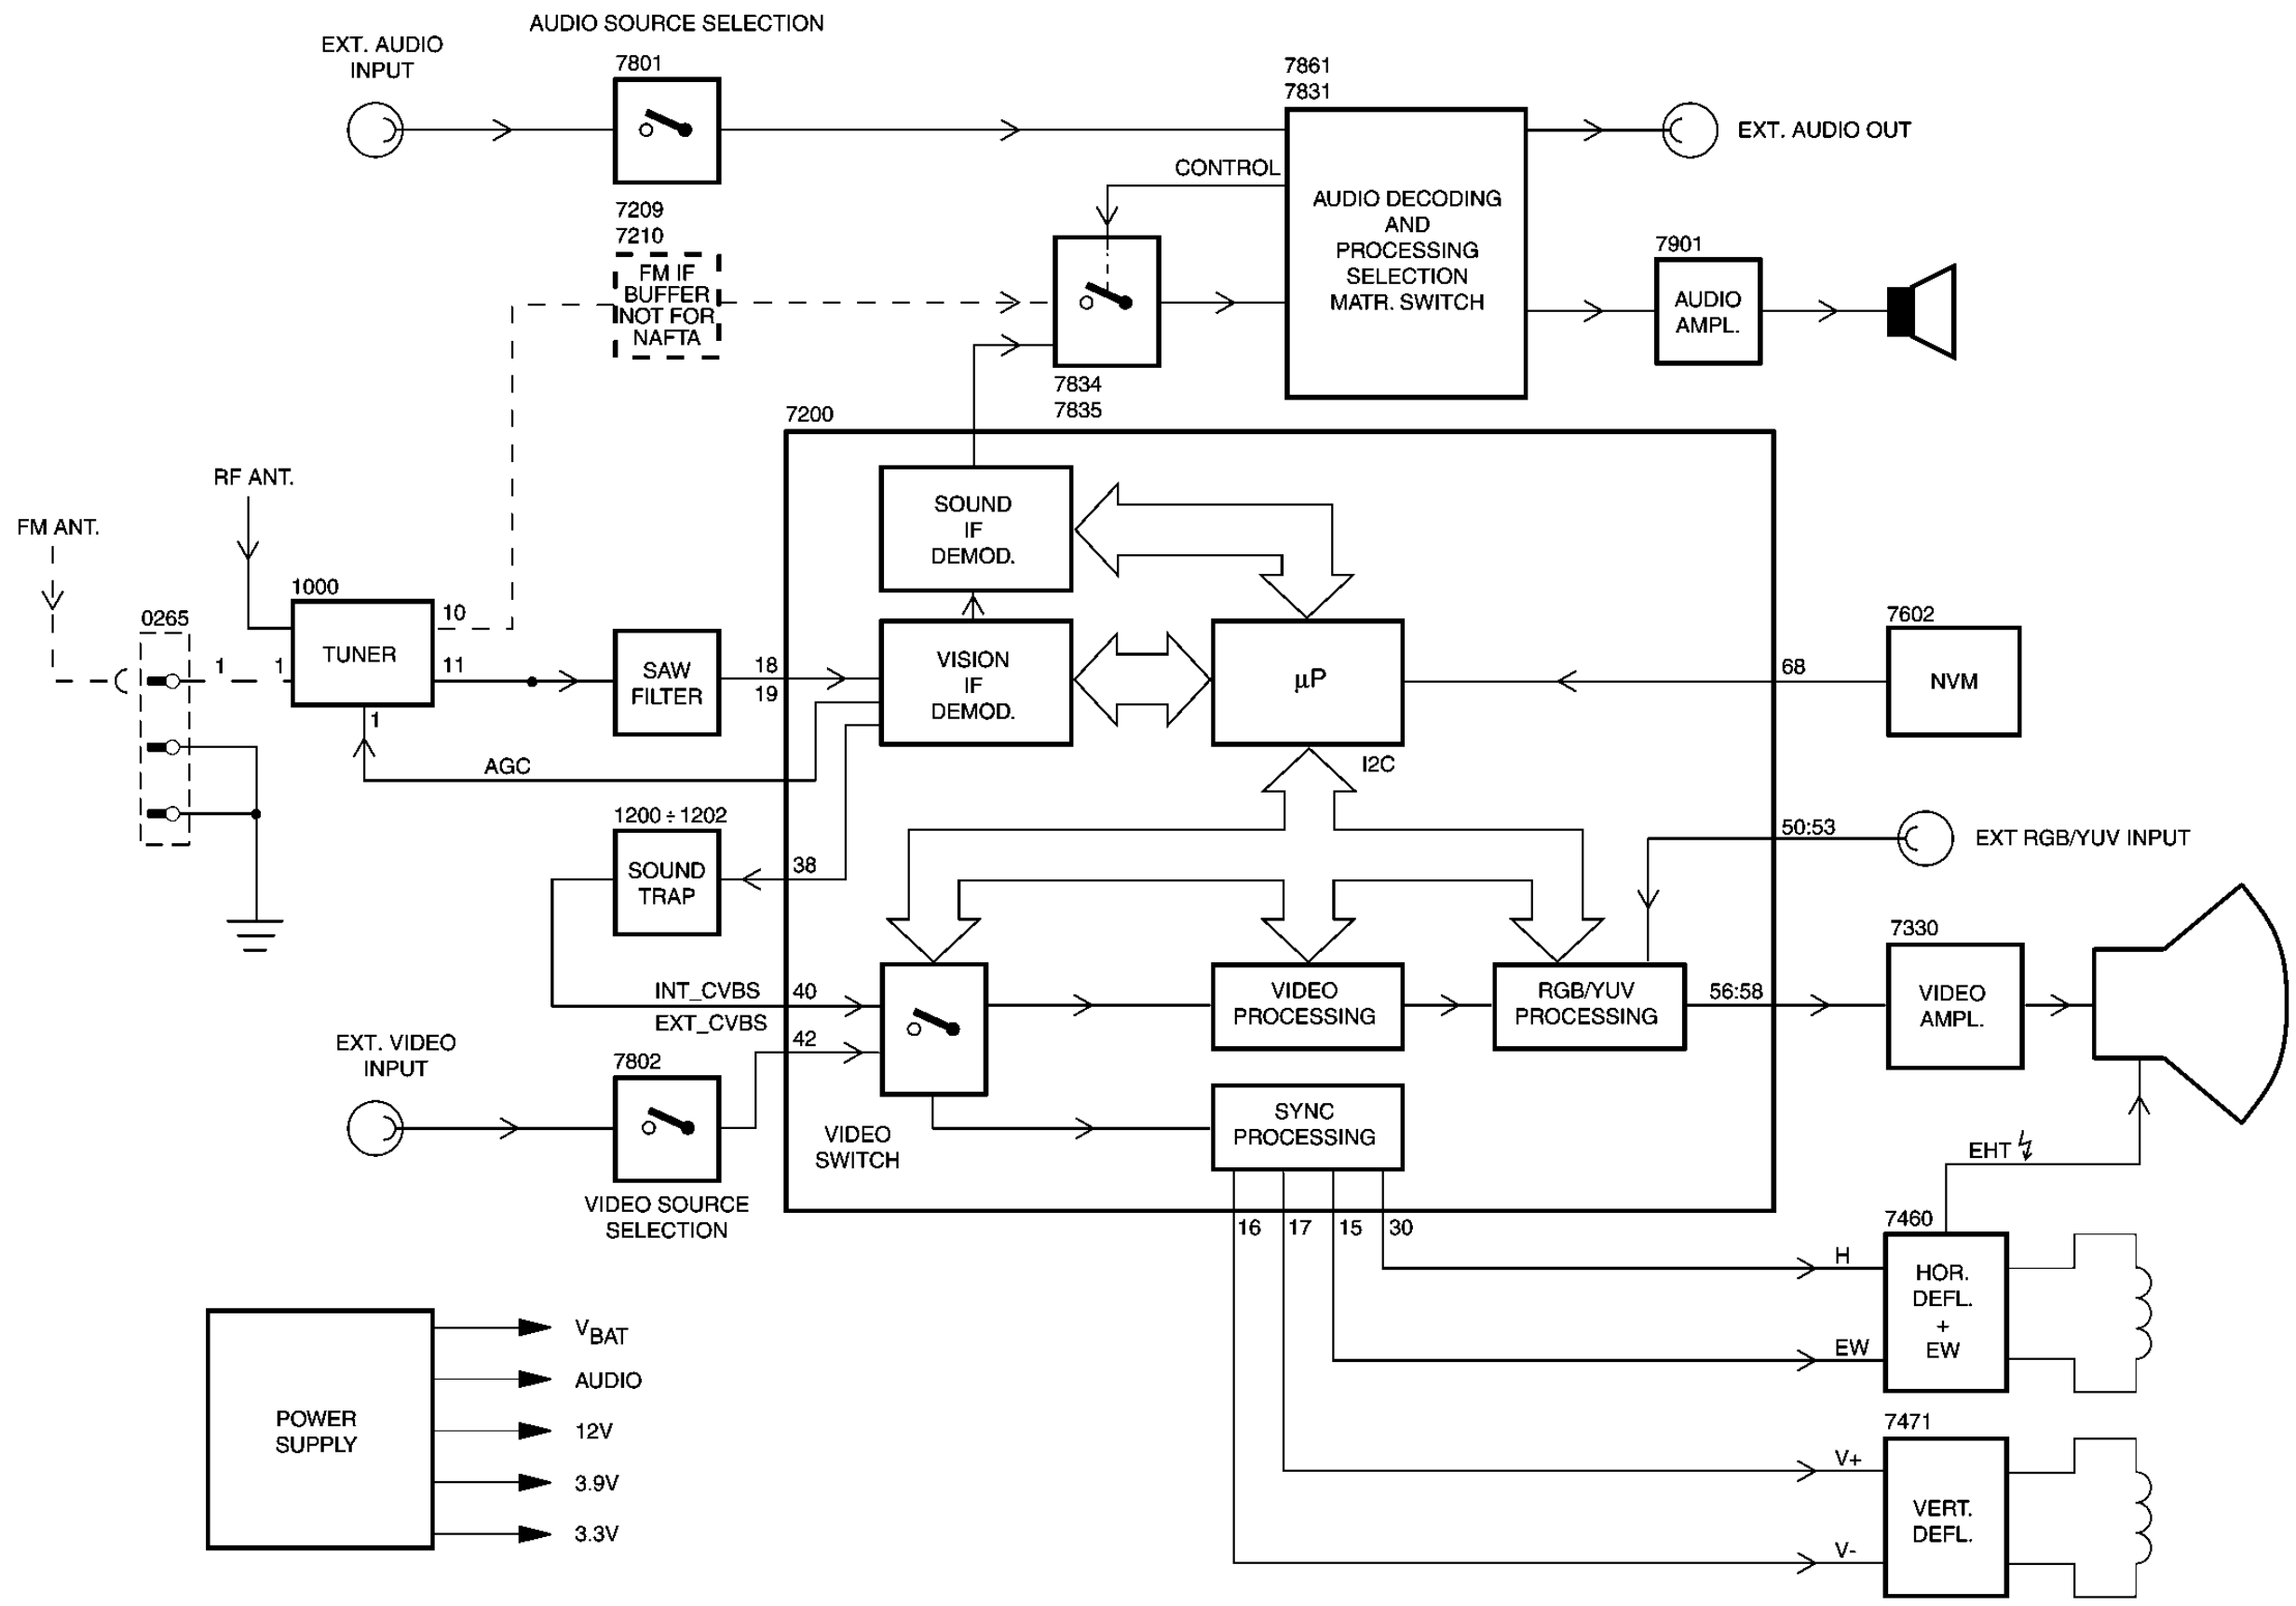


Mono

In mono sets, the signal goes via the SAW filter (position 1002/1003), to the audio demodulator part of the UOC IC 7200. The audio output on pin 48 goes to the audio amplifier (AN7523 at position 7902).

The volume level is controlled at this IC (pin 9) by a 'VolumeMute' control line from the microprocessor.

The audio signal from IC 7902 is then send to the speaker and headphone output panel.

[Mono audio signal processing]

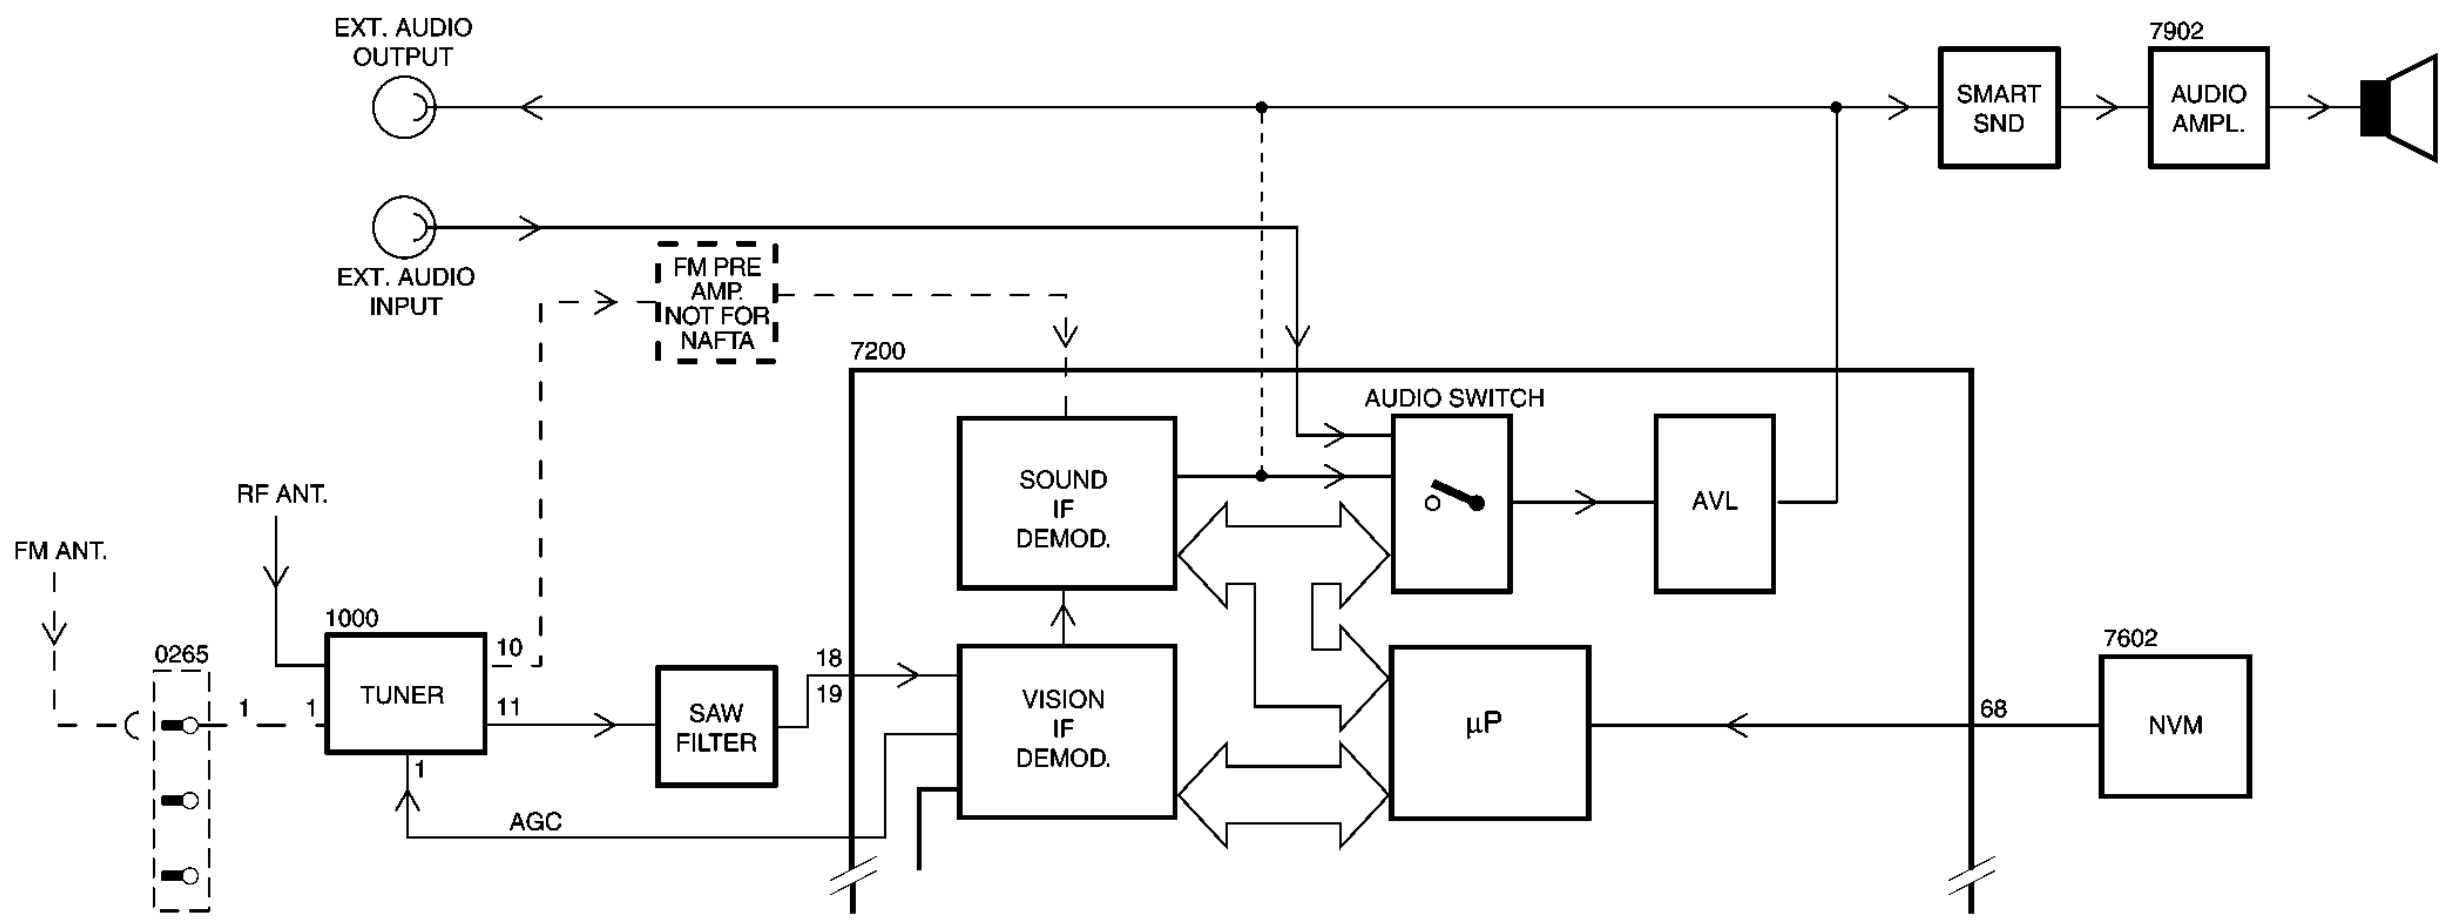

Video Signal Processing

Introduction

The video signal-processing path consists of the following parts:

- RF signal processing.
- Video source selection.
- Video demodulation.
- Luminance / Chrominance signal processing.
- RGB control.
- RGB amplifier

The processing circuits listed above are all integrated in the UOC TV processor. The surrounding components are for the adaptation of the selected application. The I^2 C bus is for defining and controlling the signals.

RF Signal Processing

The incoming RF signal goes to the tuner (pos. 1000), where the 45.75 MHz IF signal is developed and amplified. The IF signals then exits the tuner from pin 11 to pass through the SAW filter (pos. 1002/1003). The shaped signal is then applied to the IF processor part of the UOC (pos. 7200).
Tuner AGC (Automatic Gain Control) will reduce the tuner gain and thus the tuner output voltage when receiving strong RF signals. Adjust the AGC takeover point via the Service Alignment Mode (SAM). The tuner AGC starts working when the video-IF input reaches a certain input level and will adjust this level via the I^2 C bus. The tuner AGC signal goes to the tuner (pin 1) via the open collector output (pin 22) of the UOC.
The IC also generates an Automatic Frequency Control (AFC) signal that goes to the tuning system via the I^2 C bus, to provide frequency correction when needed.
The demodulated composite video signal is available at pin 38 and then buffered by transistor 7201.

Video Source Selection

The Composite Video Blanking Signal (CVBS) from buffer 7201 goes to the audio carrier trap filters 1200, 1201, or 1202 (depending on the system used), to remove the audio signal. The signal then goes to pin 40 of IC 7200. The internal input switch selects the following input signals:

- Pin 40: terrestrial CVBS input
- Pin 42: external AV1 CVBS input
- Pin 44: external Side I/O CVBS or AV2 (or comb filter) luminance (Y) input
- Pin 45: external AV2 (or comb filter) chrominance (C) input

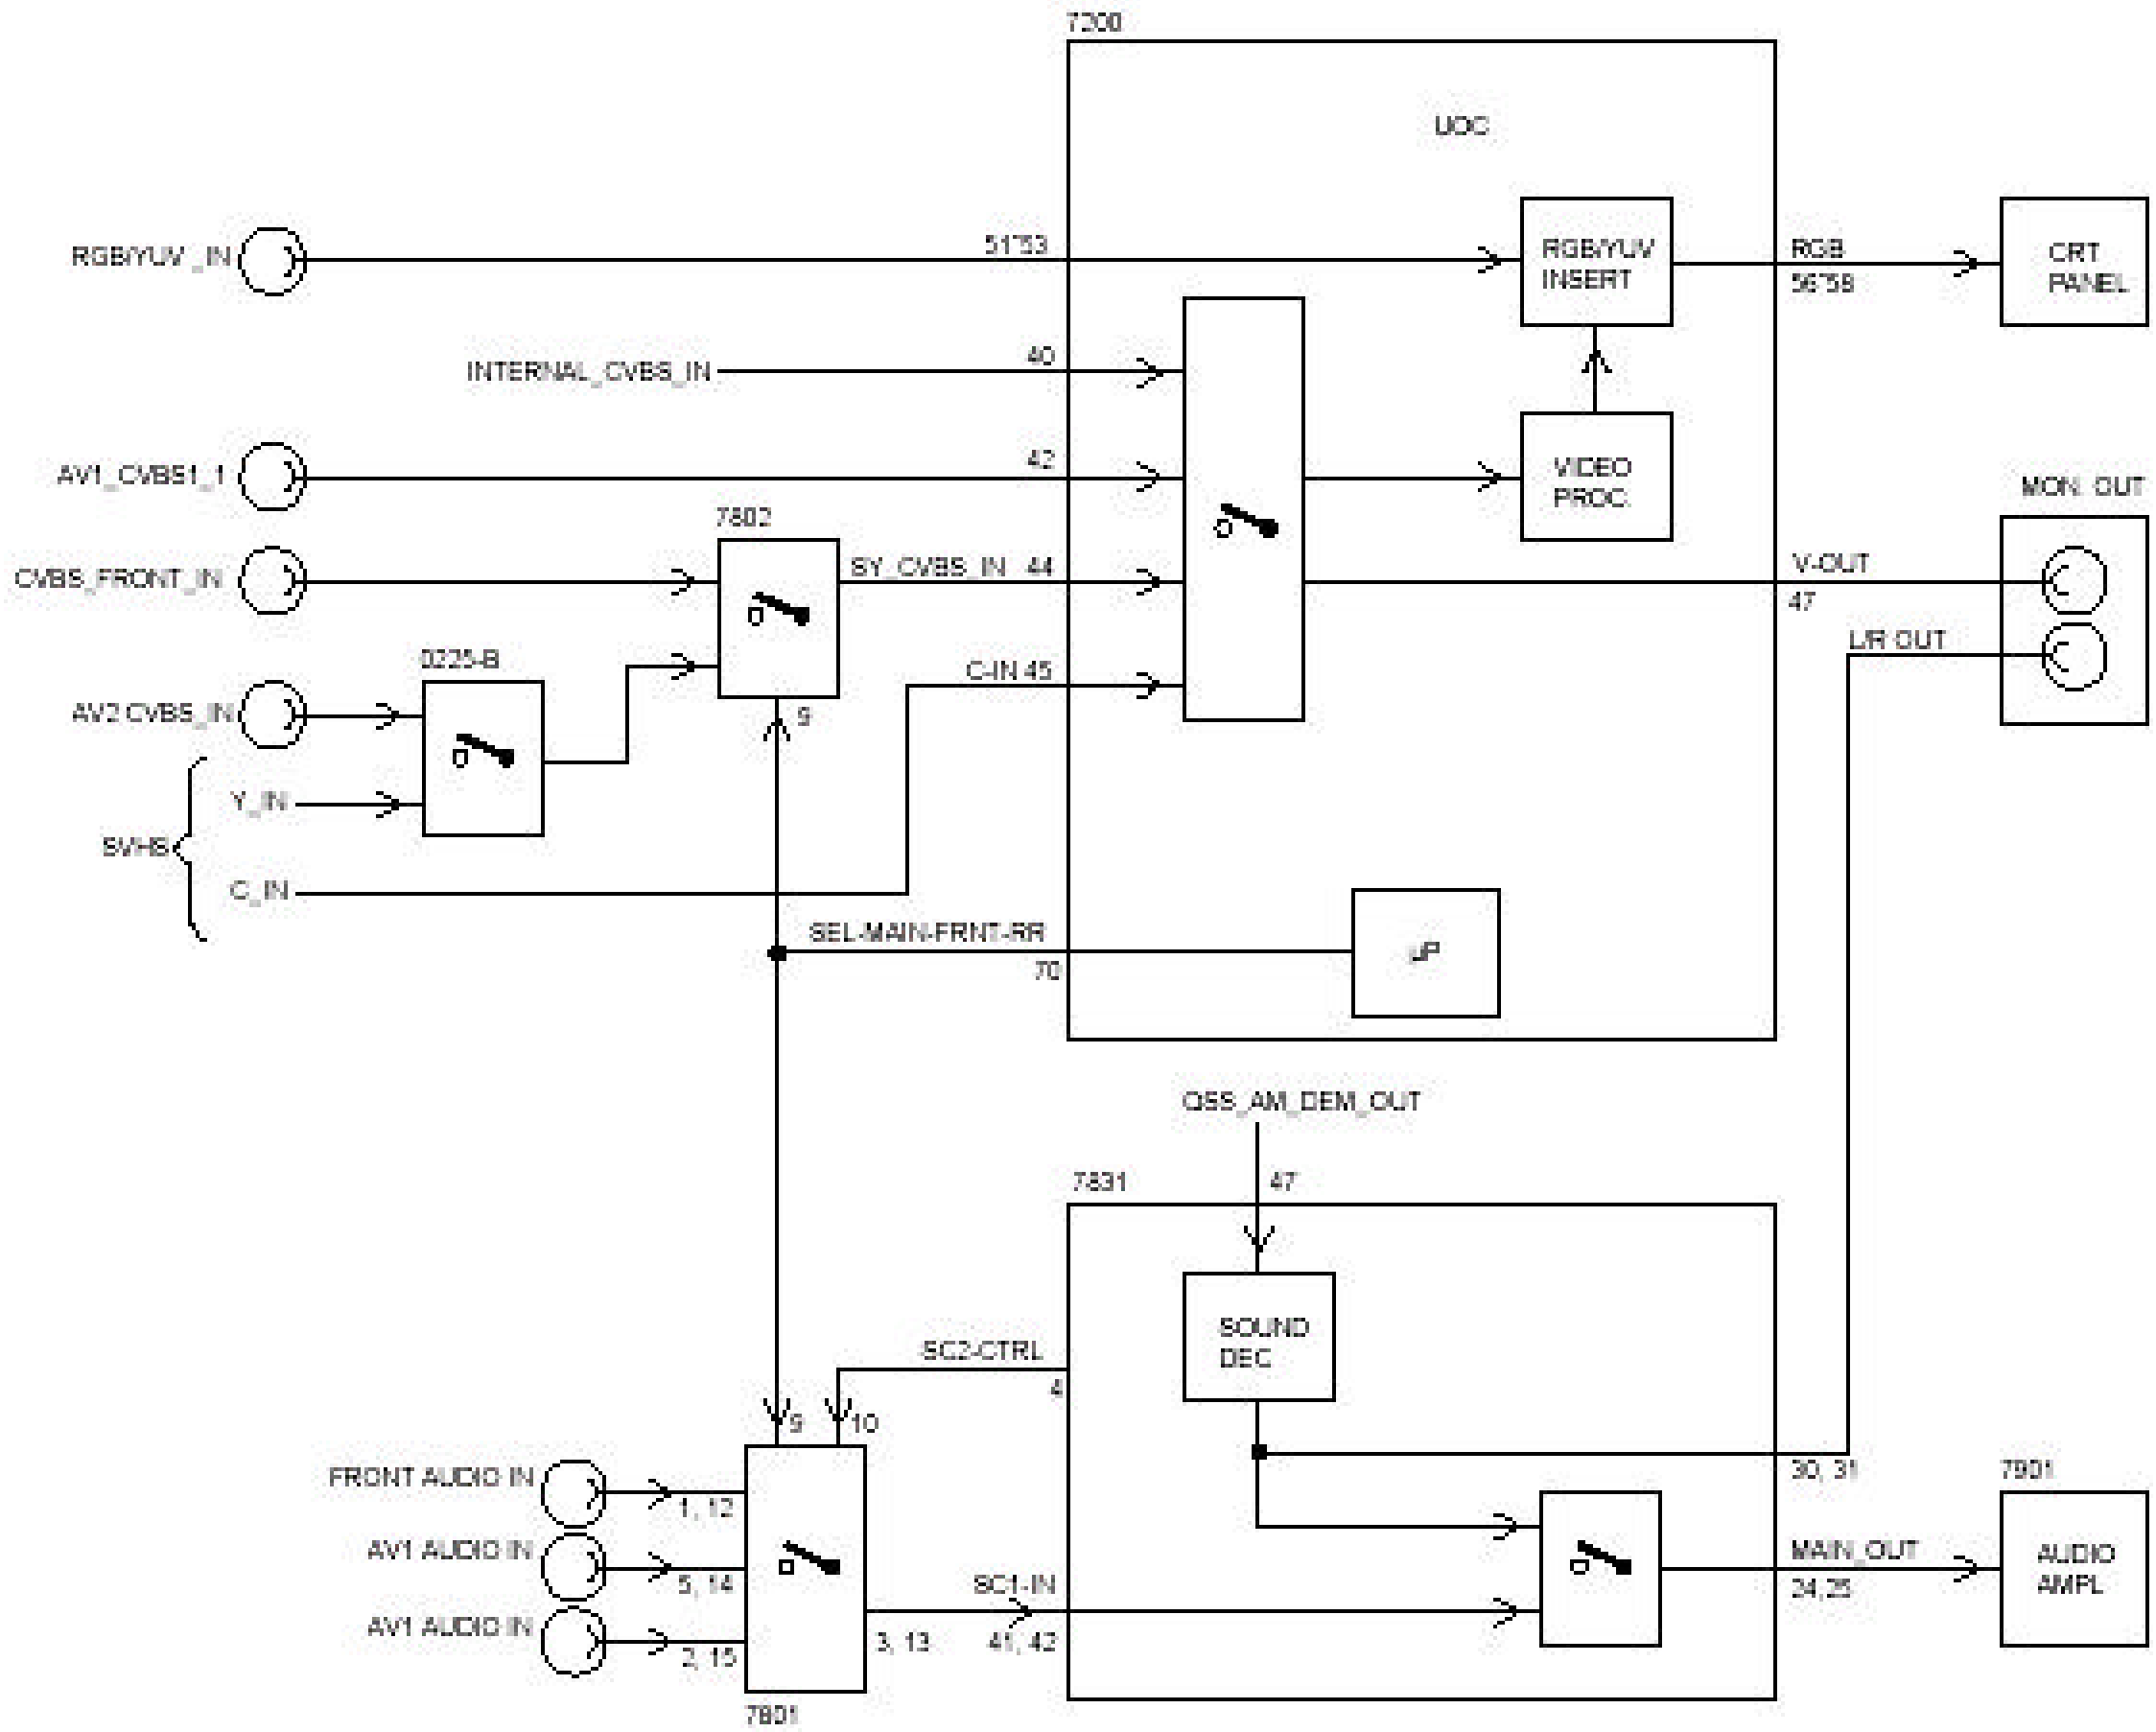


Figure: Video source selection

Once the signal source is selected, a chroma filter calibration is performed. The received color burst sub-carrier frequency is used for this. Correspondingly, the chroma band pass filter for PAL/NTSC processing or the cloche filter for SECAM processing is switched on. The selected luminance (Y) signal is supplied to the horizontal and vertical synchronization circuit and to the luminance processing circuit. In the luminance-processing block, the luminance signal goes to the chroma trap filter. This trap is switched 'on' or 'off' depending on the color burst detection of the chroma calibration circuit.

The group delay correction part can be switched between the BG and a flat group delay characteristic. This has the advantage that in multi-standard receivers no compromise has to be made for the choice of the SAW filter.

Comb Filter

Introduction

The video signal prepared for broadcast contains two major parts commingled, the luminance (makes a black and white picture in full detail) and chrominance (coloration with not quite all the detail). This method is used instead of red, green, and blue sub-signals in order to get the best looking picture that can be transmitted in the limited bandwidth of the broadcast channel.
Every TV receiver and VCR must contain a filter to separate the luminance and color (Y and C) again. Less than perfect Y/C separators lose resolution -- horizontal, vertical, or both. Also there are artifacts such as *rainbow swirls* where thin stripes should be, and *crawling dots* where patches of different colors meet. The perfect Y/C separator does not exist yet, although some 3D comb filters come close.

There are several methods for filtering:

- **No comb filter.** The cheapest solution is to use simple filters (notch, low pass, bandpass filters) that pass only the coarse and medium horizontal detail (lower 3 MHz or so) to the luminance circuits and pass the bulk of the color information still commingled with the fine luminance detail (3 to 4.2 MHz) to the color circuits.
- **Two line ordinary filter.** The improvements over 'no' comb filter are: revealing of finer horizontal detail overall, and some reduction of rainbow swirls. Improvement of fine detail is most prominent where details consist of upright dark and light lines.
- **Three line ordinary filter.** Improvement over the two-line filter consists of sharper transition from one color to another at sharp horizontal color boundaries, and less dot crawl.
- **Three line adaptive (a.k.a. 2D; dynamic) filter.** This method adapts the mixing according the line content of two fields. The big improvement that the 2D comb filter brings, is the elimination (or near elimination) of dot crawl. This type of filter

is used in the 'L01.1U AC' chassis. When present, the filter CBA is plugged-in on connector 1810B of the Mono Carrier.

- **Motion adaptive (3D) filter.** The difference with the 2D method is that this method uses three fields, so it also uses 'time' dimension. The 3D comb filter can achieve essentially perfect Y/C separation, eliminating all dot crawl and rainbow swirls for 'stationary' subject material, and perform at least as well as the 2D filter for the rest of the picture.

Implementation

The input (CVBS) signal comes from pin 47 of the UOC. On the comb filter panel, it first enters a low-pass filter (items 2409, 5408, 2408, 5407, and 2407) and an amplifier circuit (items 7401 and 7402). The LPF is used to eliminate the noise and the amplifier circuit to get a video input of 1 V_{PP} .
The 'REF0' subcarrier reference (f_{SC}) is fed to pin 11 and internally multiplied by four (4 x 3.58 MHz = 14.32 MHz) for the system clock.
After processing, the Y/C outputs (pins 25 and 23) are both filtered by a low-pass filter, in order to eliminate the high frequency harmonics of this system clock.
After filtering, the Y and C signals are fed to the source inputs of the UOC (pins 44 and 45).

Specification

If the comb filter is 'on', and the signal level drops below a specified value, then the filter is set to 'off'. Once the filter is set to 'off' it will remain 'off' until a channel change is performed.
When an S-Video (Y/C) or component video signal is offered to the TV, the filter is bypassed via the 'COMB_BYPASS' signal from the microprocessor.

Video Demodulation

The color decoder circuit detects whether the signal is a PAL, NTSC, or SECAM signal. The result is made known to the auto system manager. The PAL/NTSC decoder has an internal clock generator, which is stabilized to the required frequency by using the 12 MHz clock signal from the reference oscillator of the microcontroller / teletext decoder. The base-band delay line is used to obtain a good suppression of cross color effects. The Y signal and the delay line outputs U and V are applied to the luminance / chroma signal processing part of the TV processor.

Luminance / Chrominance signal Processing

The output of the YUV separator is fed to the internal YUV switch, which switches between the output of the YUV separator or the external YUV (for DVD or PIP) on pins 51-53. Pin 50 is the input for the insertion control signal called 'FBL-1'. When this signal level becomes higher than 0.9 V (but less than 3 V), the RGB signals at pins 51, 52, and 53 are inserted into the picture by using the internal switches.
Also, some picture improvement features are implemented in this part:

- **Black stretch.** This function corrects the black level of incoming signals, which have a difference between the black level and the blanking level. The amount of extension depends upon the difference between actual black level and the darkest part of the incoming video signal level. It is detected by means of an internal capacitor.
- **White stretch.** This function adapts the transfer characteristic of the luminance amplifier in a non-linear way depending on the average picture content of the luminance signal. It operates in such a way that maximum stretching is obtained when signals with a low video level are received. For bright pictures, stretching is not active.
- **Dynamic skin tone correction.** This circuit corrects (instantaneously and locally) the hue of those colors, which are located in the area in the UV plane that

matches the skin tone. The correction is dependent on the luminance, saturation, and distance to the preferred axis.

The YUV signal is then fed to the color matrix circuit, which converts it to R, G, and B signals.
The OSD/TXT signal from the microprocessor is mixed with the main signal at this point, before being output to the CRT board (pins 56, 57, and 58).

RGB Control

The RGB control circuit enables the picture parameters contrast, brightness, and saturation to be adjusted, by using a combination of the user menus and the remote control. Additionally automatic gain control for the RGB signals via cut-off stabilization is achieved in this functional block to obtain an accurate biasing of the picture tube. Therefore, this block inserts the cut-off point measuring pulses into the RGB signals during the vertical retrace period.

The following additional controls are used:

- **Black current calibration loop.** Because of the 2-point black current stabilization circuit, both the black level and the amplitude of the RGB output signals depend on the drive characteristics of the picture tube. The system checks whether the returning measuring currents meet the requirements, and adapt the output level and gain of the circuit when necessary. After stabilization of the loop, the RGB drive signals are switched on. The 2-point black level system adapts the drive voltage for each cathode in such a way that the two measuring currents have the right value. This is done with the measurement pulses during the frame flyback. During the first frame, three pulses with a current of 8 µA are generated to adjust the cut off voltage. During the second frame, three pulses with a current of 20 µA are generated to adjust the 'white drive'. This has as a consequence, that a

change in the gain of the output stage will be compensated by a gain change of the RGB control circuit. Pin 55 (BLKIN) of the UOC is used as the feedback input from the CRT base panel.

- **Blue stretch.** This function increases the color temperature of the bright scenes (amplitudes which exceed a value of 80% of the nominal amplitude). This effect is obtained by decreasing the small signal gain of the red and green channel signals, which exceed this 80% level.
- **Beam current limiting.** A beam current limiting circuit inside the UOC handles the contrast and brightness control for the RGB signals. This prevents the CRT from being overdriven, which could otherwise cause serious damage in the line output stage. The reference used for this purpose is the DC voltage on pin 54 (BLCIN) of the TV processor. Contrast and brightness reduction of the RGB output signals is therefore proportional to the voltage present on this pin. Contrast reduction starts when the voltage on pin 54 is lower than 2.8 V. Brightness reduction starts when the voltage on pin 54 is less than 1.7 V. The voltage on pin 54 is normally 3.3 V (limiter not active). During set switch-off, the black current control circuit generates a fixed beam current of 1 mA. This current ensures that the picture tube capacitance is discharged. During the switch-off period, the vertical deflection is placed in an over-scan position, so that the discharge is not visible on the screen.

RGB Amplifier

From outputs 56, 57, and 58 of IC 7200 the RGB signals are applied to the integrated output amplifier (7330) on the CRT panel. Via the outputs 7, 8, and 9, the picture tube cathodes are driven.
The supply voltage for the amplifier is +200 V and is derived from the line output stage.

SCAVEM (if present)

The SCAn VElocity Modulation (SCAVEM) circuitry is implemented in the layout of the picture tube panel. It is thus not an extra module. This circuit influences the horizontal deflection as a function of the picture content. In an ideal square wave, the sides are limited in slope due to a limited bandwidth (5 MHz). SCAVEM will improve the slope as follows:

- **At a positive slope** , a SCAVEM current is generated which supports the deflection current. At the first half of the slope, the spot is accelerated and the picture is darker. At the second half of the slope, the spot is delayed and the slope becomes steeper.
- **At the end of the slope** , the SCAVEM-current decays to zero and the spot is at the original position. An overshoot occurs which improves the impression of sharpness.
- **At the negative slope** , the SCAVEM-current counteracts the deflection. During the first half of the slope, the spot is delayed and the slope becomes steeper. During the second half the spot accelerates, the SCAVEM-current is zero at the end of the slope.

The R/G/B signals are fed into the SCAVEM circuit and differentiated by C2364/2365/2366 and the input impedance of 7360 stage. Diode 6364 (Schottky diode) is the coring component, which blocks all the signals below 0.3 V so that the noise is not amplified and all the signals larger than 0.3V are differentiated and amplified.
After differentiation, the signal is amplified by Q7360 with 3369 as the collector resistor. The biasing of the 7360 stage is done by 3369, 3361, 3360, 3362, and 3363.

Items 6367, 2367, 3367, 3361, and 2360 work as the clipping components that limit the SCAVEM current at a certain level, to prevent SCAVEM over correction.

After being buffered by 7369, the differentiated signals are coupled through 2375 and 2380 to the output stage. The output stage is configured into cascode stage and push-pull operation. The biasing is done by 3373, 3375, 3376, 3380, 3381, 3383, 3374, and 3384. The working voltage of the transistors is settled at half the supply voltage.
At the rising portion of the R/G/B signals, cascode 7380 and 7382 will be operating and will pull the current through the SCAVEM coil. Contrarily, at the falling portion of the R/G/B signals, cascode 7373 and 7366 will be operating and will push the current through the SCAVEM coil.

The capacitors 2362, 2373, and 2381 ground the high frequencies, to prevent high frequency amplification. The ferrite bead 5376 is for EMC purpose. Resistors 3374 and 3384 determine the output SCAVEM current.
Items 2378 and 3378 are for the fine-tuning for different SCAVEM coil impedances. They also help to suppress high frequency oscillation. Capacitor 2369 helps to suppress the high frequency components and also controls the SCAVEM delay.

Synchronization

Inside IC 7200 part D, the vertical and horizontal sync pulses are separated. These 'H' and 'V' signals are synchronized with the incoming CVBS signal. They are then fed to the H- and V-drive circuits and to the OSD/TXT circuit for synchronization of the On Screen Display and Teletext (CC) information.

Deflection

Horizontal Drive

The horizontal drive signal is obtained from an internal VCO, which is running at twice the line frequency. This frequency is divided by two, to lock the first control loop to the incoming signal.
When the IC is switched 'on', the 'Hdrive' signal is suppressed until the frequency is correct.
The 'Hdrive' signal is available at pin 30. The 'Hflybk' signal is fed to pin 31 to phase lock the horizontal oscillator, so that Q7462 cannot switch 'on' during the flyback time.
The 'EWdrive' signal for the E/W circuit (if present) is available on pin 15, where it drives transistor 7400 to make linearity corrections in the horizontal drive.

When the set is switched on, the '+8V' voltage goes to pin 9 of IC 7200. The horizontal drive starts up in a soft start mode. It starts with a very short TON time of the horizontal output transistor. The TOFF of the transistor is identical to the time in normal operation. The starting frequency during switch on is therefore about 2 times higher than the normal value. The 'on' time is slowly increased to the nominal value in 1175 ms. When the nominal value is reached, the PLL is closed in such a way that only very small phase corrections are necessary.

The 'EHTinformation' line on pin 11 is intended to be used as a 'X-ray' protection. When this protection is activated (when the voltage exceeds 6 V), the horizontal drive (pin 30) is switched 'off' immediately. If the 'H-drive' is stopped, pin 11 will become low again. Now the horizontal drive is again switched on via the slow start procedure.
The 'EHTinformation' line (Aquadag) is also fed back to the UOC IC 7200 pin 54, to adjust the picture level in order to compensate for changes in the beam current.

The filament voltage is monitored for 'no' or 'excessive' voltage. This voltage is rectified by diode 6447 and fed to the emitter of transistor 7443. If this voltage goes above 6.8 V, transistor 7443 will conduct, making the 'EHT0' line 'high'. This will immediately switch off the horizontal drive (pin 30) via the slow stop procedure.

The horizontal drive signal exits IC 7200 at pin 30 and goes to 7462, the horizontal driver transistor. The signal is amplified and coupled to the base circuit of 7460, the horizontal output transistor. This will drive the line output transformer (LOT) and associated circuit. The LOT provides the extra high voltage (EHT), the VG2 voltage and the focus and filament voltages for the CRT, while the line output circuit drives the horizontal deflection coil.

Vertical Drive

A divider circuit performs the vertical synchronization. The vertical ramp generator needs an external resistor (R3245, pin 20) and capacitor (C2244, pin 21). A differential output is available at pins 16 and 17, which are DC-coupled with the vertical output stage.
During the insertion of RGB signals, the maximum vertical frequency is increased to 72 Hz so that the circuit can also synchronize on signals with a higher vertical frequency like VGA.
To avoid damage of the picture tube when the vertical deflection fails, the guard output is fed to the beam current limiting input. When a failure is detected, the RGB-outputs are blanked. When no vertical deflection output stage is connected, this guard circuit will also blank the output signals.

These 'V_DRIVE+' and 'V_DRIVE-' signals are applied to the input pins 1 and 2 of IC 7471 (full bridge vertical deflection amplifier). These are voltage driven differential inputs. As the driver device (IC 7200) delivers output currents, R3474 and R3475 convert them to voltage. The differential input voltage is compared with the voltage

across measuring resistor R3471 that provides internal feedback information. The voltage across this measuring resistor is proportional to the output current, which is available at pins 4 and 7 where they drive the vertical deflection coil (connector 0222) in phase opposition.
IC 7471 is supplied by +13 V. The vertical flyback voltage is determined by an external supply voltage at pin 6 (VlotAux+50V). This voltage is almost totally available as flyback voltage across the coil, this being possible due to the absence of a coupling capacitor (which is not necessary, due to the 'bridge' configuration).

Deflection Corrections

The Linearity Correction

A constant voltage on the horizontal deflection coil should result in a sawtooth current. This however is not the case as the resistance of the coil is not negligible. In order to compensate for this resistance, a pre-magnetized coil L5457 is used. R3485 and C2459 ensure that L5457 does not excite, because of its own parasite capacitance. This L5457 is called the 'linearity coil'.

The Mannheim Effect

When clear white lines are displayed, the high-voltage circuit is heavily loaded. During the first half of the flyback, the high voltage capacitors are considerable charged. At that point in time, the deflection coil excites through C2465. This current peak, through the high-voltage capacitor, distorts the flyback pulse. This causes synchronization errors, causing an oscillation under the white line.
During t3 - t5, C2490//2458 is charged via R3459. At the moment of the flyback, C2490//2458 is subjected to the negative voltage pulses of the parabola as a result of which D6465 and D6466 are conducting and C2490//2458 is switched in parallel with C2456//2457. The high-voltage diodes are conducting this moment. Now extra energy is

available for excitation through C2465 and the line deflection. Consequently, the flyback pulse is less distorted.

The S-Correction

Since the sides of the picture are further away from the point of deflection than from the center, a linear sawtooth current would result in a non-linear image being scanned (the center would be scanned slower than the sides). For the center-horizontal line, the difference in relation of the distances is larger then those for the top and bottom lines. An S-shaped current will have to be superimposed onto the sawtooth current. This correction is called finger-length correction or S-correction.

C2456//2457 is relatively small, as a result of which the sawtooth current will generate a parabolic voltage with negative voltage peaks. Left and right, the voltage across the deflection coil decreases, and the deflection will slow down; in the center, the voltage increases and deflection is faster. The larger the picture width, the higher the deflection current through C2456//2457. The current also results in a parabolic voltage across C2484//2469, resulting in the finger length correction proportionally increasing with the picture width. The east/west drive signal will ensure the largest picture width in the center of the frame. Here the largest correction is applied.

East/West Correction

In this chassis, there are three types of CRTs, namely the 100º, 110º and wide screen CRTs. The 100º CRT is raster-correction-free and does not need East/West correction. The 110º 4:3 CRT comes with East/West correction and East/West protection.
The wide screen TV sets have all the correction of the 110 4:3 CRT and also have additional picture format like the 4:3 format, 16:9, 14:9, 16:9 zoom, subtitle zoom and the Super-Wide picture format

A line, written at the upper- or lower side of the screen, will be larger at the screen center when a fixed deflection current is used. Therefore, the amplitude of the deflection current must be increased when the spot approaches the center of the screen. This is called the East/West or pincushion correction.

The 'Ewdrive' signal from pin 15 of IC 7200 takes care for the correct correction. It drives FET 7400. It also corrects breathing of the picture, due to beam current variations (the EHT varies dependent of the beam current). This correction is derived from the 'EHTinformation' line.
Two protections are built-in for the E/W circuit: over-current and over-voltage protection. See paragraph 9.7.6.

Panorama

The panorama function is only used in 16:9 sets. This is a function to enable the 4:3 and Super-Wide feature. It drives the 'Bass_panorama' line, to activate relay 1400. When this relay is switched on, the capacitors 2453//2454 are added in parallel to the default S-correction capacitors 2456//2457. This results in an increased capacitance, a lower resonance frequency of the line deflection coil and the S-correction capacitors and therefore a less steep S-corrected line deflection current.

Power Supply

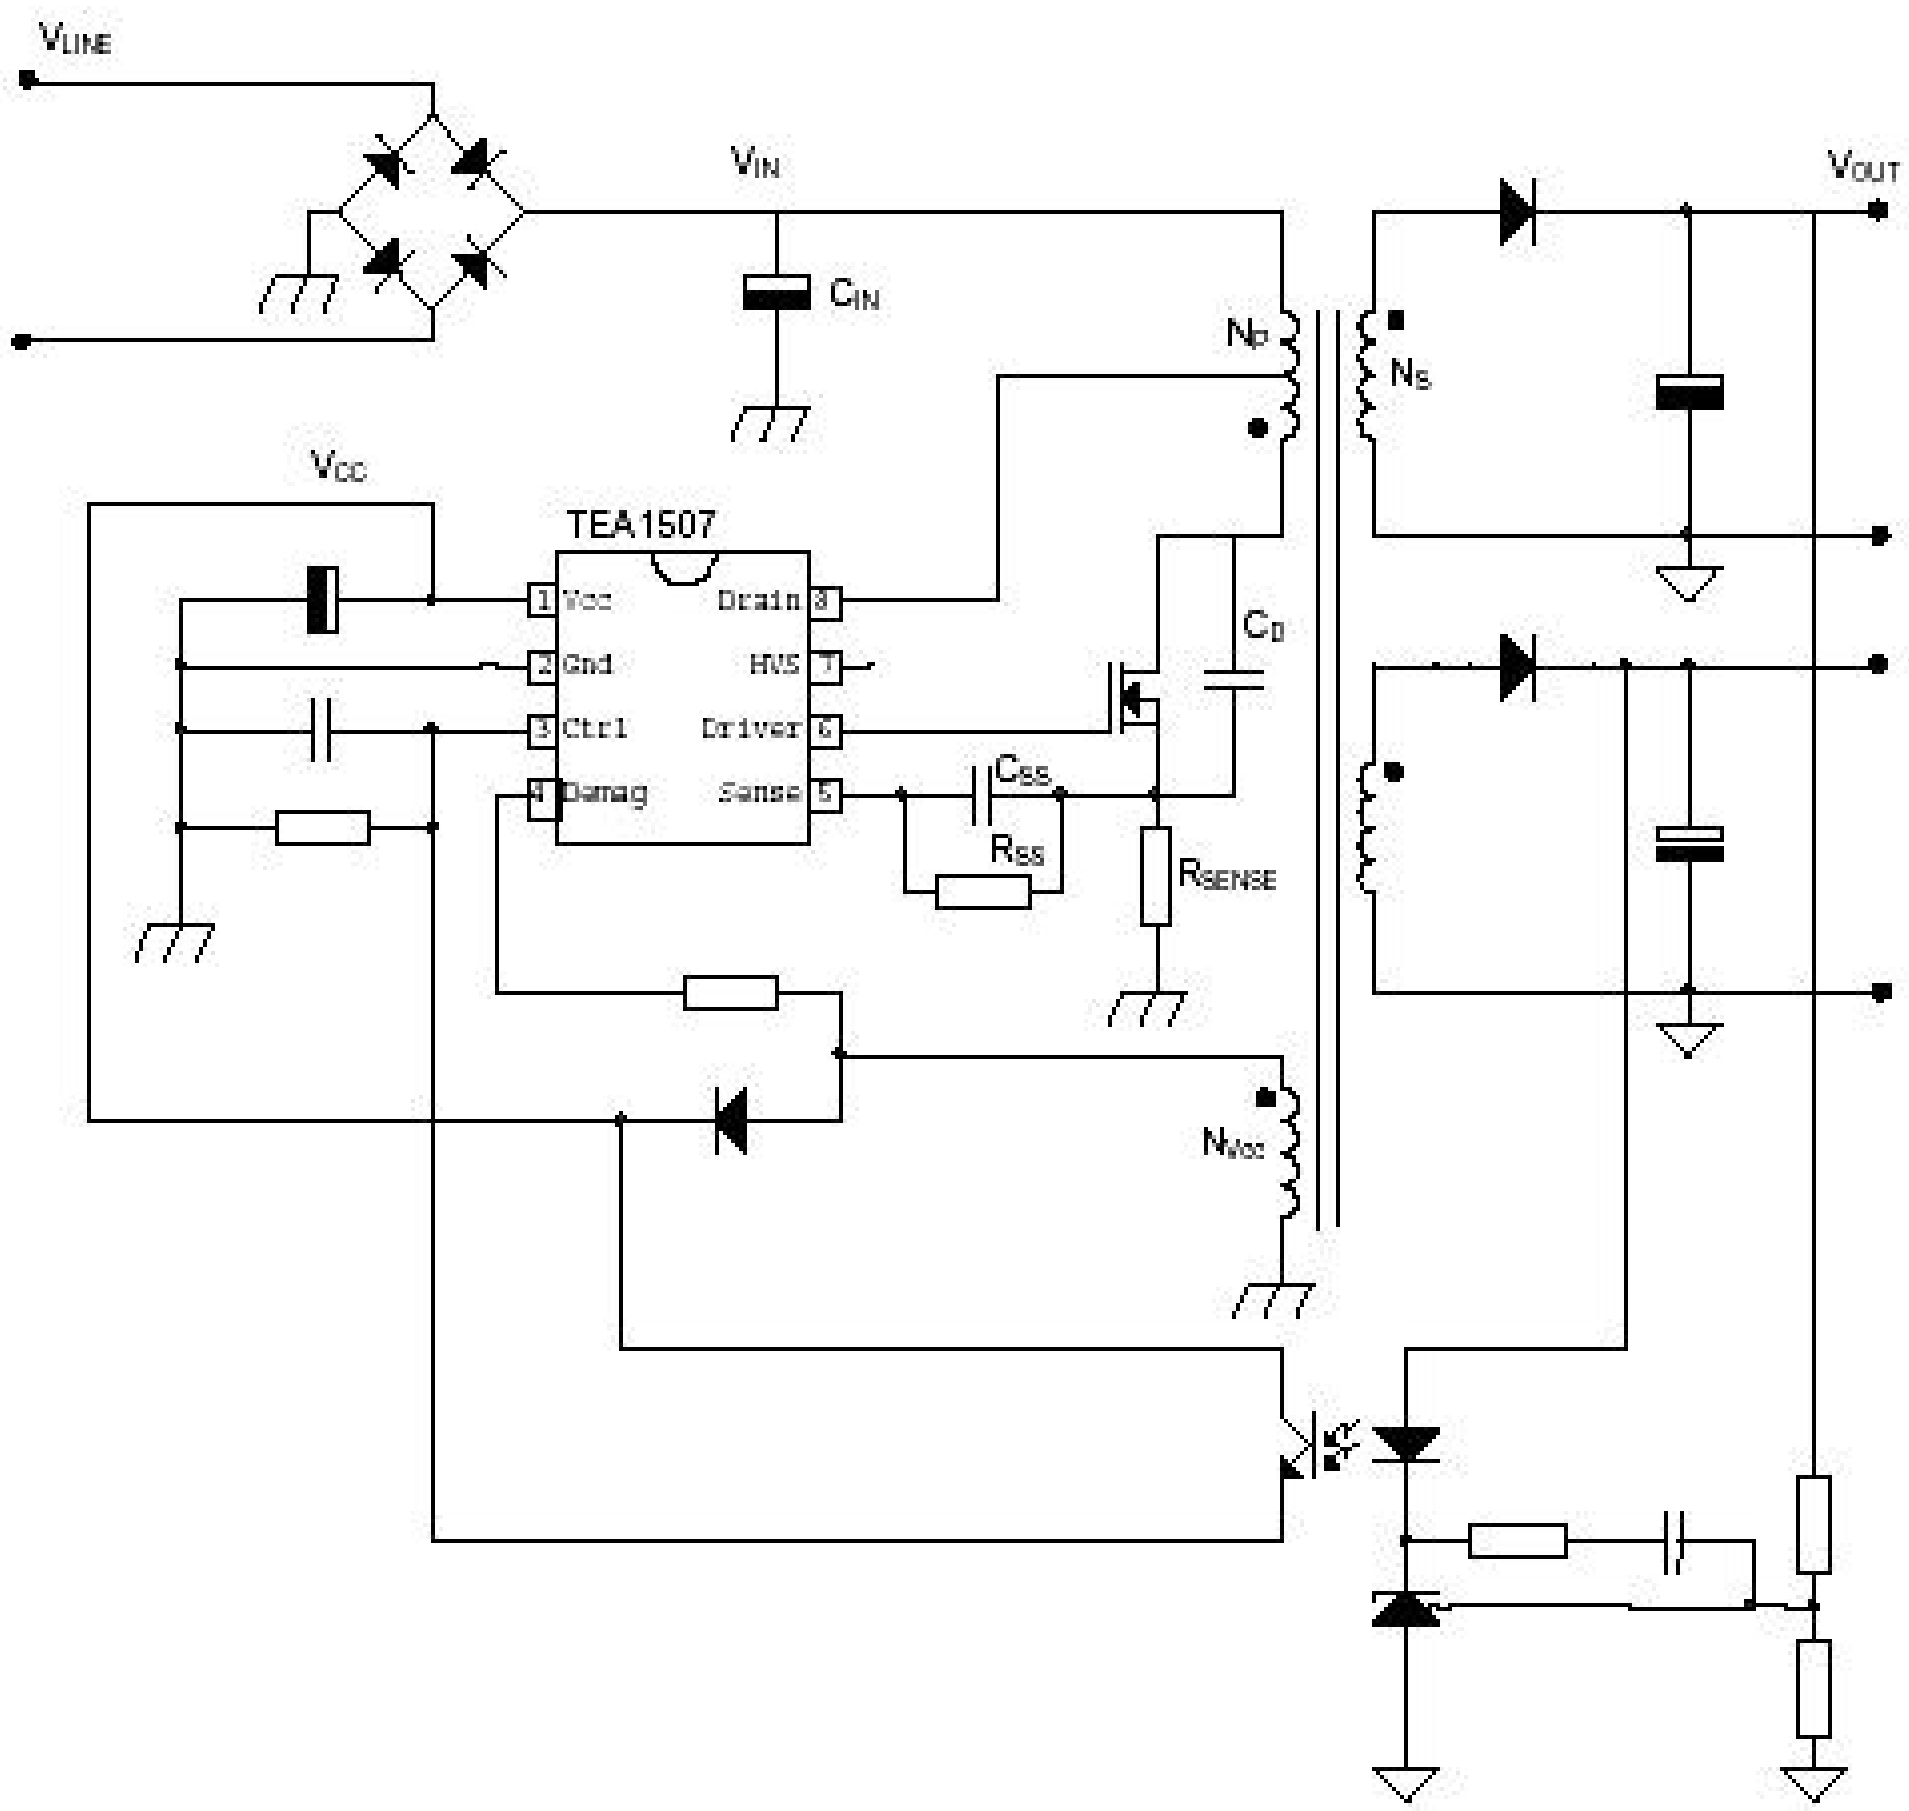


Figure: Switched Mode Power Supply standard circuit

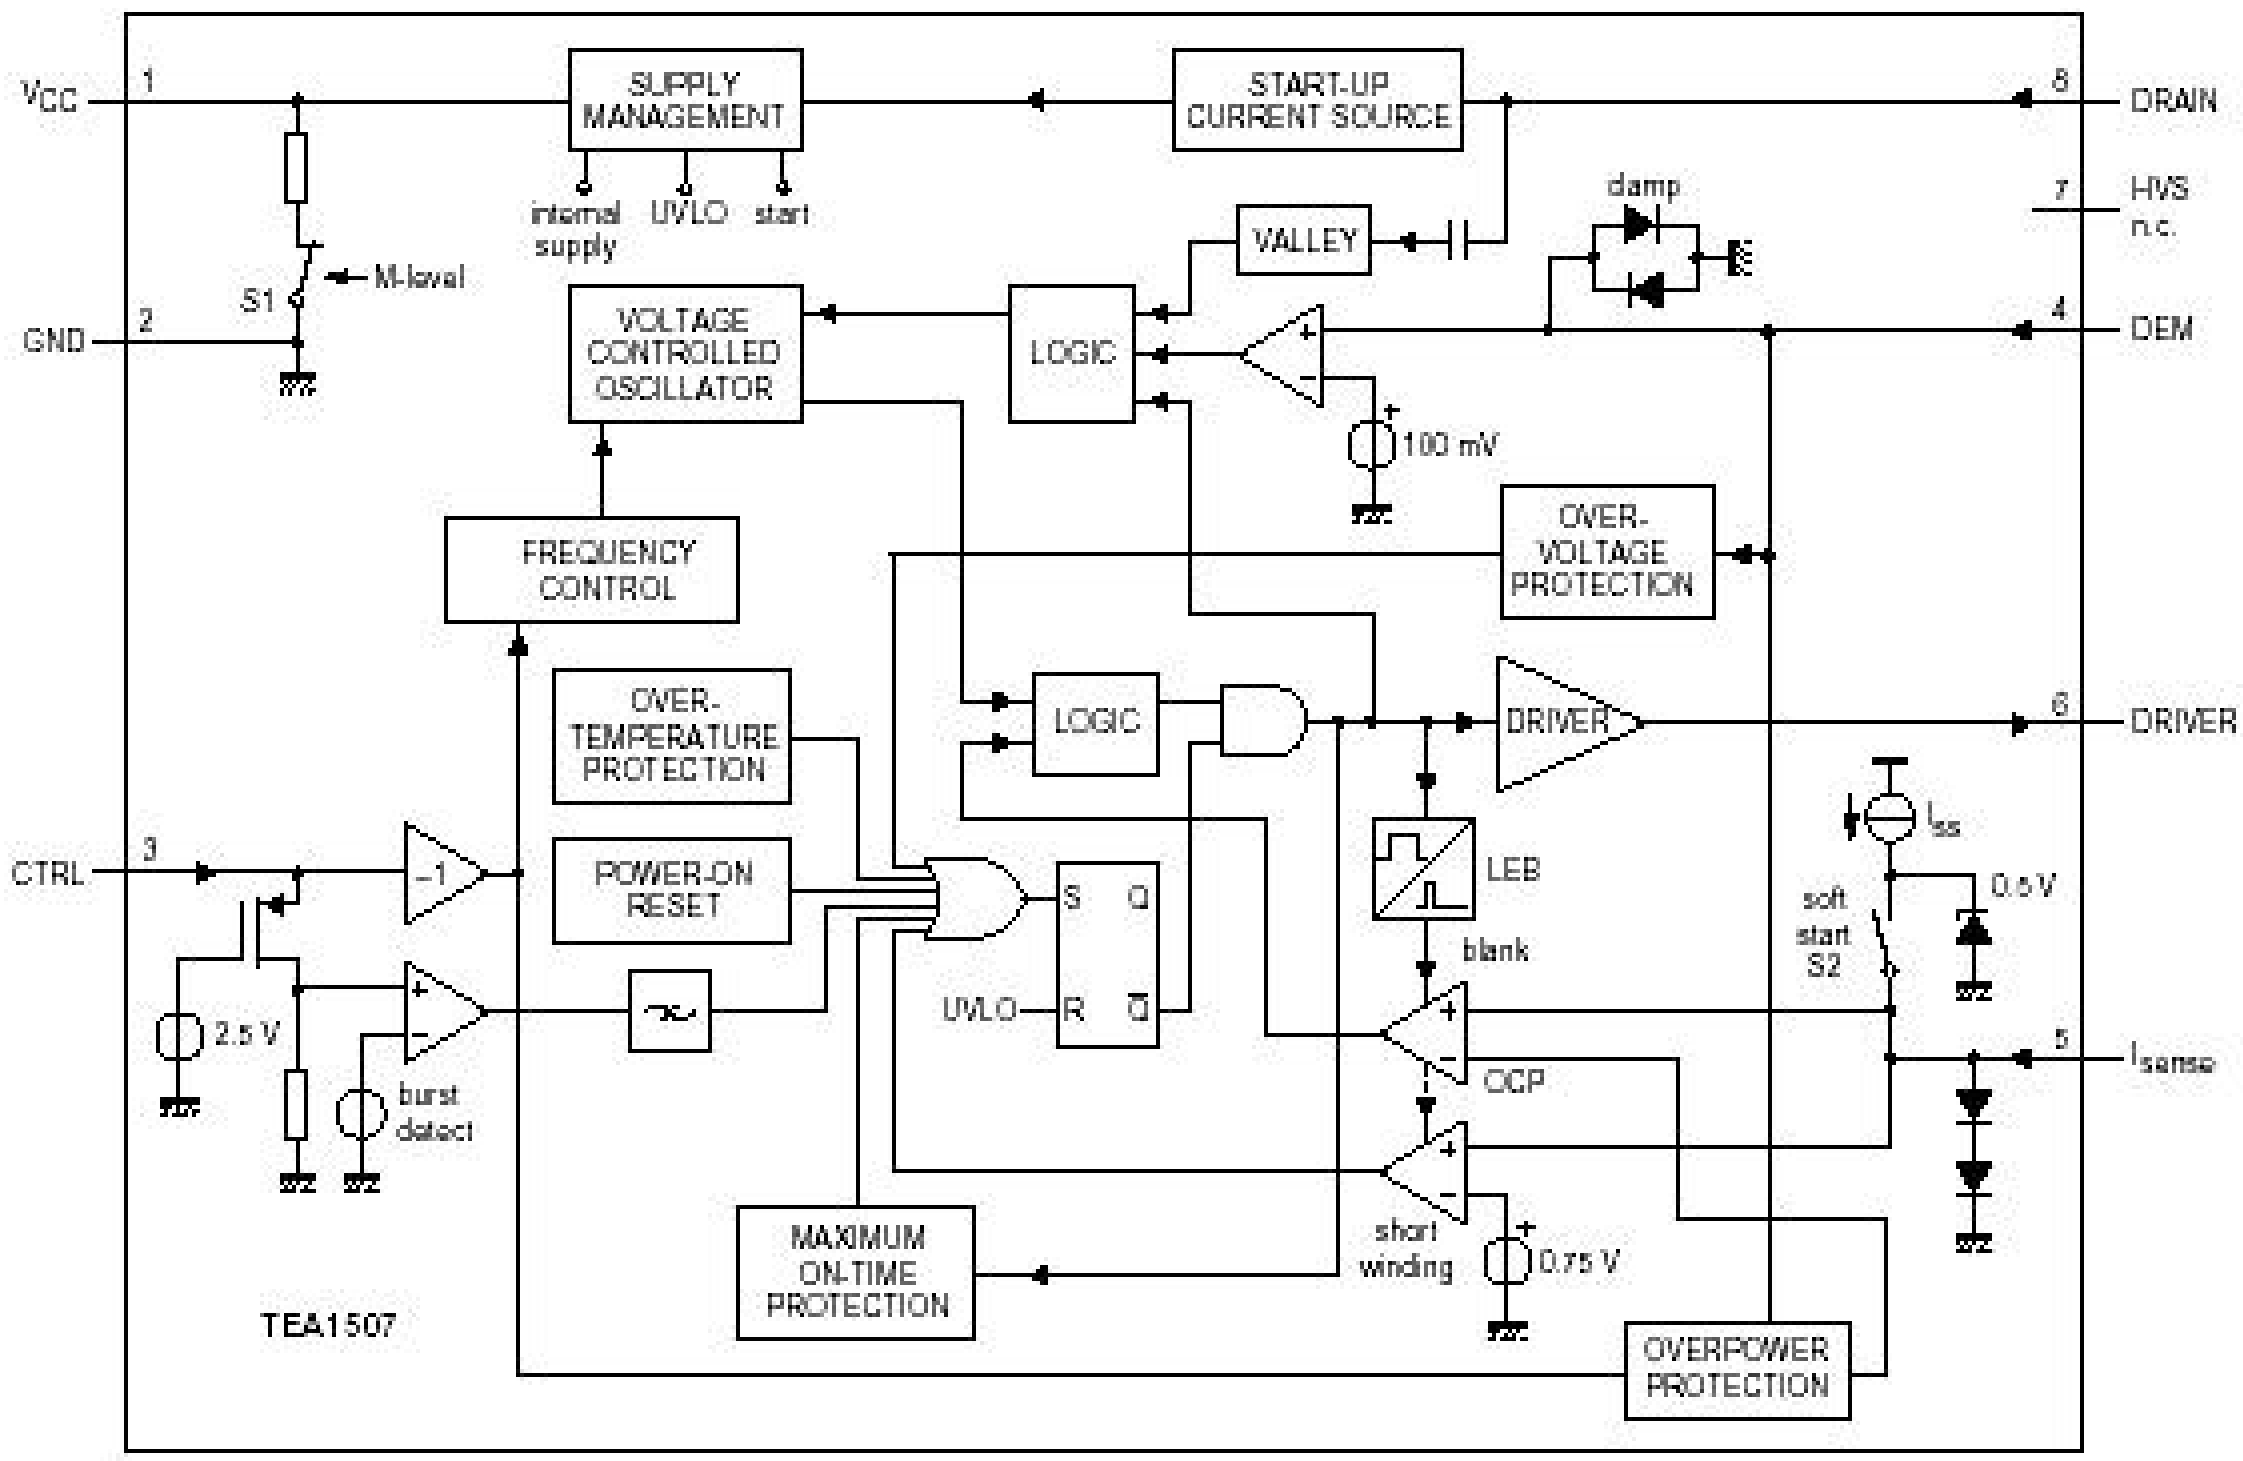


Figure: Internal block diagram of the driver IC (TEA1507)

Introduction

The supply is a Switching Mode Power Supply (SMPS). The frequency of operation varies with the circuit load. This 'Quasi-Resonant Flyback' behavior has some important benefits compared to a 'hard switching' fixed frequency Flyback converter. The efficiency can be improved up to 90%, which results in lower power consumption. Moreover, the supply runs cooler and safety is enhanced.

The power supply starts operating when a DC voltage goes from the rectifier bridge via T5520, R3532 to pin 8. The operating voltage for the driver circuit is also taken from the 'hot' side of this transformer.

The switching regulator IC 7520 starts switching the FET 'on' and 'off', to control the current flow through the primary winding of transformer 5520. The energy stored in the primary winding during the 'on' time is delivered to the secondary windings during the 'off' time.

The 'MainSupply' line is the reference voltage for the power supply. It is sampled by resistors 3543 and 3544 and fed to the input of the regulator 7540 / 6540. This regulator drives the feedback optocoupler 7515 to set the feedback control voltage on pin 3 of 7520.
The power supply in the set is 'on' any time AC power goes to the set.

Derived Voltages

The voltages supplied by the secondary windings of T5520 are:

- 'MainAux' for the audio circuit (voltage depends on set execution, see table below),
- 3.3 V and 3.9 V for the microprocessor and
- 'MainSupply' for the horizontal output (voltage depends on set execution, see table below).

Other supply voltages are provided by the LOT. It supplies +50 V (only for large screen sets), +13 V, +8 V, +5 V, and a +200 V source for the video drive. The secondary voltages of the LOT are monitored by the 'EHTinformation' lines. These lines are fed to the video processor part of the UOC IC 7200 on pins 11 and 34.
This circuit will shut 'off' the horizontal drive in case of over-voltage or excessive beam current.

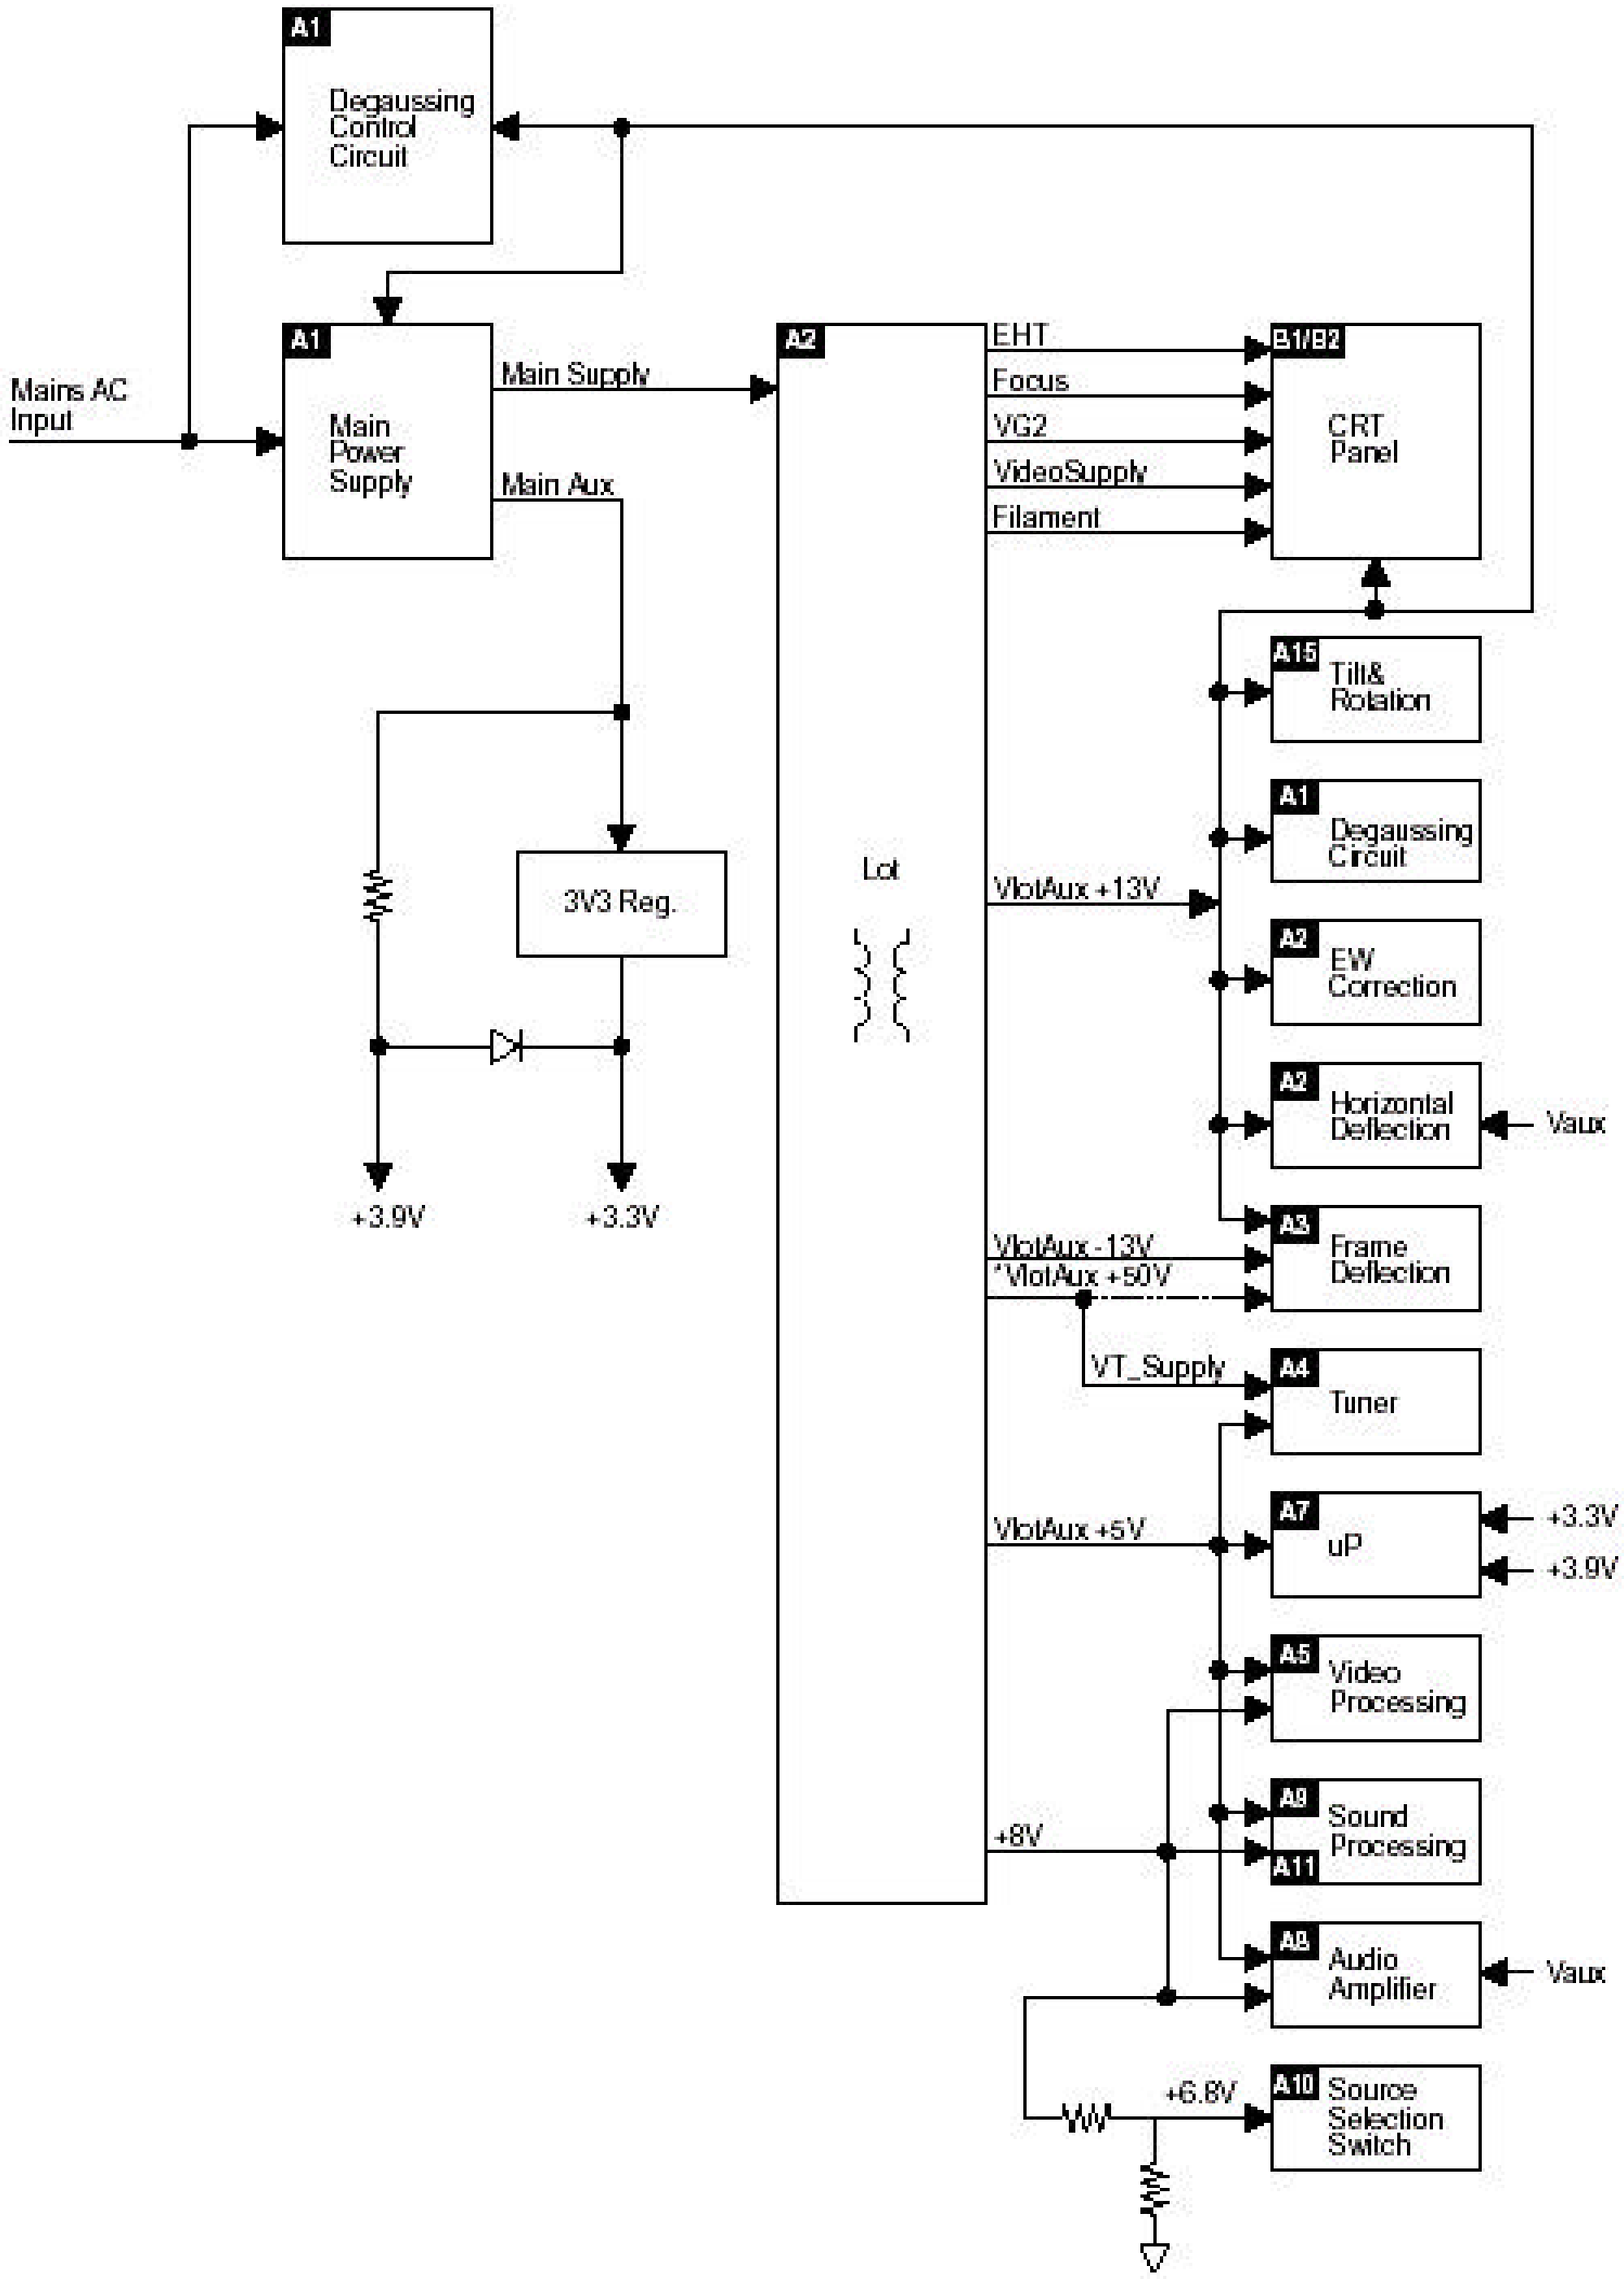


Figure: Derived voltages

Degaussing

When the set is switched on, the degaussing relay 1515 is immediately activated as transistor 7580 is conducting. Due to the RC-time of R3580 and C2580, it will last about 3 to 4 seconds before transistor 7580 is switched off.

Basic IC Functionality

For a clear understanding of the Quasi-Resonant behavior, it is possible to explain it by a simplified circuit diagram (see Figure below). In this circuit diagram, the secondary side is transferred to the primary side and the transformer is replaced by an inductance LP. CD is the total drain capacitance including the resonance capacitor CR, parasitic output capacitor COSS of the MOSFET and the winding capacitance CW of the transformer. The turn ratio of the transformer is represented by n (NP/NS).

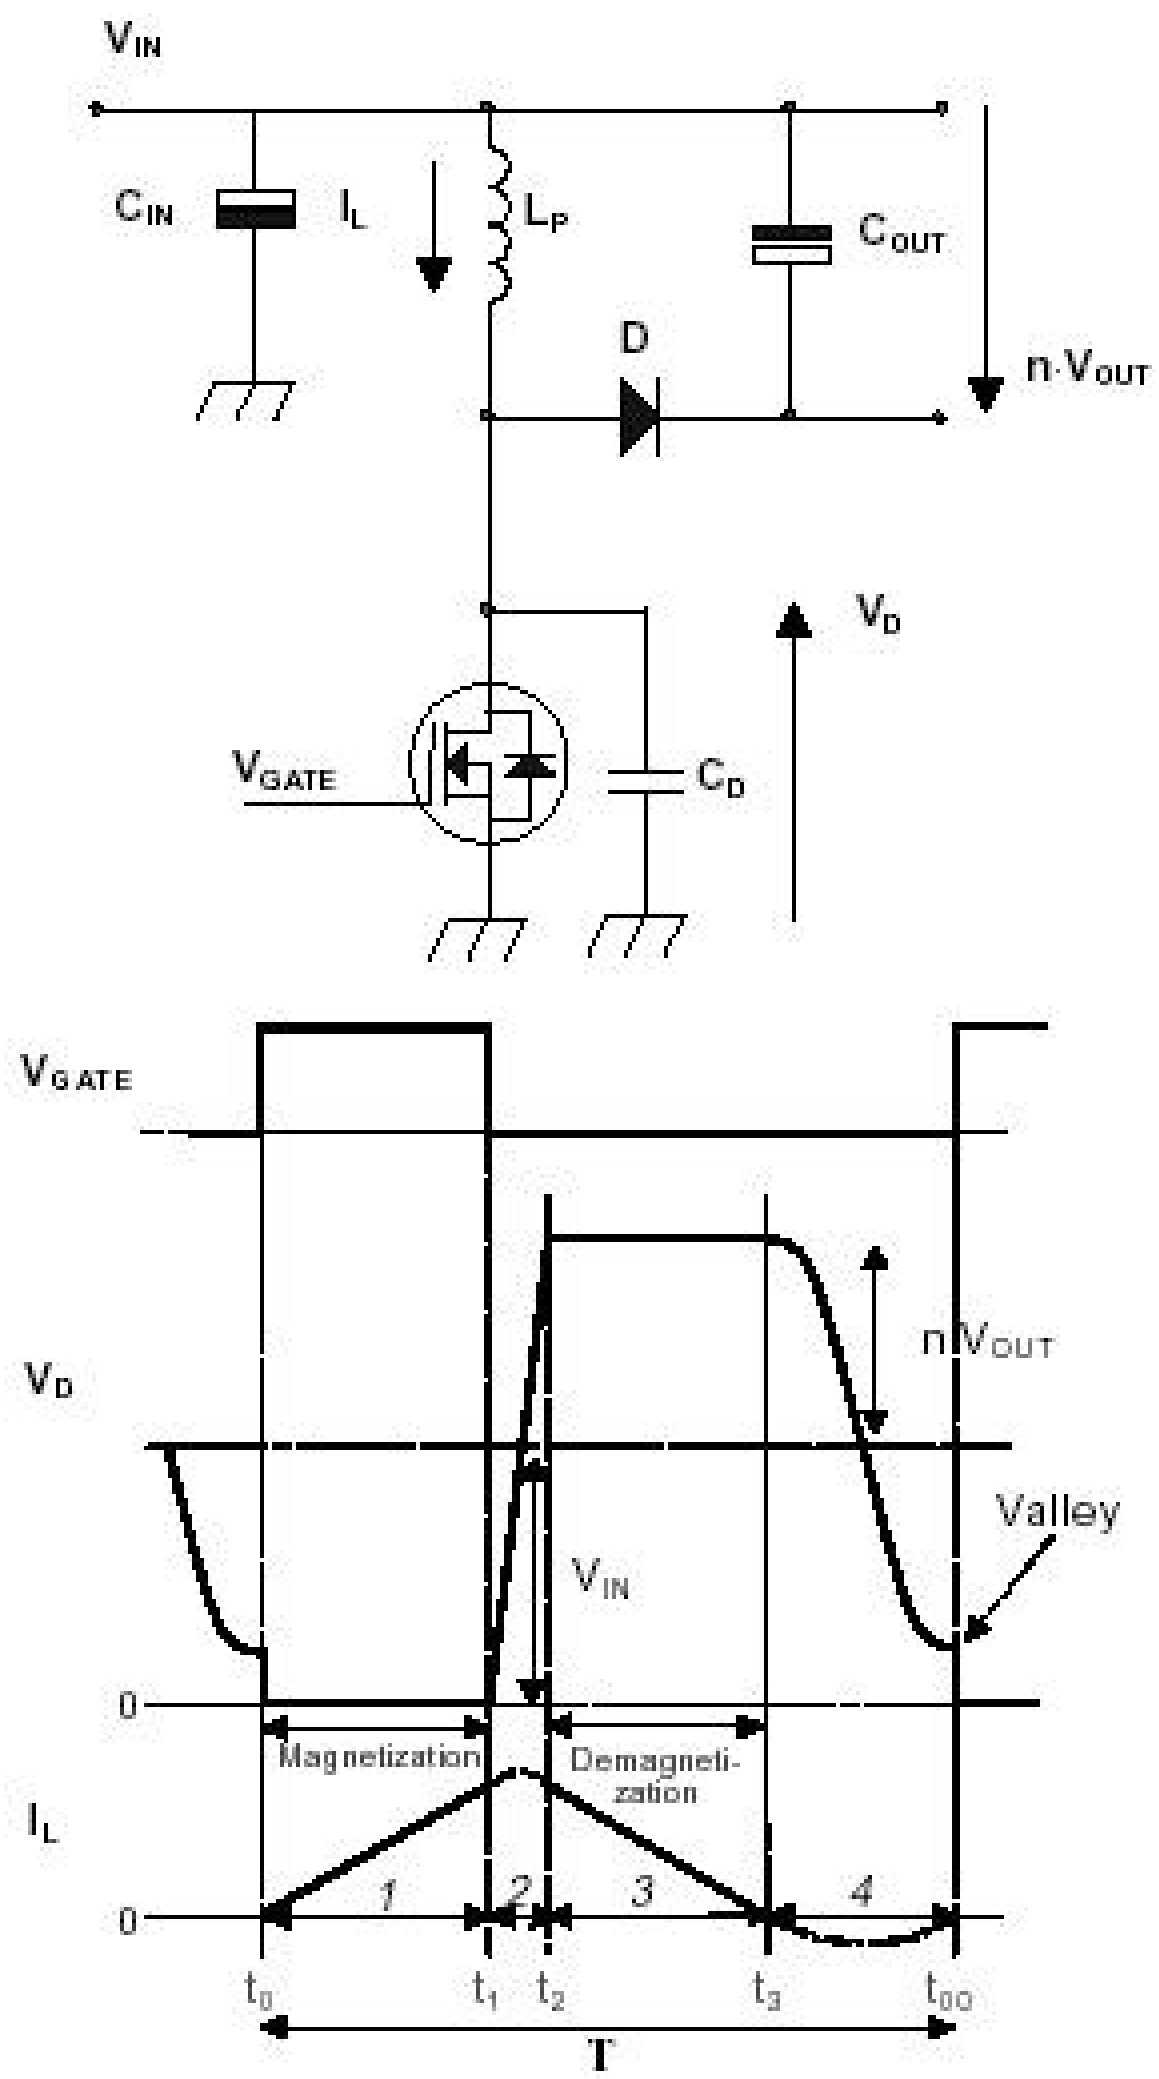


Figure: QR-mode time intervals

In the Quasi-Resonant mode each period can be divided into four different time intervals, in chronological order:

- **Interval 1: t0 < t < t1 primary stroke.** At the beginning of the first interval, the MOSFET is switched 'on' and energy is stored in the primary inductance (magnetization). At the end, the MOSFET is switched 'off' and the second interval starts.
- **Interval 2: t1 < t < t2 commutation time.** In the second interval, the drain voltage will rise from almost zero to V_{IN} +n•(V_{OUT} +V_F). V_F is the forward voltage drop of

de diode that will be omitted from the equations from now on. The current will change its positive derivative, corresponding to V_{IN} /L_P , to a negative derivative, corresponding to -n•V_{OUT} /LP.

- **Interval 3: t2 < t < t3 secondary stroke.** In the third interval, the stored energy is transferred to the output, so the diode starts to conduct and the inductive current I_L will decrease. In other words, the transformer will be demagnetized. When the inductive current has become zero the next interval begins.
- **Interval 4: t3 < t < t00 resonance time.** In the fourth interval, the energy stored in the drain capacitor C_D will start to resonate with the inductance L_P . The voltage and current waveforms are sinusoidal waveforms. The drain voltage will drop from V_{IN} +n•V_{OUT} to V_{IN} -n•V_{OUT} .

Frequency Behavior

The frequency in the QR-mode is determined by the power stage and is not influenced by the controller (important parameters are L_P and C_D). The frequency varies with the input voltage V_{IN} and the output power P_{OUT} . If the required output power increases, more energy has to be stored in the transformer. This leads to longer magnetizing t_{PRIM} and demagnetizing t_{SEC} times, which will decrease the frequency. See the frequency versus output power characteristics below. The frequency characteristic is not only output power-, but also input voltage dependent. The higher the input voltage, the smaller t_{PRIM} , so the higher the frequency will be.

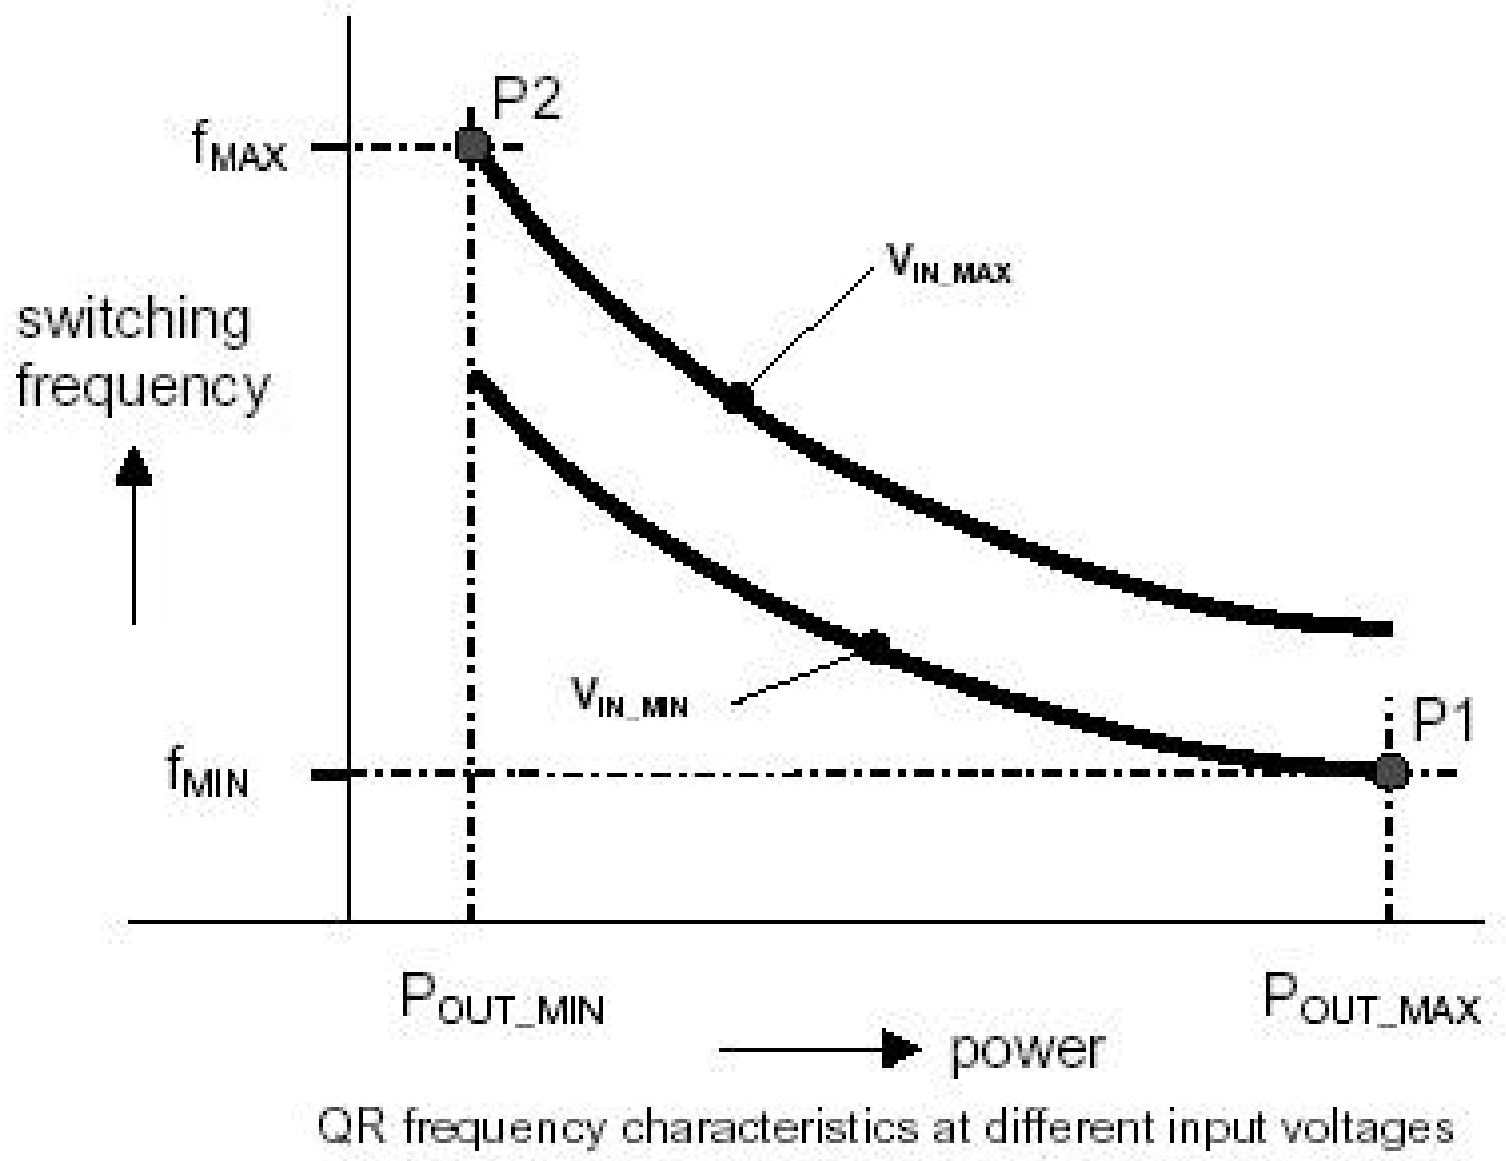


Figure: QR frequency behavior

Point P1 is the minimum frequency f_{MIN} that occurs at the specified minimum input voltage and maximum output power required by the application. Of course the minimum frequency has to be chosen above the audible limit (>20 kHz).

Start-Up Sequence

When the rectified AC voltage V_{IN} (via the center tap connected to pin 8) reaches the Mains dependent operation level (Mlevel: between 60 and 100 V), the internal 'Mlevel switch' will be opened and the start-up current source is enabled to charge capacitor C2521 at the V_{CC} pin as shown below.
The 'soft start' switch is closed when the V_{CC} reaches a level of 7 V and the 'soft start' capacitor C_{SS} (C2522, between pin 5 and the sense resistor R3526), is charged to 0.5 V.
Once the V_{CC} capacitor is charged to the start-up voltage V_{CC} -start (11 V), the IC starts driving the MOSFET. Both internal current sources are switched 'off' after reaching this

start-up voltage. Resistor R_{SS} (3524) will discharge the 'soft start' capacitor, such that the peak current will slowly increase. This to prevent 'transformer rattle'.
During start-up, the V_{CC} capacitor will be discharged until the moment that the primary auxiliary winding takes over this voltage.

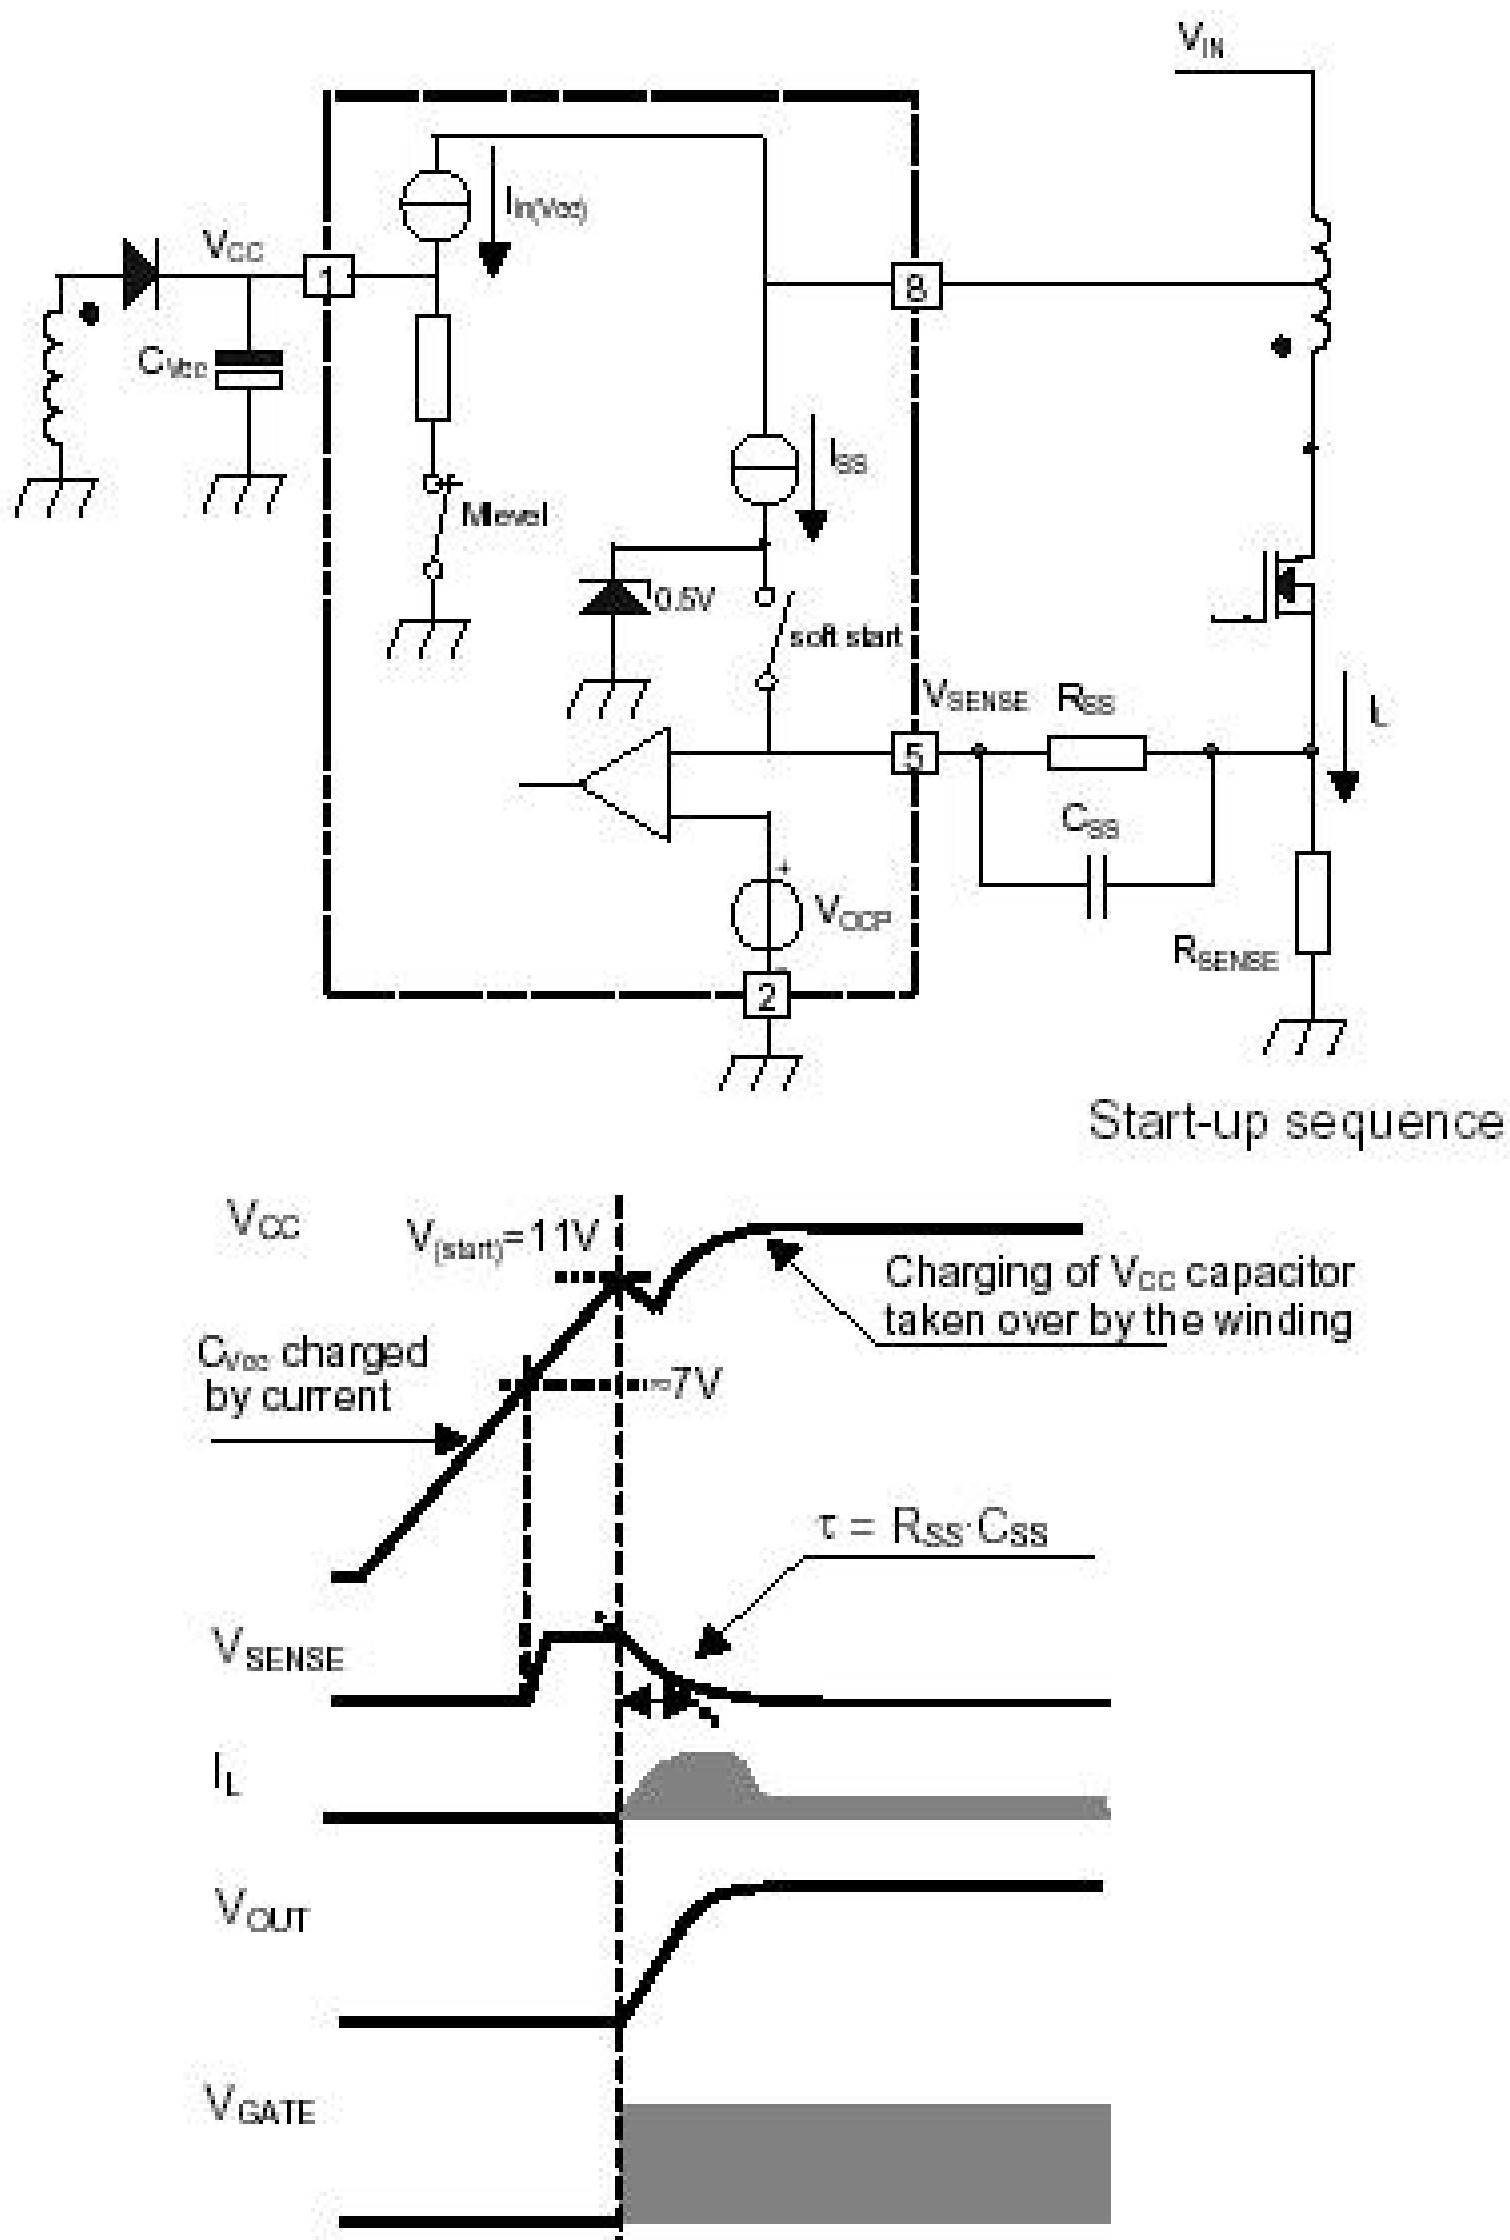


Figure: Start-up behavior

The moment that the voltage on pin 1 drops below the 'under voltage lock out' level (UVLO = ± 9 V), the IC will stop switching and will enter a safe restart from the rectified mains voltage.

Operation

The supply can run in three different modes depending on the output power:

- **Quasi-Resonant mode (QR).** The 'QR' mode, described above, is used during normal operation. This will give a high efficiency.
- **Frequency Reduction mode (FR).** The 'FR' mode (also called 'VCO' mode) is implemented to decrease the switching losses at low output loads. In this way, the efficiency at low output powers is increased, which enables power consumption smaller than 3 W during stand-by. The voltage at the pin 3 (Ctrl) determines where the frequency reduction starts. An external Ctrl voltage of 1.425 V corresponds with an internal VCO level of 75 mV. This fixed VCO level is called $V_{VCO,start}$. The frequency will be reduced in relation to the VCO voltage between 75 mV and 50 mV (at levels larger than 75 mV, Ctrl voltage < 1.425V, the oscillator will run on maximum frequency f_{oscH} = 175 kHz typically). At 50 mV ($V_{VCO,max}$), the frequency is reduced to the minimum level of 6 kHz. Valley switching is still active in this mode.
- **Minimum Frequency mode (MinF).** At VCO levels below 50 mV, the minimum frequency will remain on 6 kHz, which is called the 'MinF' mode. Because of this low frequency, it is possible to run at very low loads without having any output regulation problems.

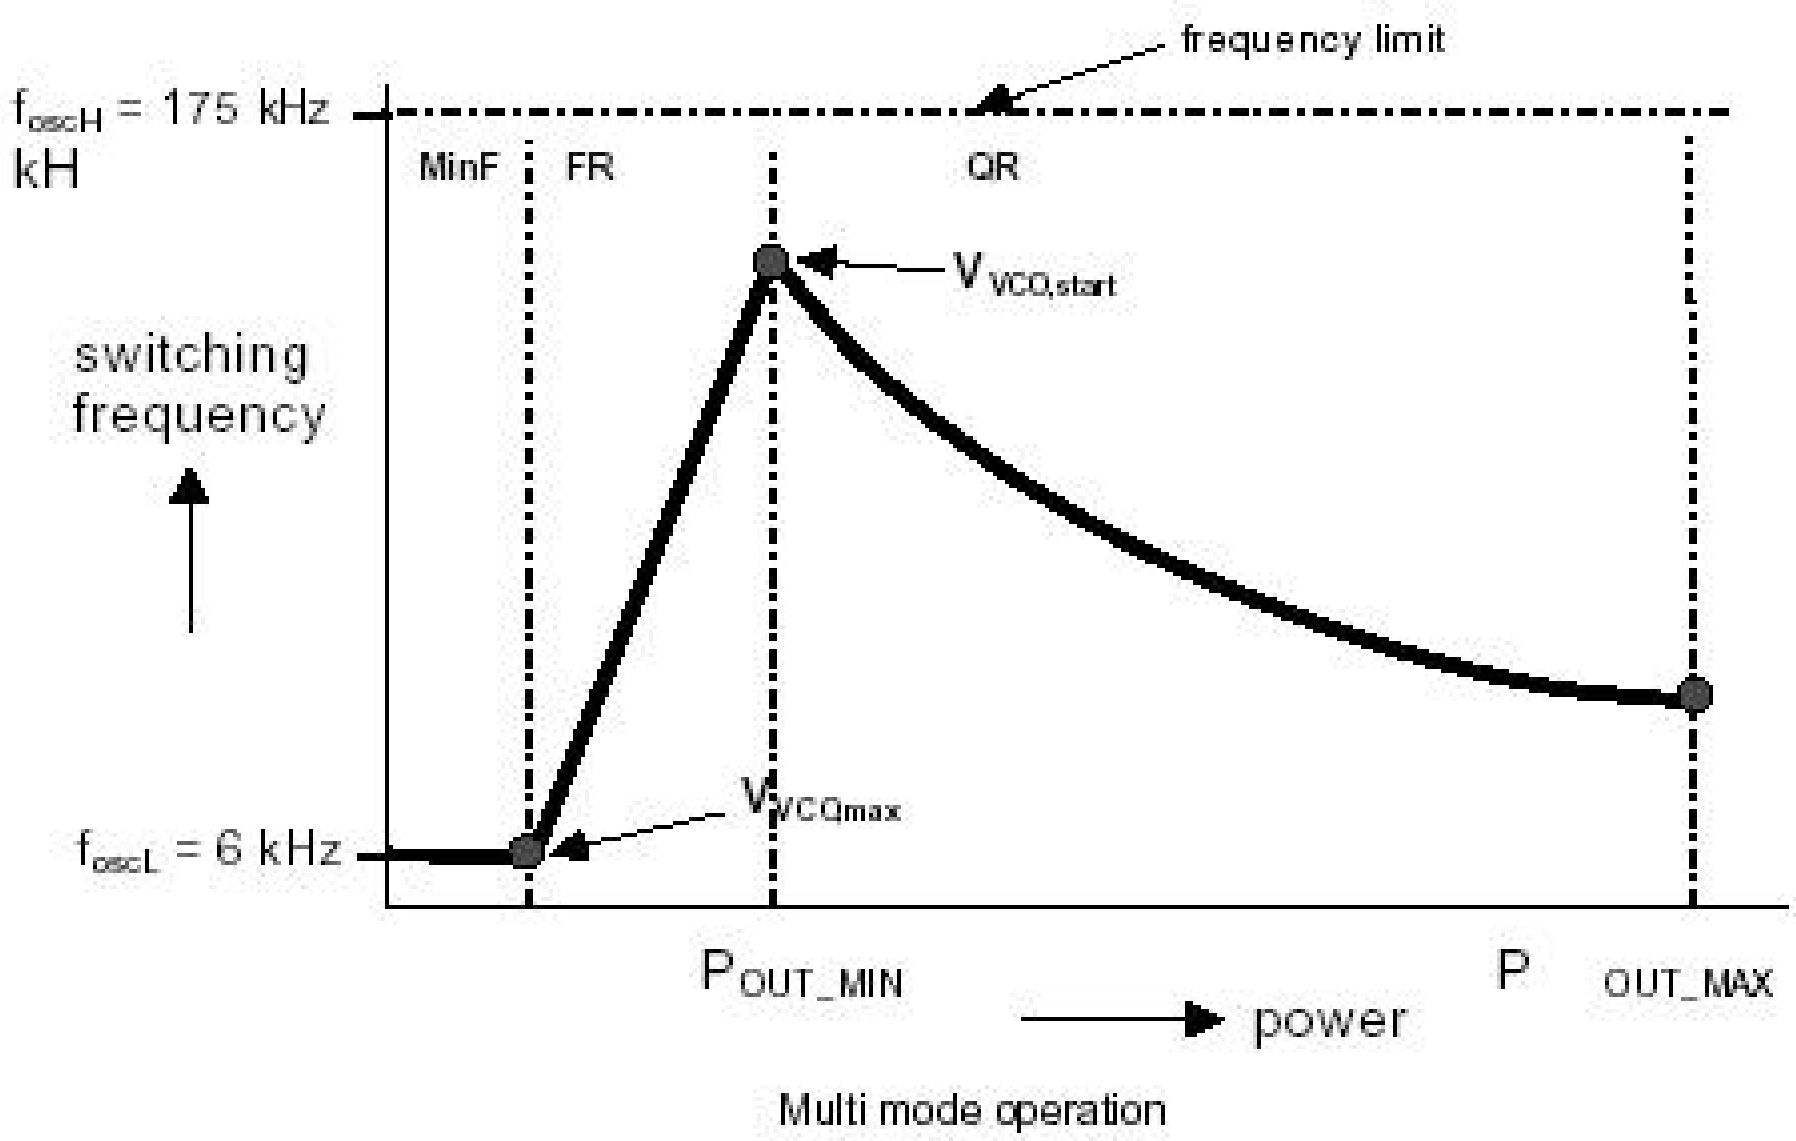


Figure: Different supply modes

Safe-Restart Mode

This mode is introduced to prevent the components from being destroyed during eventual system fault conditions. It is also used for the Burst mode. The Safe-Restart mode will be entered if it is triggered by one of the following functions:

- Over voltage protection,
- Short winding protection,
- Maximum 'on time' protection,
- V_{CC} reaching UVLO level (fold back during overload),
- Detecting a pulse for Burst mode,
- Over temperature protection.

When entering the Safe-Restart mode, the output driver is immediately disabled and latched. The V_{CC} winding will not charge the VCC capacitor anymore and the V_{CC} voltage will drop until UVLO is reached. To recharge the V_{CC} capacitor, the internal current source ($I_{(restart)(VCC)}$) will be switched 'on' to initiate a new start-up sequence as described before. This Safe-Restart mode will persist until the controller detects no faults or burst triggers.


Standby

The set goes to Standby in the following cases:

- After pressing the 'standby' key on the remote control.
- When the set is in protection mode.

In Standby, the power supply works in 'burst mode'. Burst mode can be used to reduce the power consumption below 1 W at stand-by. During this mode, the controller is active (generating gate pulses) for only a short time and for a longer time inactive waiting for the next burst cycle.

In the active period, the energy is transferred to the secondary and stored in the buffer capacitor C_{STAB} in front of the linear stabilizer (see Figure below). During the inactive period, the load (e.g. microprocessor) discharges this capacitor. In this mode, the controller makes use of the Safe-Restart mode.

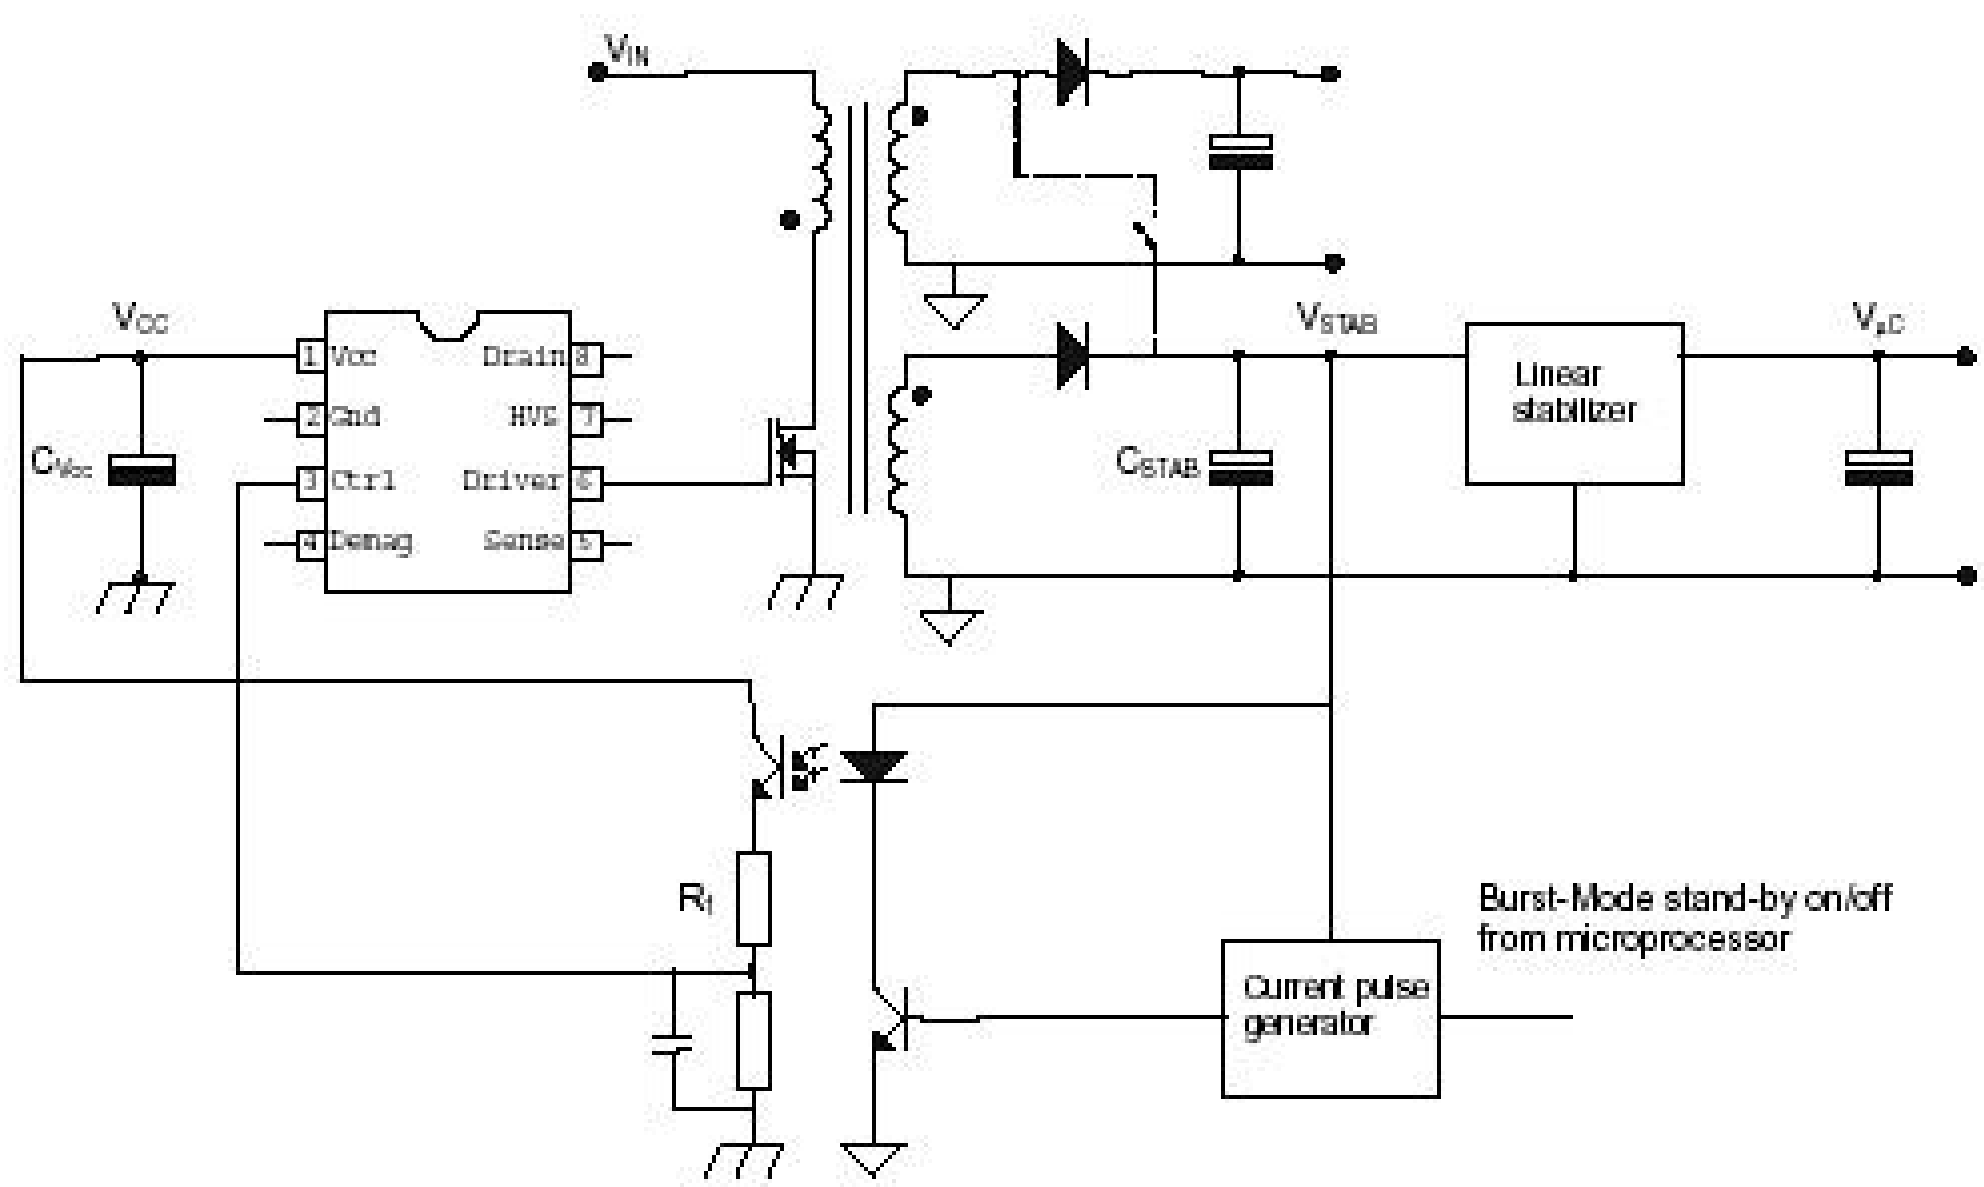

Basic Burst mode configuration

Figure: Supply standby mode (burst mode)

The system enters burst mode standby when the microprocessor activates the 'Stdby_con' line. When this line is pulled high, the base of Q7541 is allowed to go high. This is triggered by the current from collector Q7542. When Q7541 turns 'on', the opto-coupler (7515) is activated, sending a large current signal to pin 3 (Ctrl). In response to this signal, the IC stops switching and enters a 'hiccup' mode. This burst activation signal should be present for longer than the 'burst blank' period (typically 30 s): the blanking time prevents false burst triggering due to spikes.
Burst mode standby operation continues until the microcontroller pulls the 'Stdby_con' signal low again. The base of Q7541 is unable to go high, thus cannot turn 'on'. This will disable the burst mode. The system then enters the start-up sequence and begins normal switching behavior.

For a more detailed description of one burst cycle, three time intervals are defined:
t1: Discharge of V_{CC} when gate drive is active. During the first interval, energy is transferred, which result in a ramp-up of the output voltage (V_{STAB}) in front of the stabilizer. When enough energy is stored in the capacitor, the IC will be switched 'off' by a current pulse generated at the secondary side. This pulse is transferred to the primary side via the opto coupler. The controller will disable the output driver (safe restart mode) when the current pulse reaches a threshold level of 16 mA into the Ctrl pin. A resistor R1 (R3519) is placed in series with the opto coupler, to limit the current going into the Ctrl pin. Meanwhile the V_{CC} capacitor is discharged but has to stay above V_{UVLO} .
t2: Discharge of V_{CC} when gate drive is inactive. During the second interval, the V_{CC} is discharged to V_{UVLO} . The output voltage will decrease depending on the load.
t3: Charge of V_{CC} when gate drive is inactive. The third interval starts when the UVLO is reached. The internal current source charges the V_{CC} capacitor (also the soft start capacitor is recharged). Once the V_{CC} capacitor is charged to the start-up voltage, the driver is activated and a new burst cycle is started.

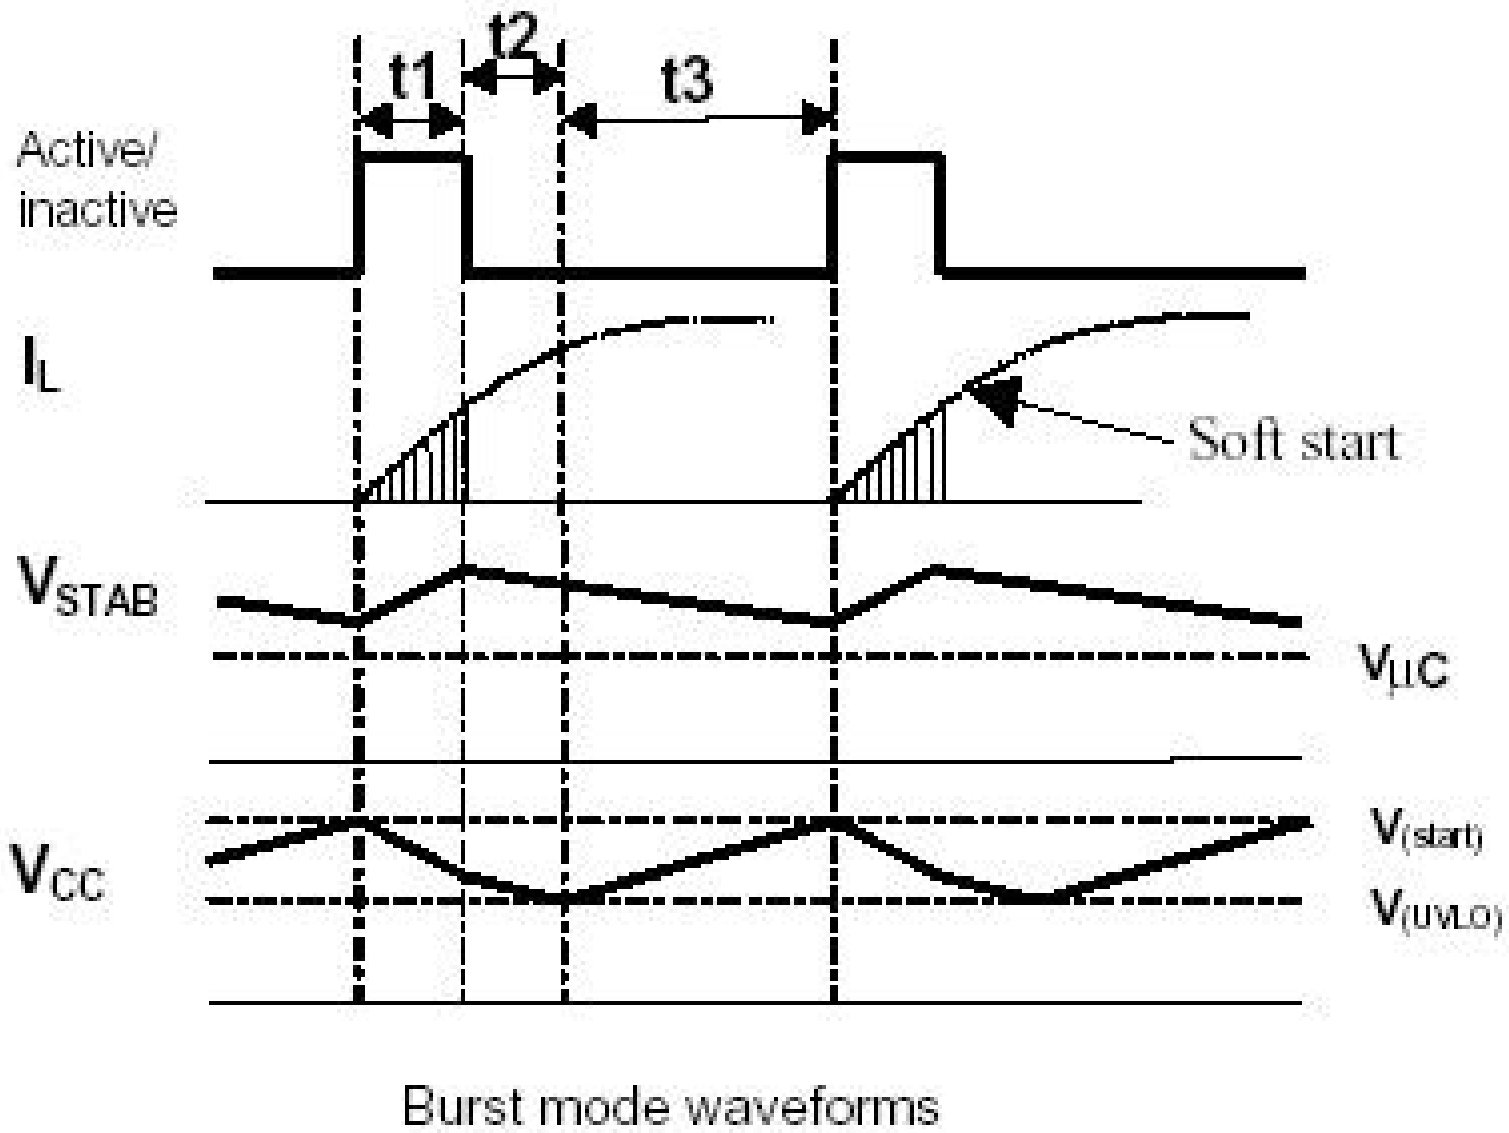


Figure: Burst mode waveforms

Protection Events

The SMPS IC 7520 has the following protection features:

Demagnetization sense

This feature guarantees discontinuous conduction mode operation in every situation. The oscillator will not start a new primary stroke until the secondary stroke has ended. This is to ensure that FET 7521 will not turn on until the demagnetization of transformer 5520 is complete. The function is an additional protection feature against:

- saturation of the transformer,
- damage of the components during initial start-up,
- an overload of the output.

The demag(netization) sense is realized by an internal circuit that guards the voltage (Vdemag) at pin 4 that is connected to V_{CC} winding by resistor R1 (R3522).
The Figure below shows the circuit and the idealized waveforms across this winding.

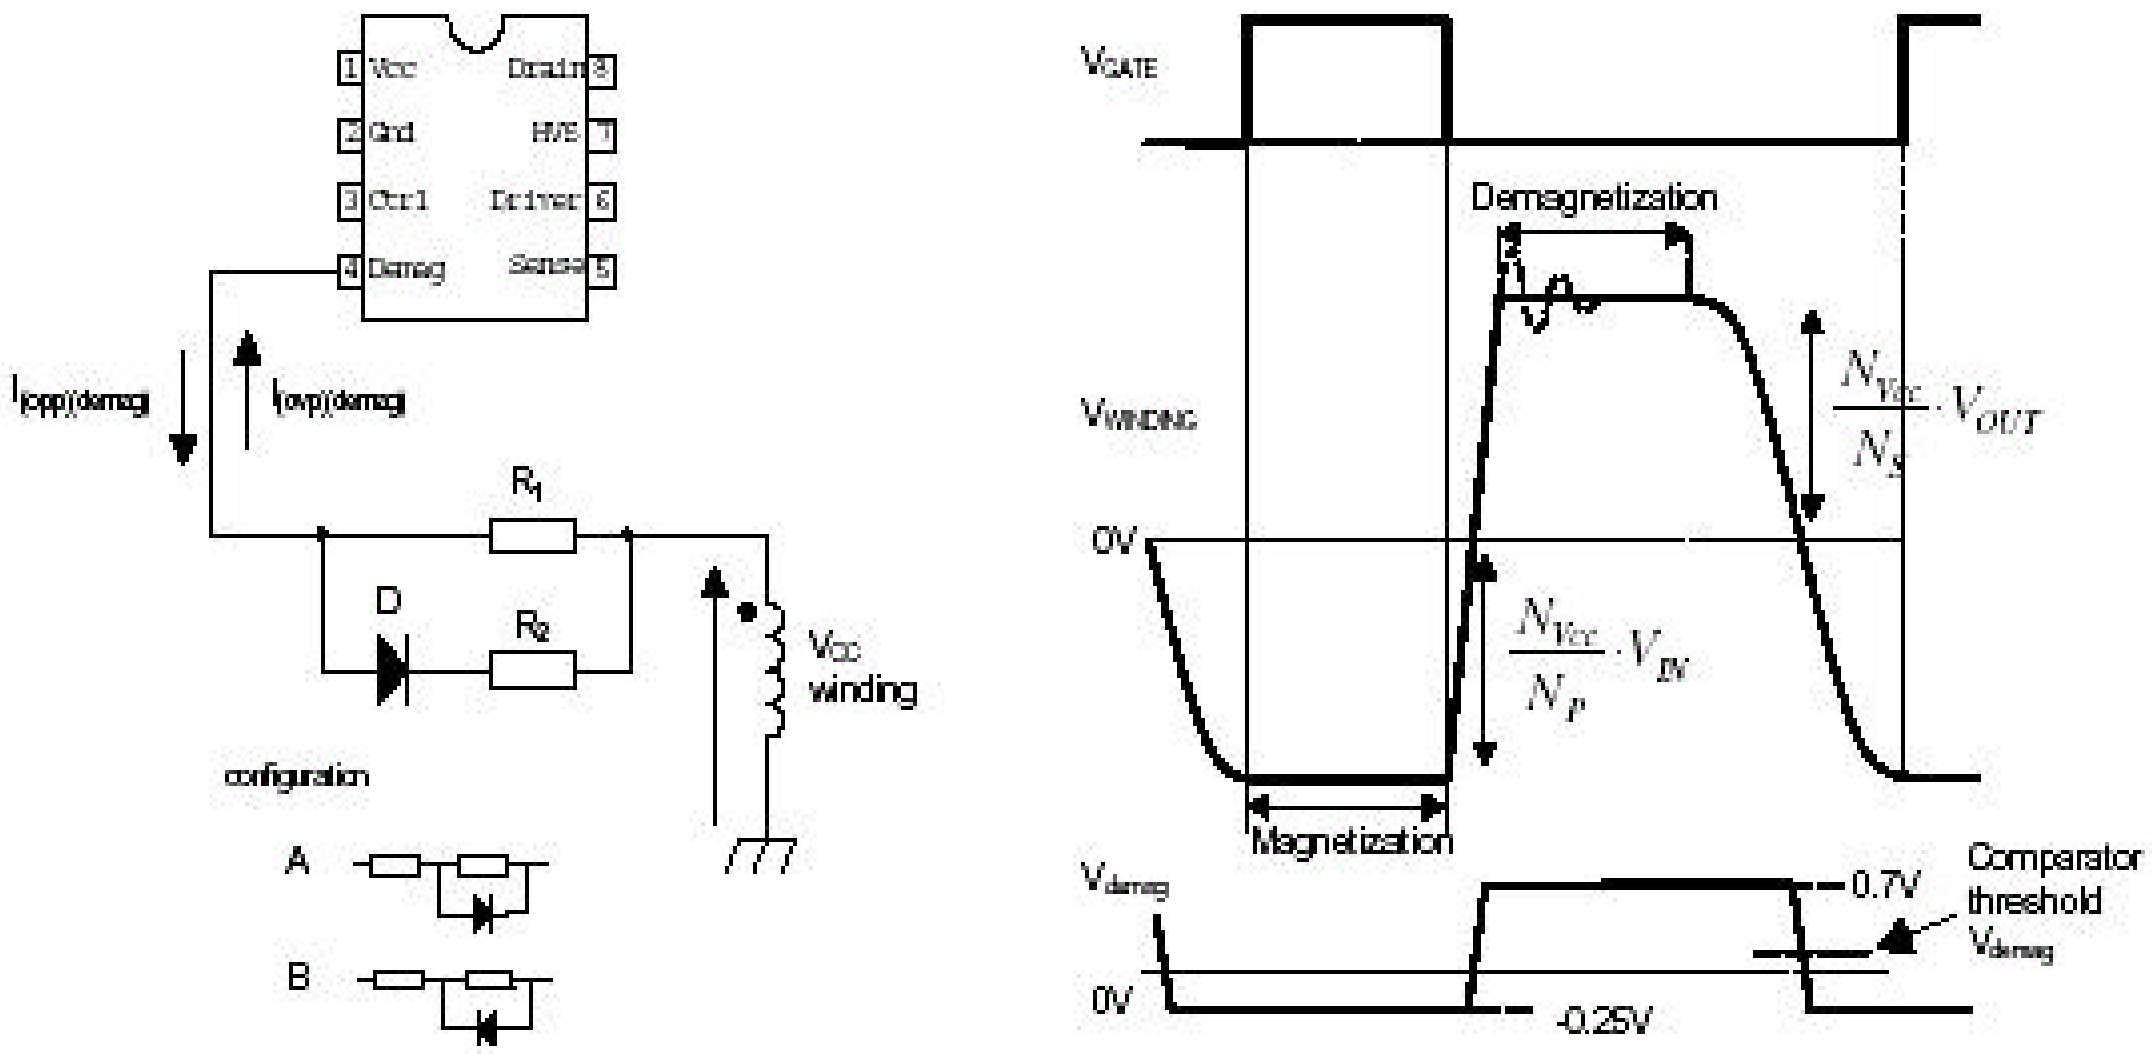


Figure: Demagnetization protection

Over Voltage Protection

The Over Voltage Protection ensures that the output voltage will remain below an adjustable level. This works by sensing the auxiliary voltage via the current flowing into pin 4 (DEM) during the secondary stroke. This voltage is a well-defined replica of the output voltage. Any voltage spikes are averaged by an internal filter.
If the output voltage exceeds the OVP trip level, the OVP circuit switches the power MOSFET 'off'.
Next, the controller waits until the 'under voltage lock out' level (UVLO = ± 9 V) is reached on pin 1 (V_{CC}). This is followed by a safe restart cycle, after which switching starts again. This process is repeated as long as the OVP condition exists. The output voltage at which the OVP function trips, is set by the demagnetization resistor R3522.

Over Current Protection

The internal OCP protection circuit limits the 'sense' voltage on pin 5 to an internal level.

Over Power Protection

During the primary stroke, the rectified AC input voltage is measured by sensing the current drawn from pin 4 (DEM). This current is dependent on the voltage on pin 9 of transformer 5520 and the value of R3522. The current information is used to adjust the peak drain current, which is measured via pin I_{SENSE} .

Short Winding Protection

If the 'sense' voltage on pin 5 exceeds the short winding protection voltage (0.75 V), the converter will stop switching. Once V_{CC} drops below the UVLO level, capacitor C2521 will be recharged and the supply will start again. This cycle will be repeated until the short circuit is removed (safe restart mode).
The short winding protection will also protect in case of a secondary diode short circuit. This protection circuit is activated after the leading edge blanking time (LEB).

LEB time

The LEB (Leading Edge Blanking) time is an internally fixed delay, preventing false triggering of the comparator due to current spikes. This delay determines the minimum 'on' time of the controller.

Over Temperature protection

When the junction temperature exceeds the thermal shutdown temperature (typ. 140º C), the IC will disable the driver. When the V_{CC} voltage drops to UVLO, the V_{CC} capacitor will be recharged to the V(start) level. If the temperature is still too high, the V_{CC} voltage will drop again to the UVLO level (Safe-Restart mode). This mode will persist until the junction temperature drops 8 degrees typically below the shutdown temperature.

Mains dependent operation enabling level

To prevent the supply from starting at a low input voltage, which could cause audible noise, a mains detection is implemented (Mlevel). This detection is provided via pin 8, which detects the minimum start-up voltage between 60 and 100 V. As previous mentioned, the controller is enabled between 60 and 100 V.
An additional advantage of this function is the protection against a disconnected buffer capacitor (C_{IN}). In this case, the supply will not be able to start-up because the V_{CC} capacitor will not be charged to the start-up voltage.

Control

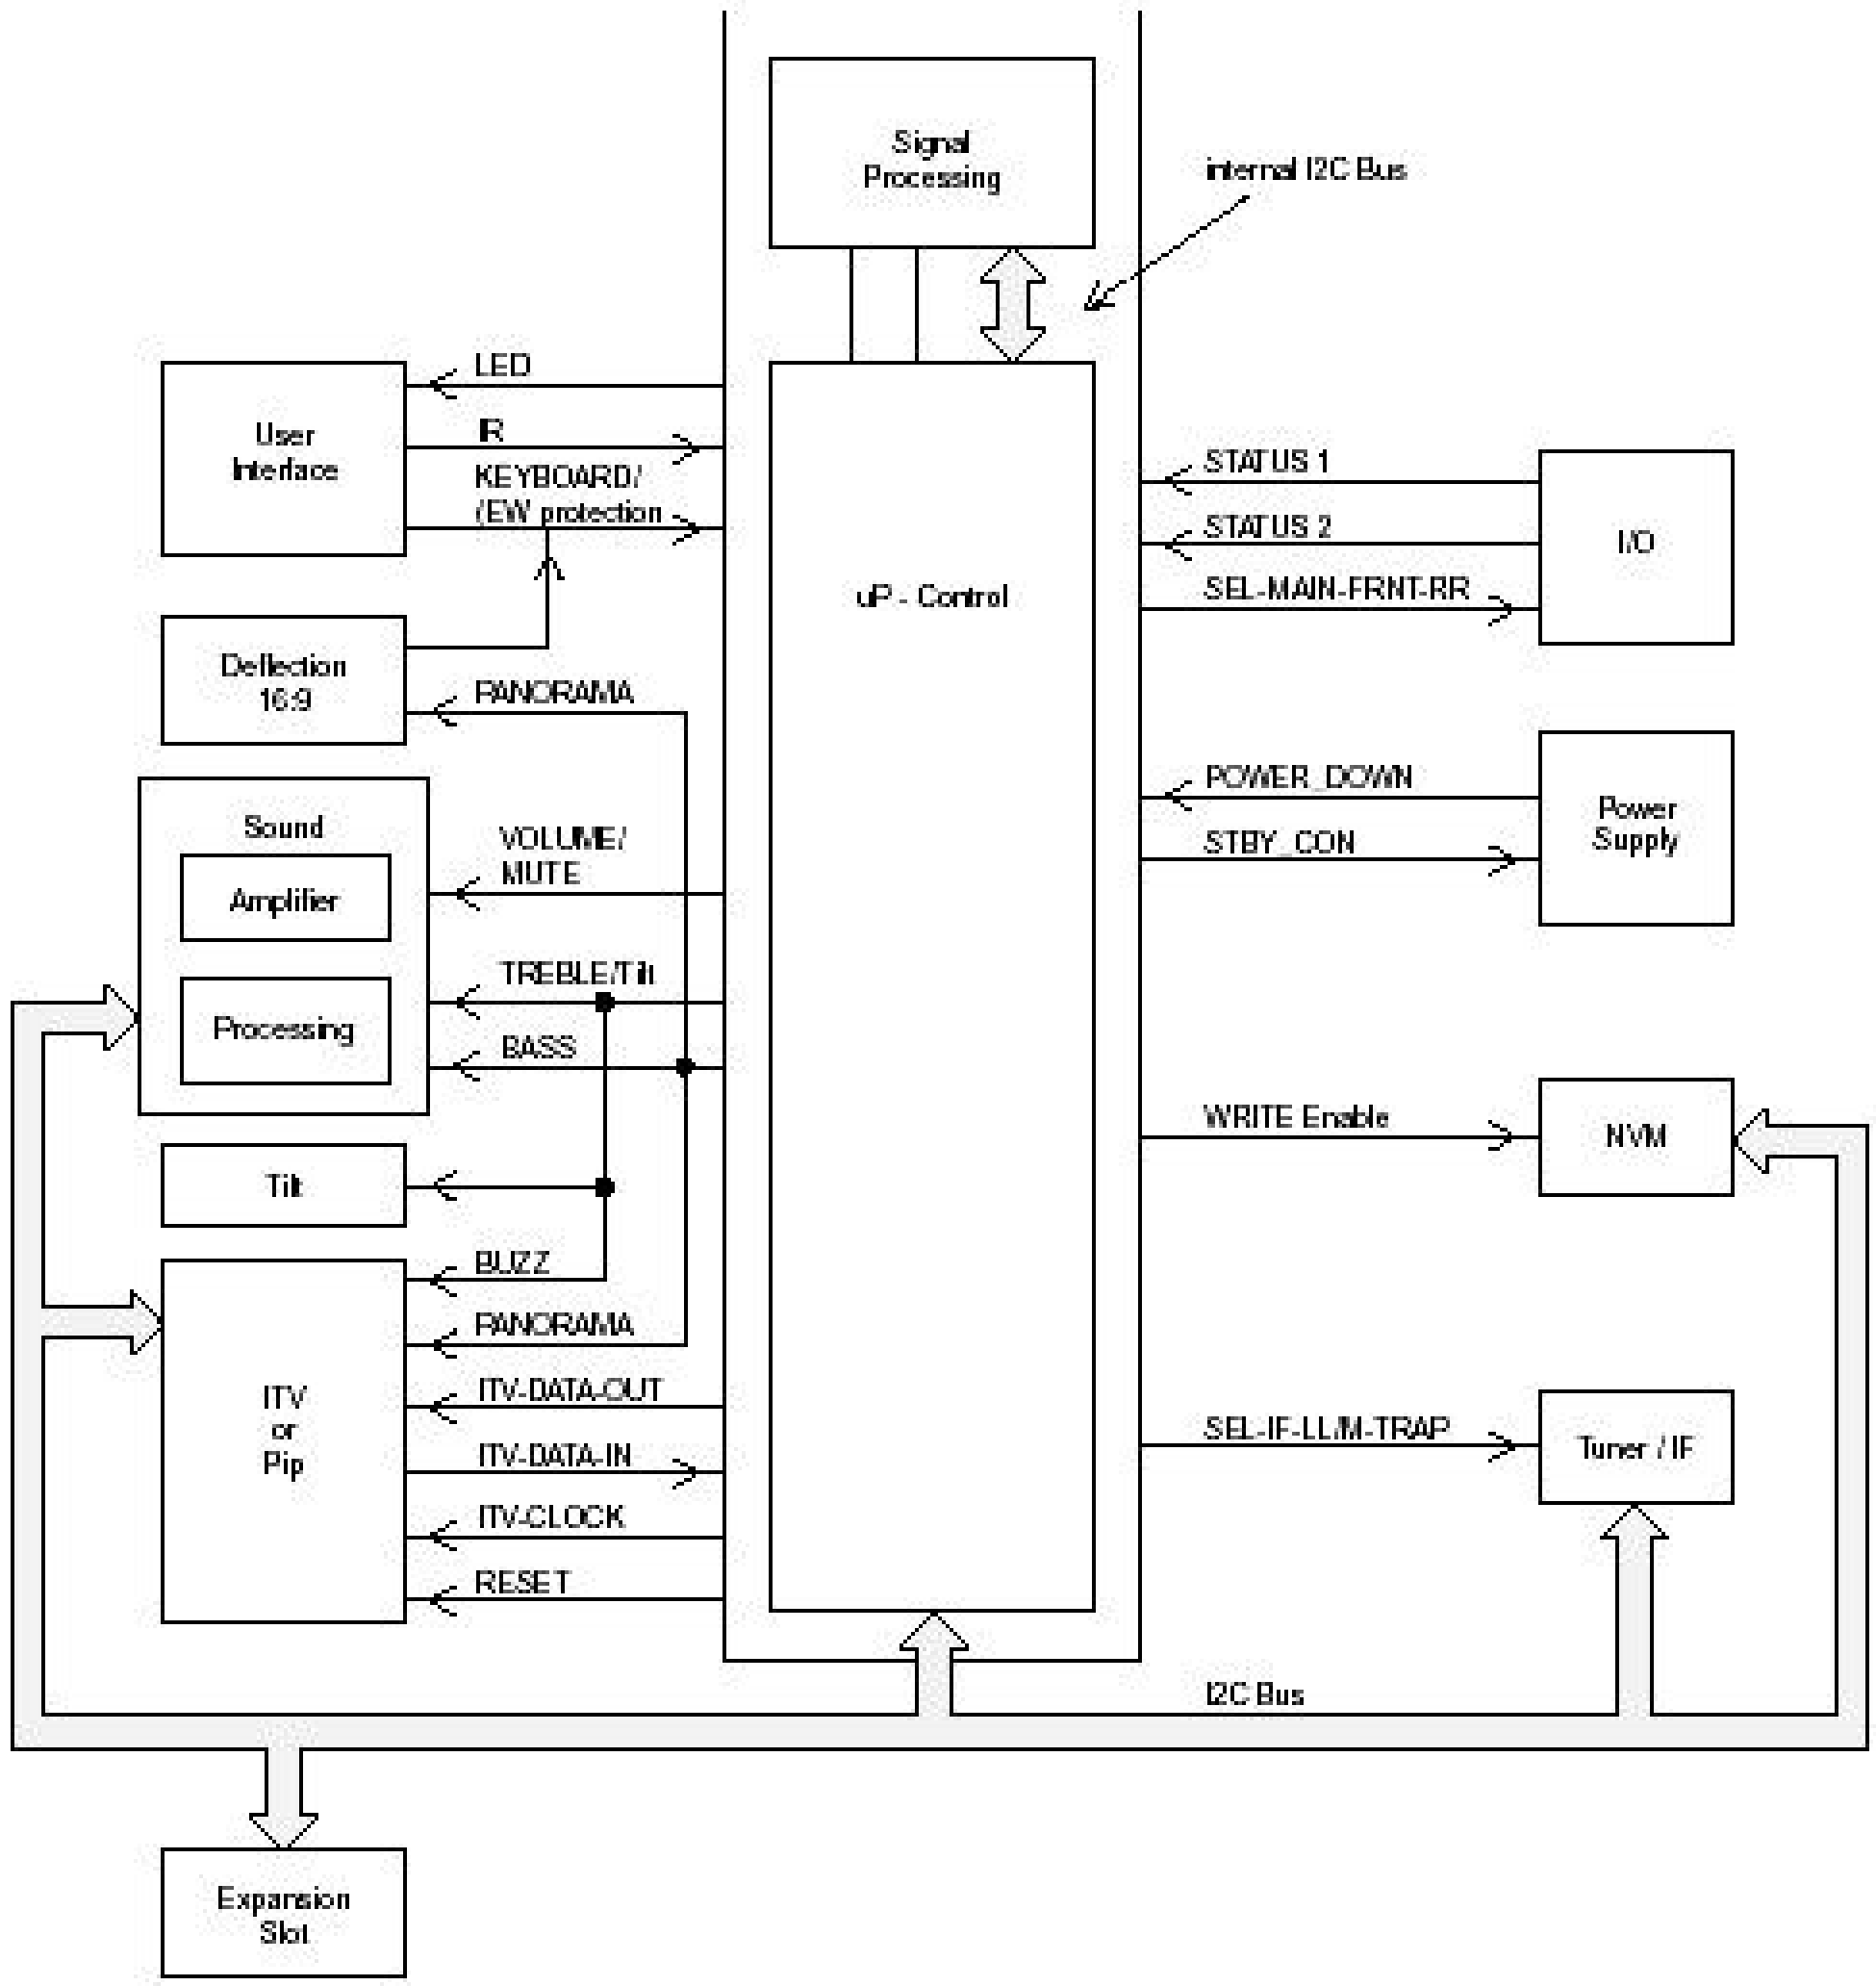


Figure: Block diagram set control

Introduction

The microprocessor part of the UOC, has the complete control and teletext on board. User menu, Service Default Mode, Service Alignment Mode and Customer Service Mode are generated by the uP. Communication to other ICs is done via the I^2 C-bus.

I 2 C-Bus

The main control system, which consists of the microprocessor part of the UOC (7200), is linked to the external devices (tuner, NVM, MSP, etc) by means of the I^2 C-bus. An internal I^2 C-bus is used to control other signal processing functions, like video processing, sound IF, vision IF, synchronization, etc.

User Interface

The 'L01.1U AC' uses a remote control with RC5 protocol. The incoming signal is connected to pin 67 of the UOC.

The 'Top Control' keyboard, connected to UOC pin 80, can also control the set. Button recognition is done via a voltage divider.

The front LED (6691) is connected to an output control line of the microprocessor (pin 5). It is activated to provide the user information about whether or not the set is working correctly (e.g., responding to the remote control, normal operation (USA only) or fault condition)

In- and Output Selection

For the control of the input and output selections, there are three lines:

- **STATUS1.** This signal provides information to the microprocessor on whether a video signal is available on the SCART1 AV input and output port (only for Europe). This signal is not connected in NAFTA sets.
- **STATUS2.** This signal provides information to the microprocessor on whether a video signal is available on the SCART2 AV input and output port (only for Europe). For sets with an SVHS input it provides the additional information if a

Y/C or CVBS source is present. The presence of an external Y/C source makes this line 'high' while a CVBS source makes the line 'low'.

- **SEL-MAIN-FRNT-RR.** This is the source select control signal from the microprocessor. This control line is under user control or can be activated by the other two control lines.

Power Supply Control

The microprocessor part is supplied with 3.3 V and 3.9 V both derived from the 'MainAux' voltage via a 3V3 stabilizer (7560) and a diode.
Two signals are used to control the power supply:

- **Stdby_con.** This signal is generated by the microprocessor when over-current takes place at the 'MainAux' line. This is done to enable the power supply into standby burst mode, and to enable this mode during a protection. This signal is 'low' under normal operation conditions and goes to 'high' (3.3 V) under 'standby' and 'fault' conditions.
- **POWER_DOWN.** This signal is generated by the power supply. Under normal operating conditions, this signal is 'high' (3.3 V). During 'standby' mode, this signal is a pulse train of approx. 10 Hz and a 'high' duration of 5 ms. It is used to give information to the UOC about the fault condition in the Audio amplifier supply circuit. This information is generated by sensing the current on the 'MainAux' line (using voltage drop across R3564 to trigger Q7562). This signal goes 'low' when the DC-current on the 'MainAux' line exceeds 1.6 - 2.0 A. It is also used to give an early warning to the UOC about a power failure. Then the information is used to mute the sound amplifier to prevent a switch off noise and to solve the switch-off spot.

Protection Events

Several protection events are controlled by the UOC:

- **BC protection** , to protect the picture tube from a too high beam current. The UOC has the capability of measuring the normal back level current during the vertical flyback. So if for some reason the CRT circuit is malfunctioning (i.e. high beam current), the normal black current will be out of the 75 A range, and the UOC will trigger the power supply to shut down. However, this is a high beam-current situation, the TV screen will be bright white before the set is shut down.
- **E/W protection** , two protection mechanisms are built in, over-current and over-voltage.
  - In case of over-current due to defective parts in the line deflection output stage, a high current will flow through resistors 3405//3406. If this current is large enough to create a voltage drop of 0.7 V across 3405//3406, transistor Q7606 (in A7 diagram) will conduct and pin 80 of the UOC will be pulled down. Thereafter, the UOC will shut down the power supply. In case of further current increase, the fused resistor 3411 is built-in for double protection.
  - In case of a high voltage appearing across capacitor 2401 (dependent of the tube size), which is high enough to trigger zener diode 6401 into conduction, transistor Q7606 (in A7 diagram) will conduct and UOC is triggered to shut down the power supply.
- **I2C protection** , to check whether all I^2 C ICs are functioning.

In case one of these protections is activated, the set will go into 'standby'.

The 'on' and 'standby' LEDs are controlled via the UOC.

Abbreviation list

Abbreviation	Description
2CS	2 Carrier (or Channel) Stereo
ACI	Automatic Channel Installation: algorithm that installs TV sets directly from cable network by means of a predefined TXT page
ADC	Analogue to Digital Converter
AFC	Automatic Frequency Control: control signal used to tune to the correct frequency
AFT	Automatic Fine Tuning
AGC	Automatic Gain Control: algorithm that controls the video input of the feature box
AM	Amplitude Modulation
AP	Asia Pacific
AR	Aspect Ratio: 4 by 3 or 16 by 9
ATS	Automatic Tuning System
AV	External Audio Video
AVL	Automatic Volume Level
BC-PROT	Beam Current Protection
BCL	Beam Current Limitation
B/G	Monochrome TV system. Sound carrier distance is 5.5 MHz

BLC-INFORMATION	Black current information
BTSC	Broadcast Television Standard Committee. Multiplex FM stereo sound system, originating from the USA and used e.g. in LATAM and AP-NTSC countries
B-TXT	Blue teletext
CBA	Circuit Board Assembly
CC	Closed Caption
ComPair	Computer aided rePair
CRT	Cathode Ray Tube or picture tube
CSM	Customer Service Mode
CTI	Color Transient Improvement: manipulates steepness of chroma transients
CVBS	Composite Video Blanking and Synchronization
DAC	Digital to Analogue Converter
DBE	Dynamic Bass Enhancement: extra low frequency amplification
DBX	Dynamic Bass Expander
D/K	Monochrome TV system. Sound carrier distance is 6.5 MHz
DFU	Direction For Use: description for the end user
DNR	Dynamic Noise Reduction
DSP	Digital Signal Processing

DST	Dealer Service Tool: special remote control designed for dealers to enter e.g. service mode
DVD	Digital Versatile Disc
EEPROM	Electrically Erasable and Programmable Read Only Memory
EHT	Extra High Tension
EHT-INFORMATION	Extra High Tension information
EU	Europe
EW	East West, related to horizontal deflection of the set
EXT	External (source), entering the set via SCART or Cinch
FBL	Fast Blanking: DC signal accompanying RGB signals
FILAMENT	Filament of CRT
FLASH	Flash memory
FM	Field Memory
FM	Frequency Modulation
HA	Horizontal Acquisition: horizontal sync pulse coming out of the HIP
HFB	Horizontal Flyback Pulse: horizontal sync pulse from large signal deflection
HP	Headphone
Hue	Color phase control for NTSC (not the same as 'Tint')

I	Monochrome TV system. Sound carrier distance is 6.0 MHz
I2C	Integrated IC bus
IF	Intermediate Frequency
IIC	Integrated IC bus
Interlaced	Scan mode where two fields are used to form one frame. Each field contains half the number of the total amount of lines. The fields are written in 'pairs', causing line flicker.
ITV	Institutional TV
LATAM	Latin America
LED	Light Emitting Diode
L/L'	Monochrome TV system. Sound carrier distance is 6.5 MHz. L' is Band I, L is all bands except for Band I
LNA	Low Noise Amplifier
LS	Large Screen
LS	Loudspeaker
LSP	Large signal panel
M/N	Monochrome TV system. Sound carrier distance is 4.5 MHz
MSP	Multistandard Sound Processor: ITT sound decoder
MUTE	Mute-Line

NC	Not Connected
NICAM	Near Instantaneous Compounded Audio Multiplexing. This is a digital sound system, mainly used in Europe.
NTSC	National Television Standard Committee. Color system mainly used in North America and Japan. Color carrier NTSC M/N = 3.579545 MHz, NTSC 4.43 = 4.433619 MHz (this is a VCR norm, it is not transmitted off-air)
NVM	Non Volatile Memory: IC containing TV related data e.g. alignments
OB	Option Byte
OC	Open Circuit
OSD	On Screen Display
PAL	Phase Alternating Line. Color system mainly used in West Europe (color carrier = 4.433619 MHz) and South America (color carrier PAL M = 3.575612 MHz and PAL N = 3.582056 MHz)
PCB	Printed Circuit board
PIP	Picture In Picture
PLL	Phase Locked Loop. Used for e.g. FST tuning systems. The customer can give directly the desired frequency
POR	Power-On Reset
Progressive Scan	Scan mode where all scan lines are displayed in one frame at the same time, creating a double vertical resolution.

PTP	Picture Tube Panel (or CRT-panel)
RAM	Random Access Memory
RC	Remote Control handset
RC5	Remote Control system 5, signal from the remote control receiver
RGB	Red Green Blue
ROM	Read Only Memory
SAM	Service Alignment Mode
SAP	Second Audio Program
SC	Sandcastle: pulse derived from sync signals
S/C	Short Circuit
SCAVEM	Scan Velocity Modulation
SCL	Serial Clock
SDA	Serial Data
SDM	Service Default Mode
SECAM	SEequence Couleur Avec Memoire. Color system mainly used in France and East Europe. Color carriers = 4.406250 MHz and 4.250000 MHz
SIF	Sound Intermediate Frequency
SS	Small Screen
STBY	Standby


SVHS	Super Video Home System
SW	Software
THD	Total Harmonic Distortion
TXT	Teletext
uP	Microprocessor
UOC	Ultimate One Chip
VA	Vertical Acquisition
VBAT	Main supply voltage for the deflection stage (mostly 141 V)
V-chip	Violence Chip
VCR	Video Cassette Recorder
WYSIWYR	What You See Is What You Record: record selection that follows main picture and sound
XTAL	Quartz crystal
YC	Luminance (Y) and Chrominance (C) signal

IC Data Sheets

In this paragraph, the internal block diagrams and pinning are given of ICs that are drawn as a 'black box' in the electrical diagrams (with the exception of 'memory' and 'logic' ICs).


This is not applicable for this manual (all ICs are drawn with internal block diagrams)

P2




20V / div DC
2µs / div

L1




500mV / div DC
20µs / div

L2




500mV / div DC
20µs / div

L3




200V / div DC
20µs / div

L4




20V / div AC
5ms / div

F1




50mV / div DC
5ms / div

F2




50mV / div DC
5ms / div

F3




1V / div DC
5ms / div

F4




0.2V / div DC
5ms / div

I1




0.1V / div DC
200µs / div

I2




0.1V / div DC
200µs / div

I4




1V / div DC
20µs / div

V4




10V / div DC
20µs / div

V5




10V / div DC
20µs / div

V6




10V / div DC
20µs / div

V7




10V / div DC
20µs / div

V8




10V / div DC
5ms / div

V9




500mV / div DC
10µs / div

V10




1V / div DC
10µs / div

S1




10V / div DC
20µs / div

S2




10V / div DC
20µs / div

S3




500mV / div DC
5ms / div

S4




500mV / div DC
5ms / div

S5




500mV / div DC
5ms / div

C1




500mV / div DC
1ms / div

C2




500mV / div DC
1ms / div

C3




200mV / div DC
1ms / div

C4




10V / div DC
100µs / div

C5




10V / div DC
100µs / div

A1




200mV / div AC
1ms / div

A2




200mV / div AC
1ms / div

A3




200mV / div AC
1ms / div

A4




200mV / div AC
1ms / div

A5




200mV / div AC
1ms / div

A6




200mV / div AC
1ms / div

A7




200mV / div AC
1ms / div

A8




200mV / div AC
1ms / div

A8a




200mV / div AC
1ms / div

A9




200mV / div AC
1ms / div

A10




200mV / div AC
1ms / div

A11




200mV / div AC
1ms / div

A11a




200mV / div AC
1ms / div

A12




200mV / div AC
1ms / div

A13




10V / div DC
20µs / div

A14




10V / div DC
20µs / div

A15




10V / div DC
1ms / div

A16




10V / div DC
1ms / div

C6




10V / div DC
2ms / div

V11




10V / div DC
20µs / div

V12




10V / div DC
20µs / div

V13




10V / div DC
20µs / div

V14




50V / div DC
20µs / div

V15




50V / div DC
20µs / div

V16



50V / div DC
20µs / div

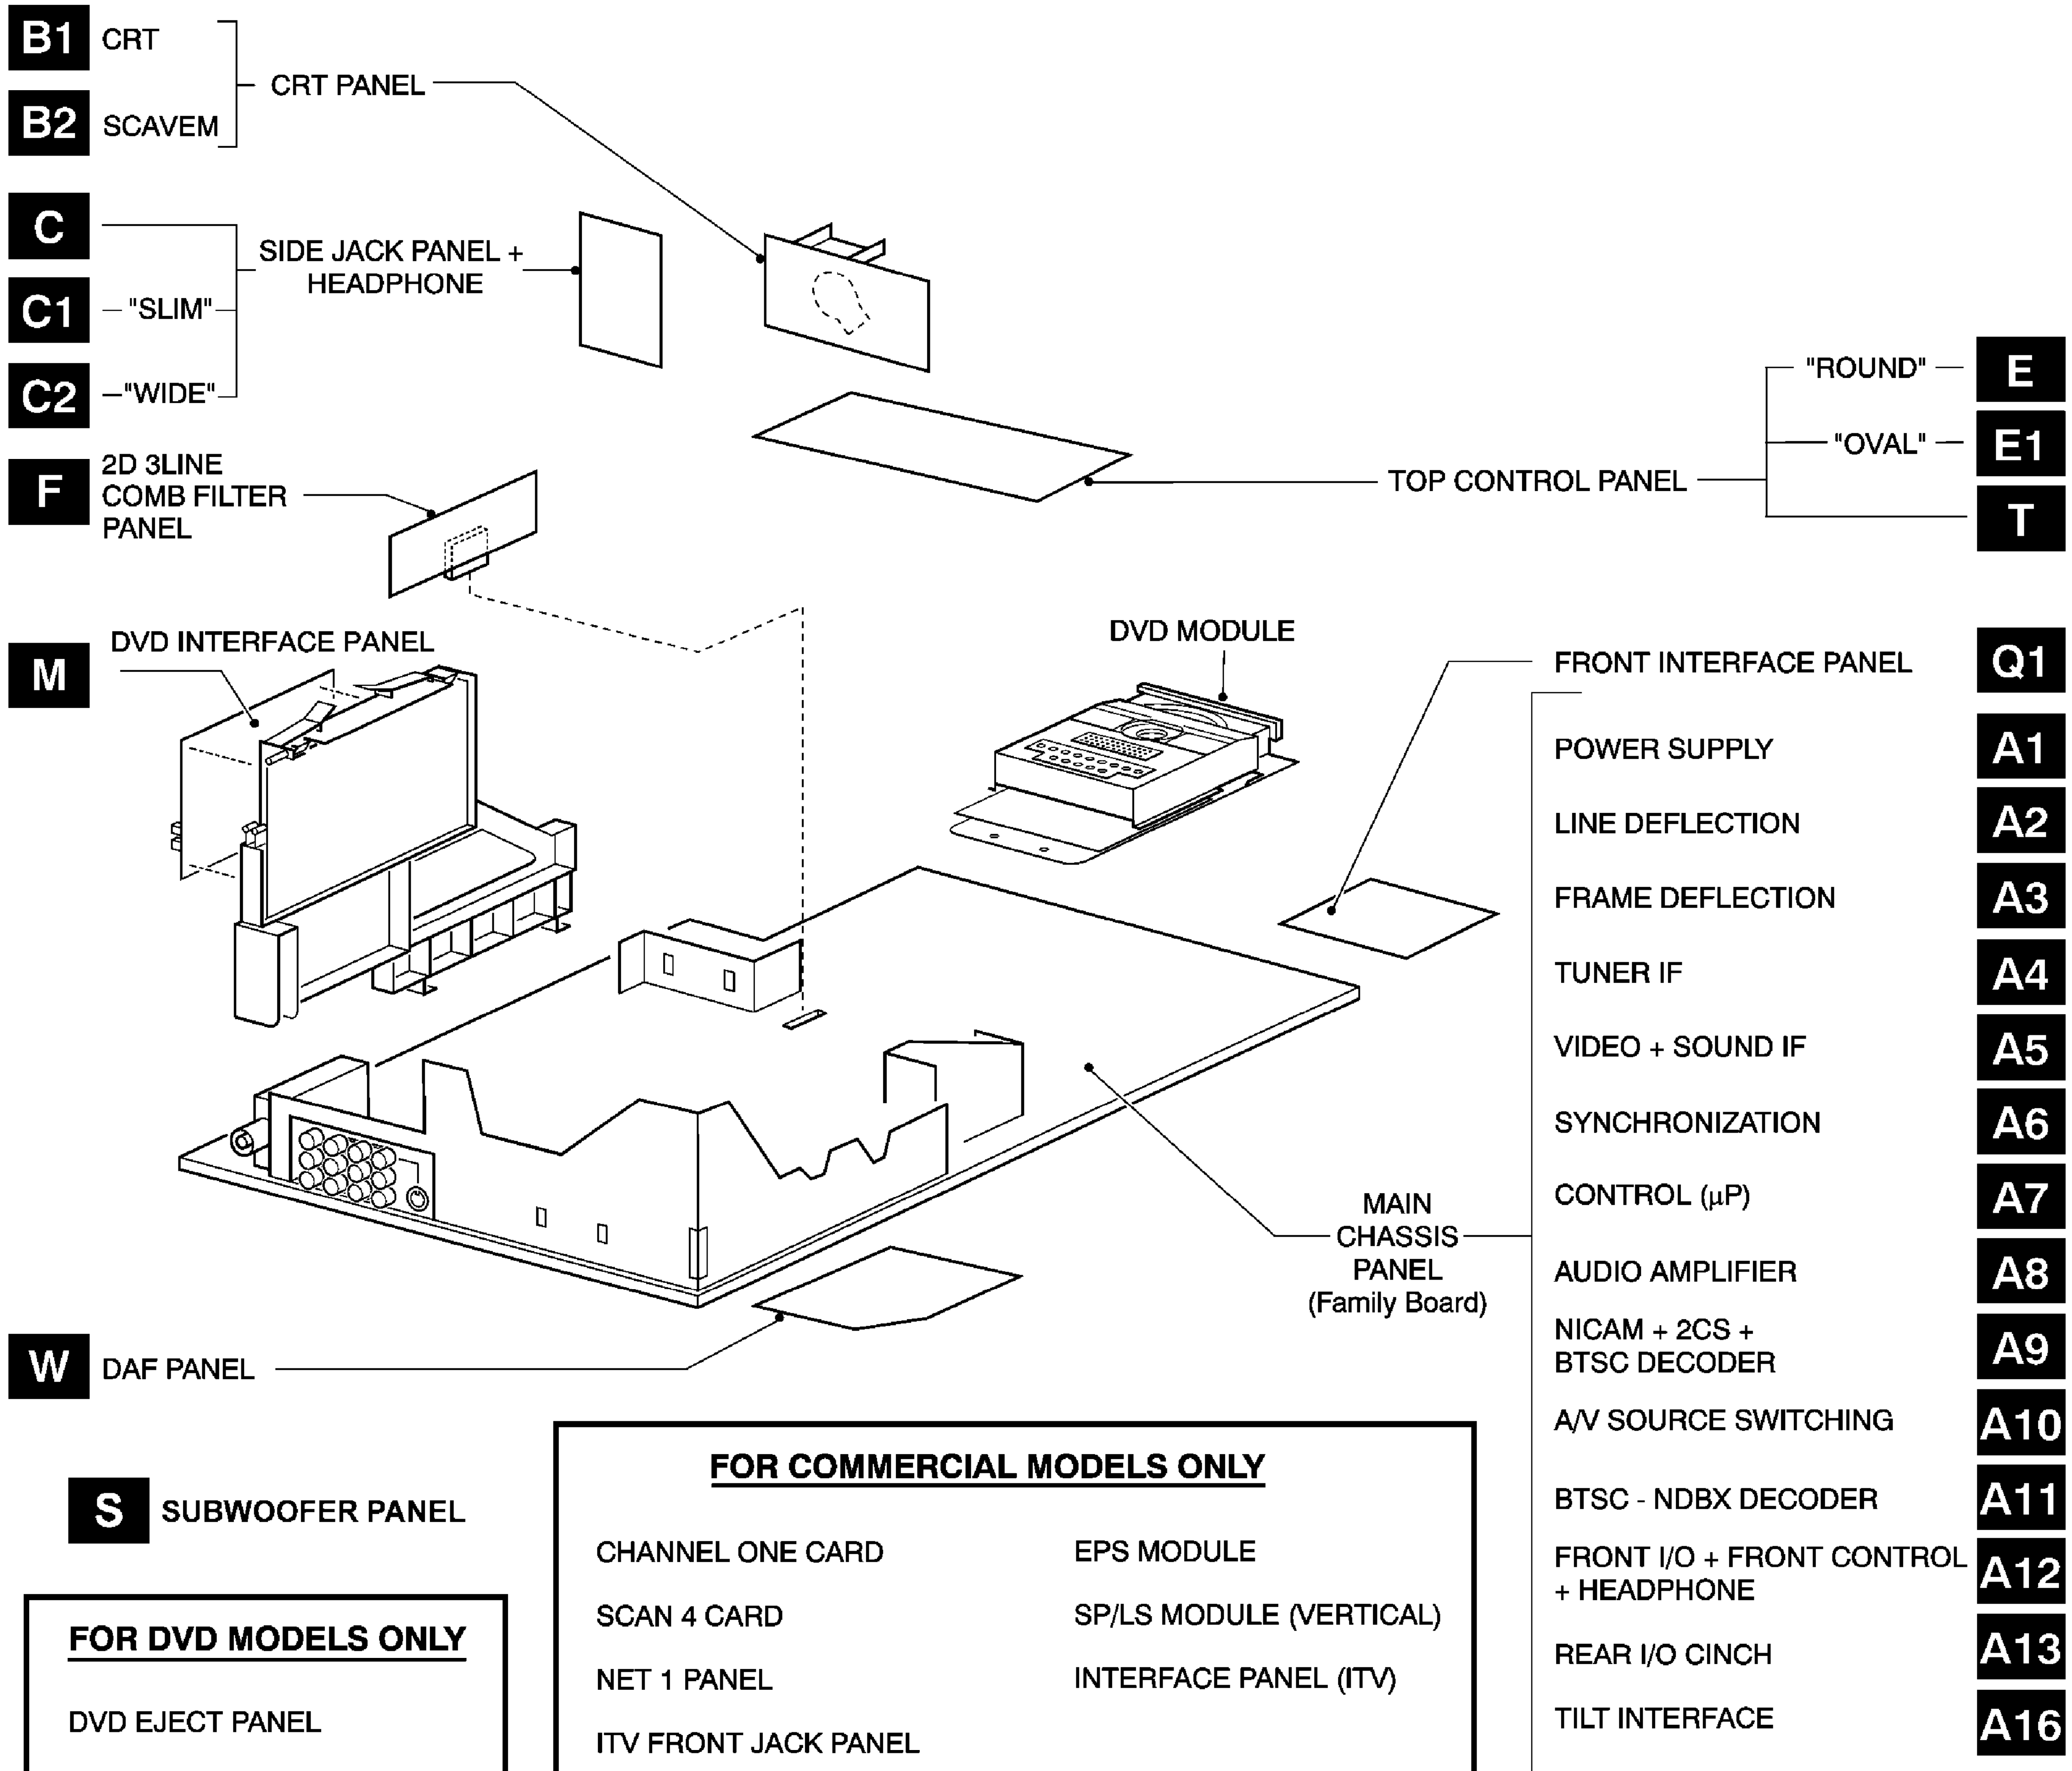


FOR DVD MODELS ONLY

DVD EJECT PANEL


FOR COMMERCIAL MODELS ONLY

CHANNEL ONE CARD
SCAN 4 CARD
NET 1 PANEL
ITV FRONT JACK PANEL
EPS MODULE
SP/LS MODULE (VERTICAL)
INTERFACE PANEL (ITV)

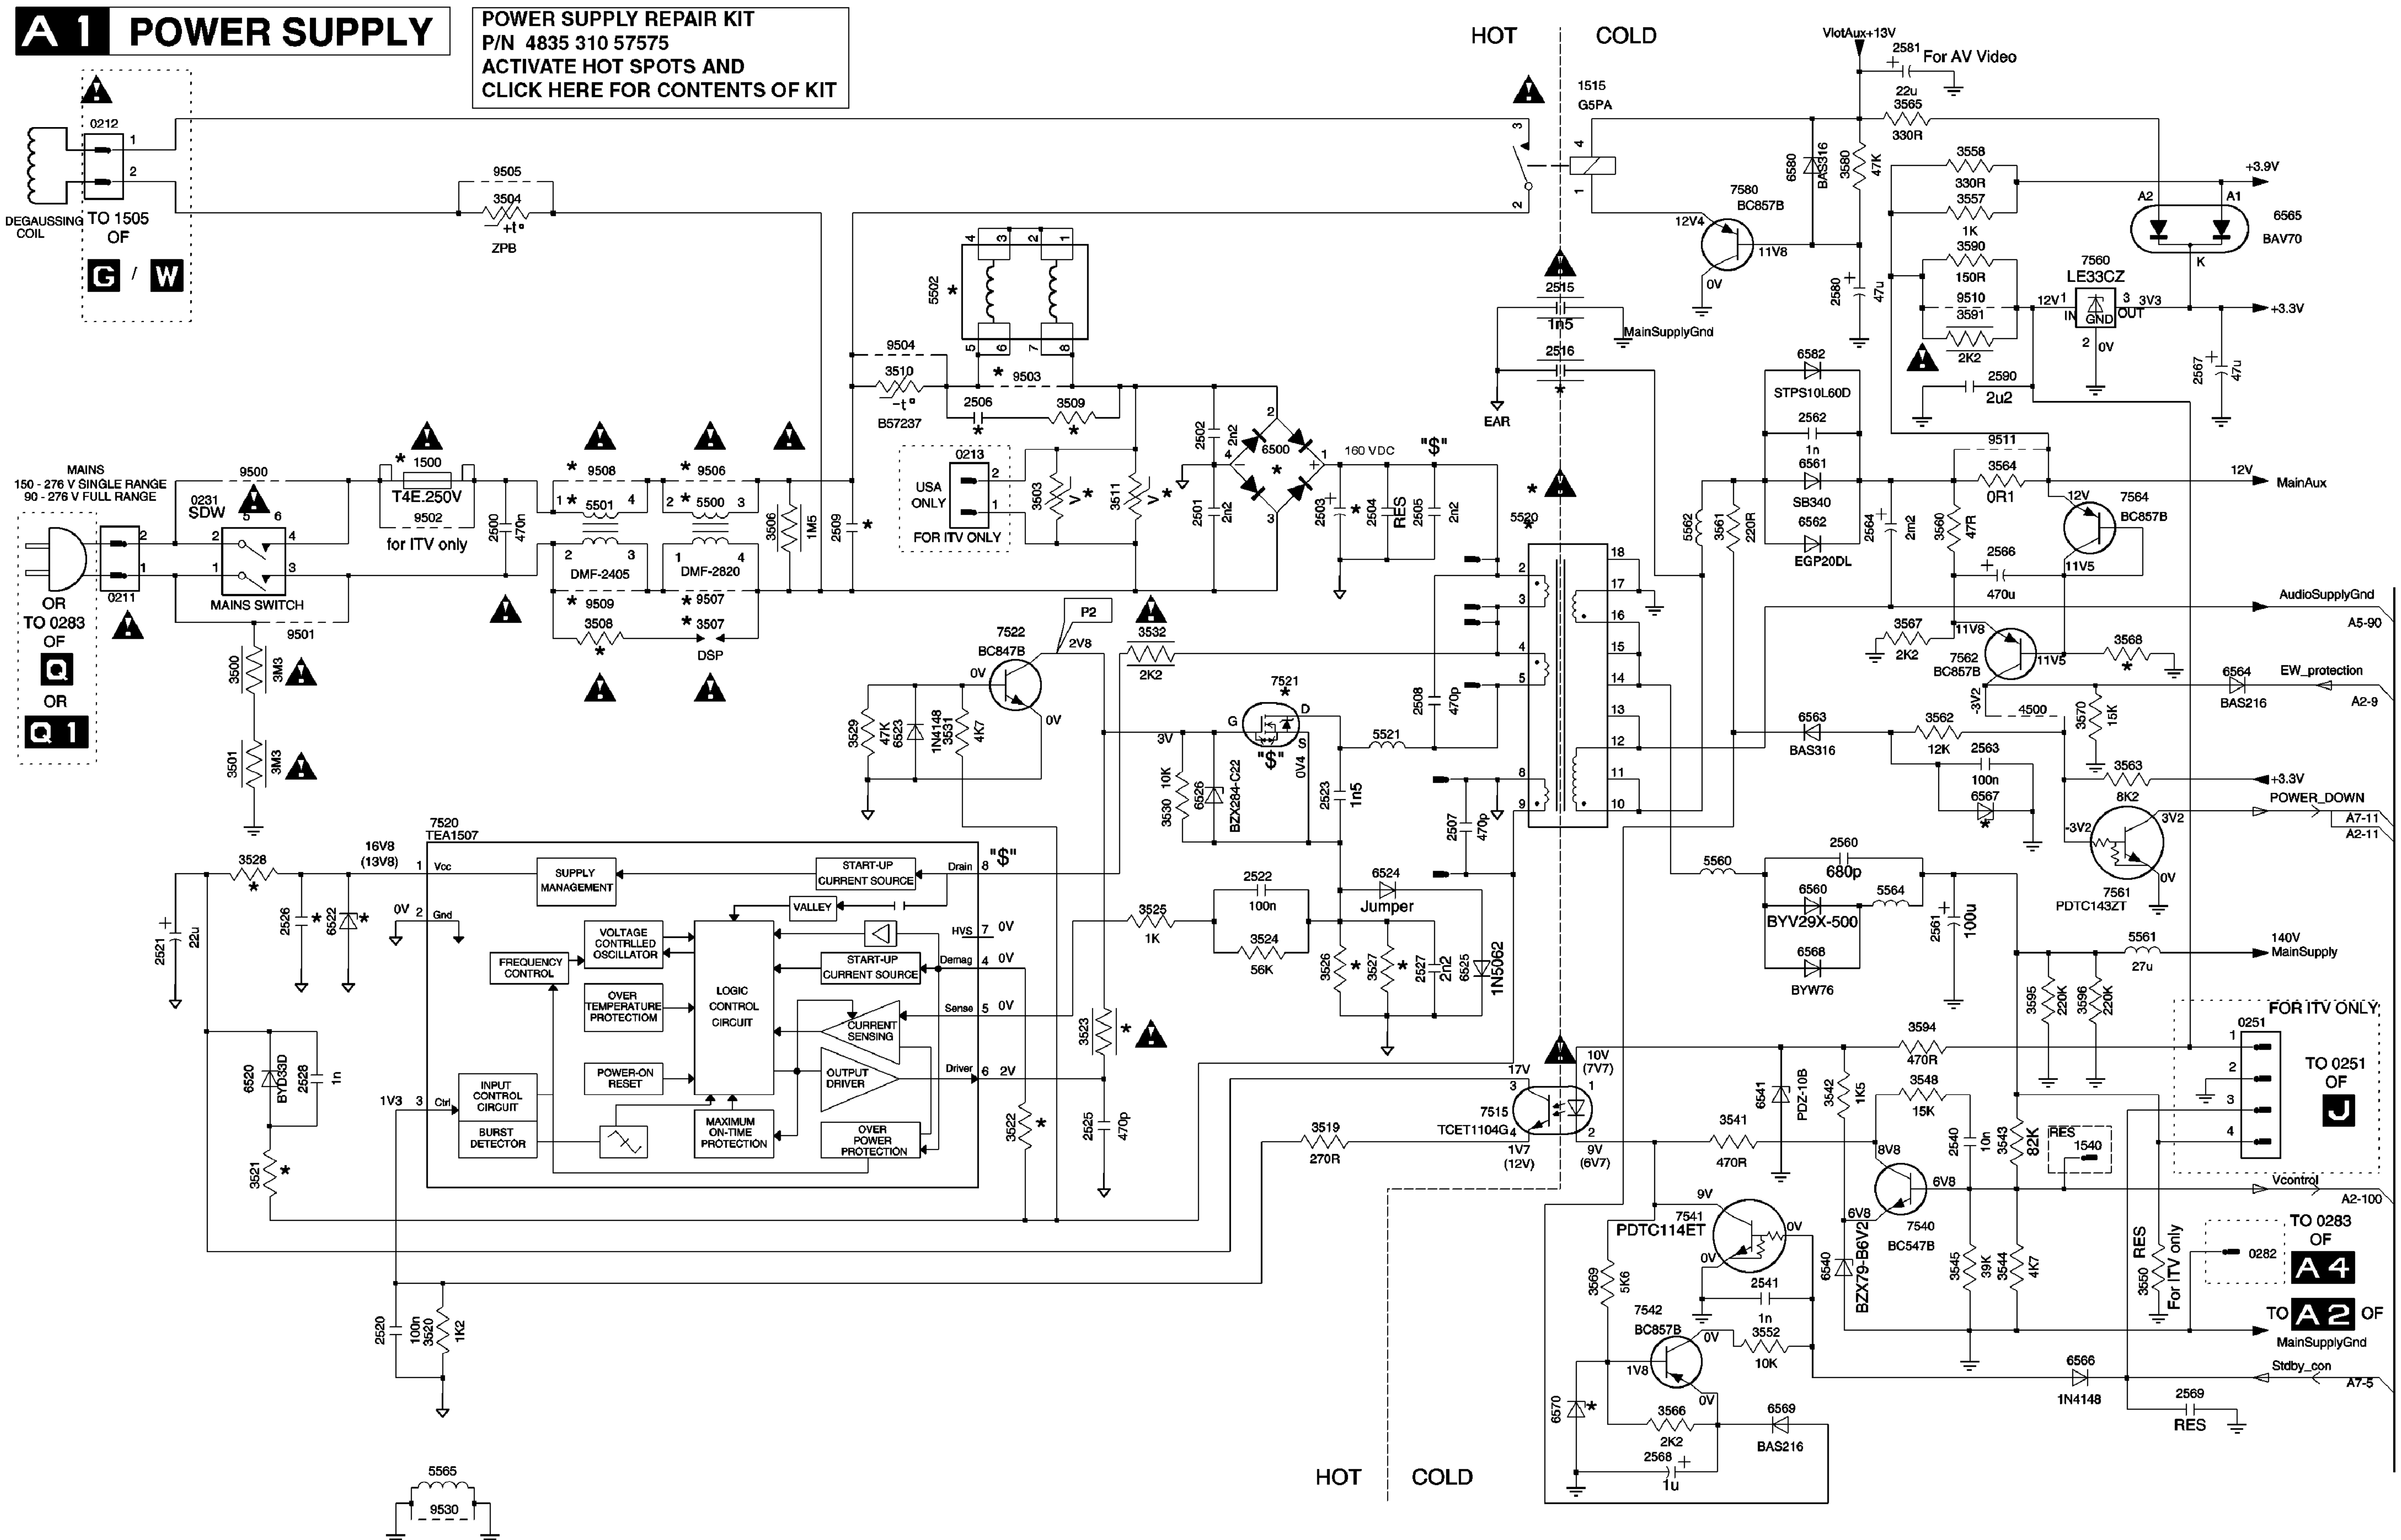
A 1 POWER SUPPLY
POWER SUPPLY REPAIR KIT
P/N 4835 310 57575
ACTIVATE HOT SPOTS AND
CLICK HERE FOR CONTENTS OF KIT
HOT
COLD
DEGAUSSING COIL
TO 1505 OF
G / W
MAINS
150 - 276 V SINGLE RANGE
90 - 276 V FULL RANGE
SDW
MAINS SWITCH
OR
TO 0283 OF
Q
OR
Q 1
T4E.250V
for ITV only
DMF-2405
DMF-2820
DSP
ZPB
B57237
USA ONLY
FOR ITV ONLY
160 VDC
EAR
MainSupplyGnd
TEA1507
SUPPLY MANAGEMENT
START-UP CURRENT SOURCE
VALLEY
VOLTAGE CONTRLLED OSCILLATOR
FREQUENCY CONTROL
OVER TEMPERATURE PROTECTIOM
LOGIC CONTROL CIRCUIT
CURRENT SENSING
POWER-ON RESET
OUTPUT DRIVER
INPUT CONTROL CIRCUIT
BURST DETECTOR
MAXIMUM ON-TIME PROTECTION
OVER POWER PROTECTION
Vcc
Gnd
Ctrl
Drain
HVS
Demag
Sense
Driver
Jumper
TCET1104G
PDTC114ET
BC857B
BC547B
BC847B
PDTC143ZT
LE33CZ
BAV70
For AV Video
VlotAux+13V
+3.9V
+3.3V
12V MainAux
AudioSupplyGnd
EW_protection
POWER_DOWN
140V MainSupply
FOR ITV ONLY
TO 0251 OF
J
Vcontrol
TO 0283 OF
A 4
TO A 2 OF
MainSupplyGnd
Stdby_con
STPS10L60D
SB340
EGP20DL
BYV29X-500
BYW76
BZX284-C22
BZX79-B6V2
PDZ-10B
1N4148
1N5062
BAS316
BAS216
For ITV only
RES


A2 LINE DEFLECTION

HORIZONTAL REPAIR KIT
P/N 4835 310 57577
ACTIVATE HOT SPOTS AND
CLICK HERE FOR CONTENTS OF KIT

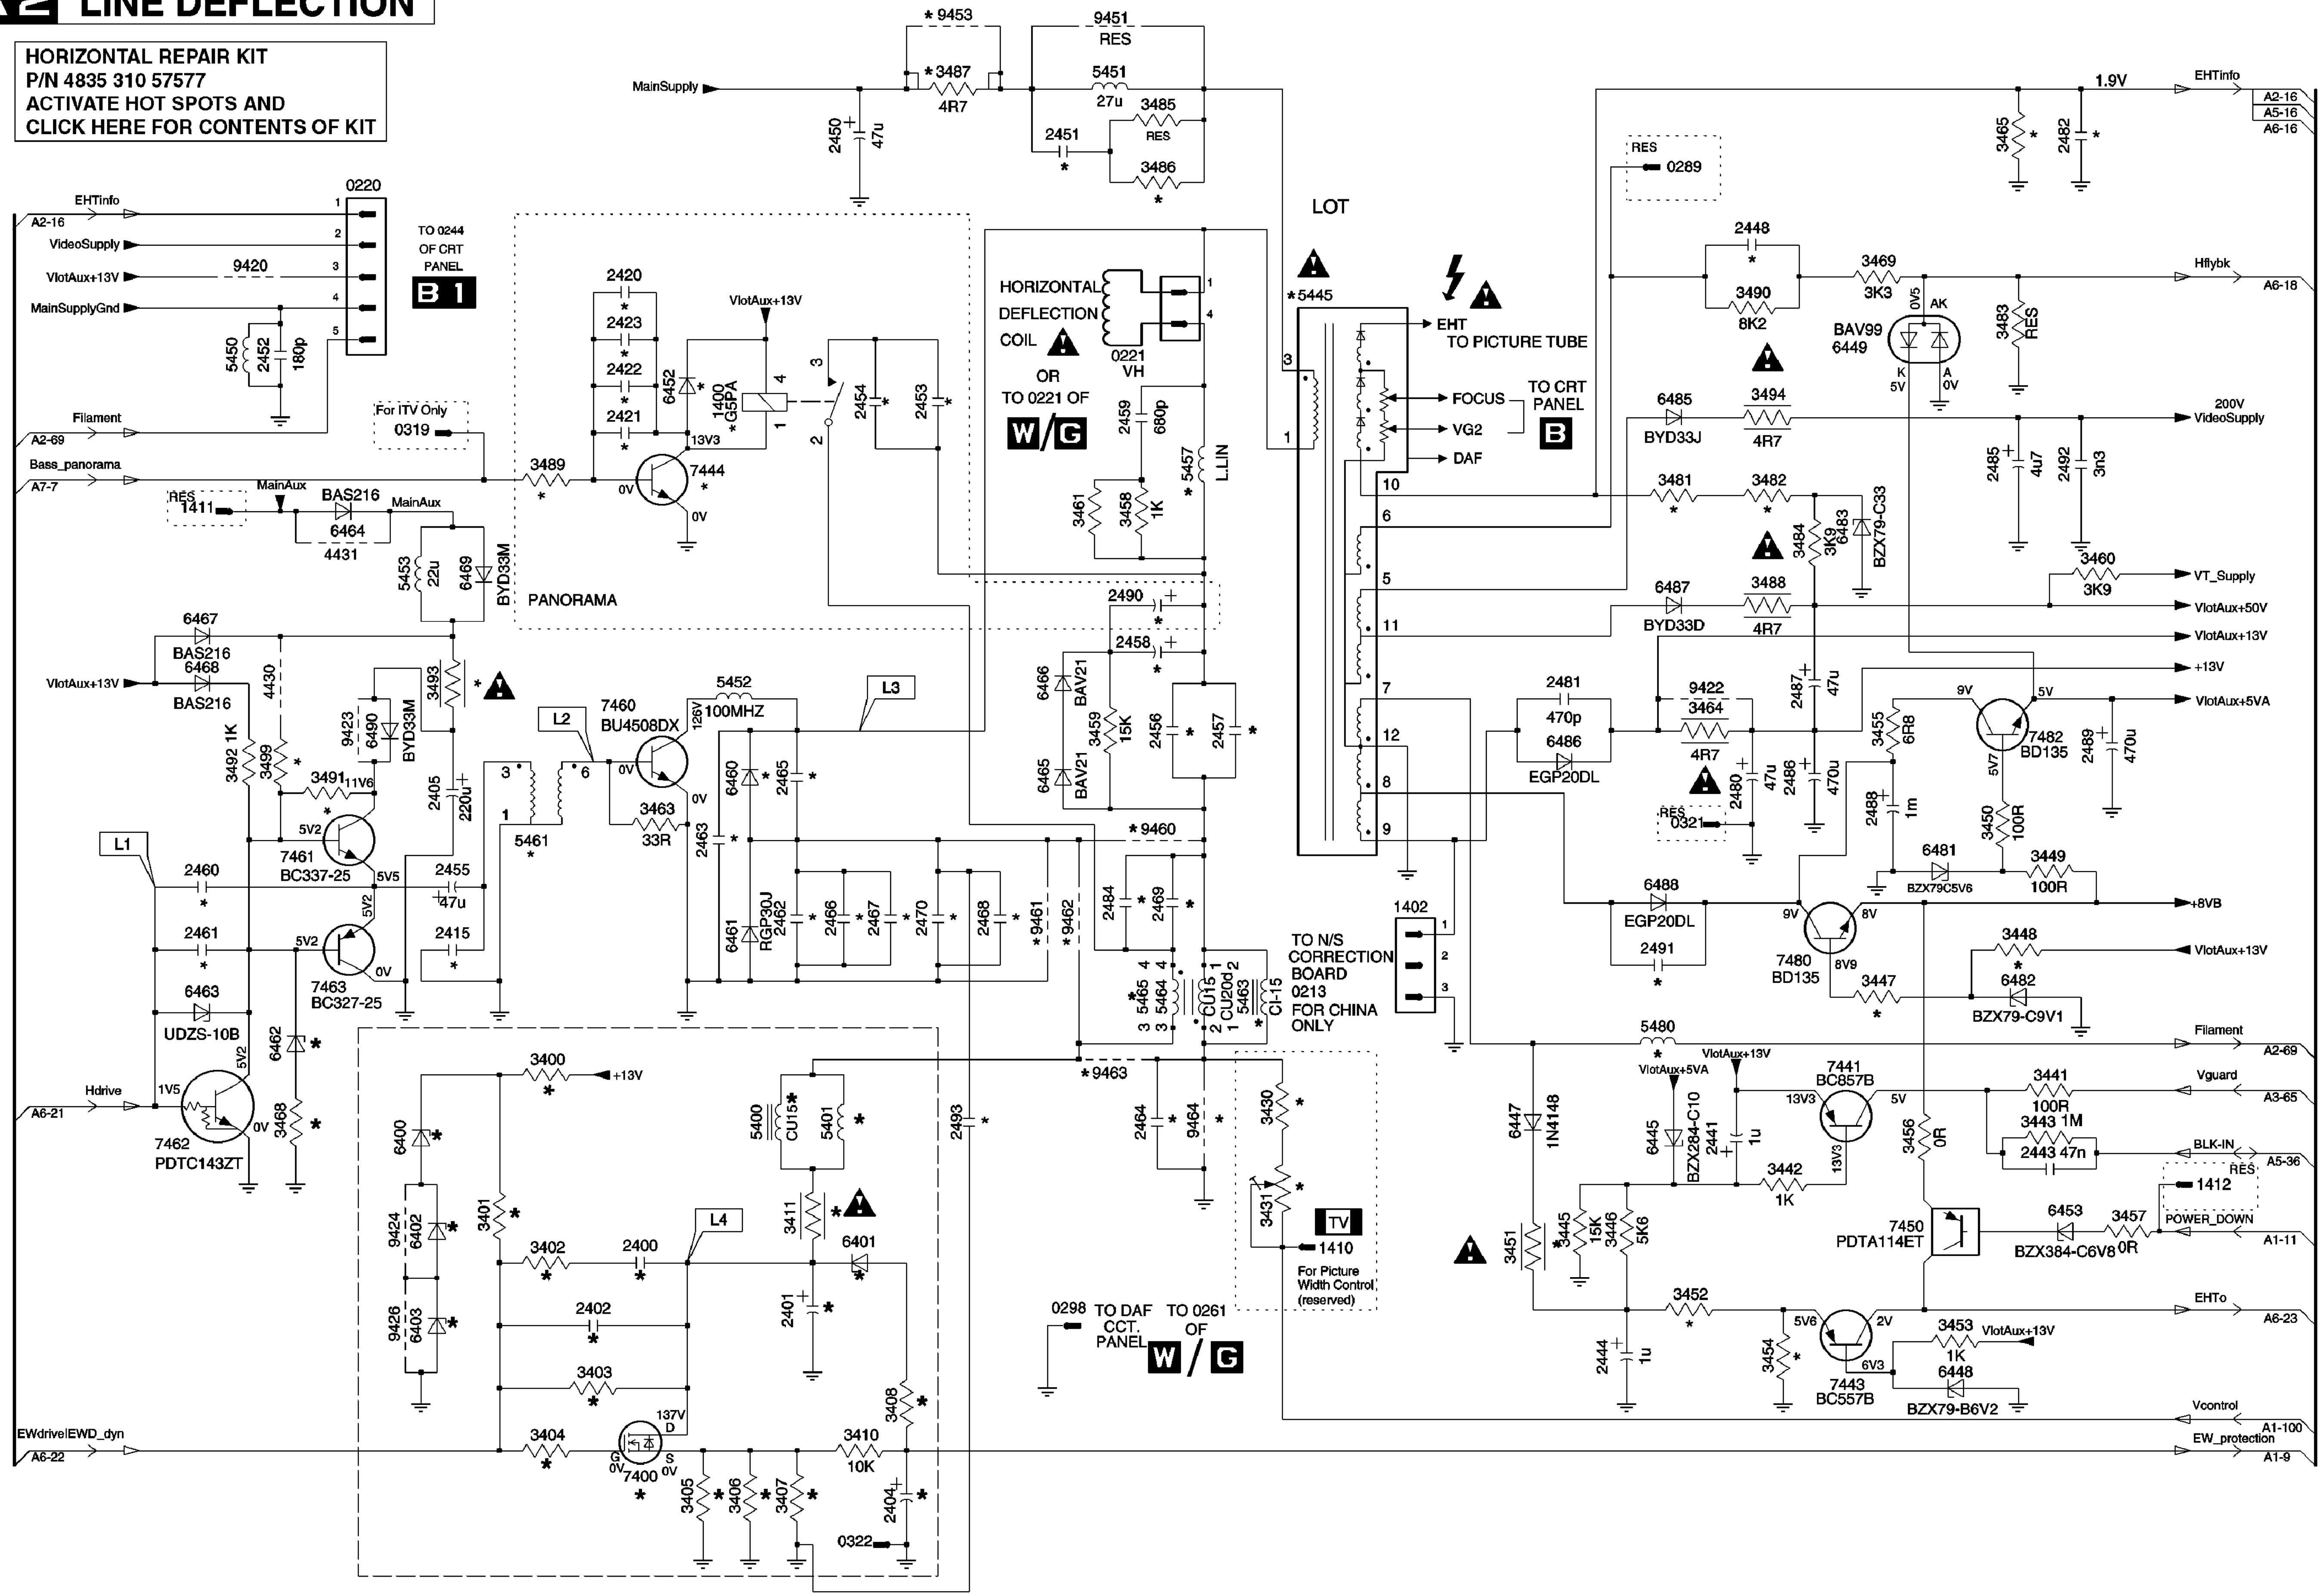


A3 FRAME DEFLECTION


VERTICAL REPAIR KIT
P/N 4835 310 57582
ACTIVATE HOT SPOTS AND
CLICK HERE FOR CONTENTS OF KIT

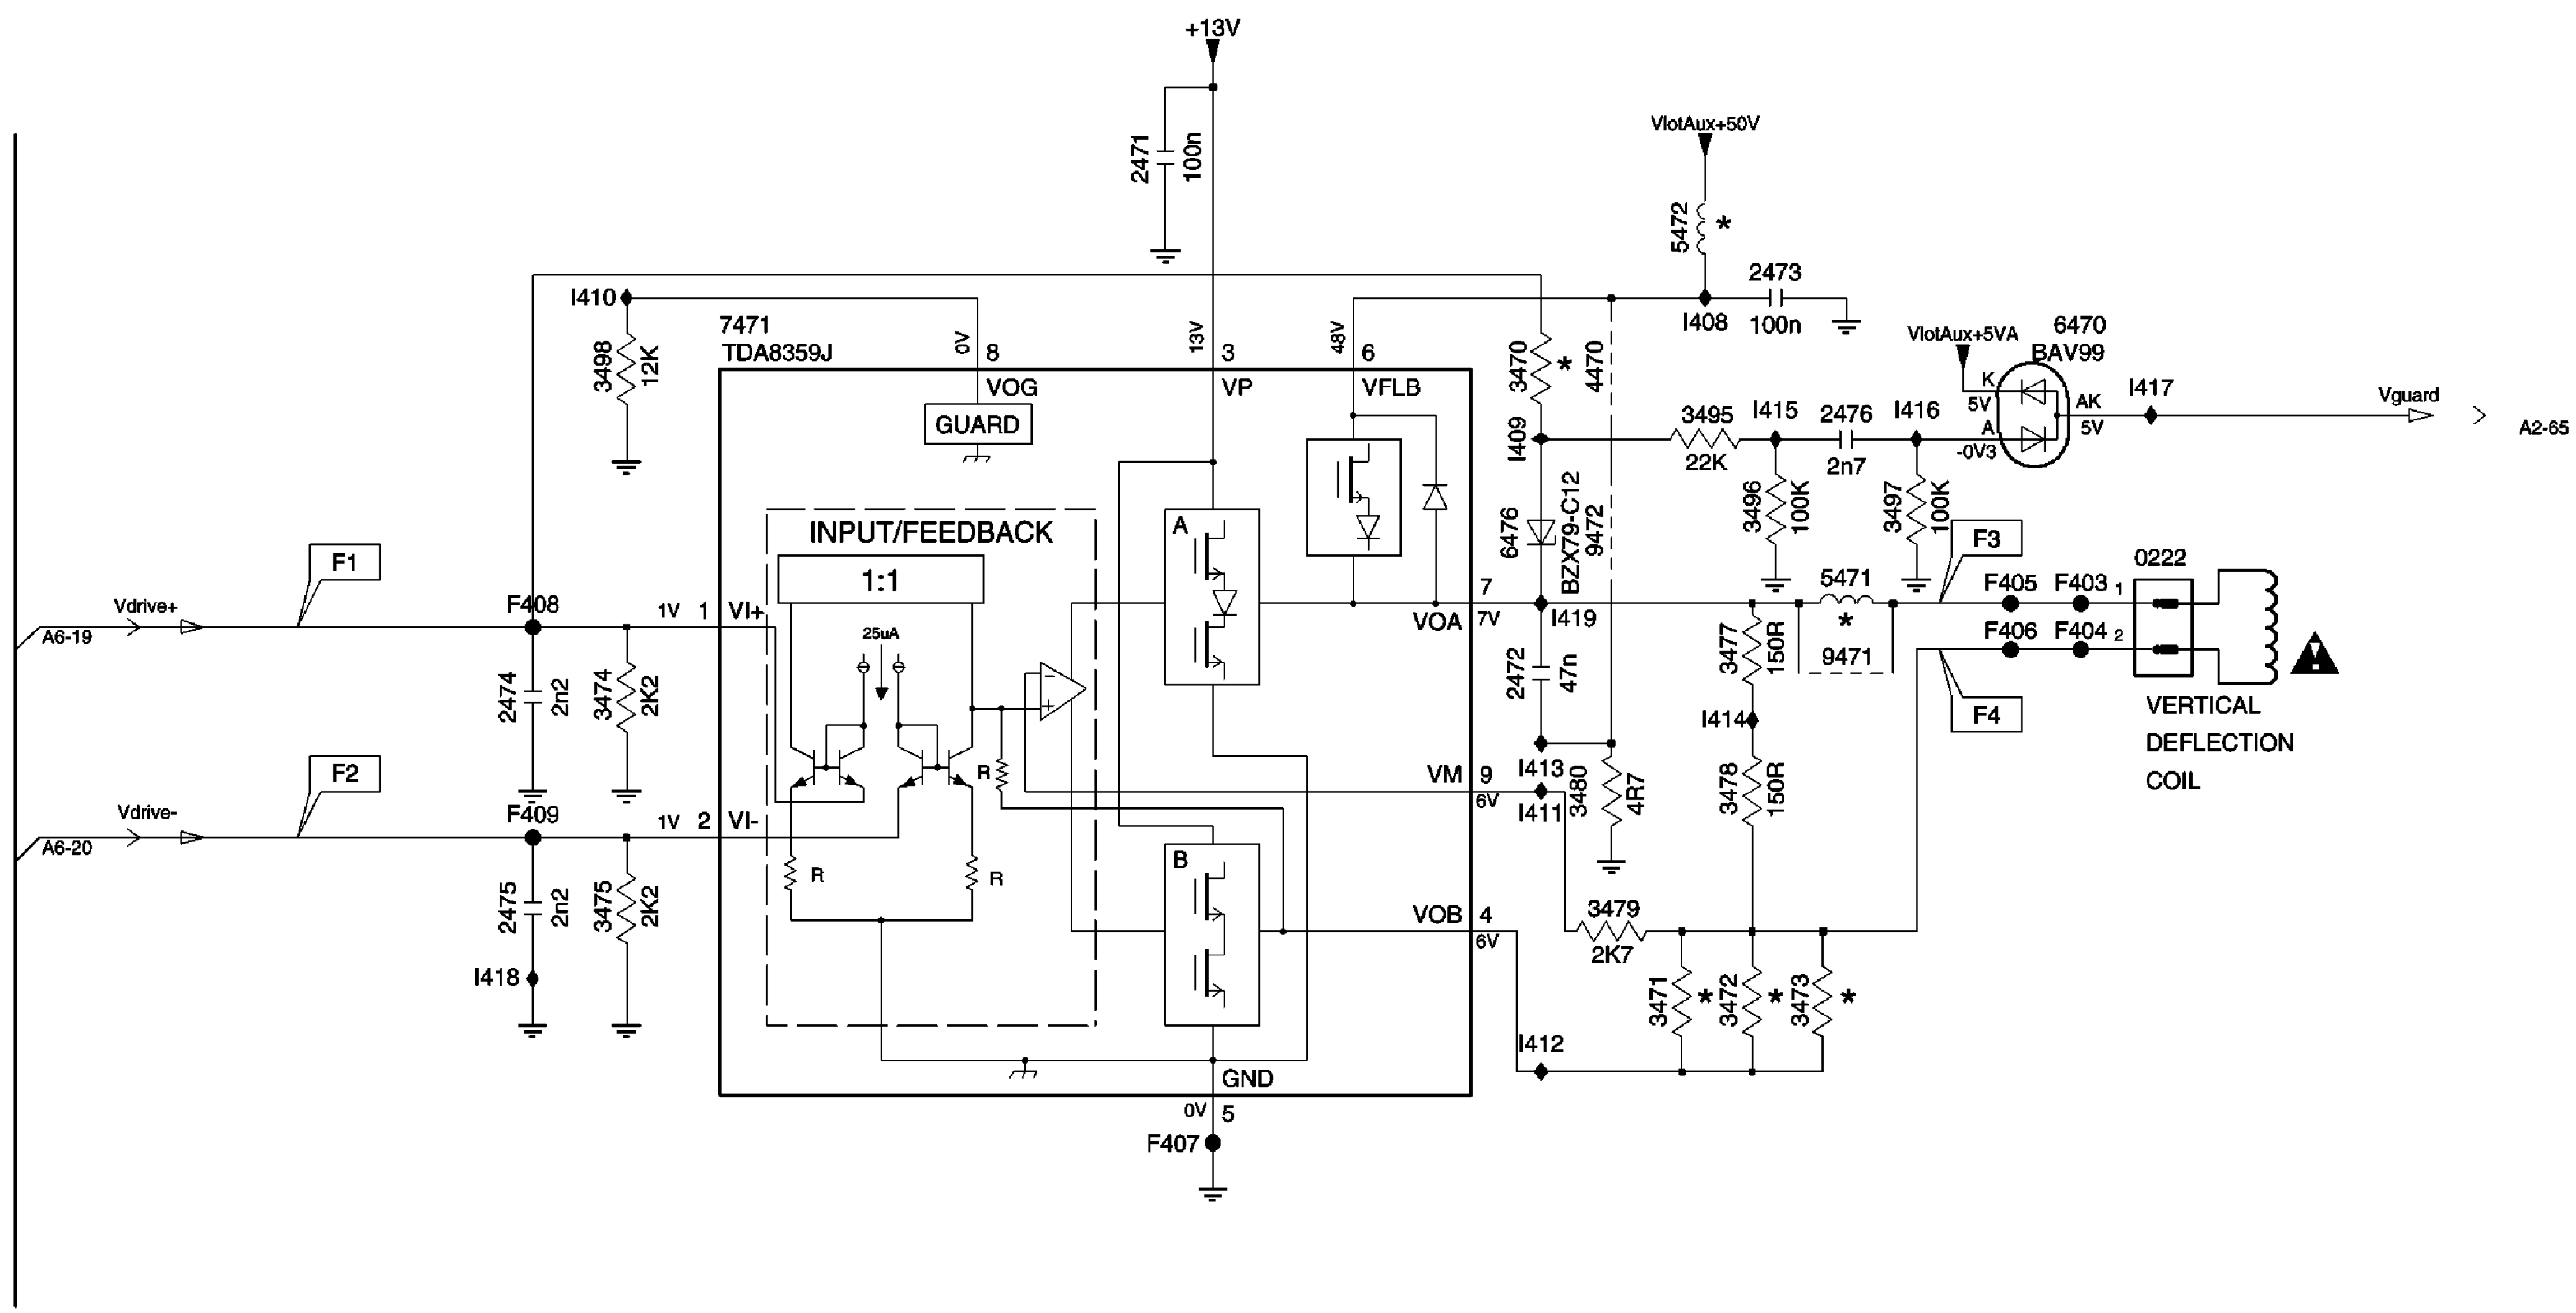


A4 TUNER IF

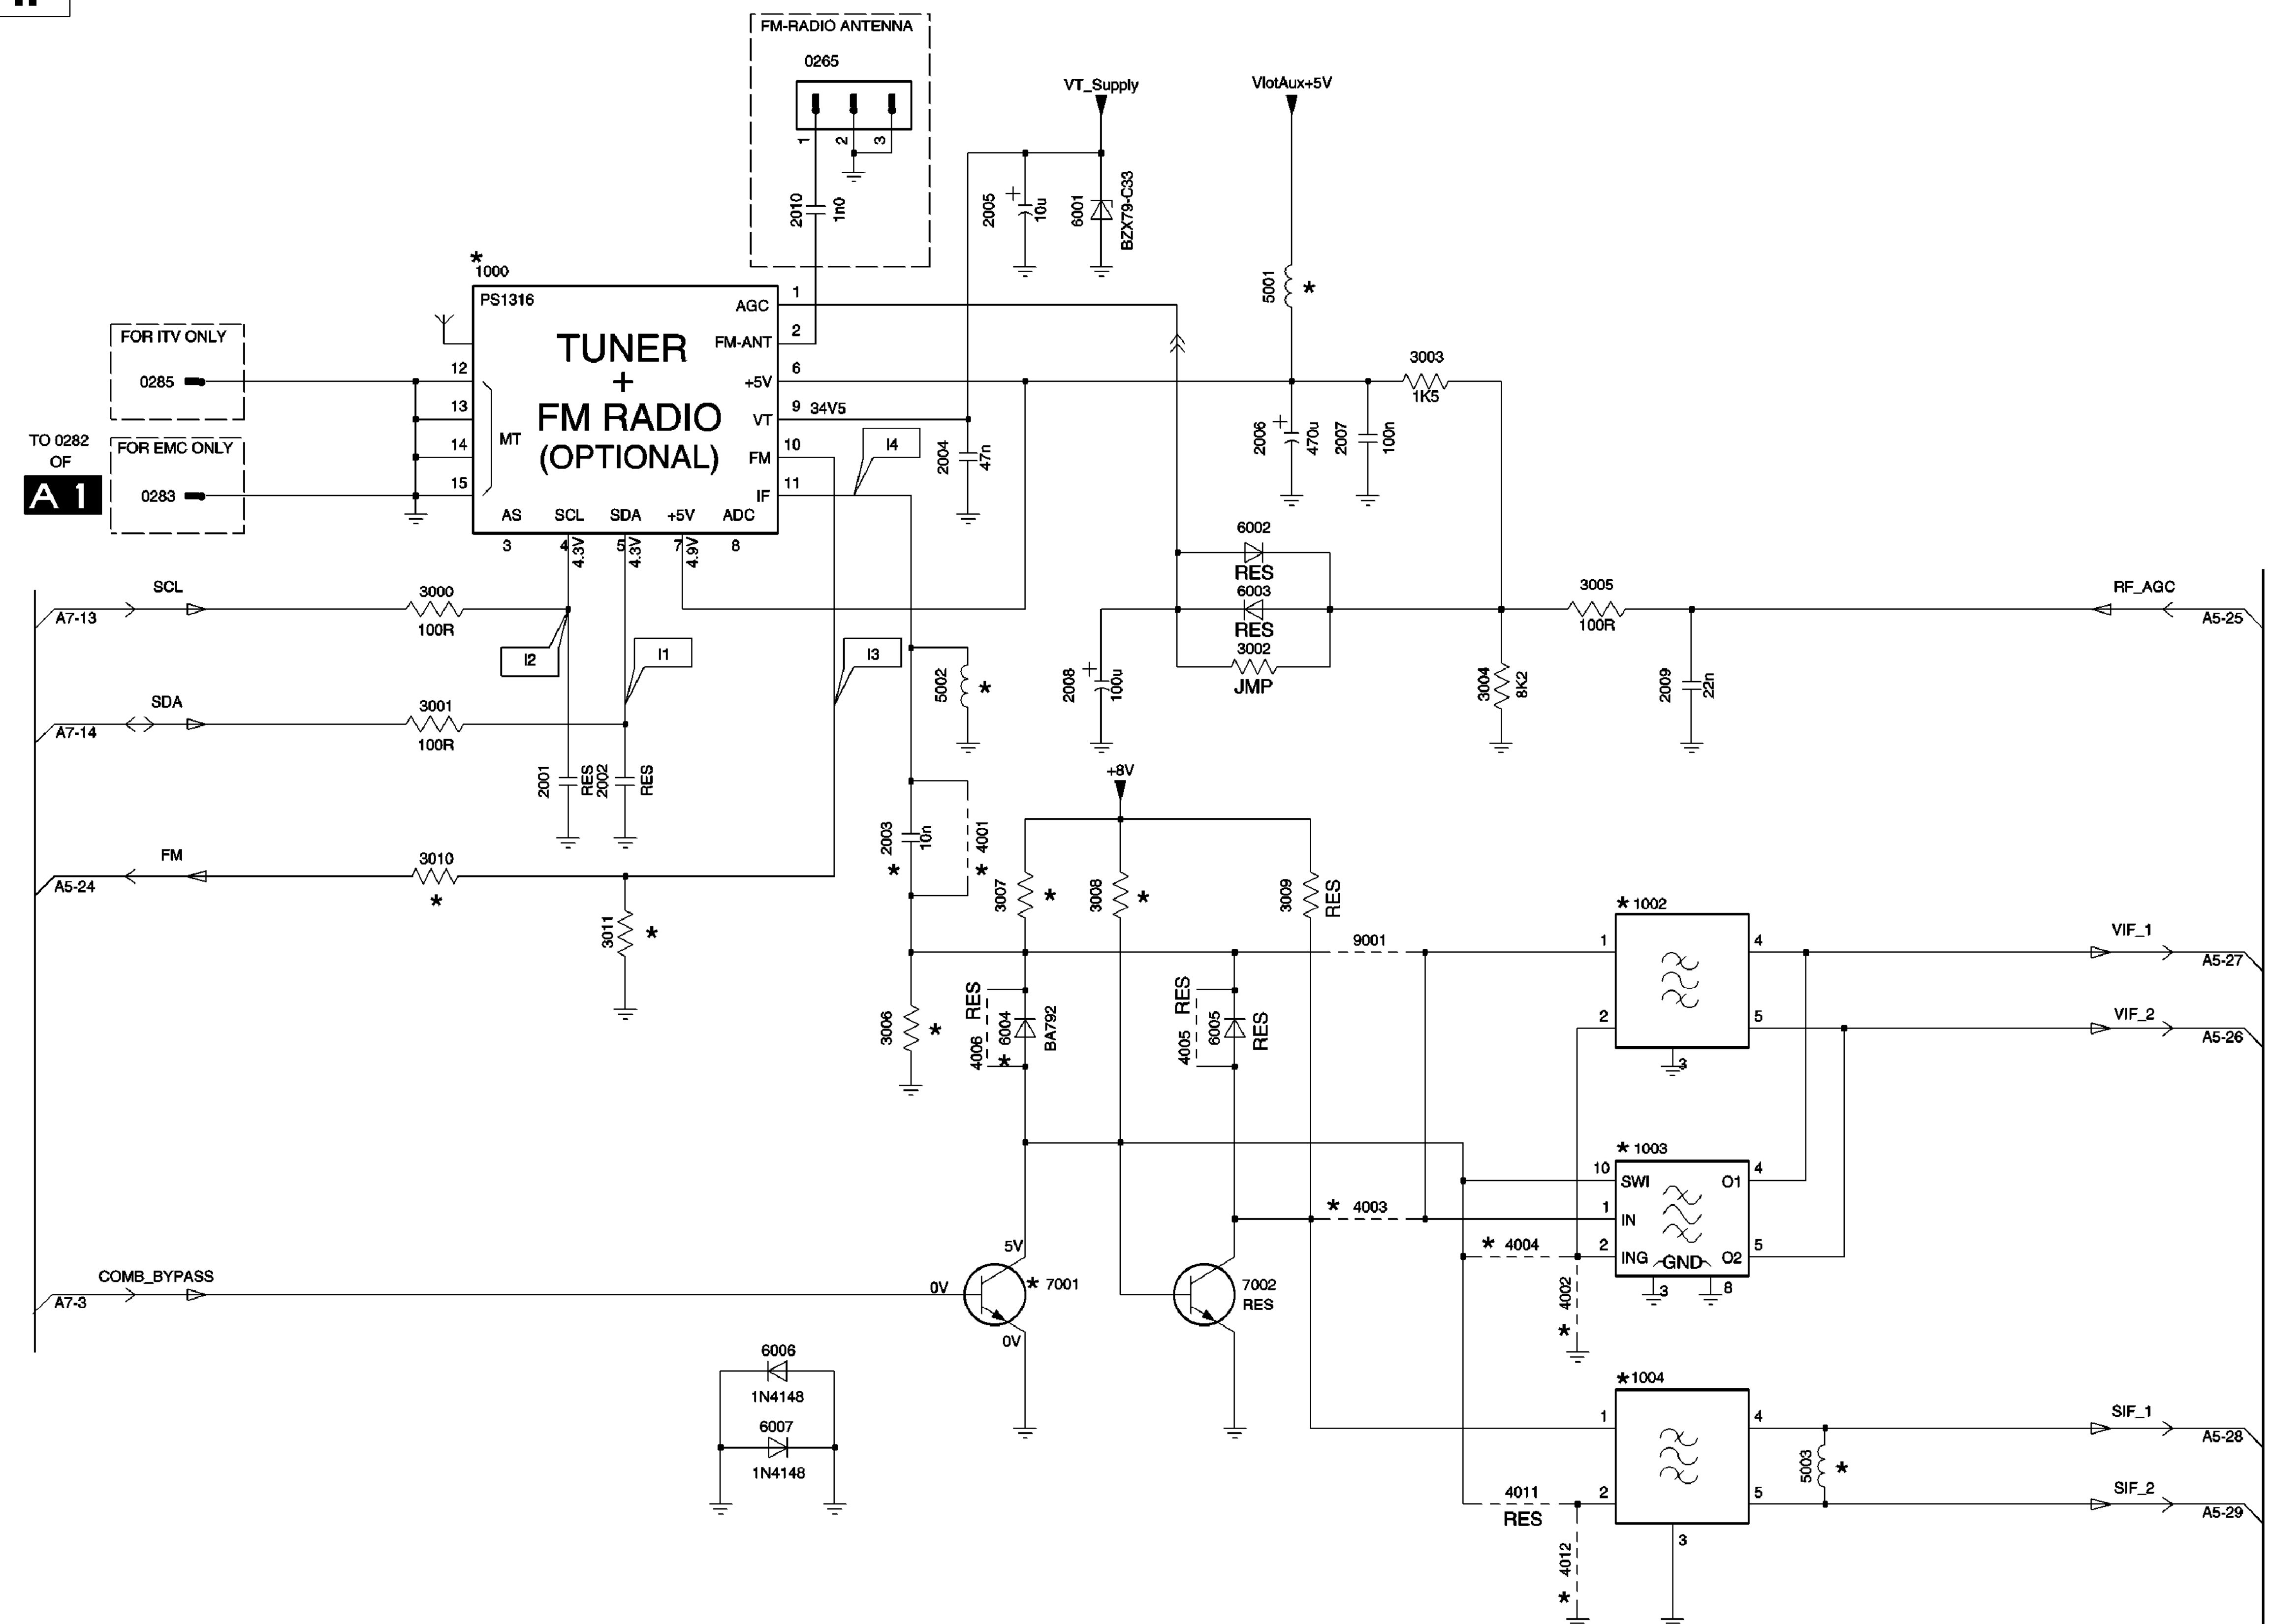
FM-RADIO ANTENNA
0265
VT_Supply
VlotAux+5V
1000
PS1316
TUNER
+
FM RADIO
(OPTIONAL)
FOR ITV ONLY
0285
FOR EMC ONLY
0283
TO 0282 OF A1
AGC
FM-ANT
+5V
VT
FM
IF
MT
AS
SCL
SDA
+5V
ADC
34V5
SCL
SDA
FM
COMB_BYPASS
A7-13
A7-14
A5-24
A7-3
RF_AGC
A5-25
VIF_1
A5-27
VIF_2
A5-26
SIF_1
A5-28
SIF_2
A5-29
BZX79-C33
BA792
1N4148
JMP
RES
+8V
SWI
IN
ING
GND
O1
O2
1002
1003
1004
7001
7002
9001


A5 VIDEO IF + SOUND IF

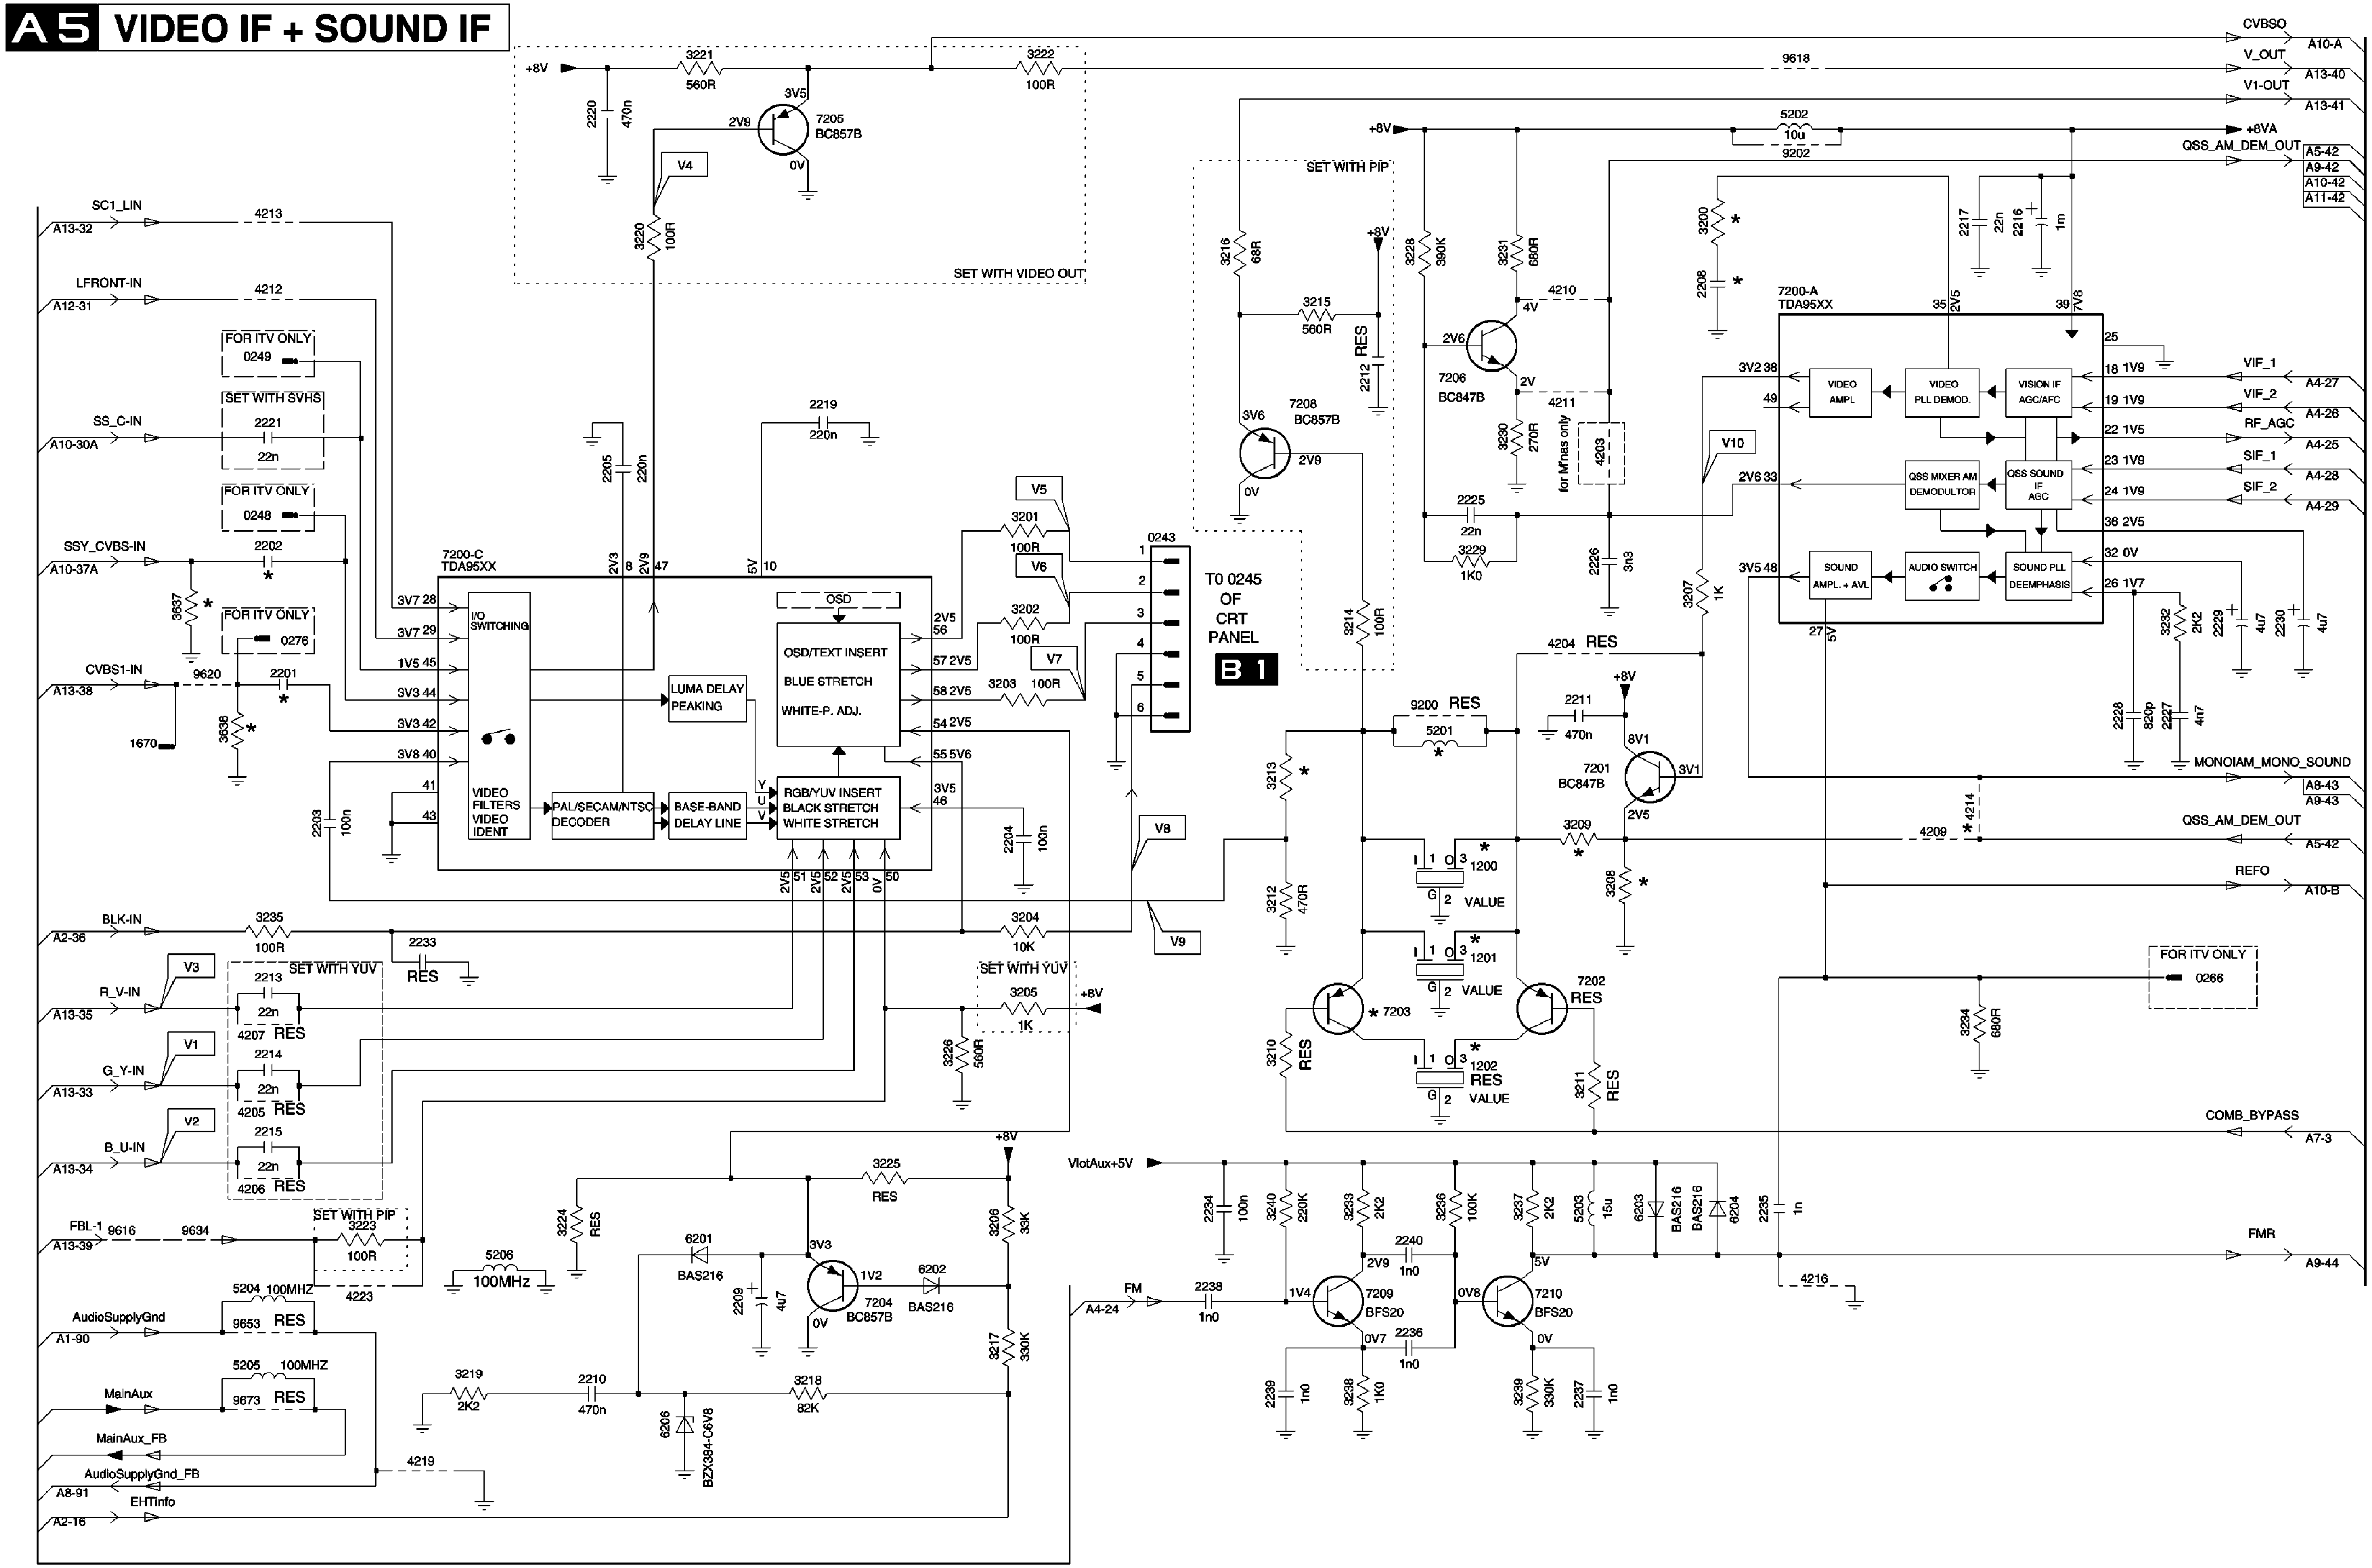


A6 SYNCHRONISATION

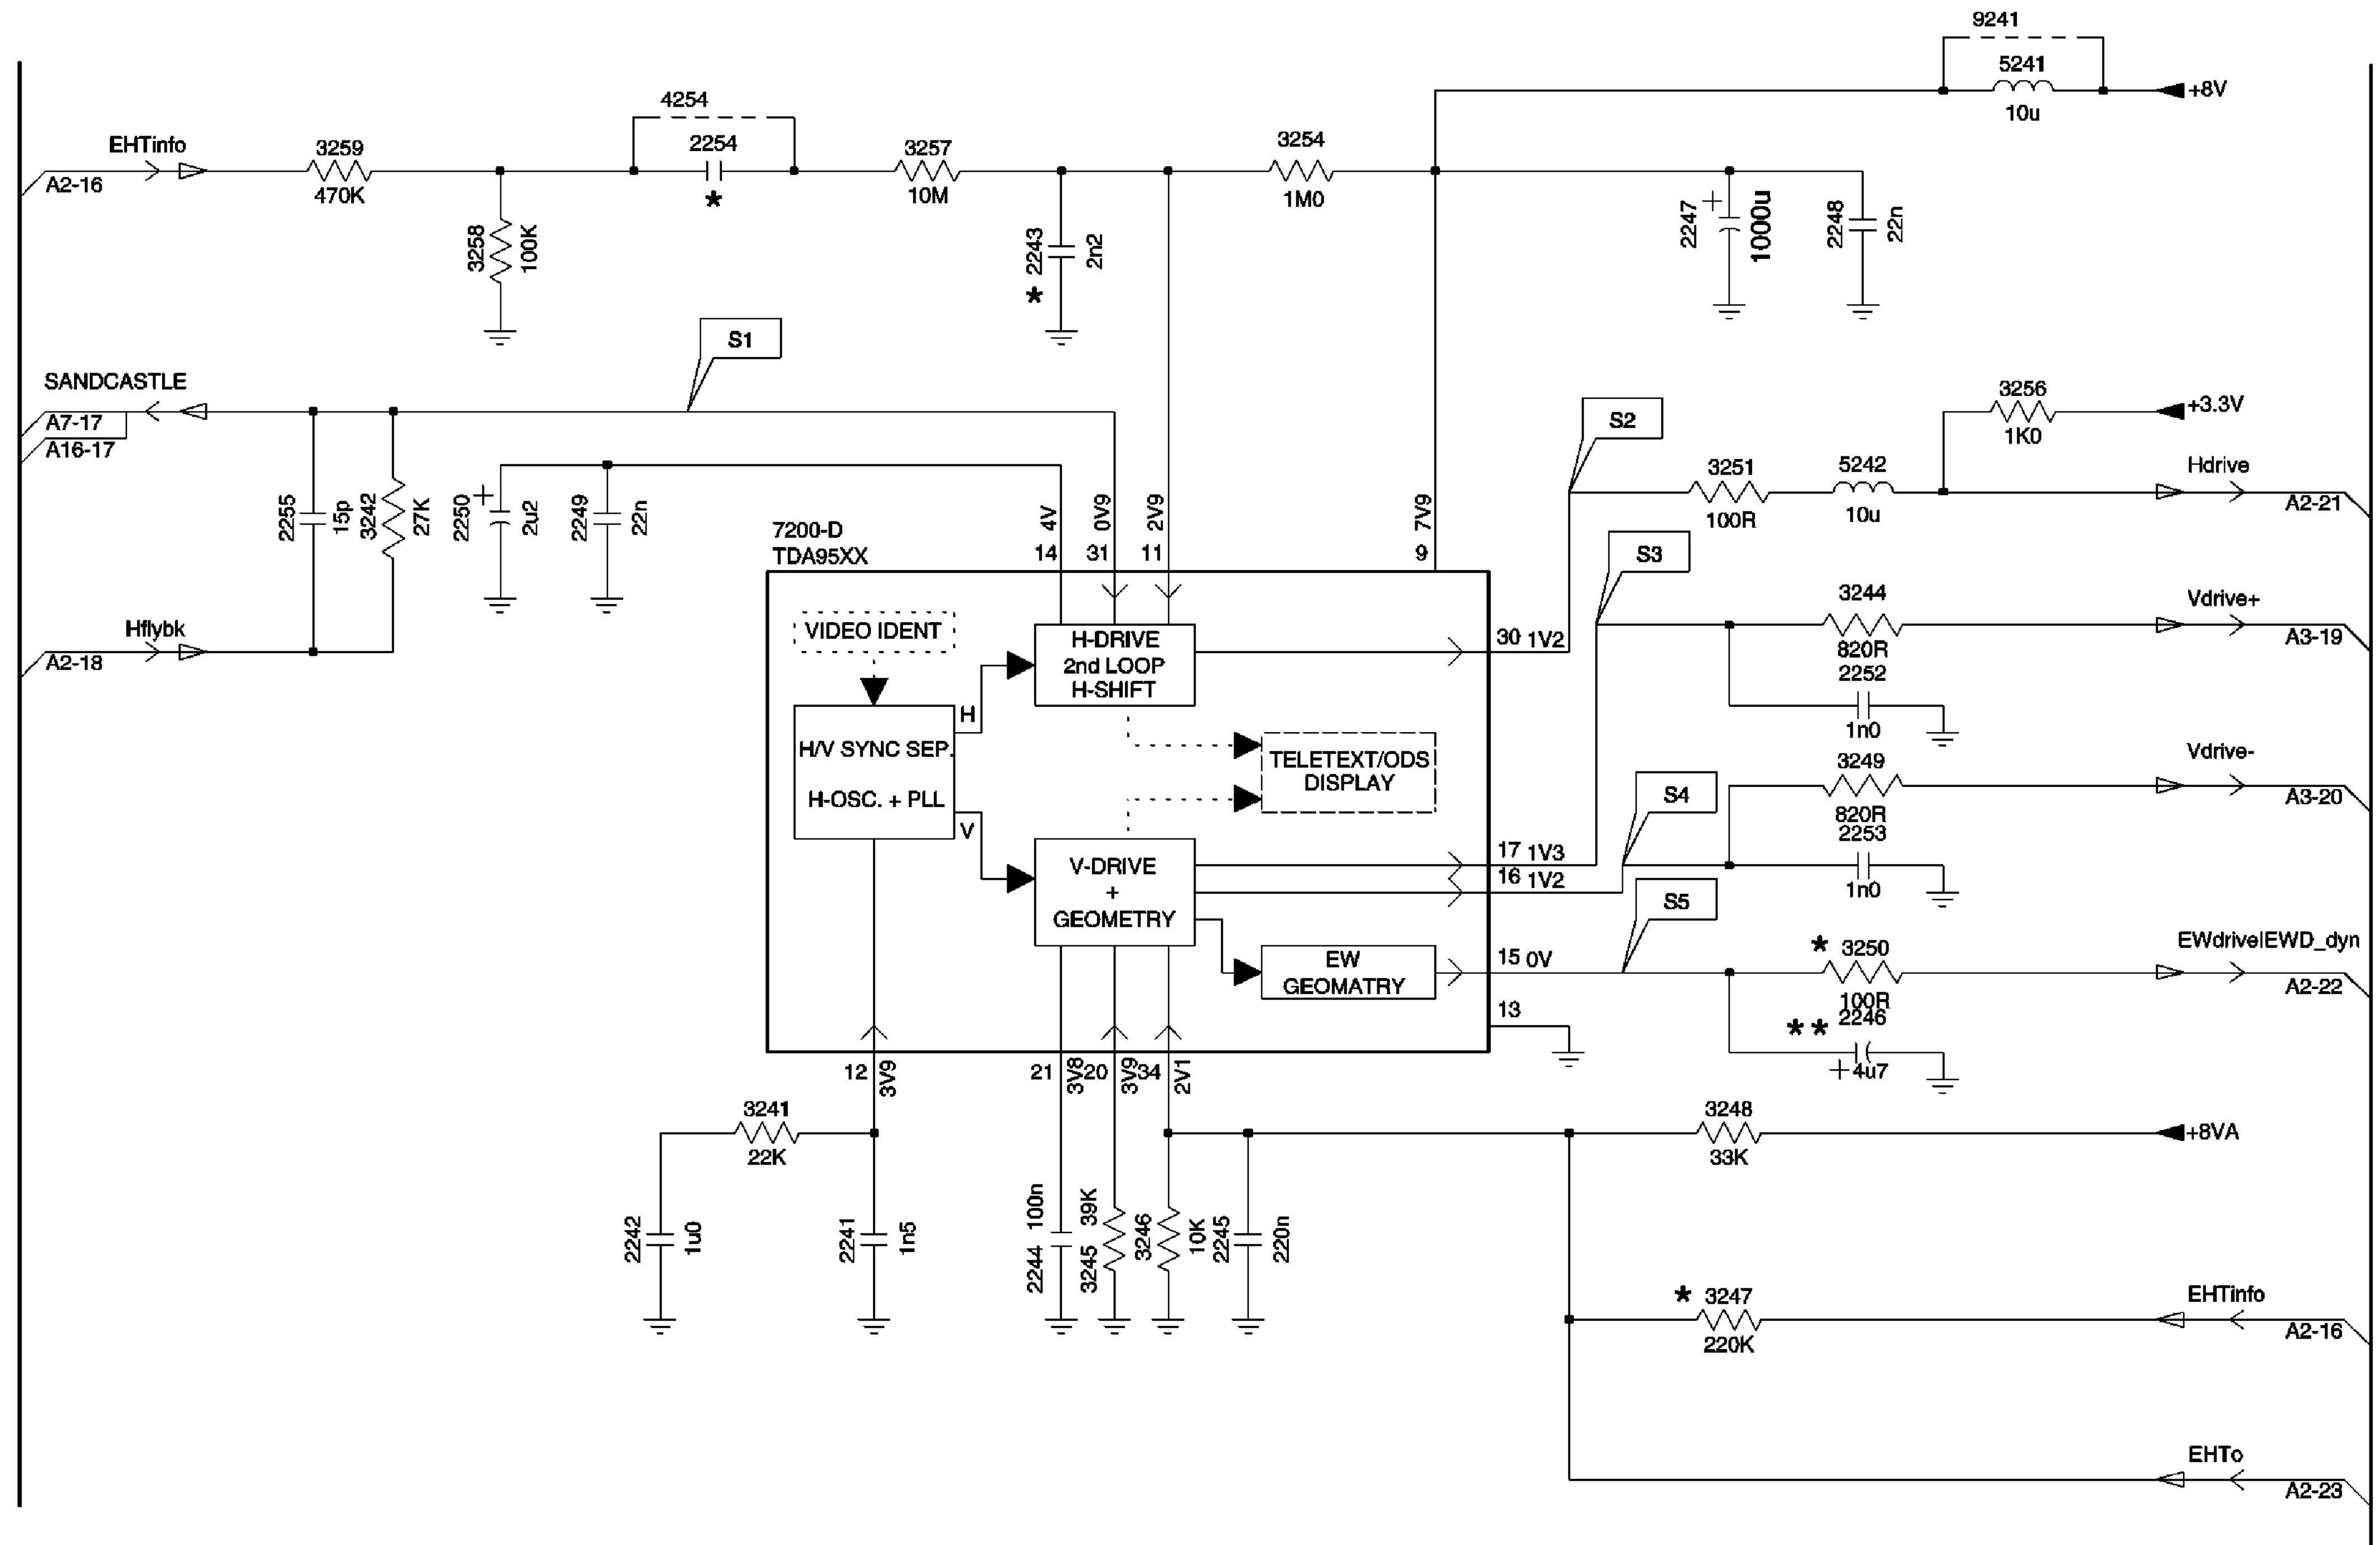


A7 CONTROL

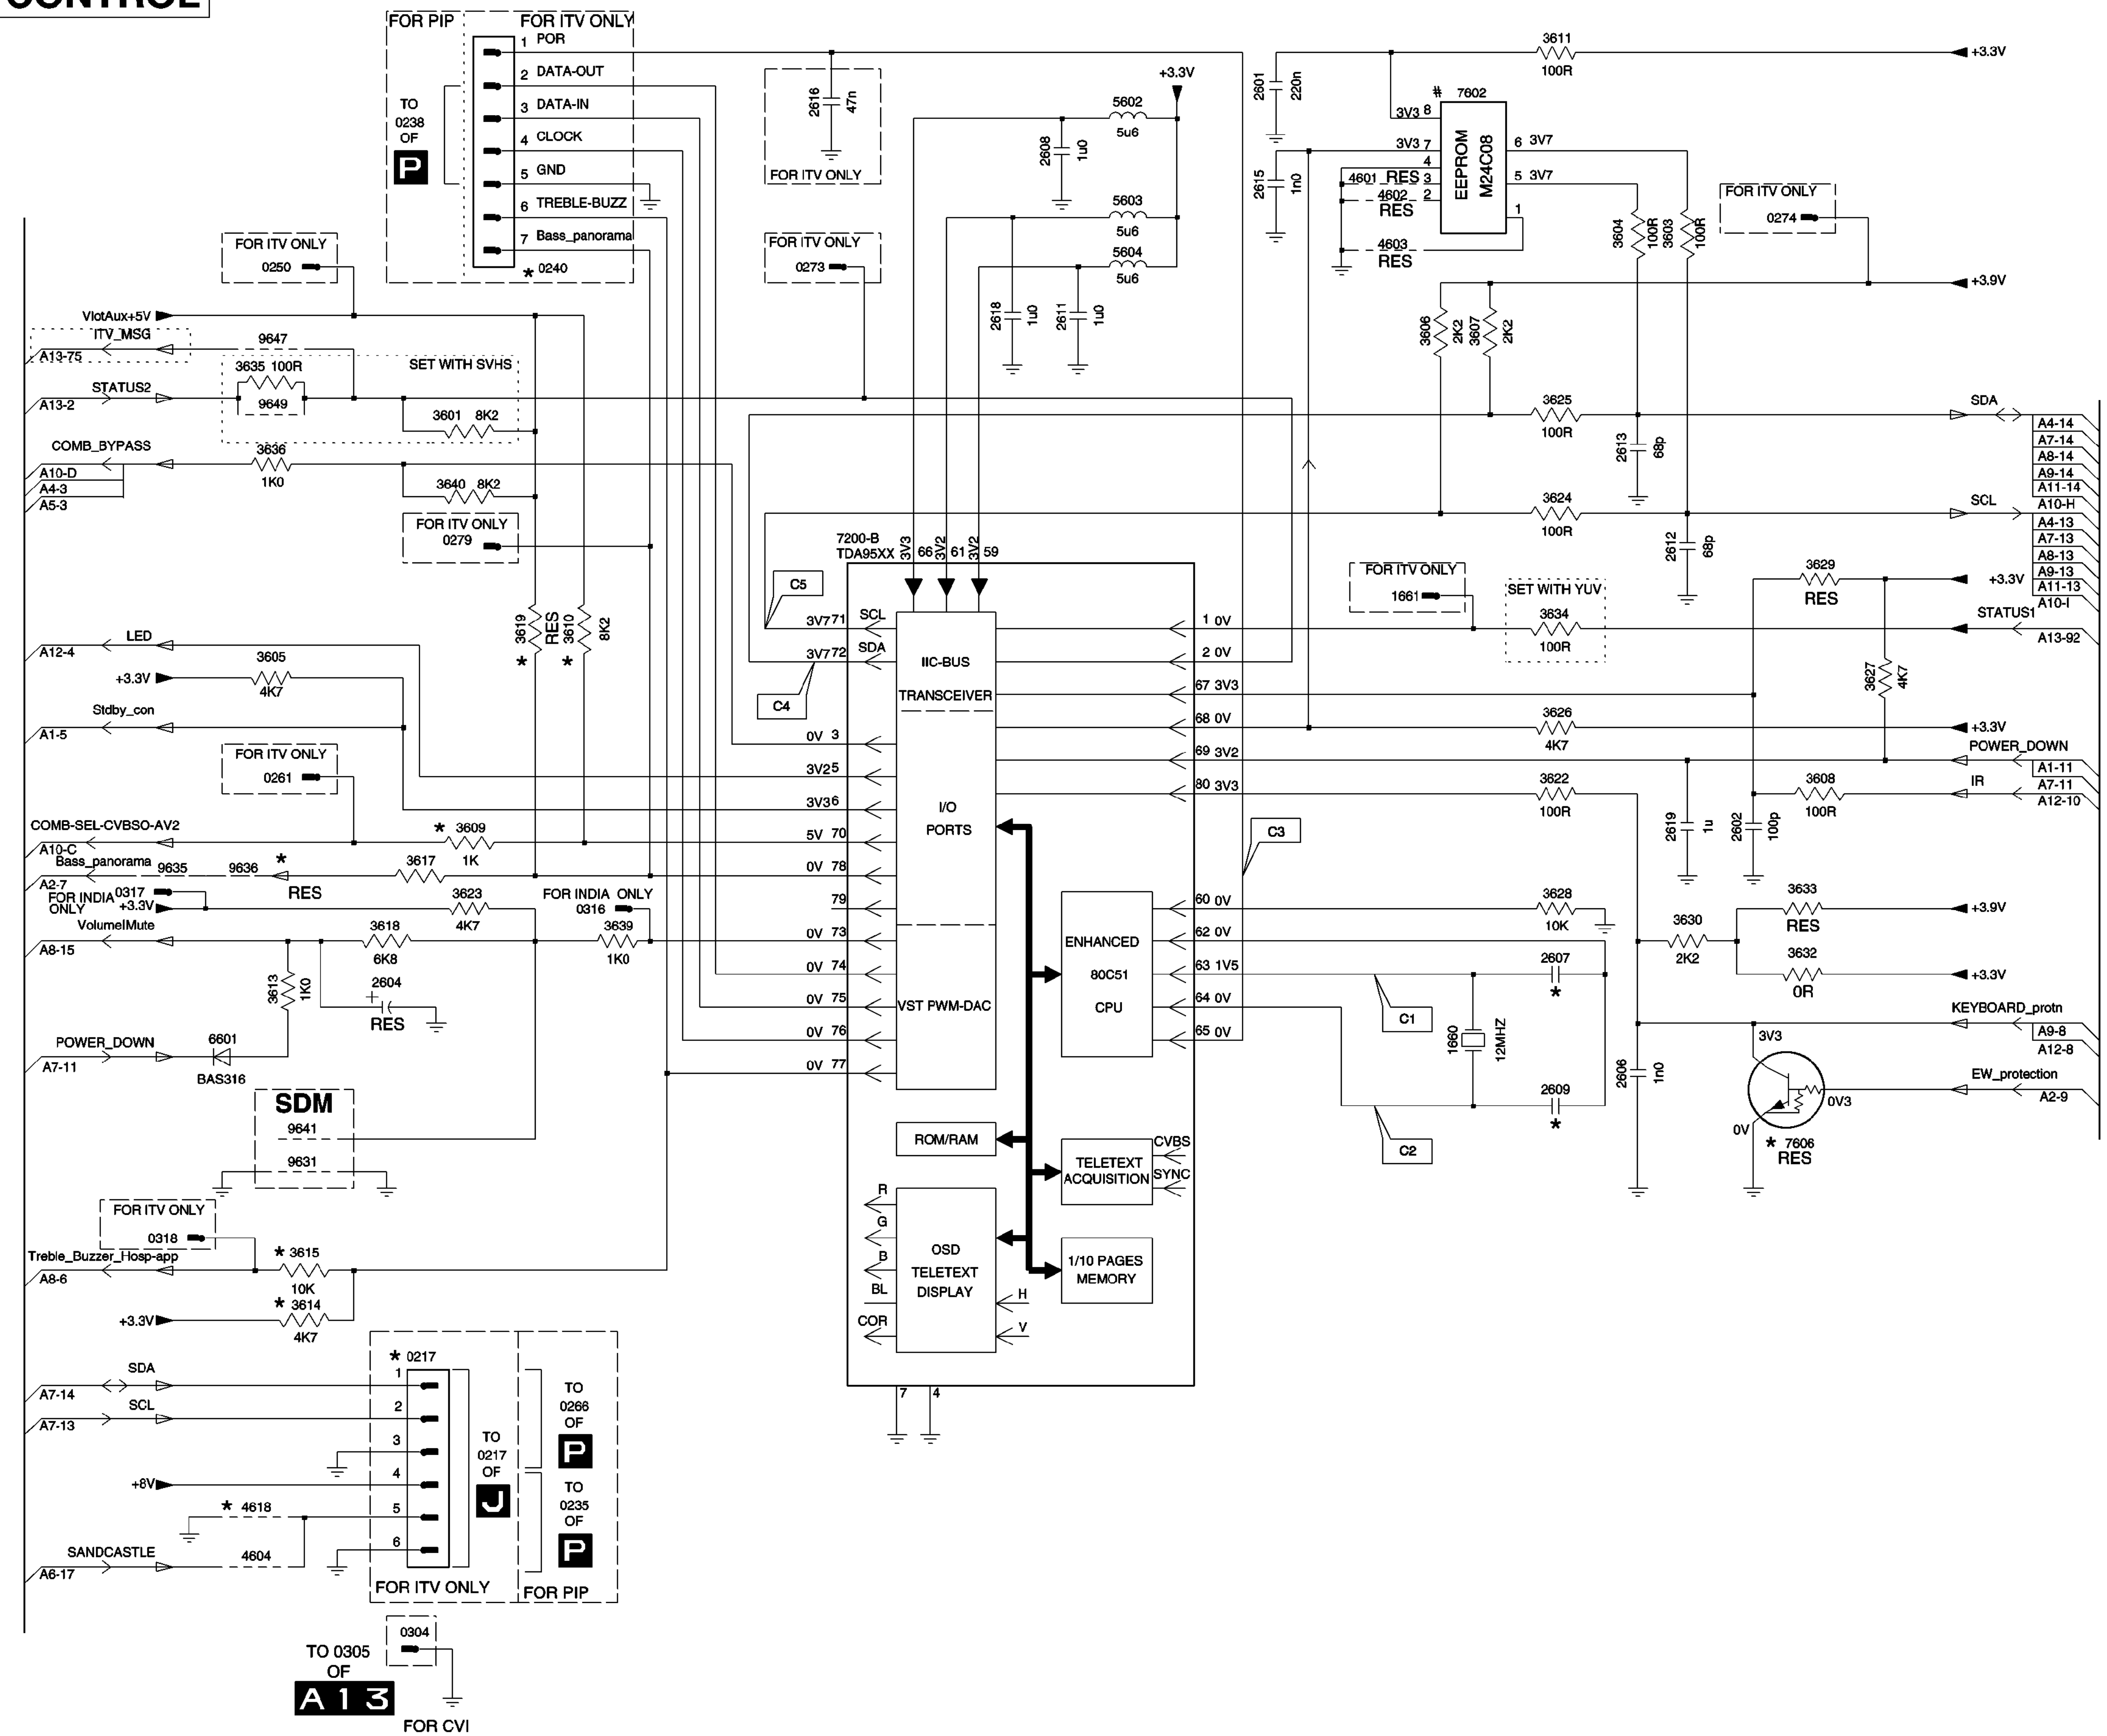
FOR PIP
FOR ITV ONLY
TO 0238 OF P
POR
DATA-OUT
DATA-IN
CLOCK
GND
TREBLE-BUZZ
Bass_panorama
0240
FOR ITV ONLY 0250
VlotAux+5V
ITV_MSG
A13-75
STATUS2
A13-2
COMB_BYPASS
A10-D
A4-3
A5-3
SET WITH SVHS
FOR ITV ONLY 0279
LED
A12-4
Stdby_con
A1-5
FOR ITV ONLY 0261
COMB-SEL-CVBSO-AV2
A10-C
Bass_panorama
A2-7
FOR INDIA ONLY
VolumelMute
A8-15
POWER_DOWN
A7-11
BAS316
SDM
FOR ITV ONLY 0318
Treble_Buzzer_Hosp-app
A8-6
SDA
SCL
A7-14
A7-13
SANDCASTLE
A6-17
FOR ITV ONLY
TO 0217 OF J
TO 0266 OF P
TO 0235 OF P
FOR PIP
TO 0305 OF A13
FOR CVI
FOR ITV ONLY
FOR ITV ONLY 0273
FOR INDIA ONLY 0316
7200-B TDA95XX
IIC-BUS TRANSCEIVER
I/O PORTS
VST PWM-DAC
ENHANCED 80C51 CPU
ROM/RAM
TELETEXT ACQUISITION
CVBS SYNC
OSD TELETEXT DISPLAY
1/10 PAGES MEMORY
12MHZ
EEPROM M24C08
7602
FOR ITV ONLY 0274
FOR ITV ONLY 1661
SET WITH YUV
SDA
SCL
STATUS1
A13-92
POWER_DOWN
IR
A1-11
A7-11
A12-10
KEYBOARD_protn
A9-8
A12-8
EW_protection
A2-9
7606 RES
+3.3V
+3.9V


A8 AUDIO_AMPLIFIER

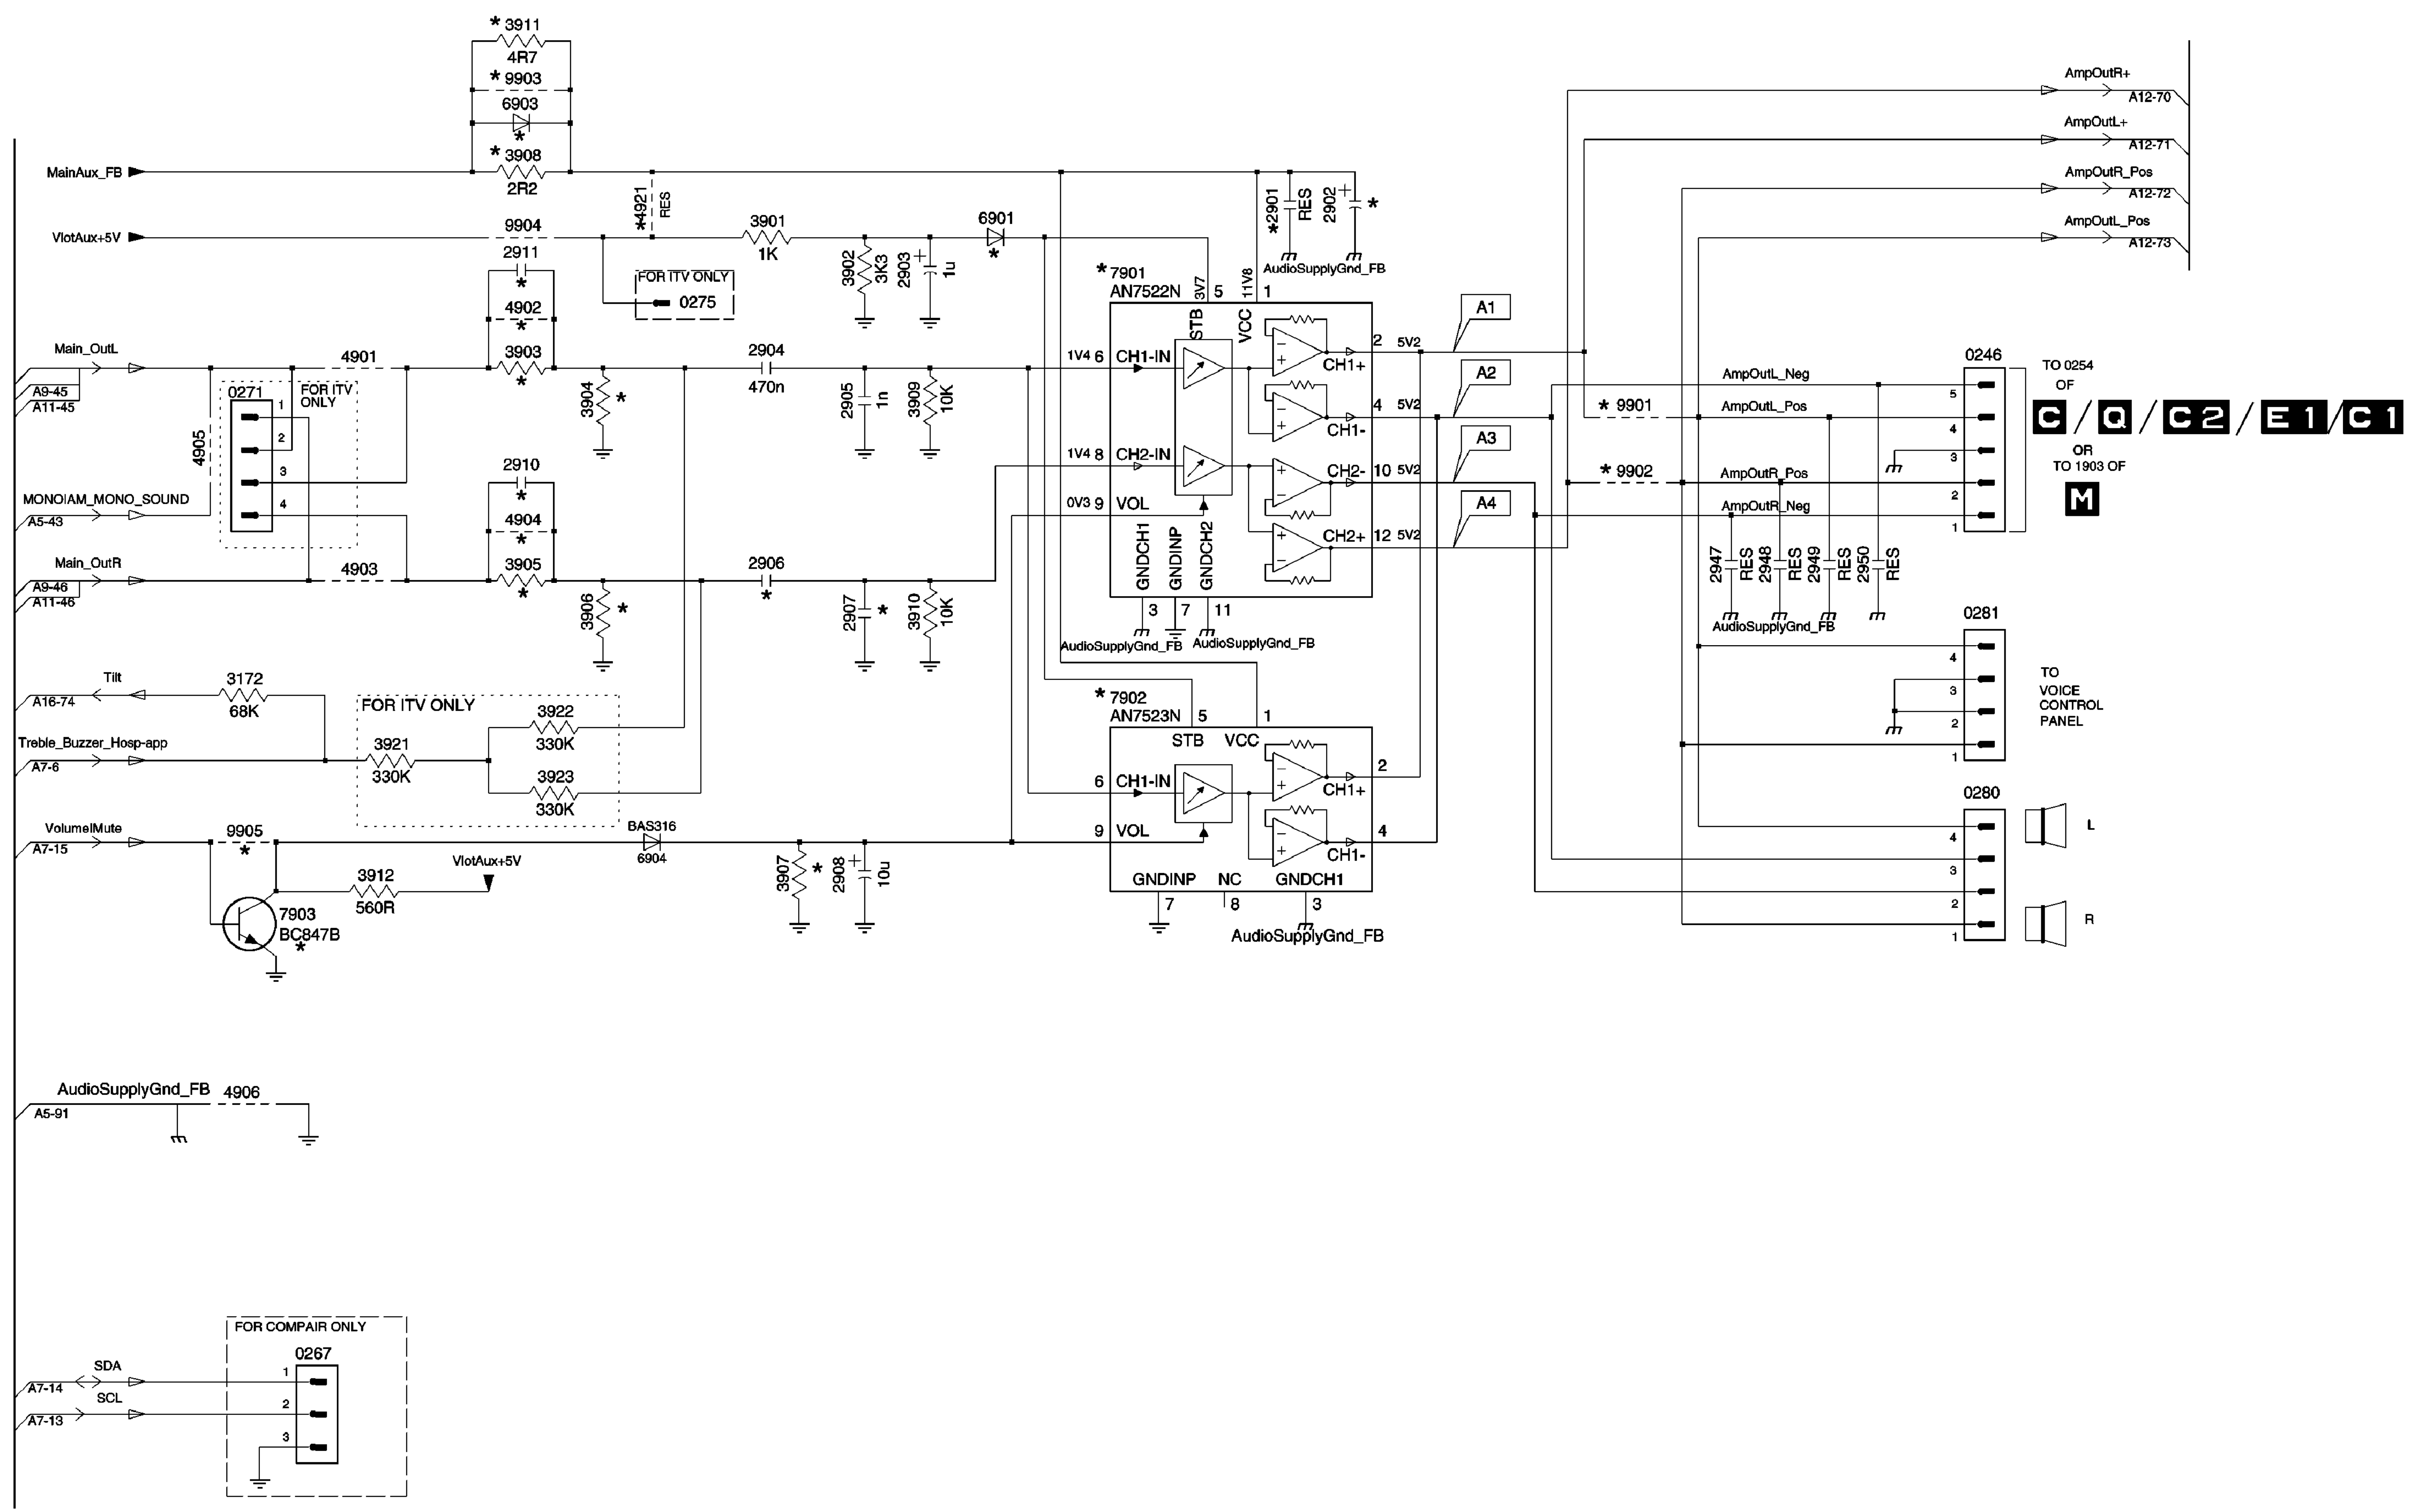


A9 NICAM + 2CS + BTSC (STEREO/SAP) DECODER

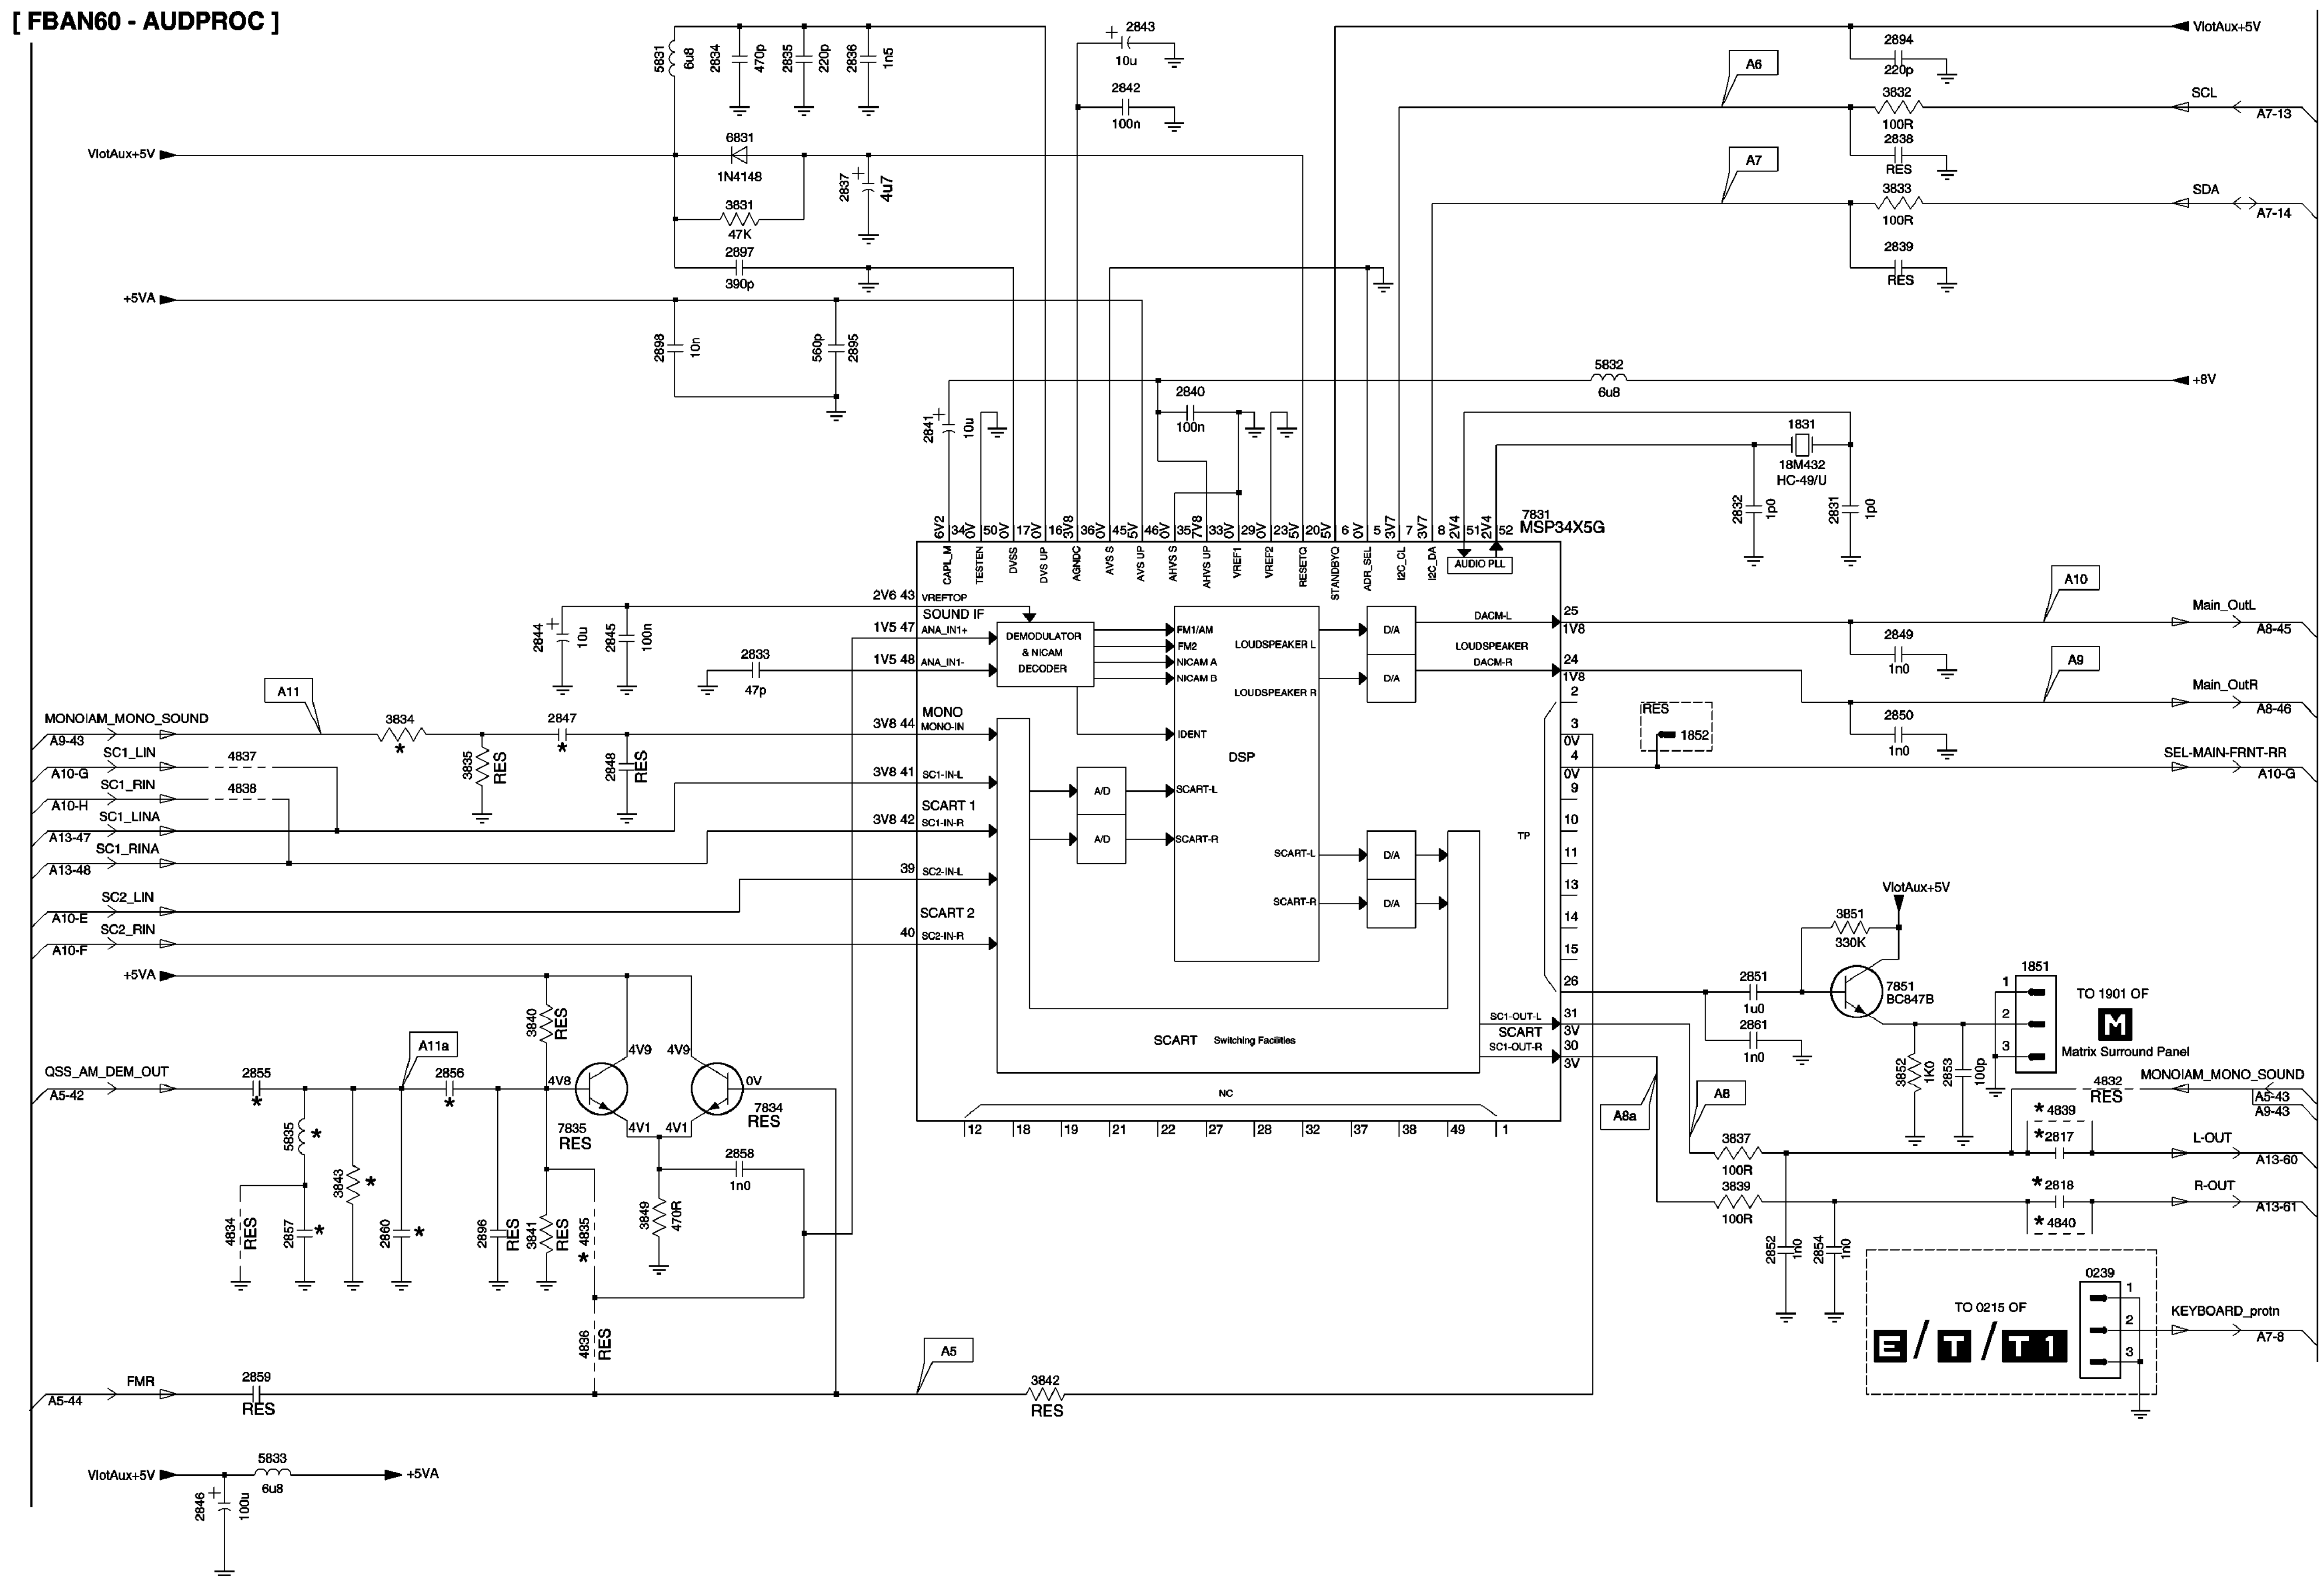


A10 AUDIO/VIDEO SOURCE SWITCHING

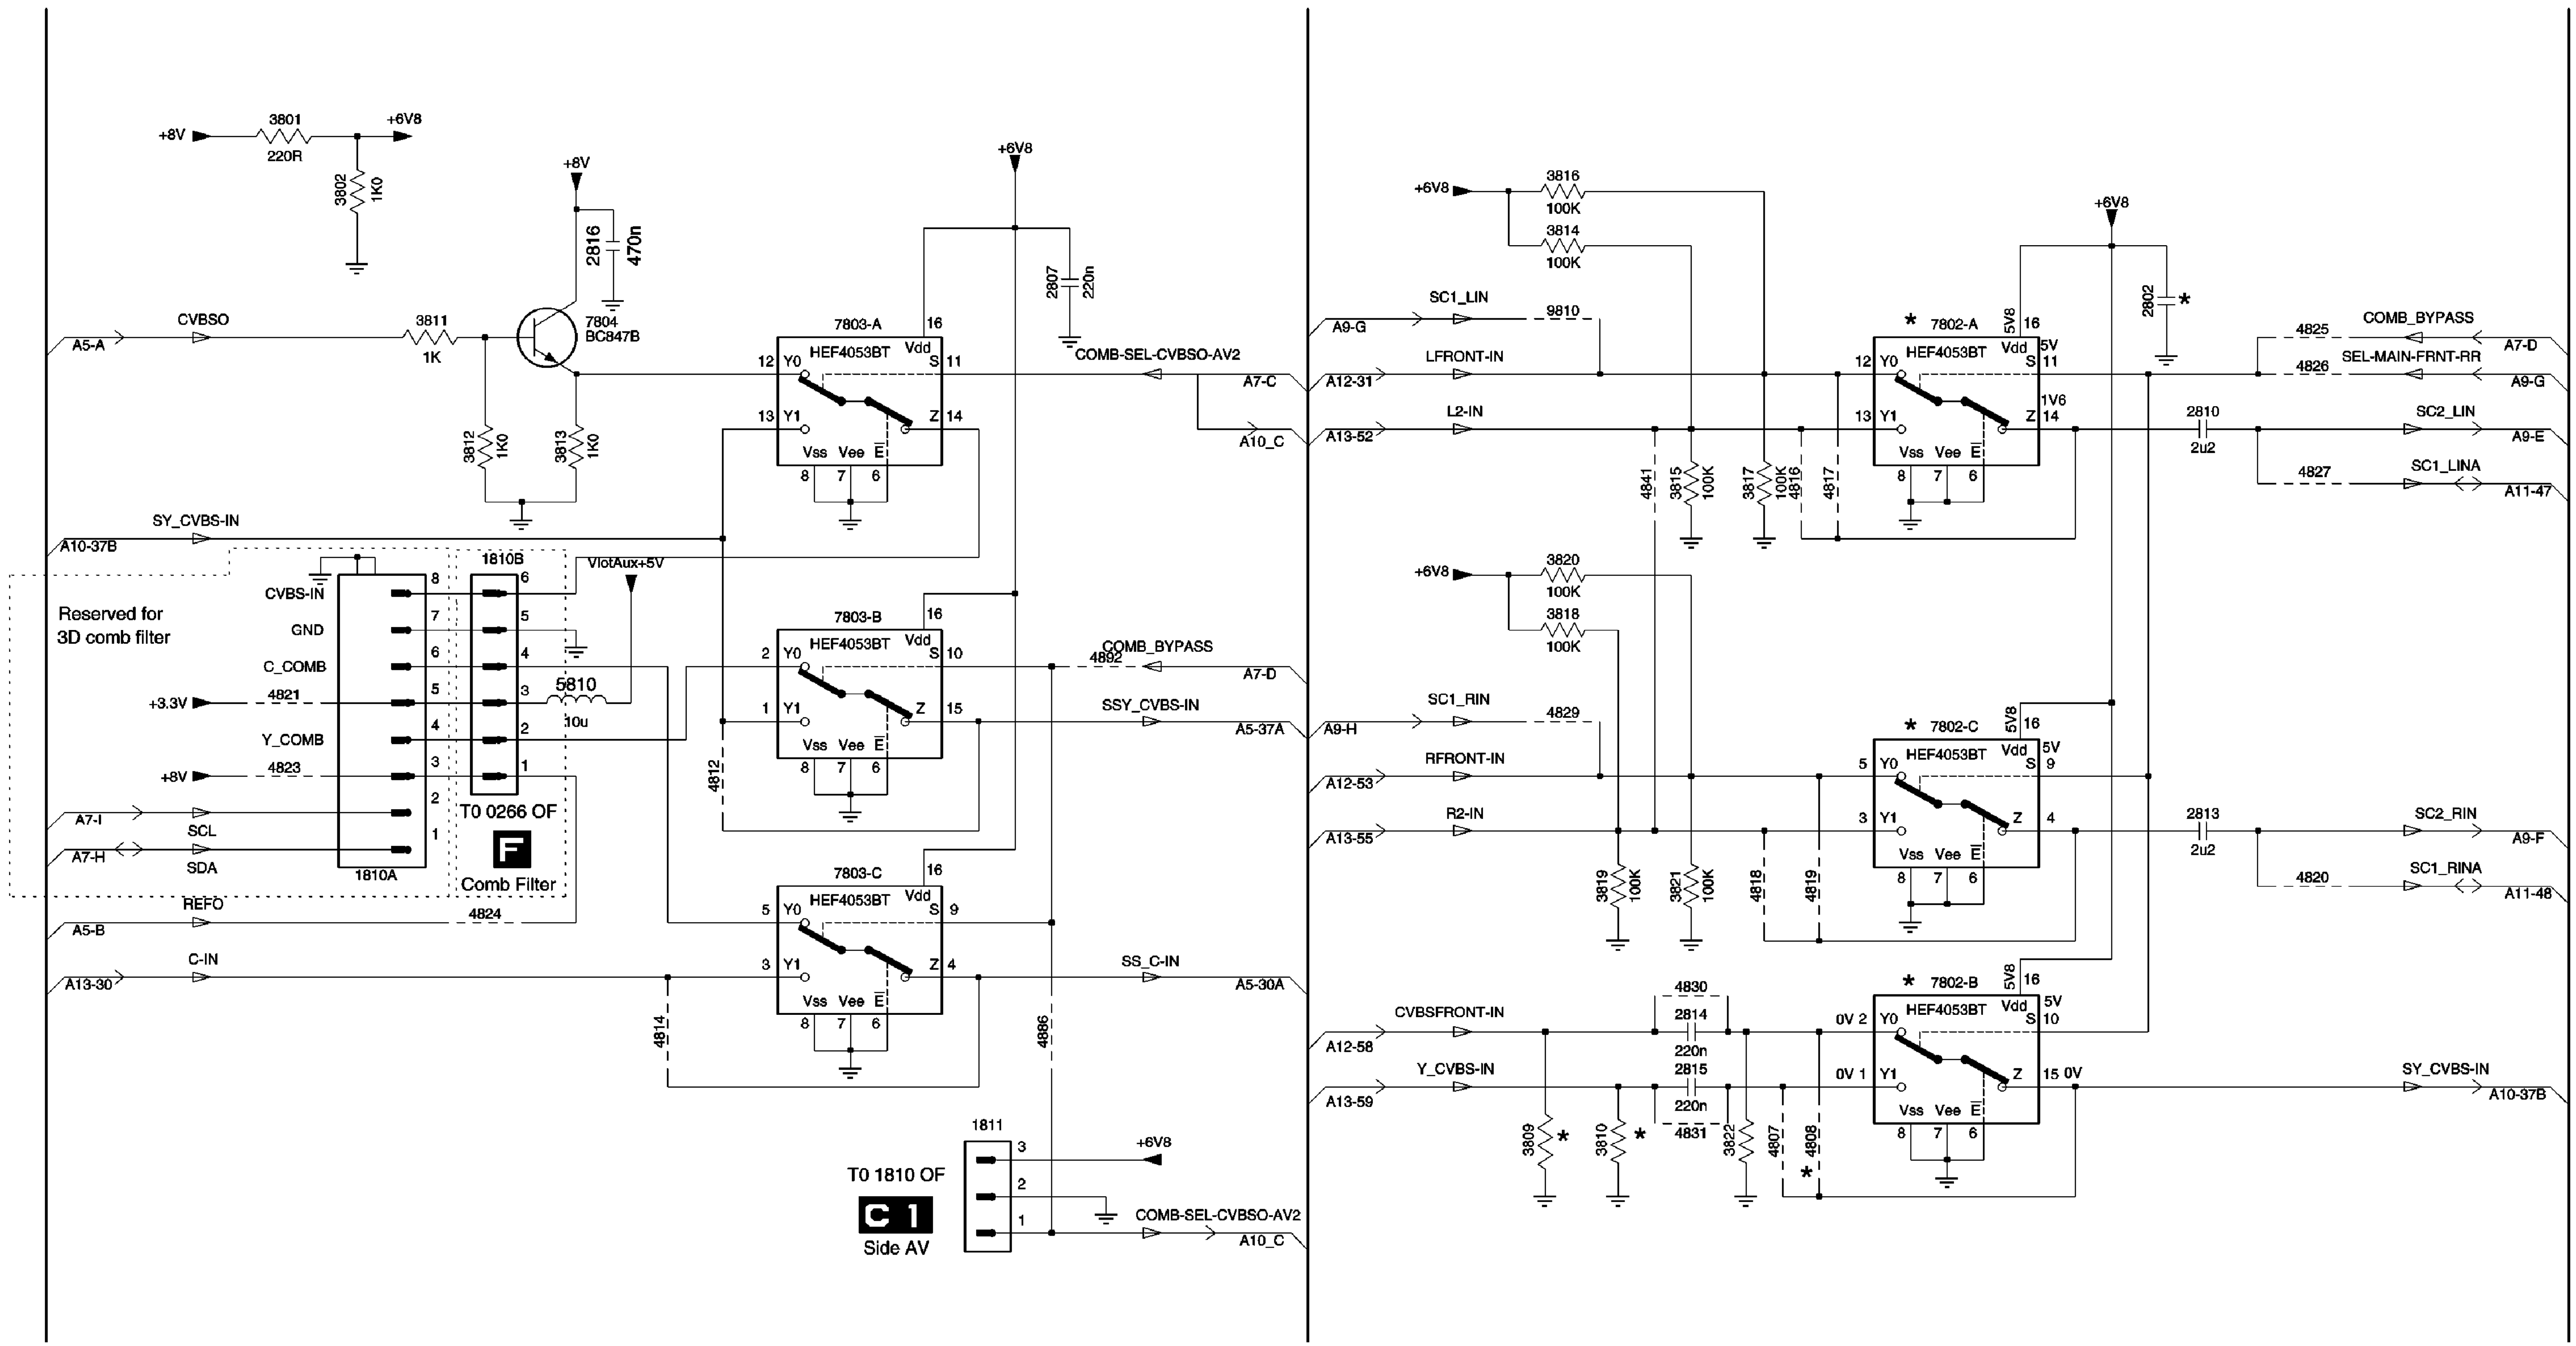



A11 BTSC - NDBX STEREO DECODER

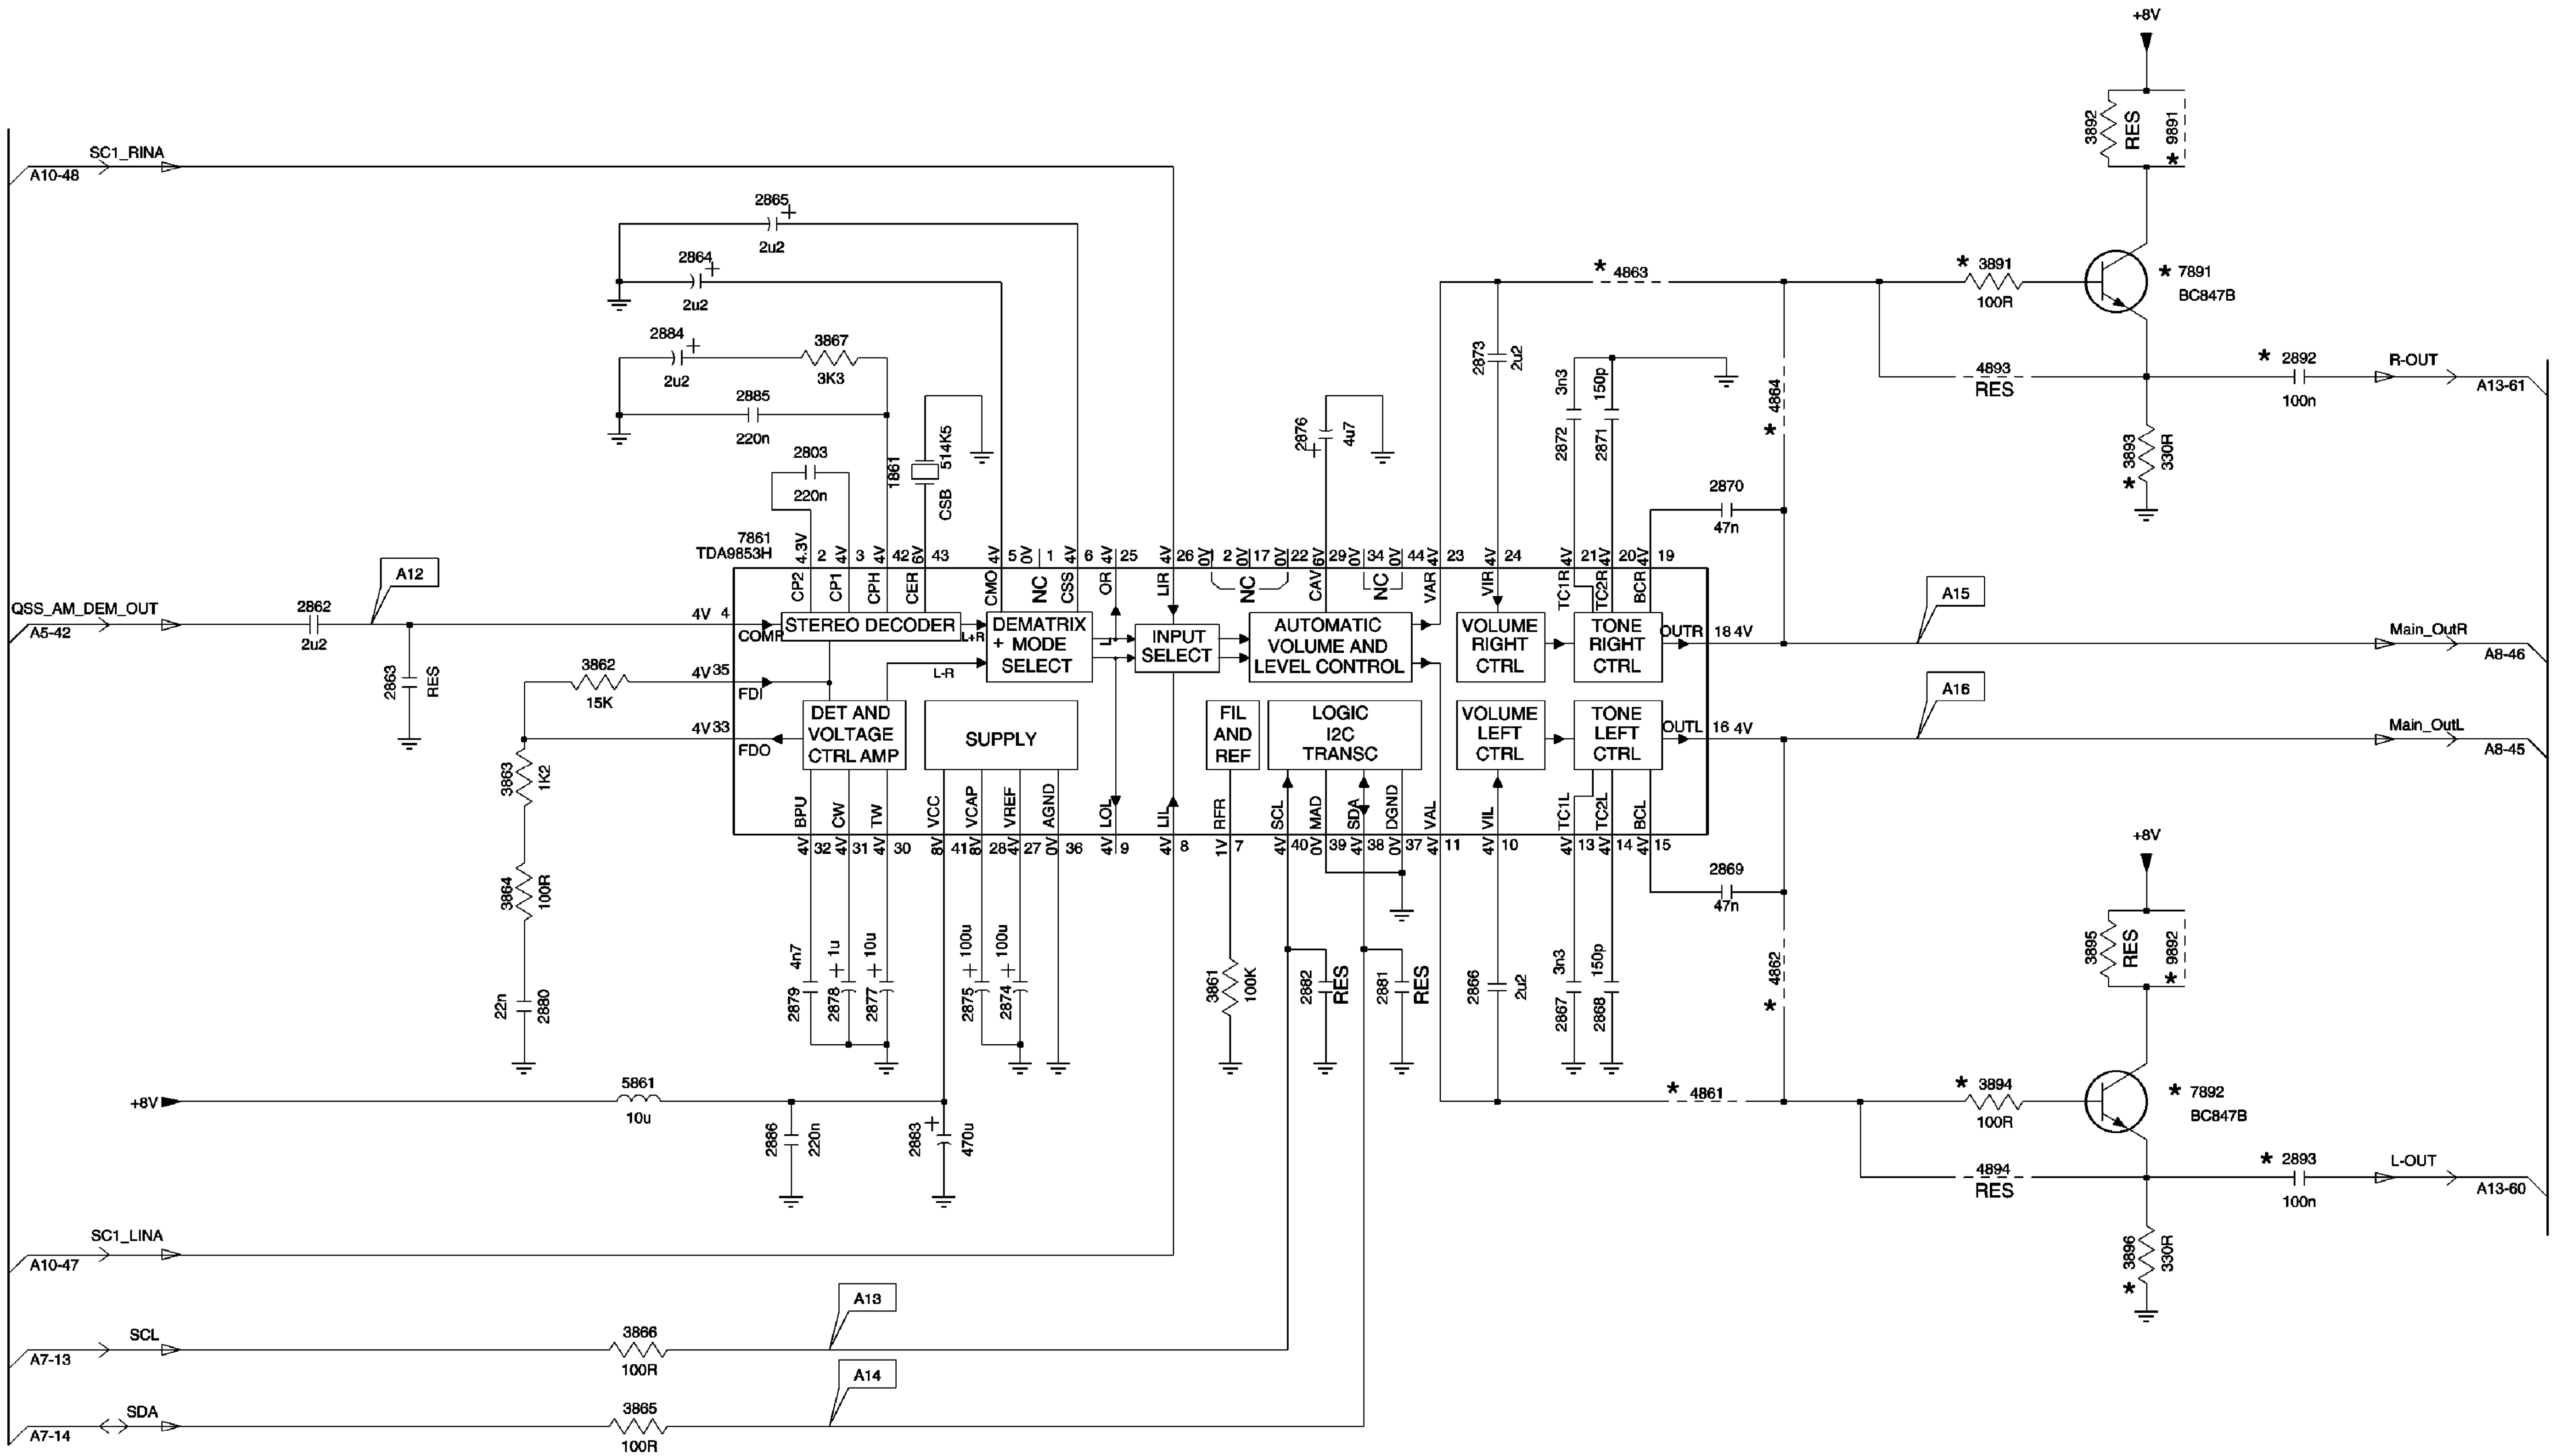

A12 FRONT IO + FRONT CONTROL + HEADPHONE

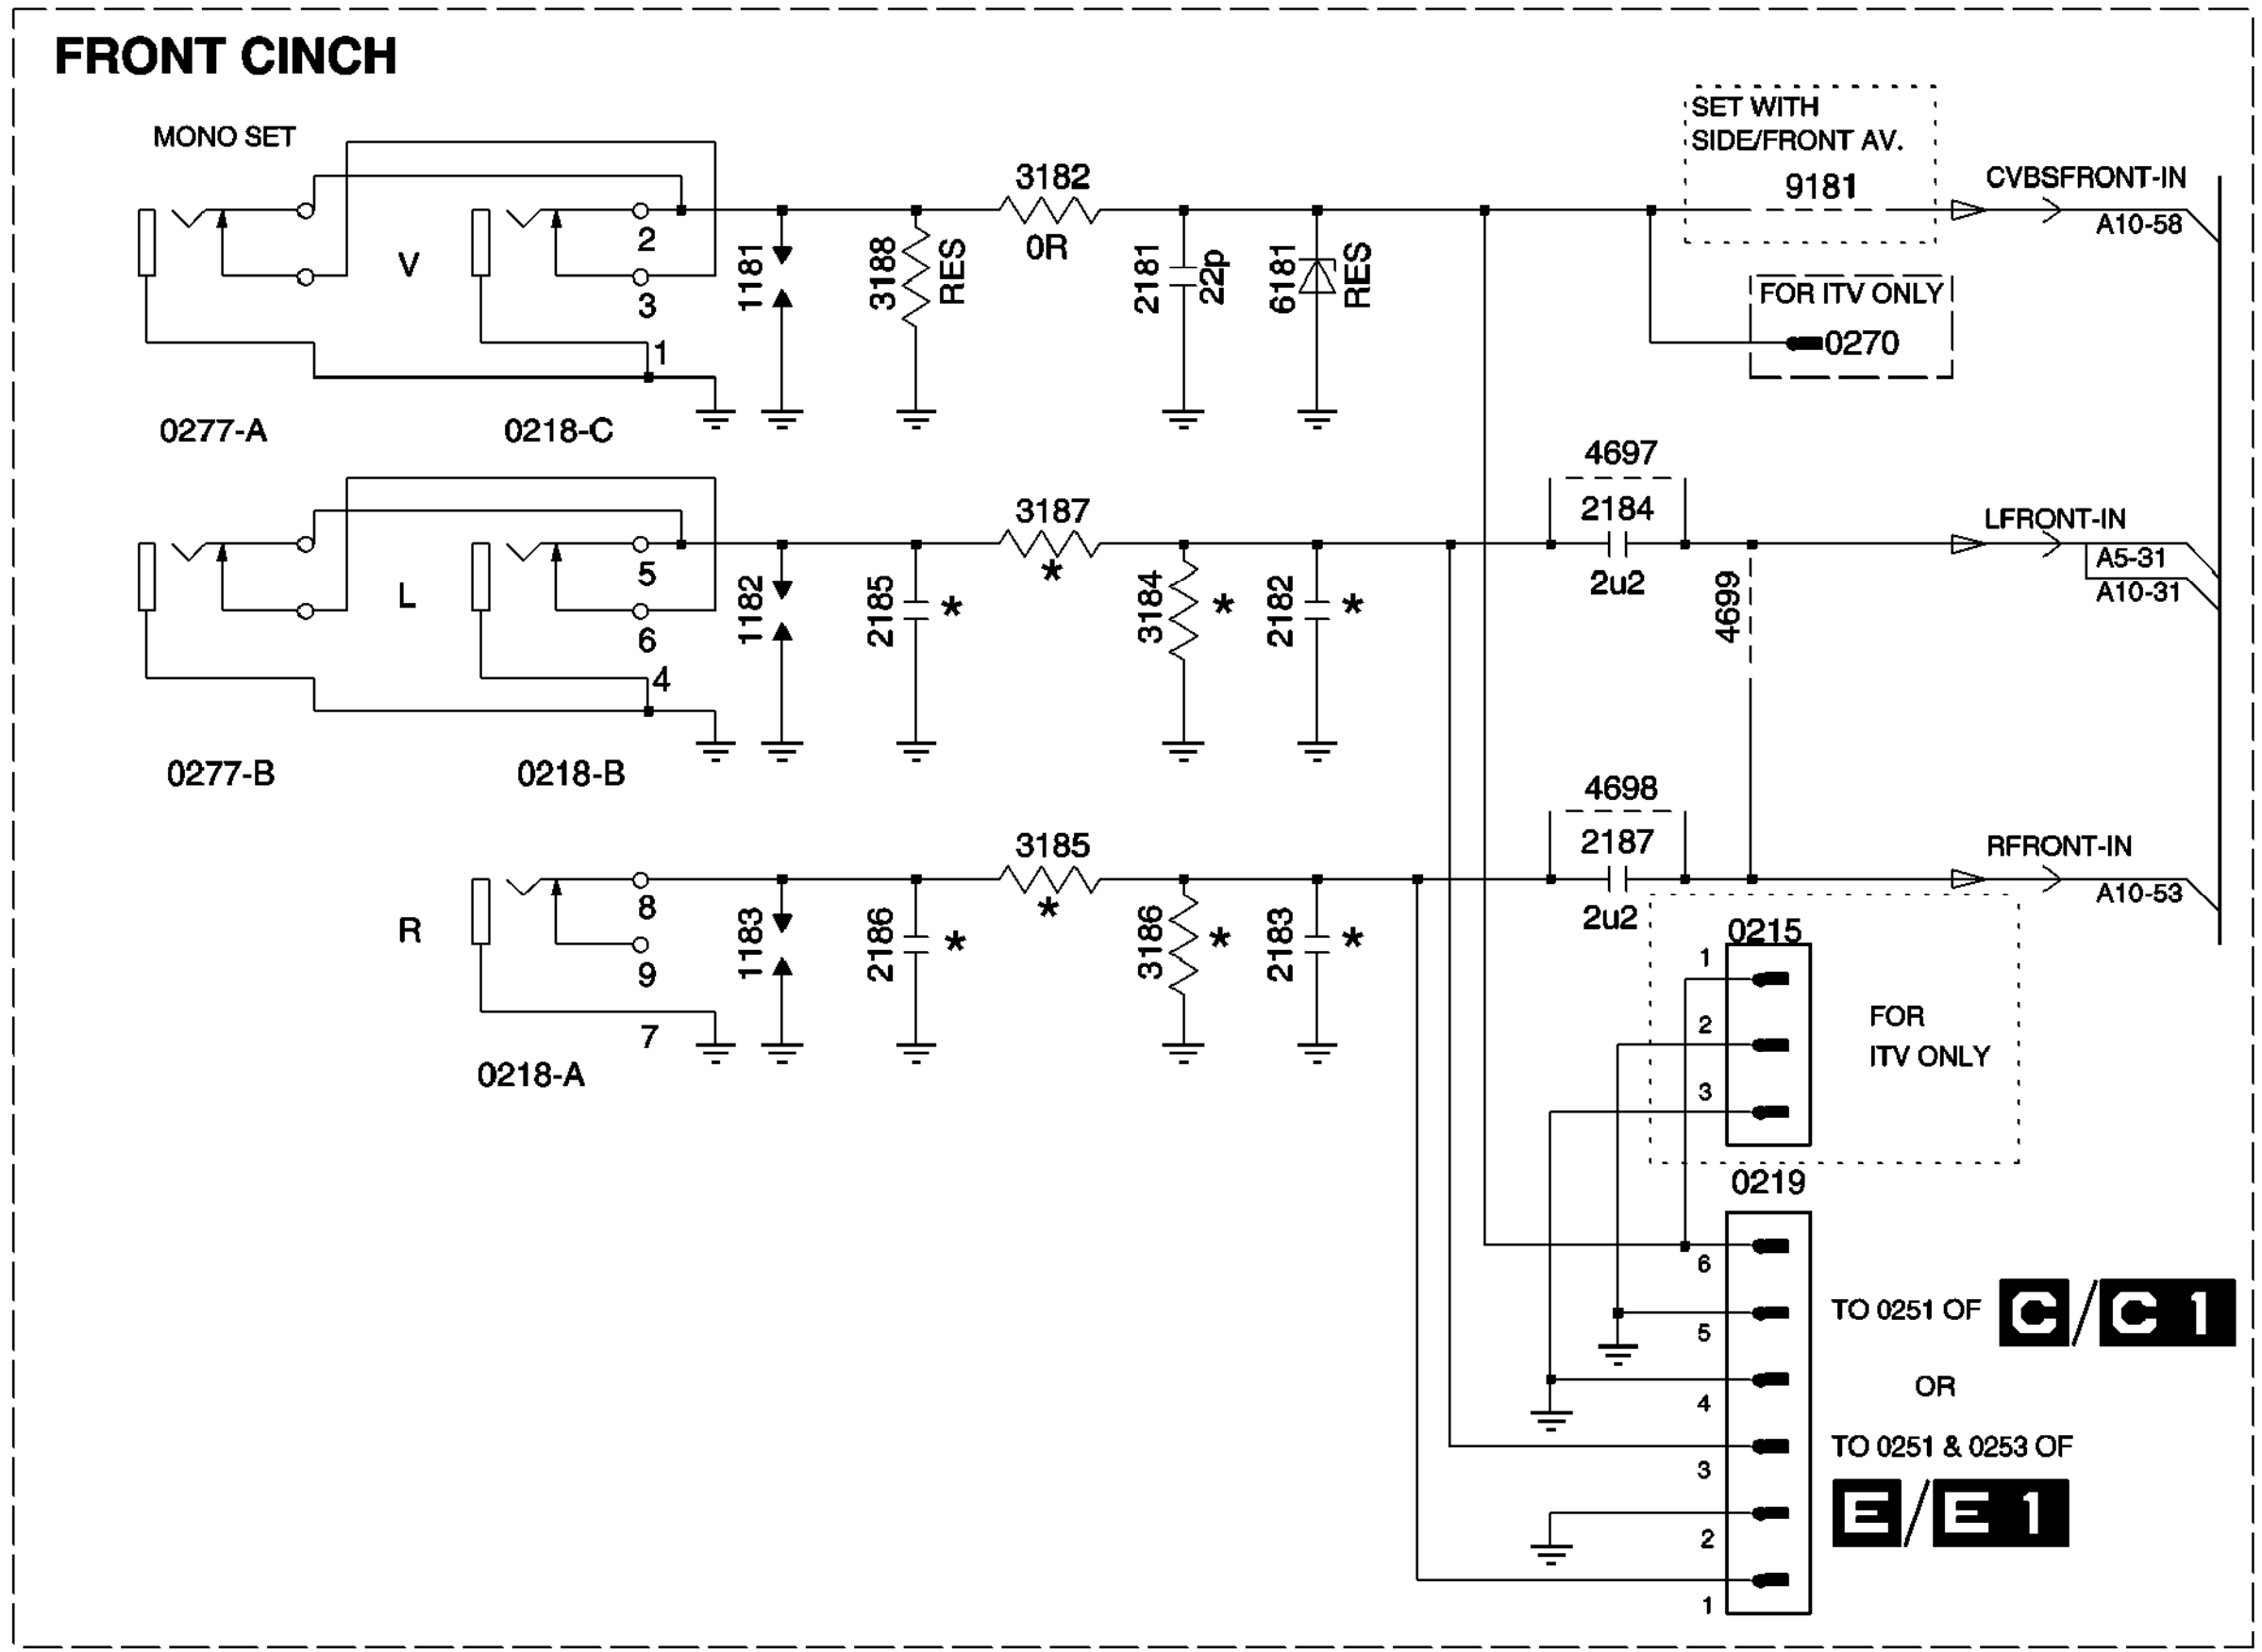

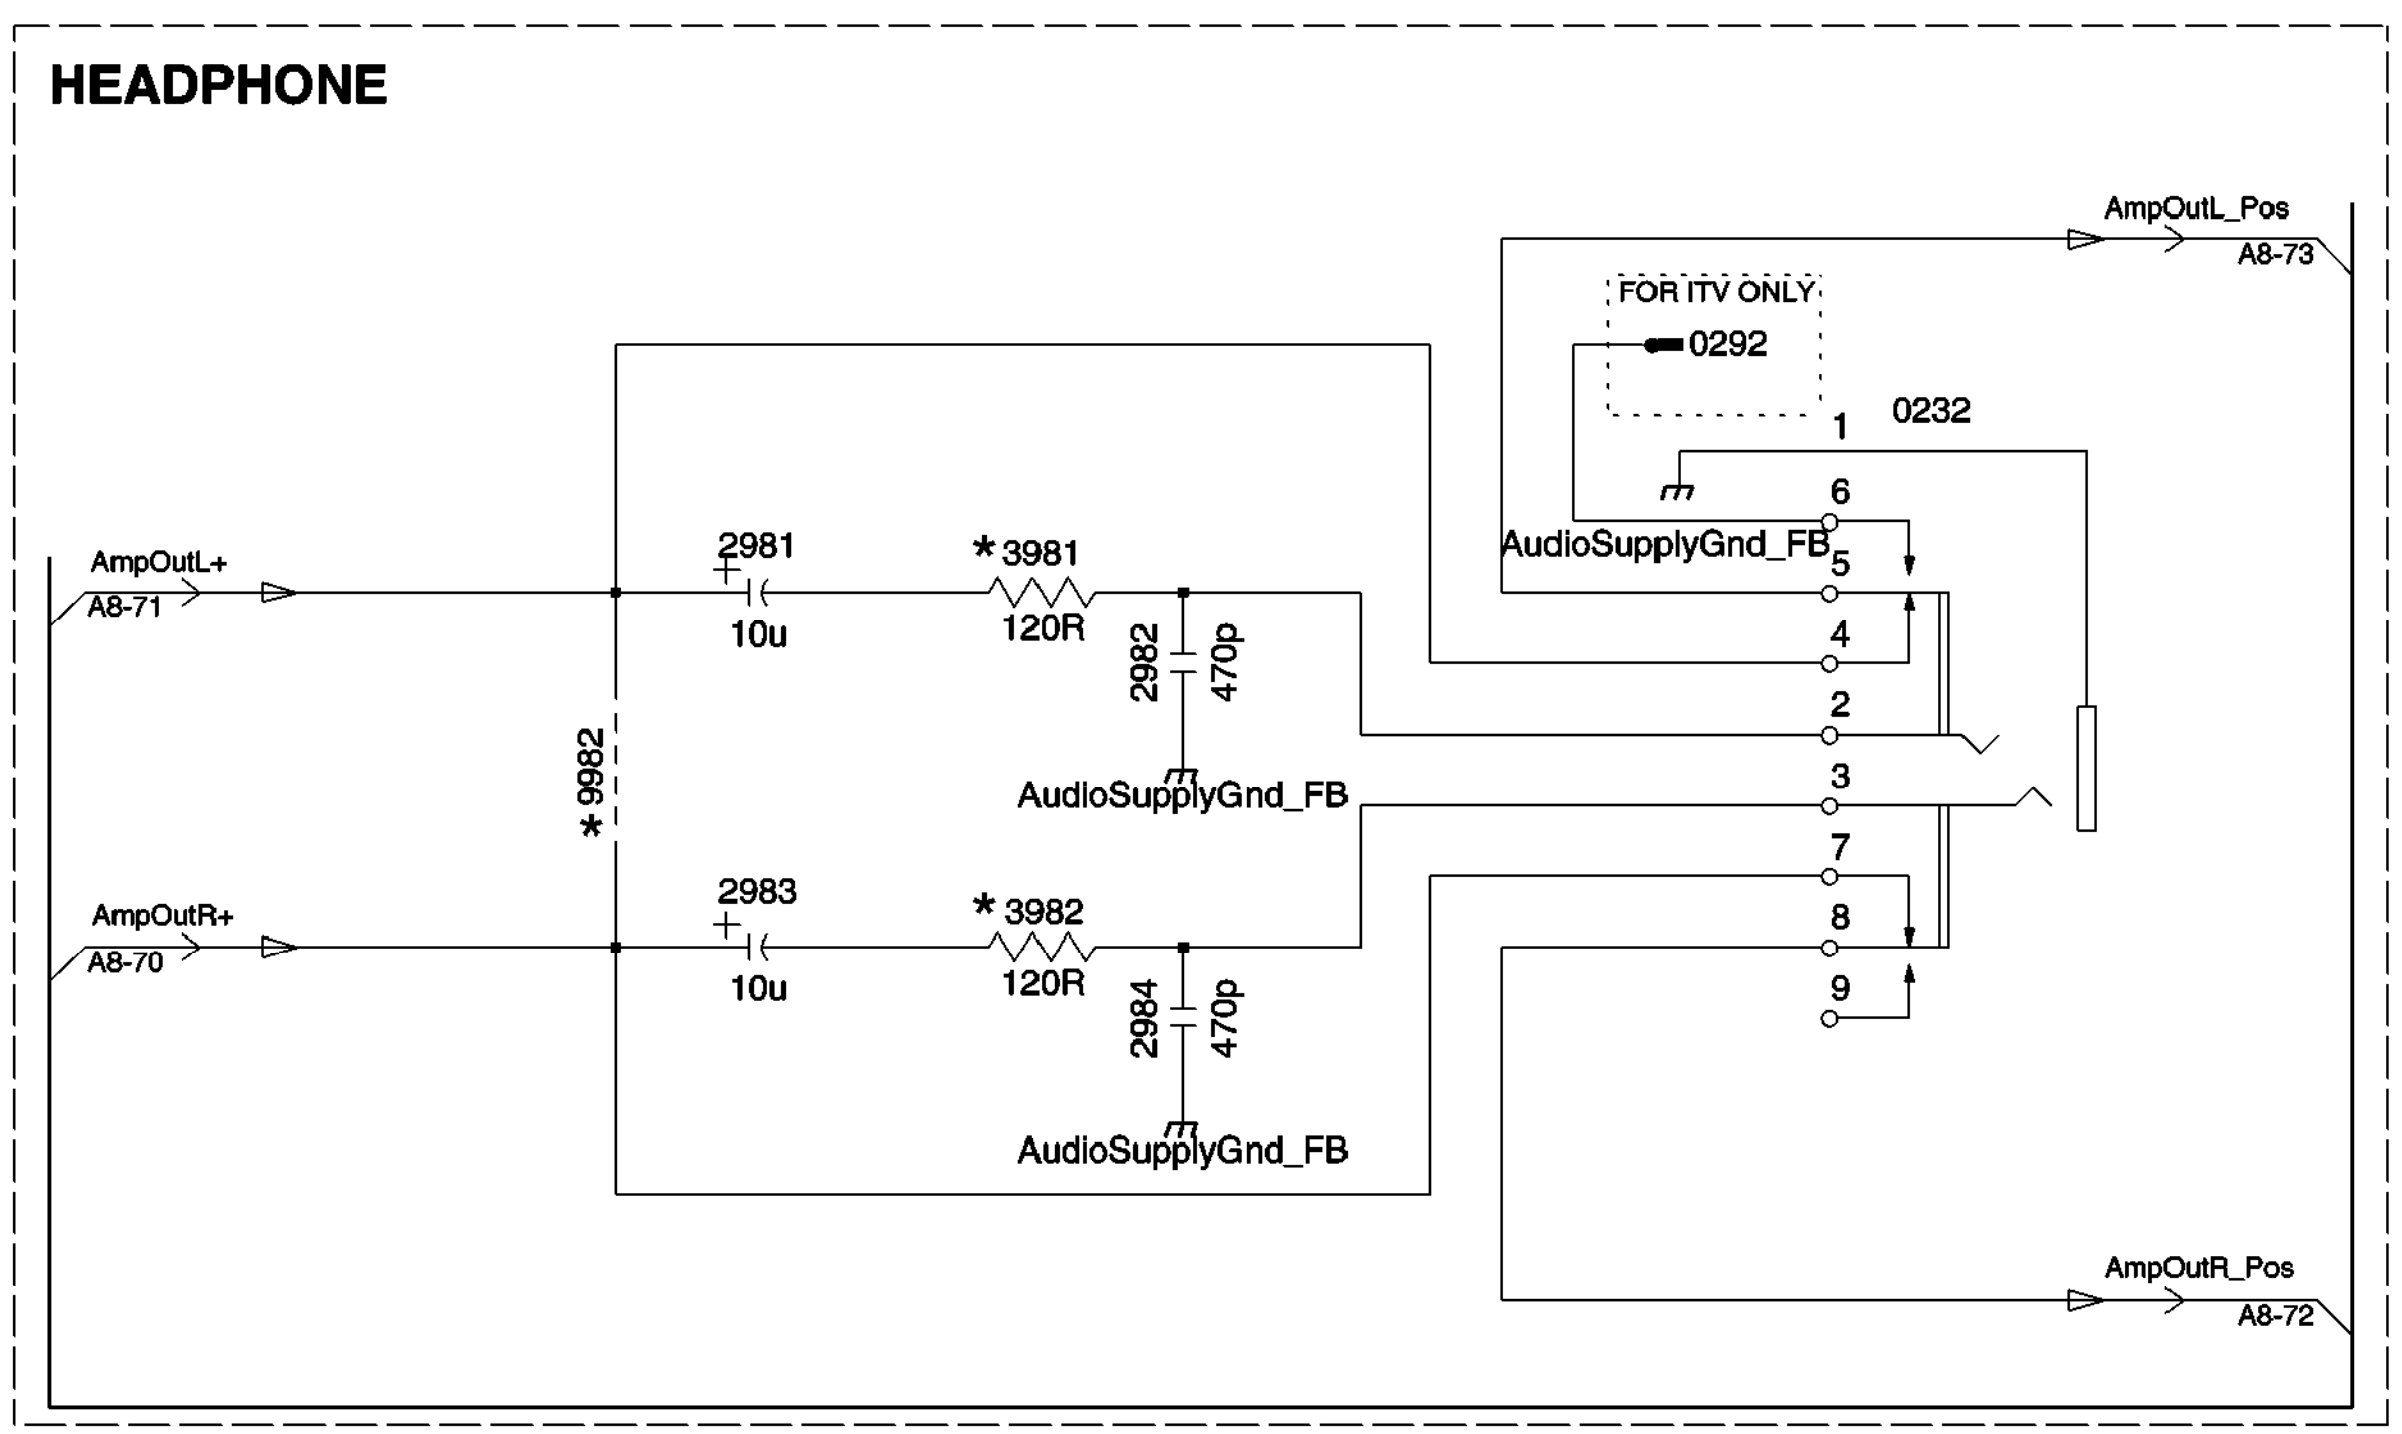


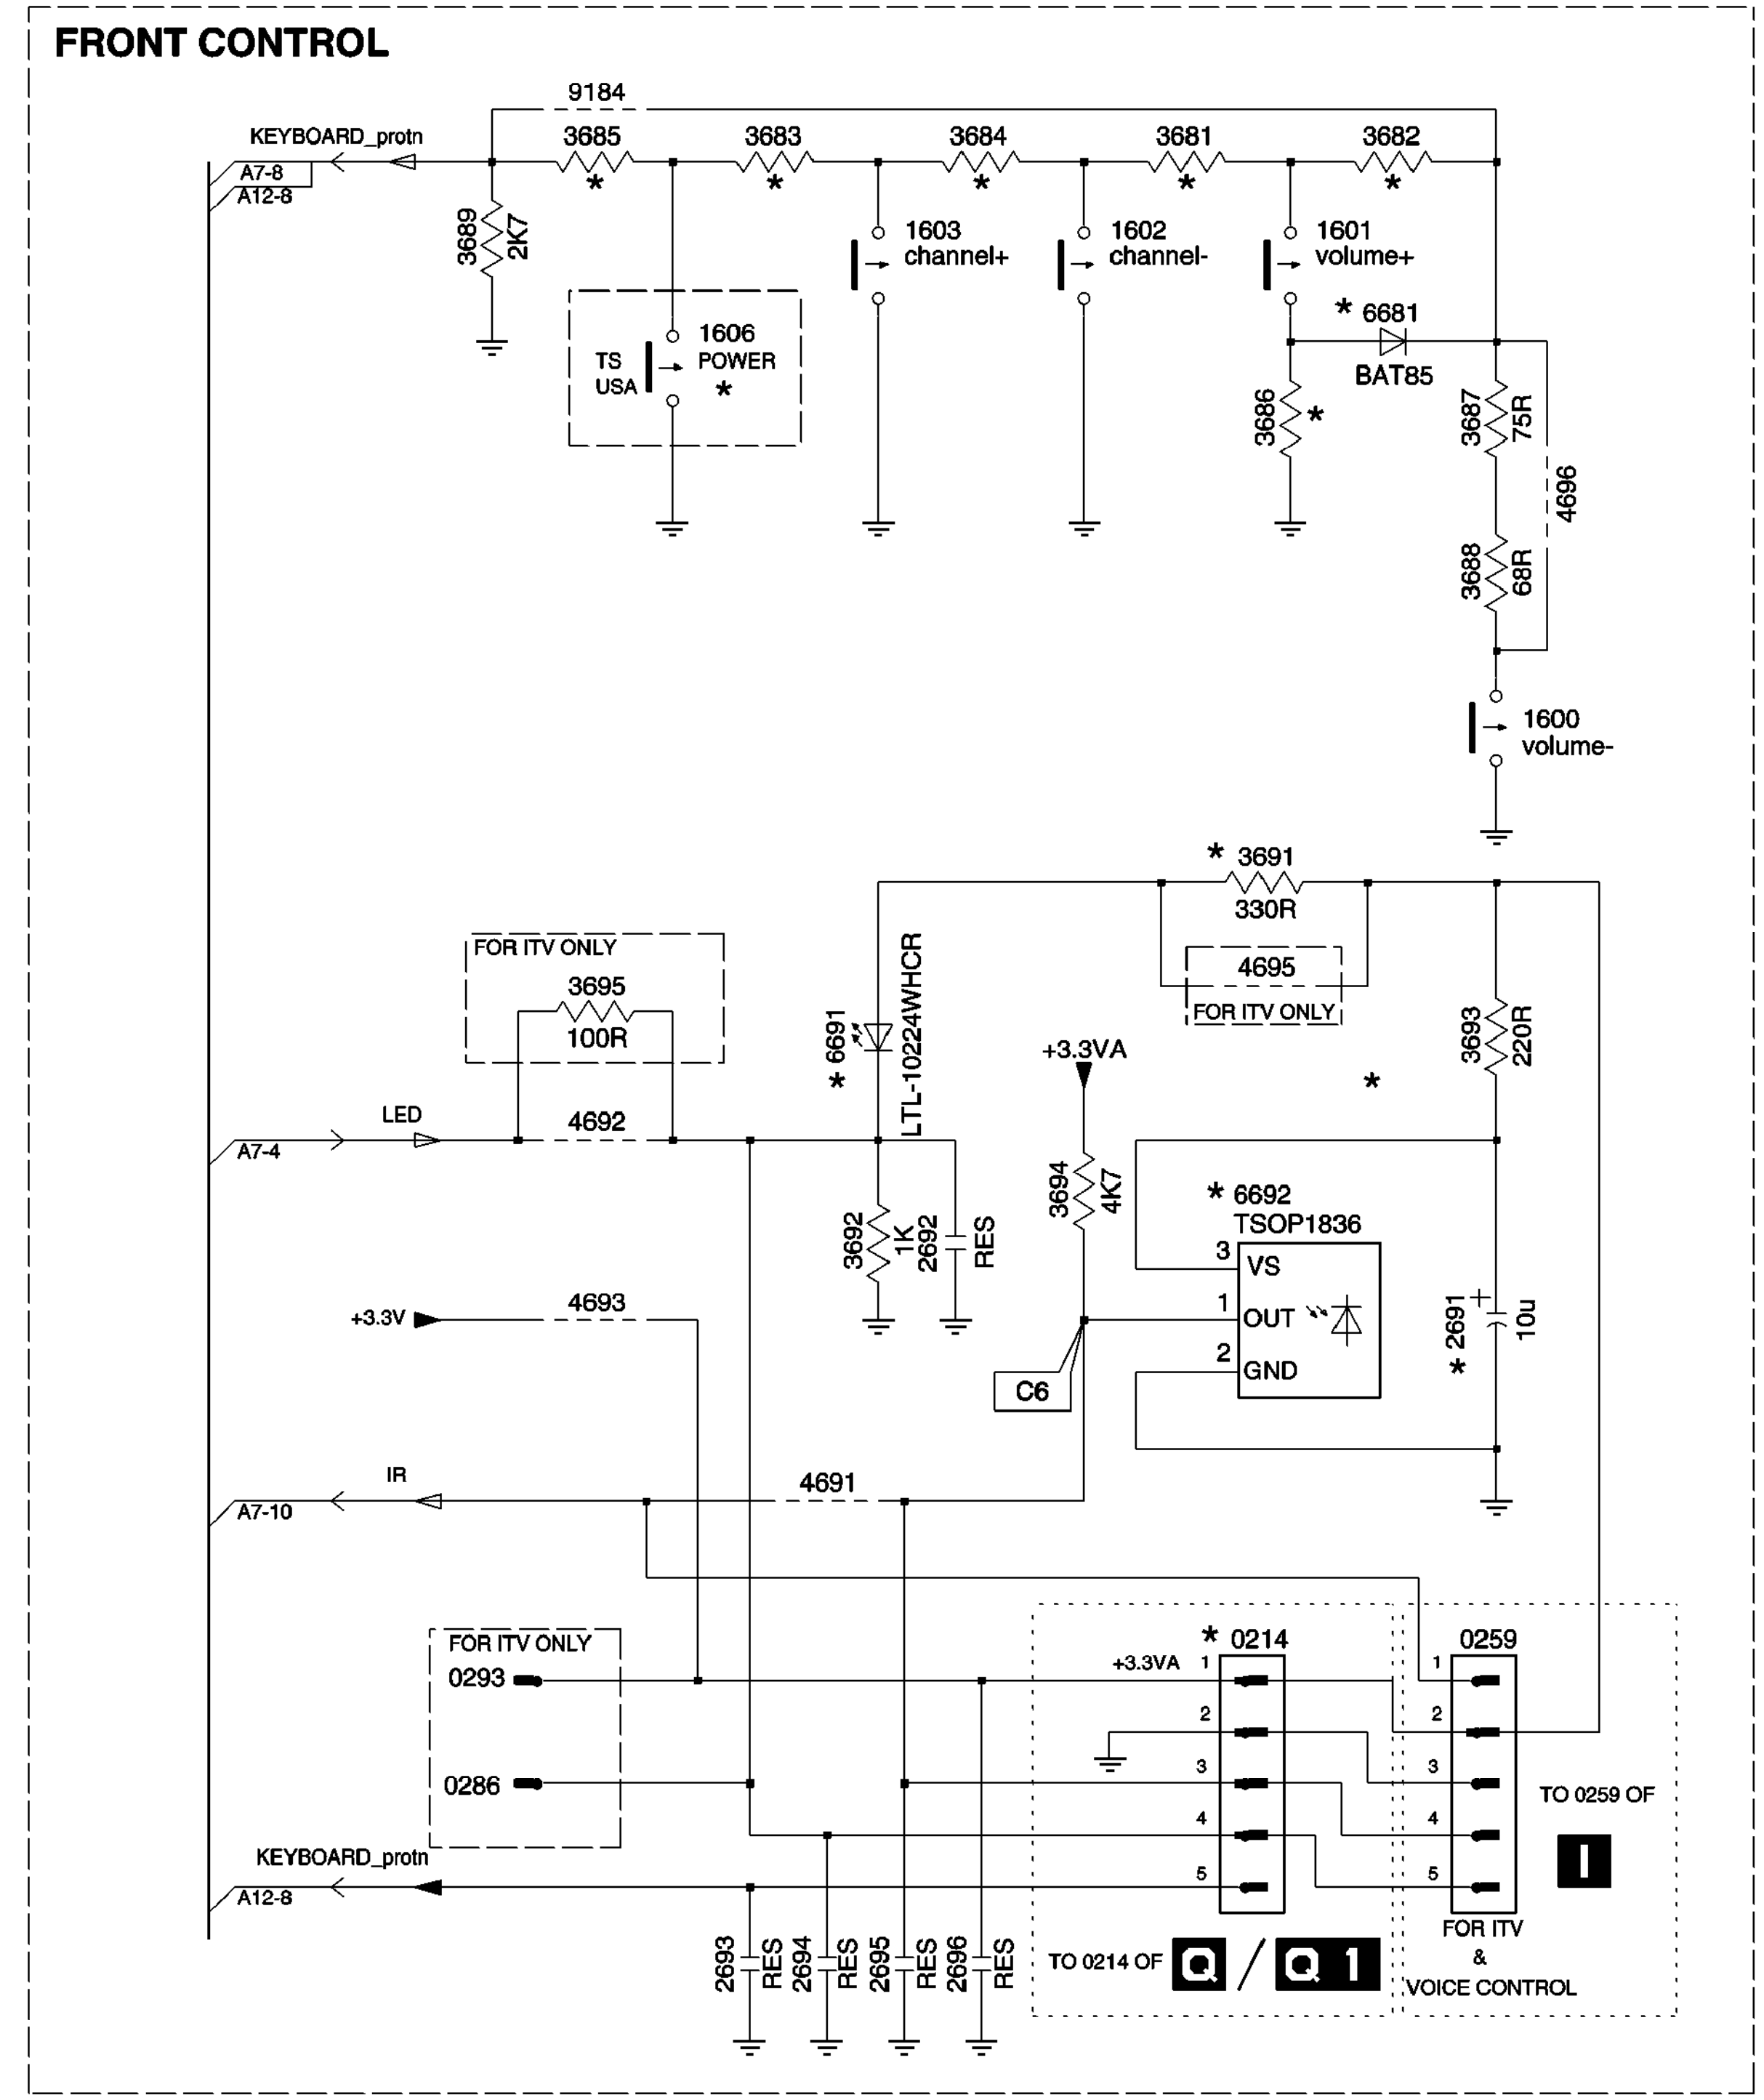


For Engg Purpose Only

4694


A13 REAR I/O CINCH

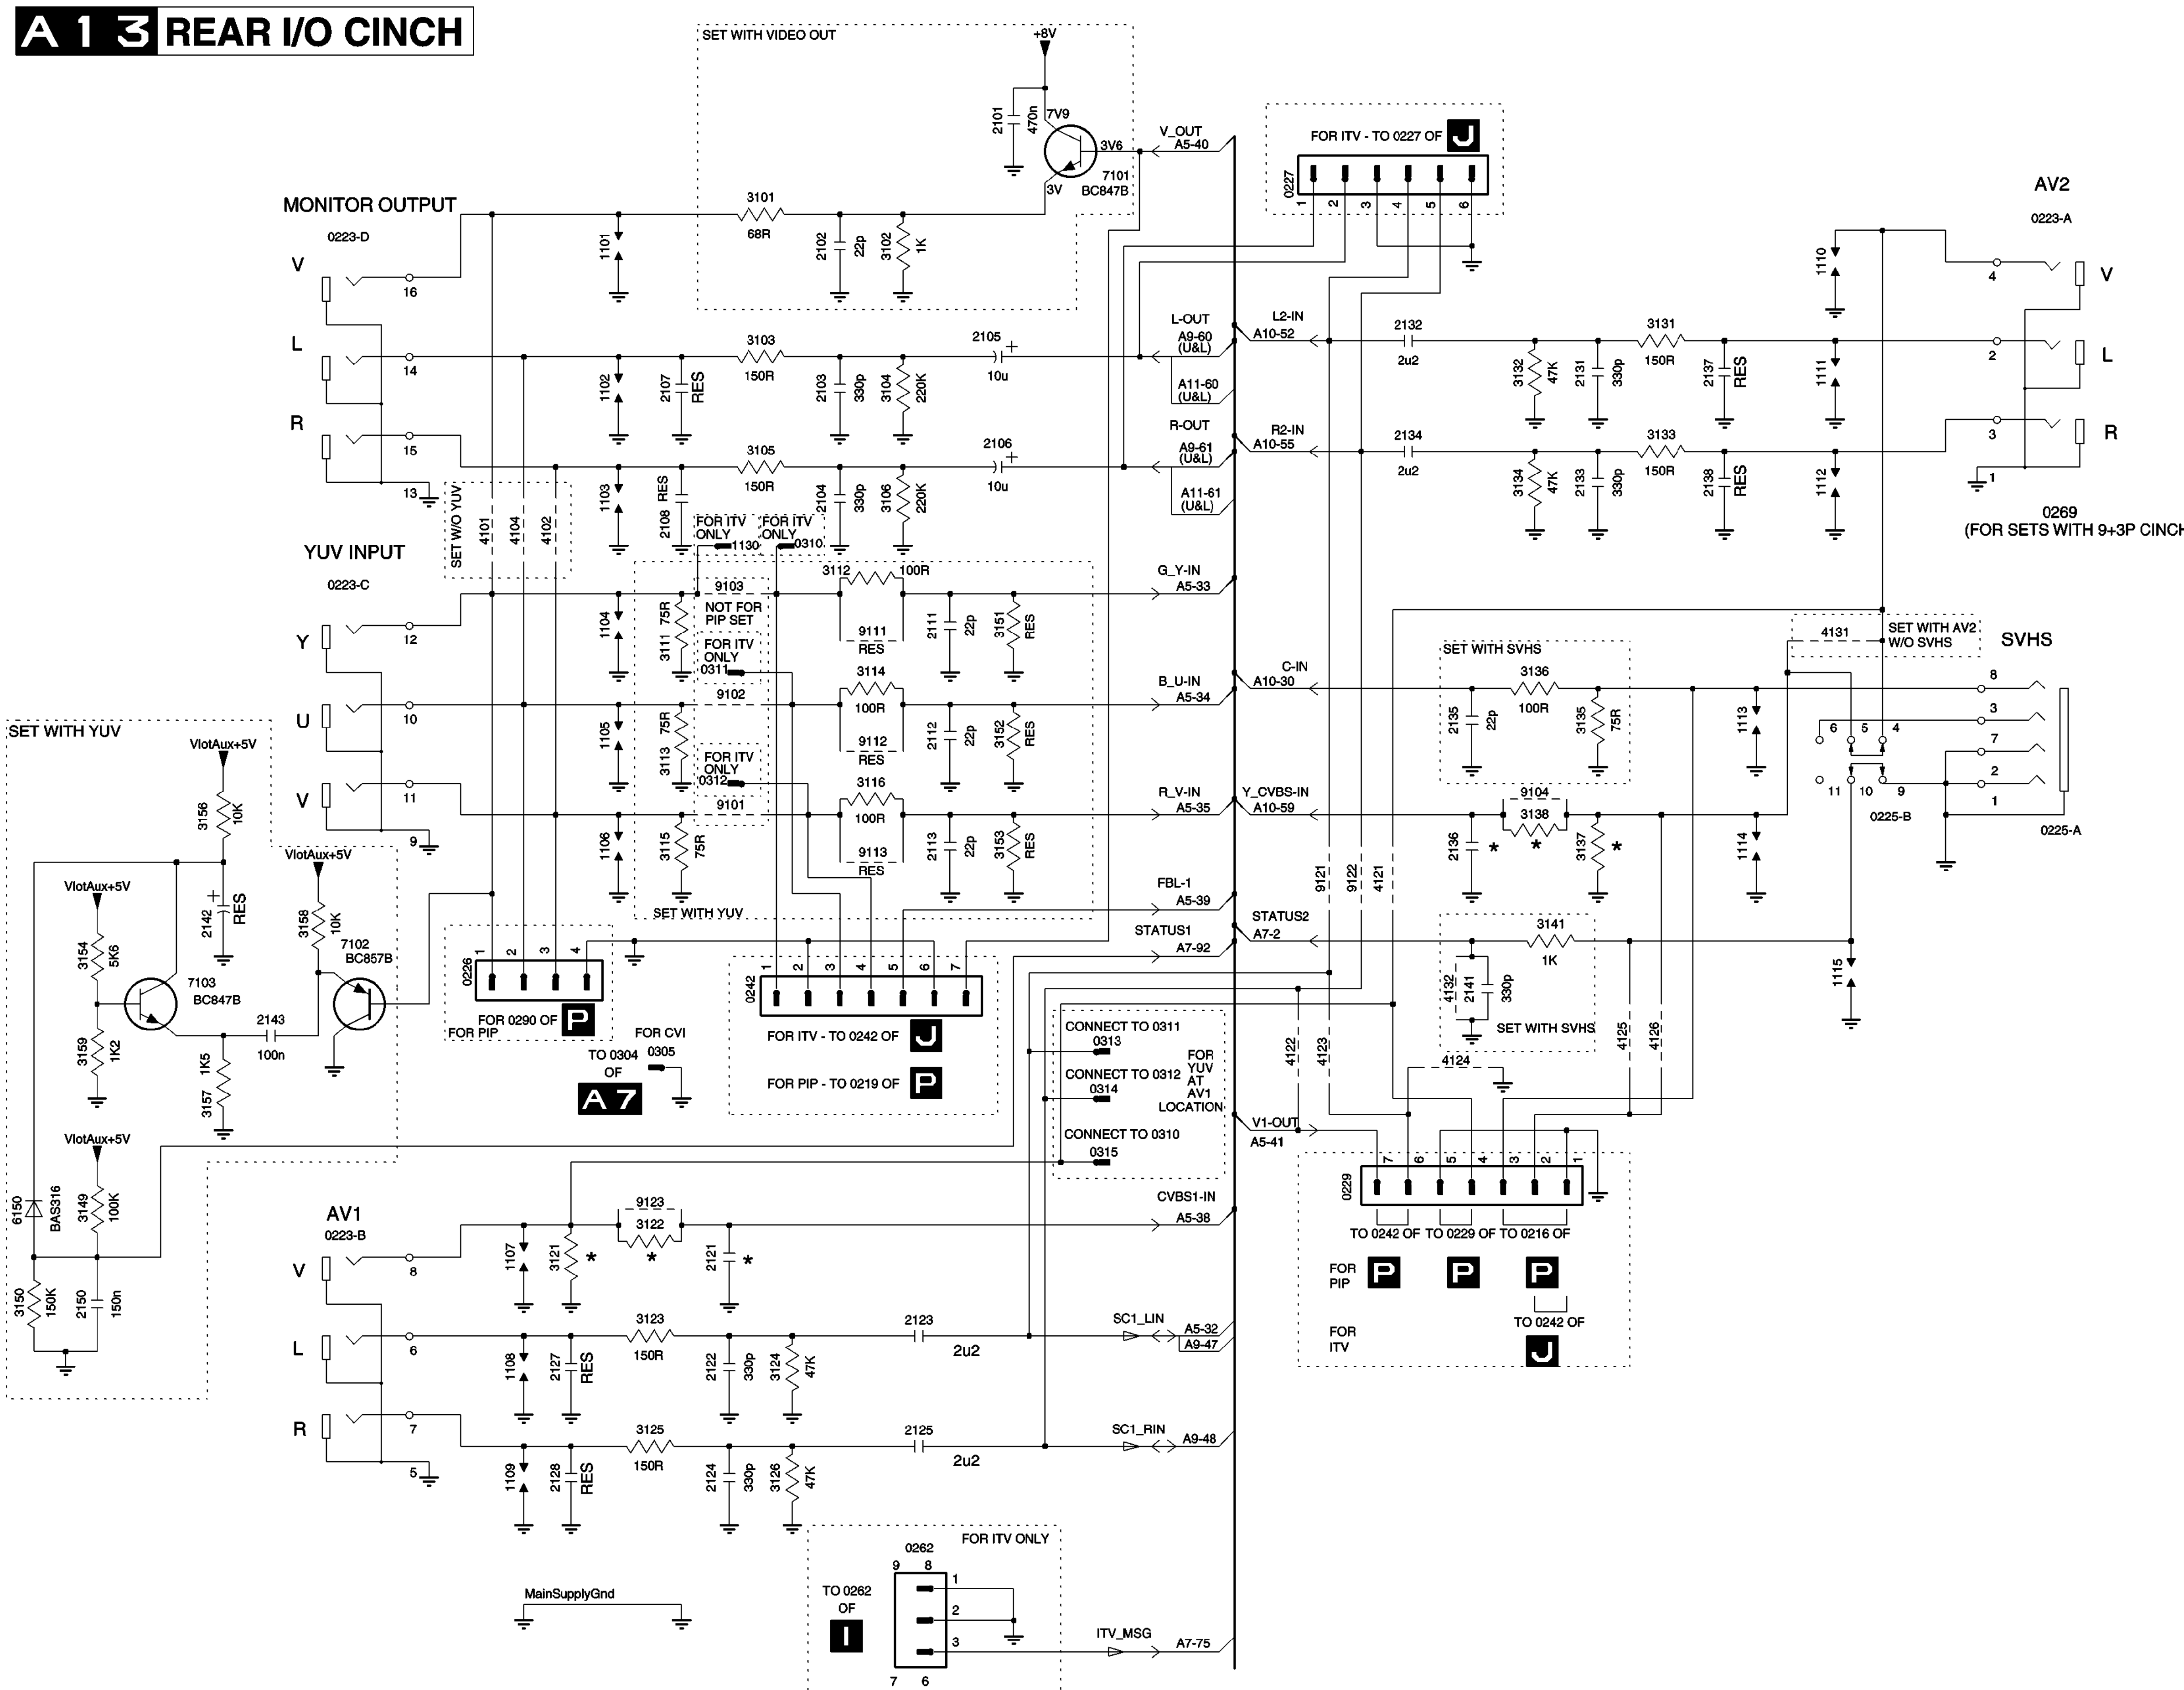


A16 PIP INTERFACE CIRCUIT & TILT INTERFACE

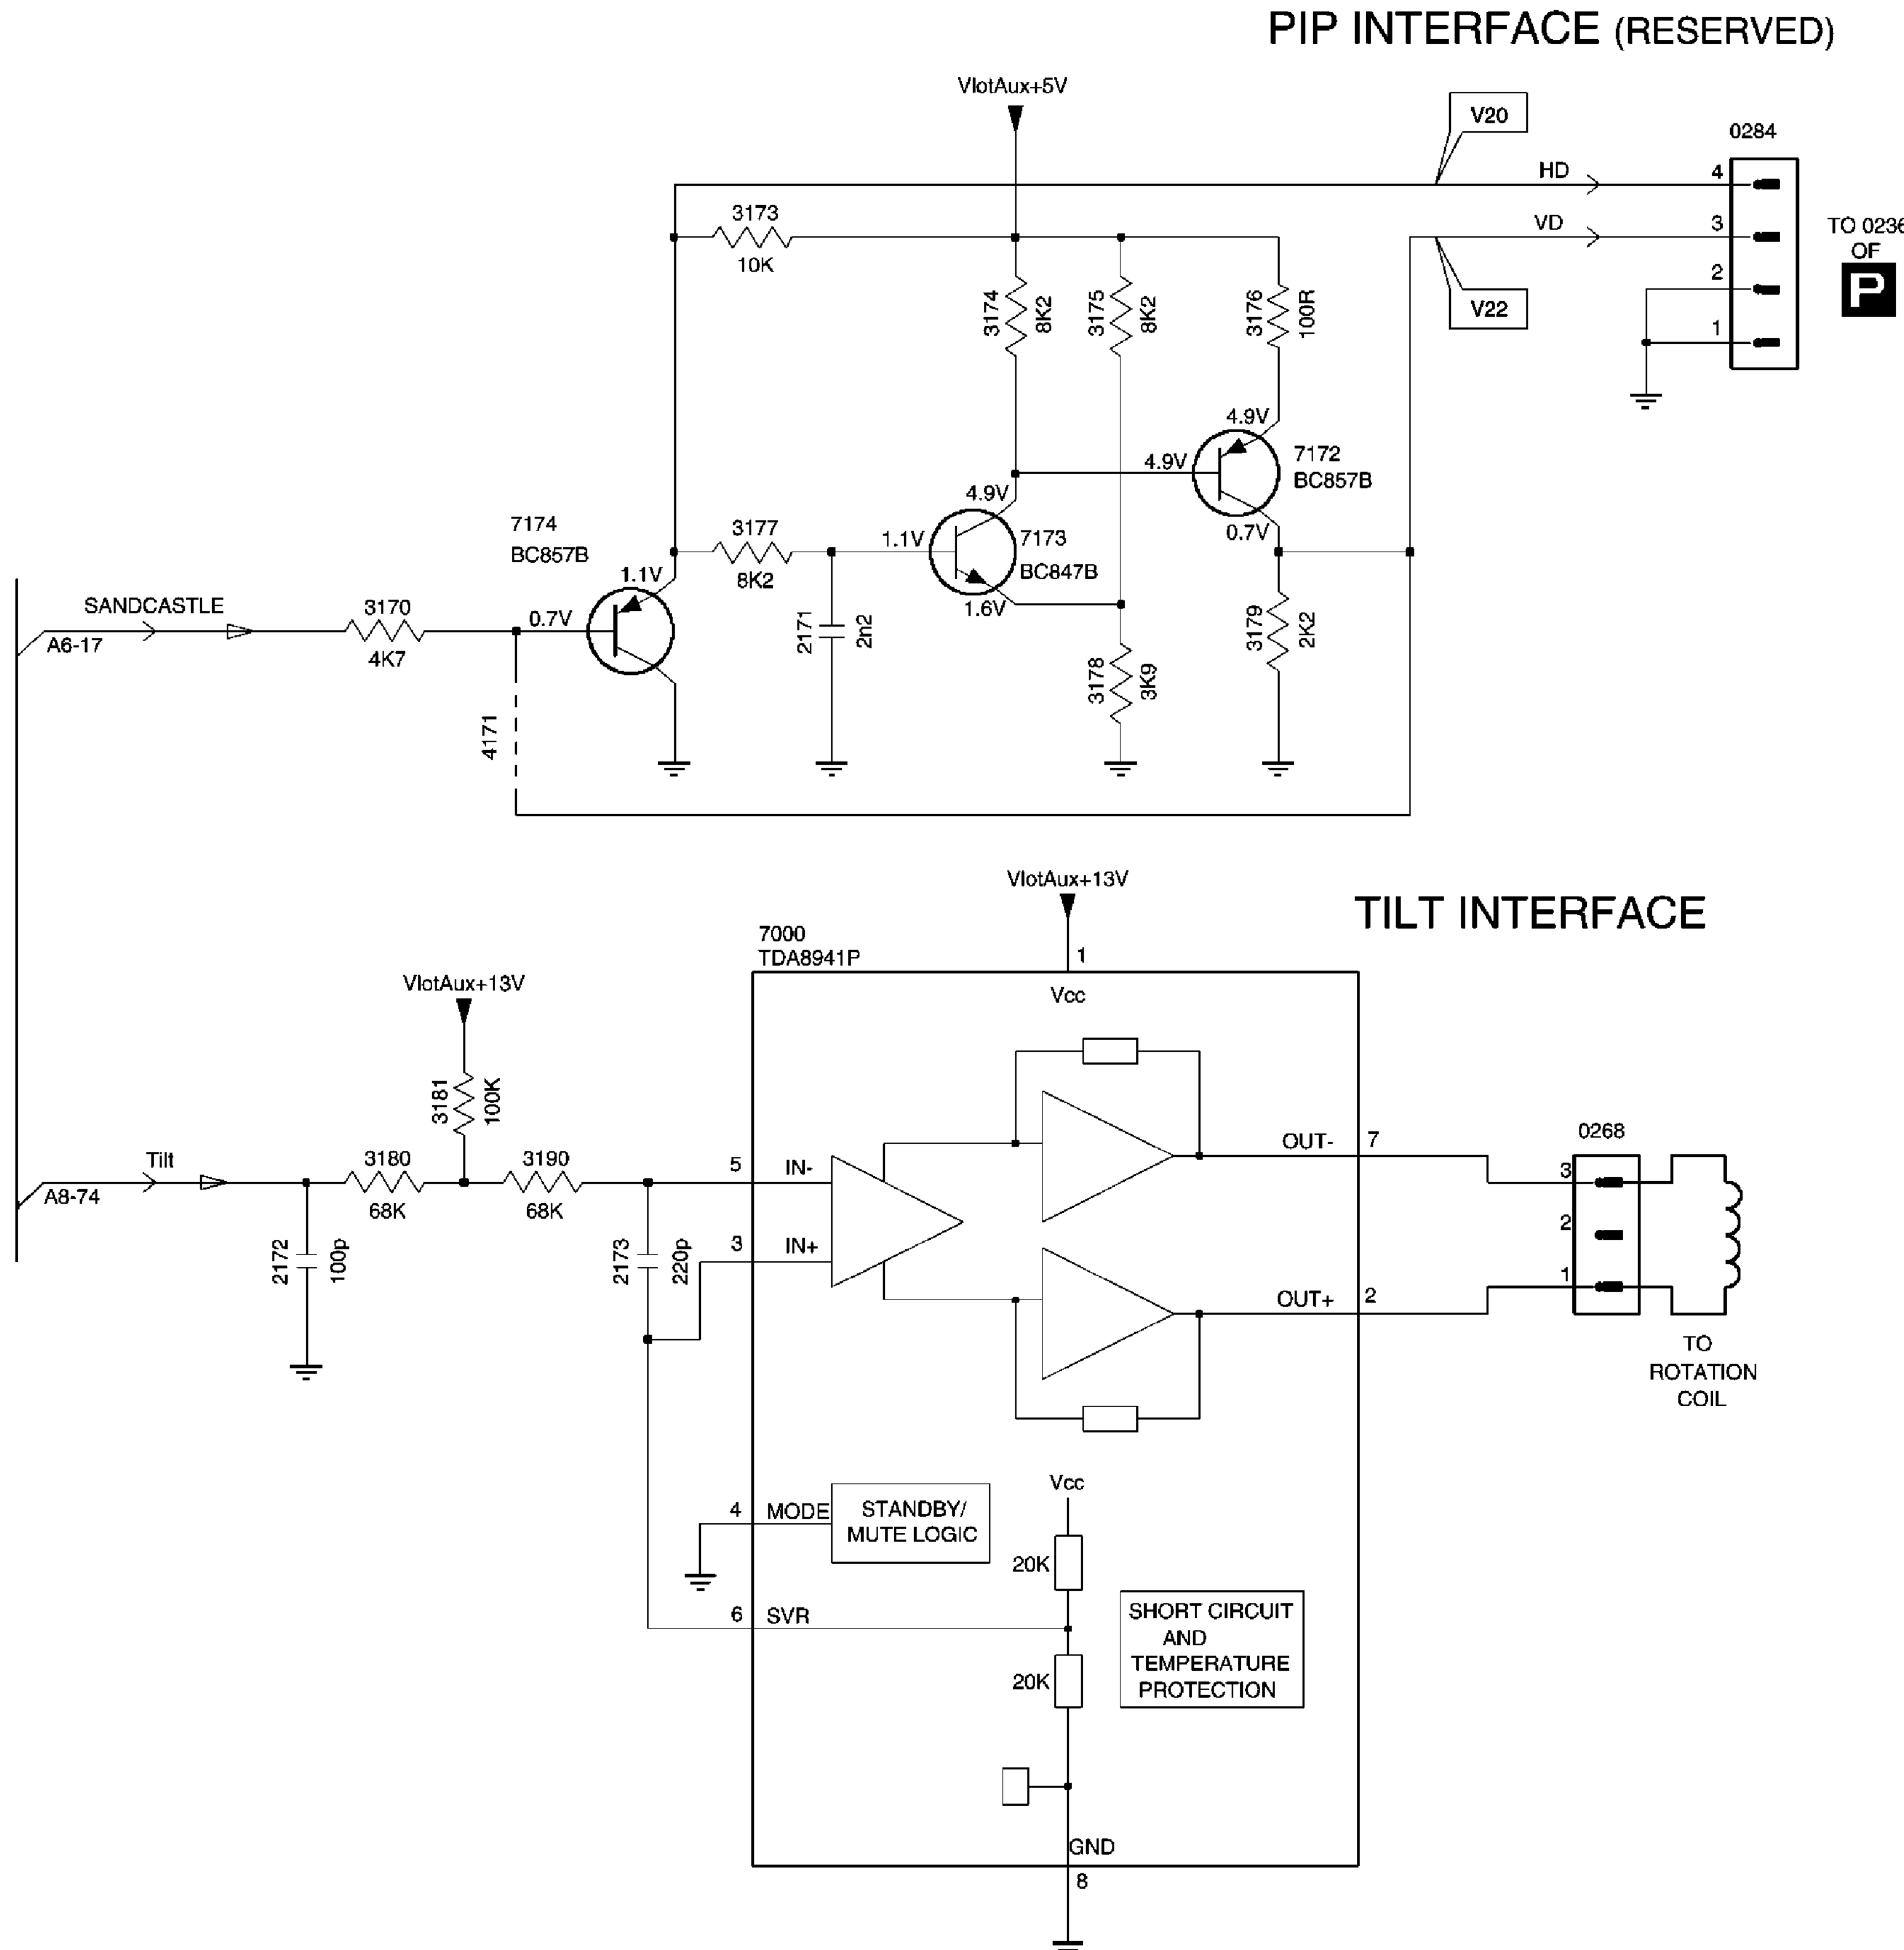


B1 CRT PANEL (ECO SCAVEM)

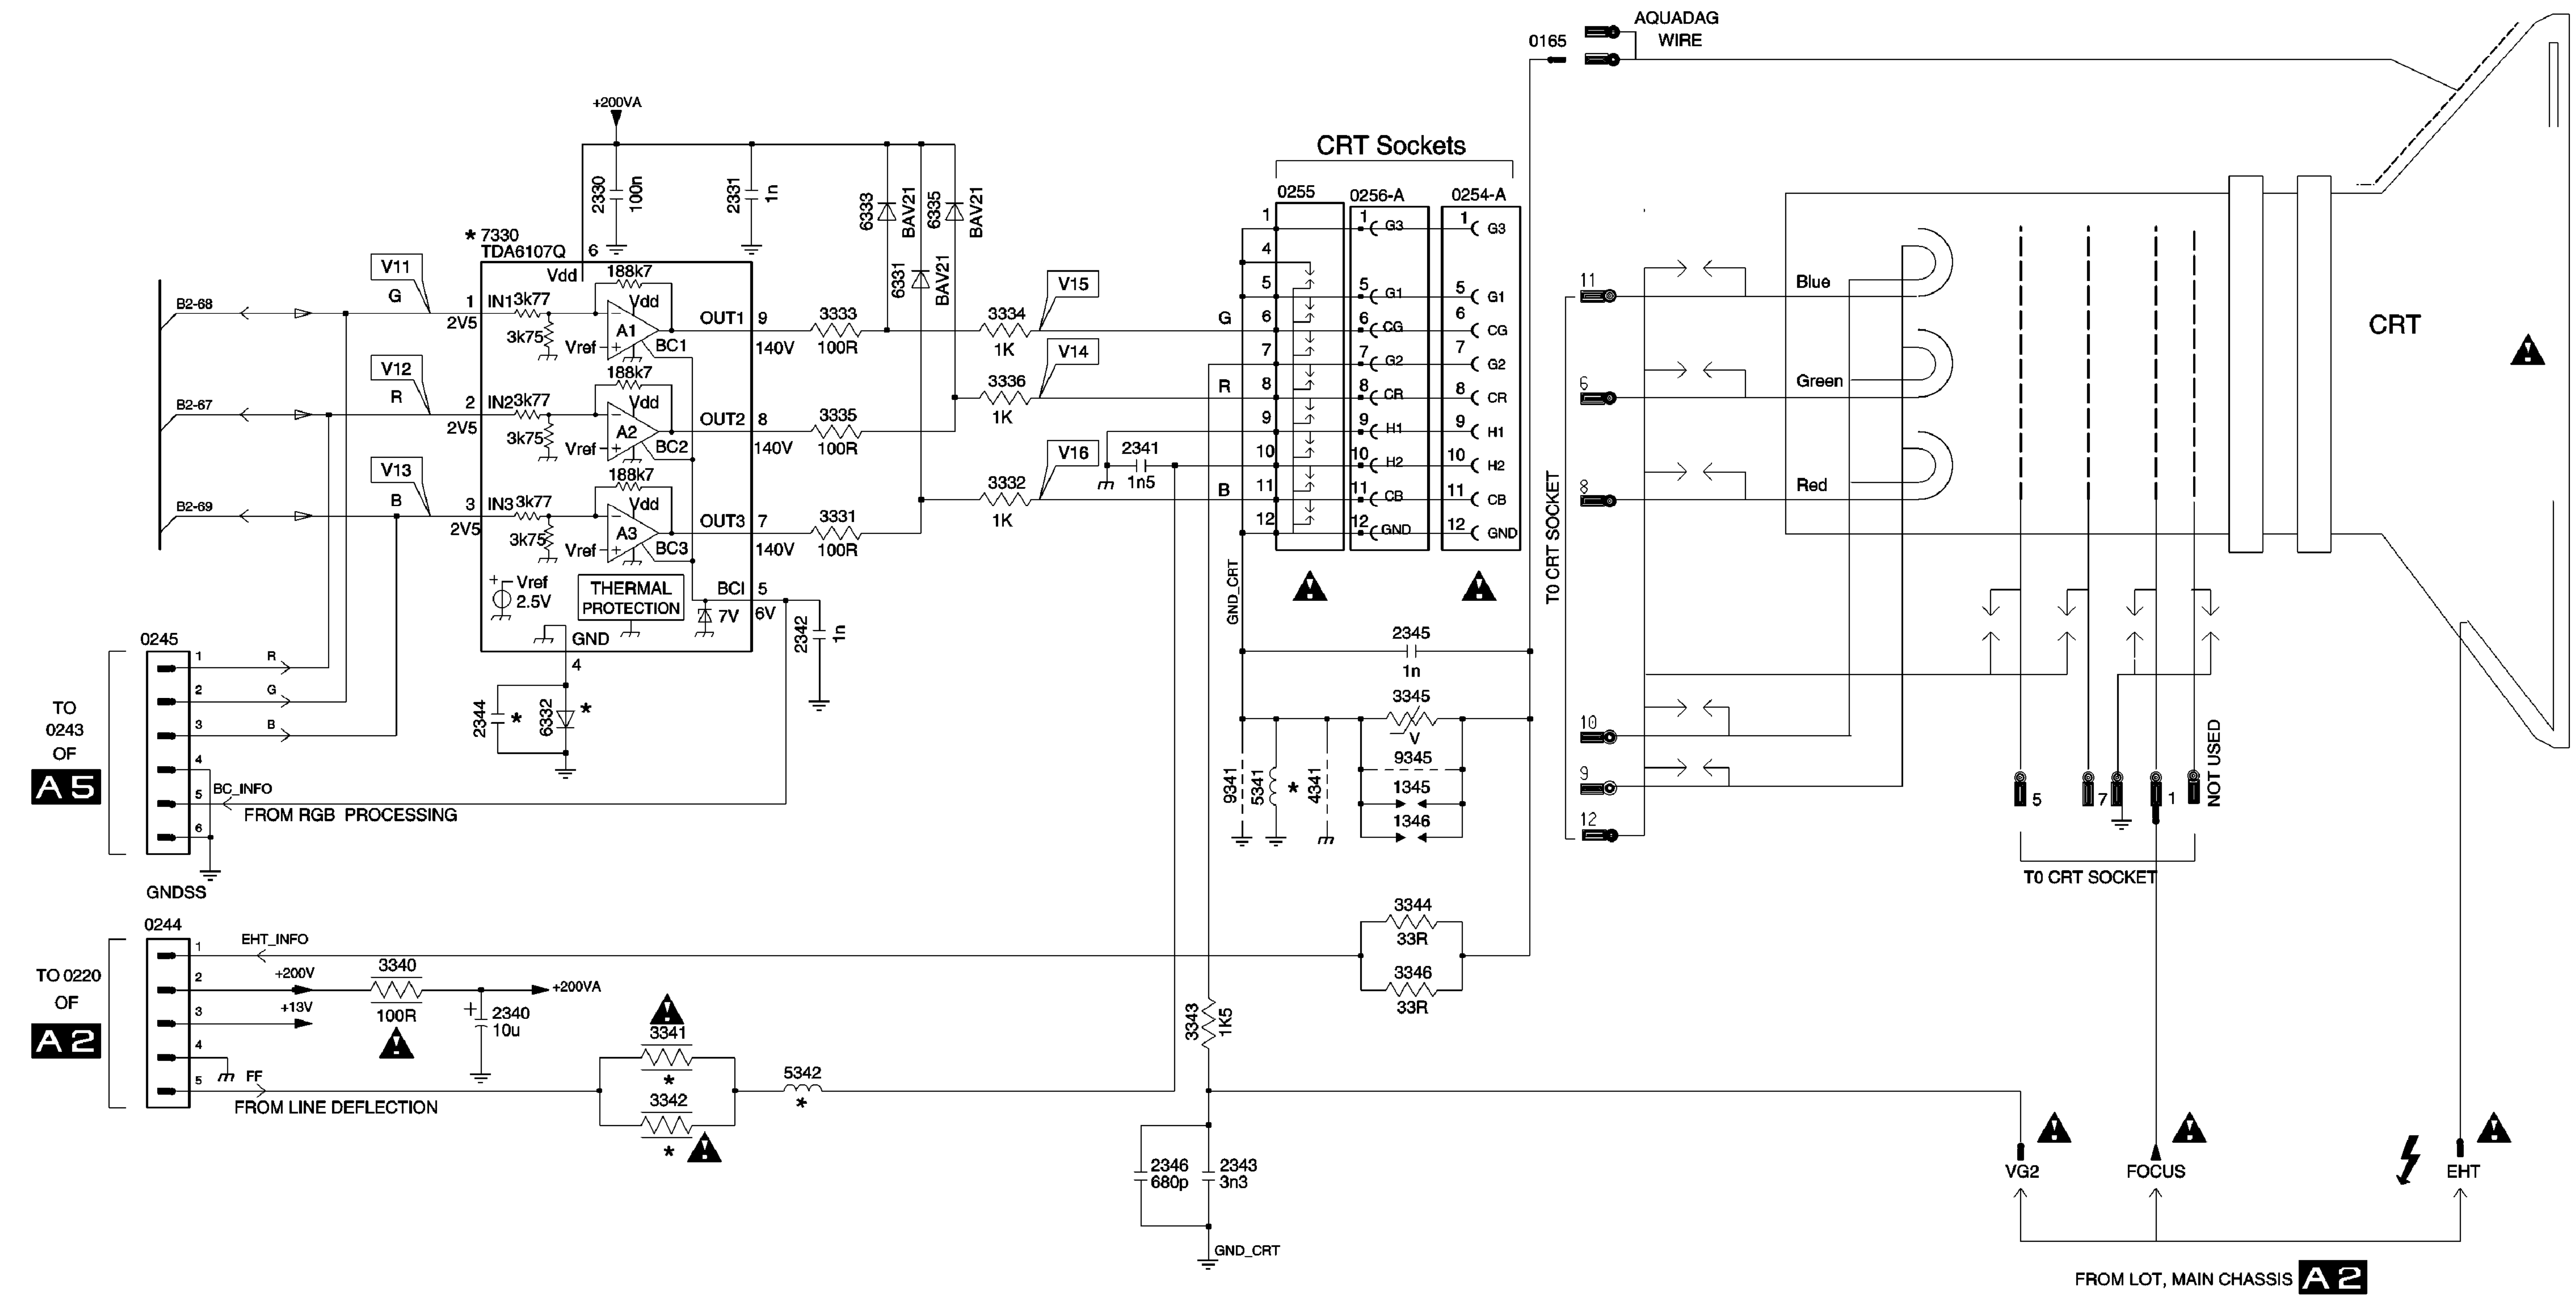


B2 ECO SCAVEM

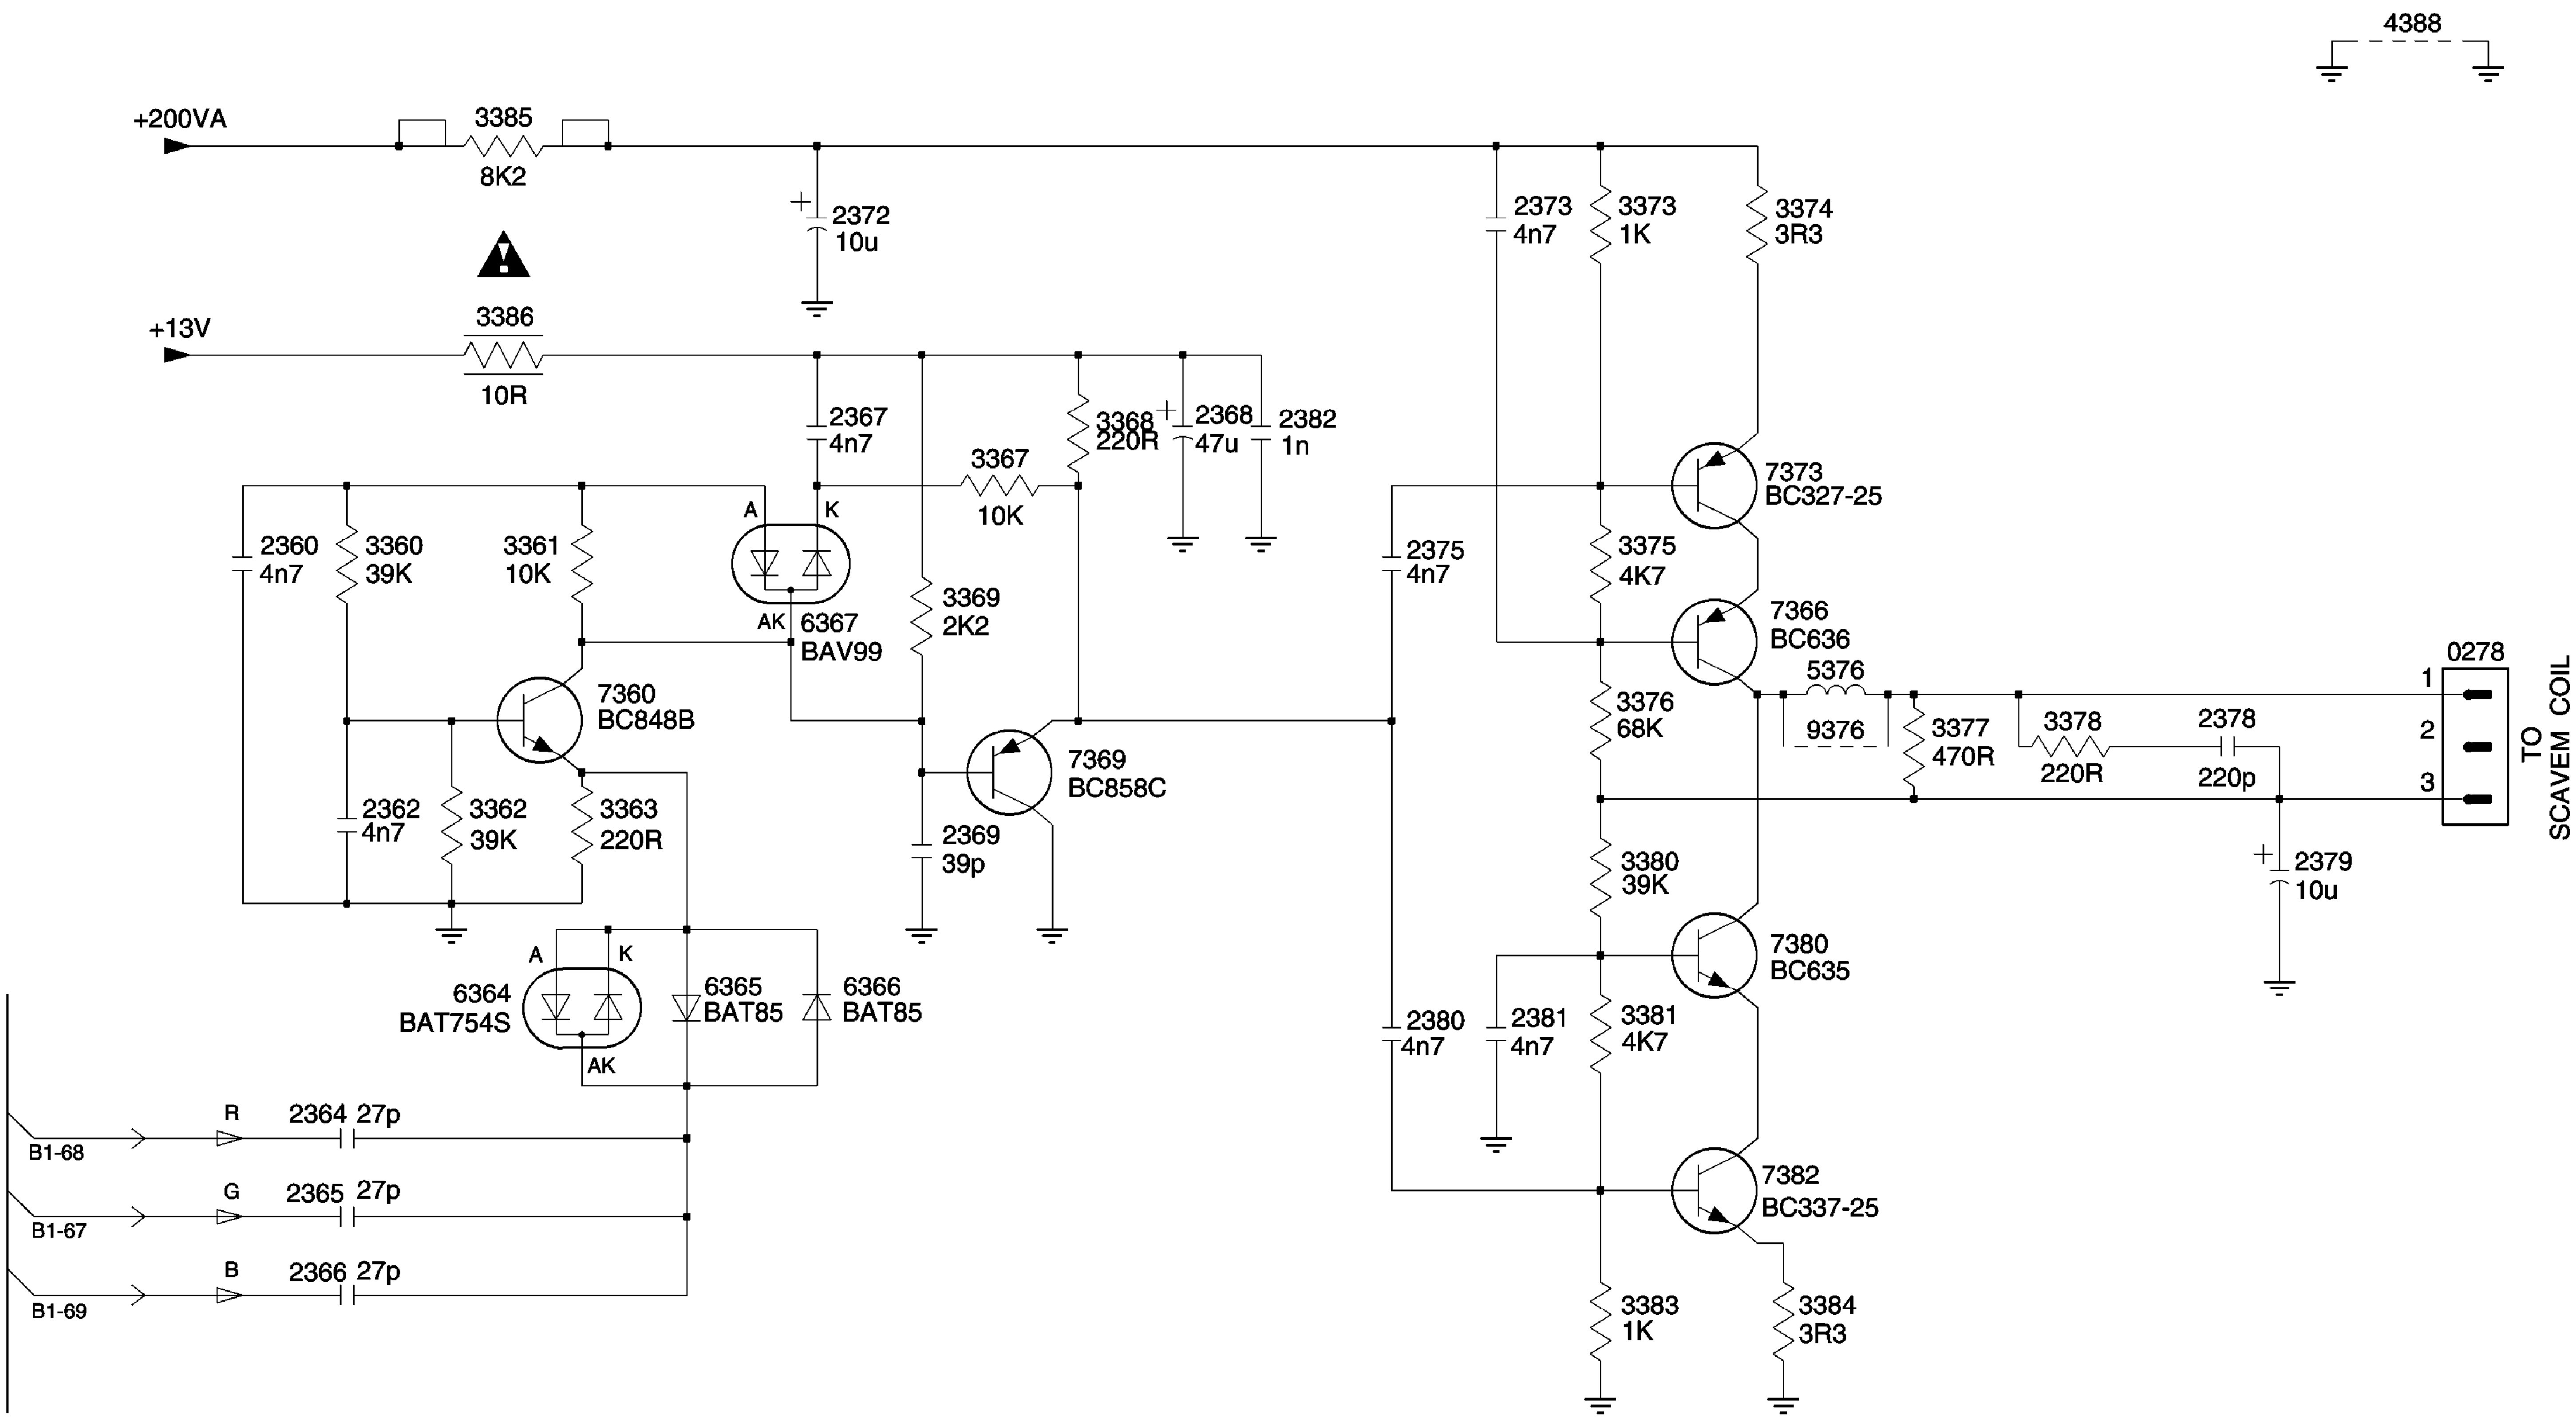


C SIDE AV PANEL + HP PANEL

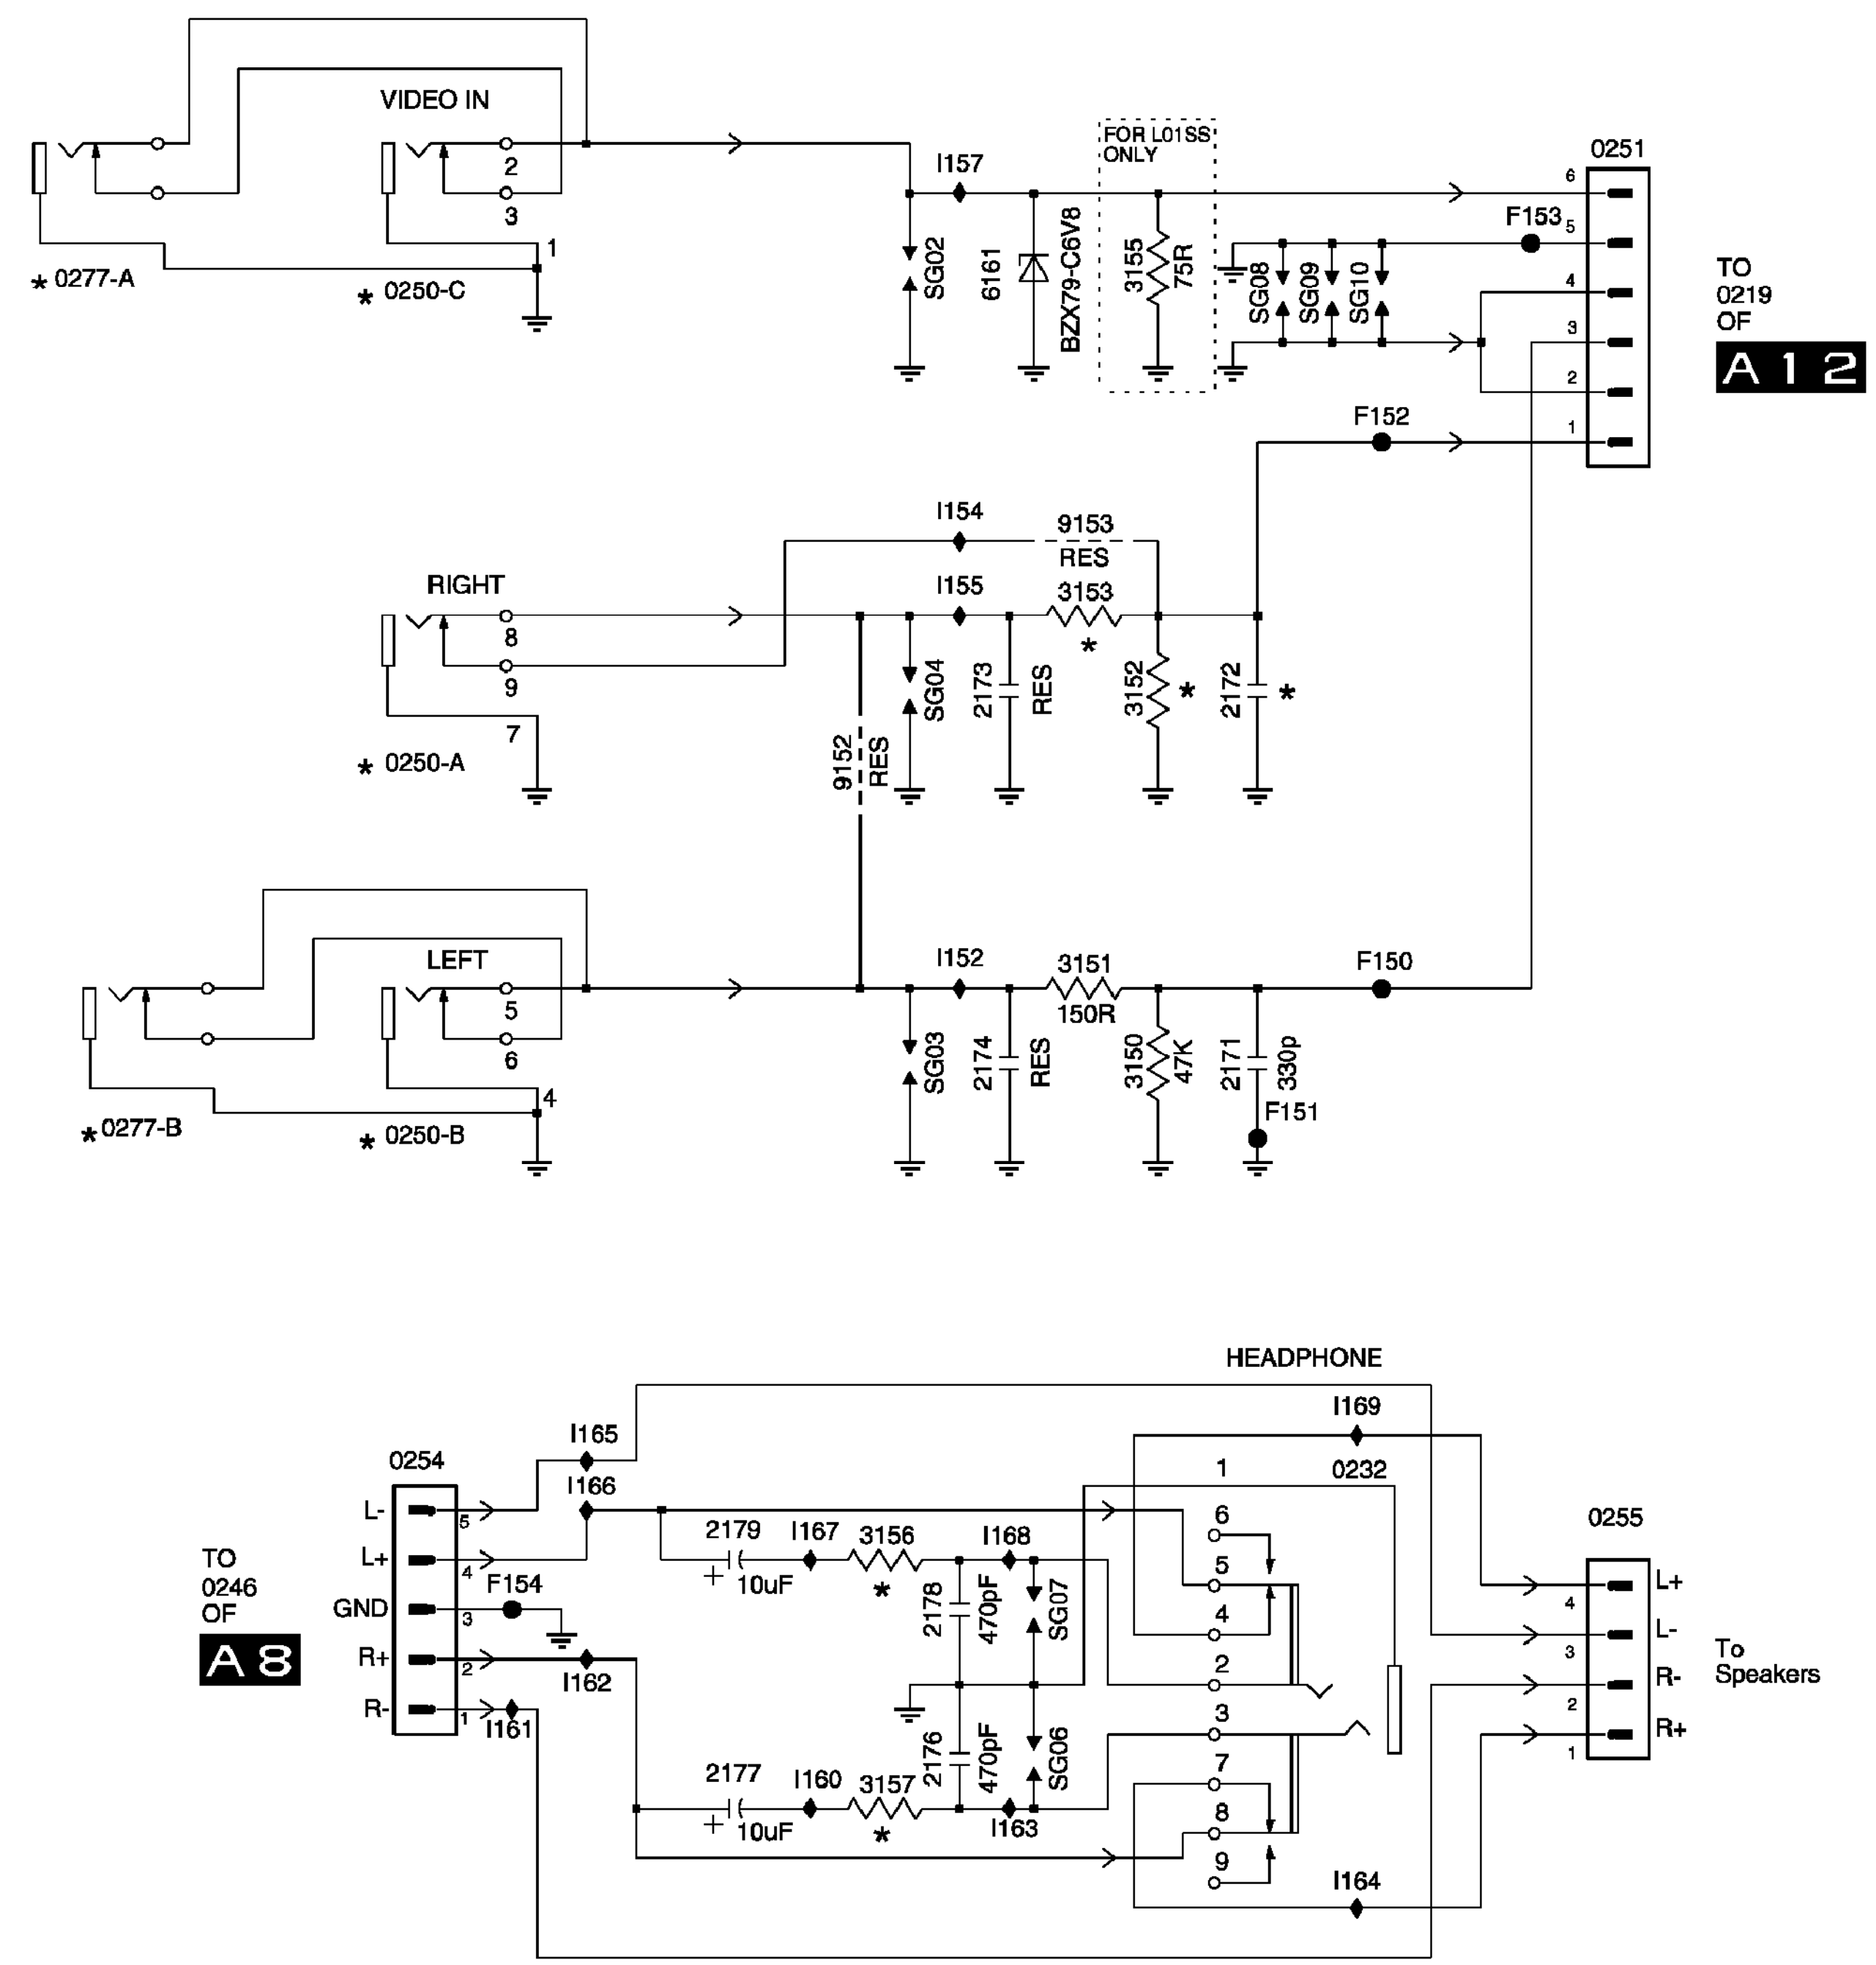


C 1 SIDE AV PANEL + HP PANEL (SLIM)

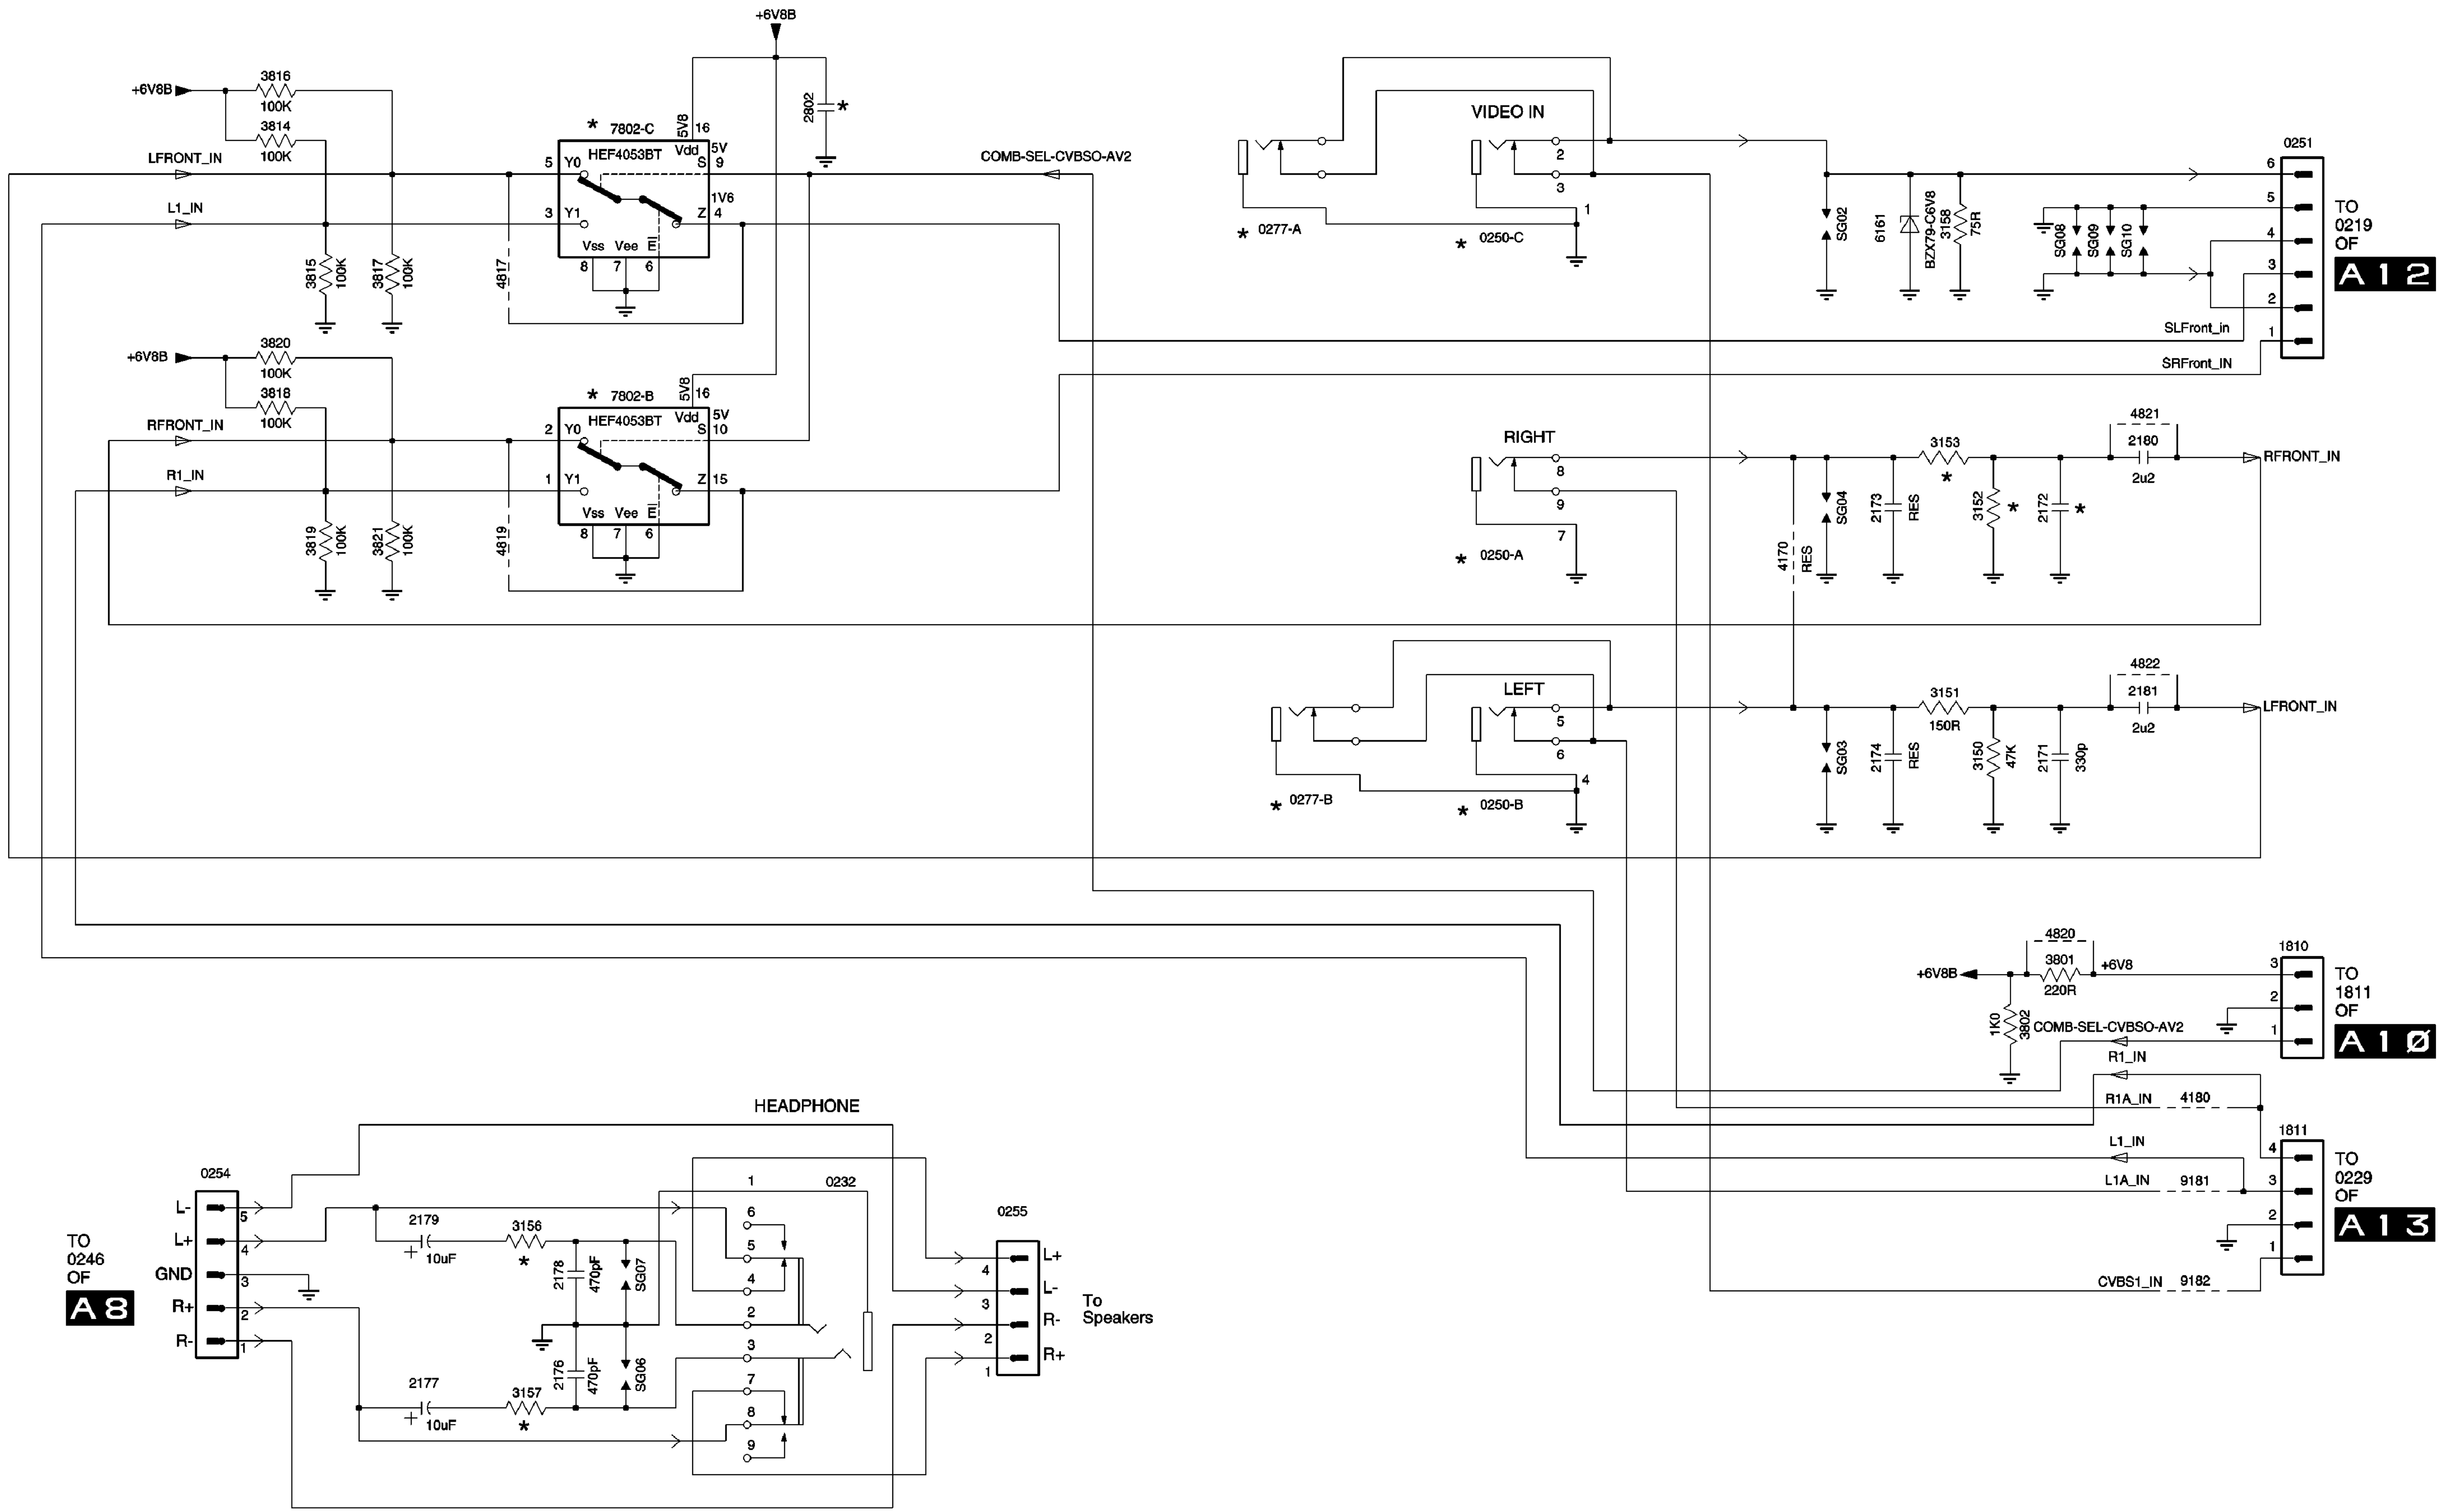


C2 SIDE AV PANEL + HP PANEL (WIDE)

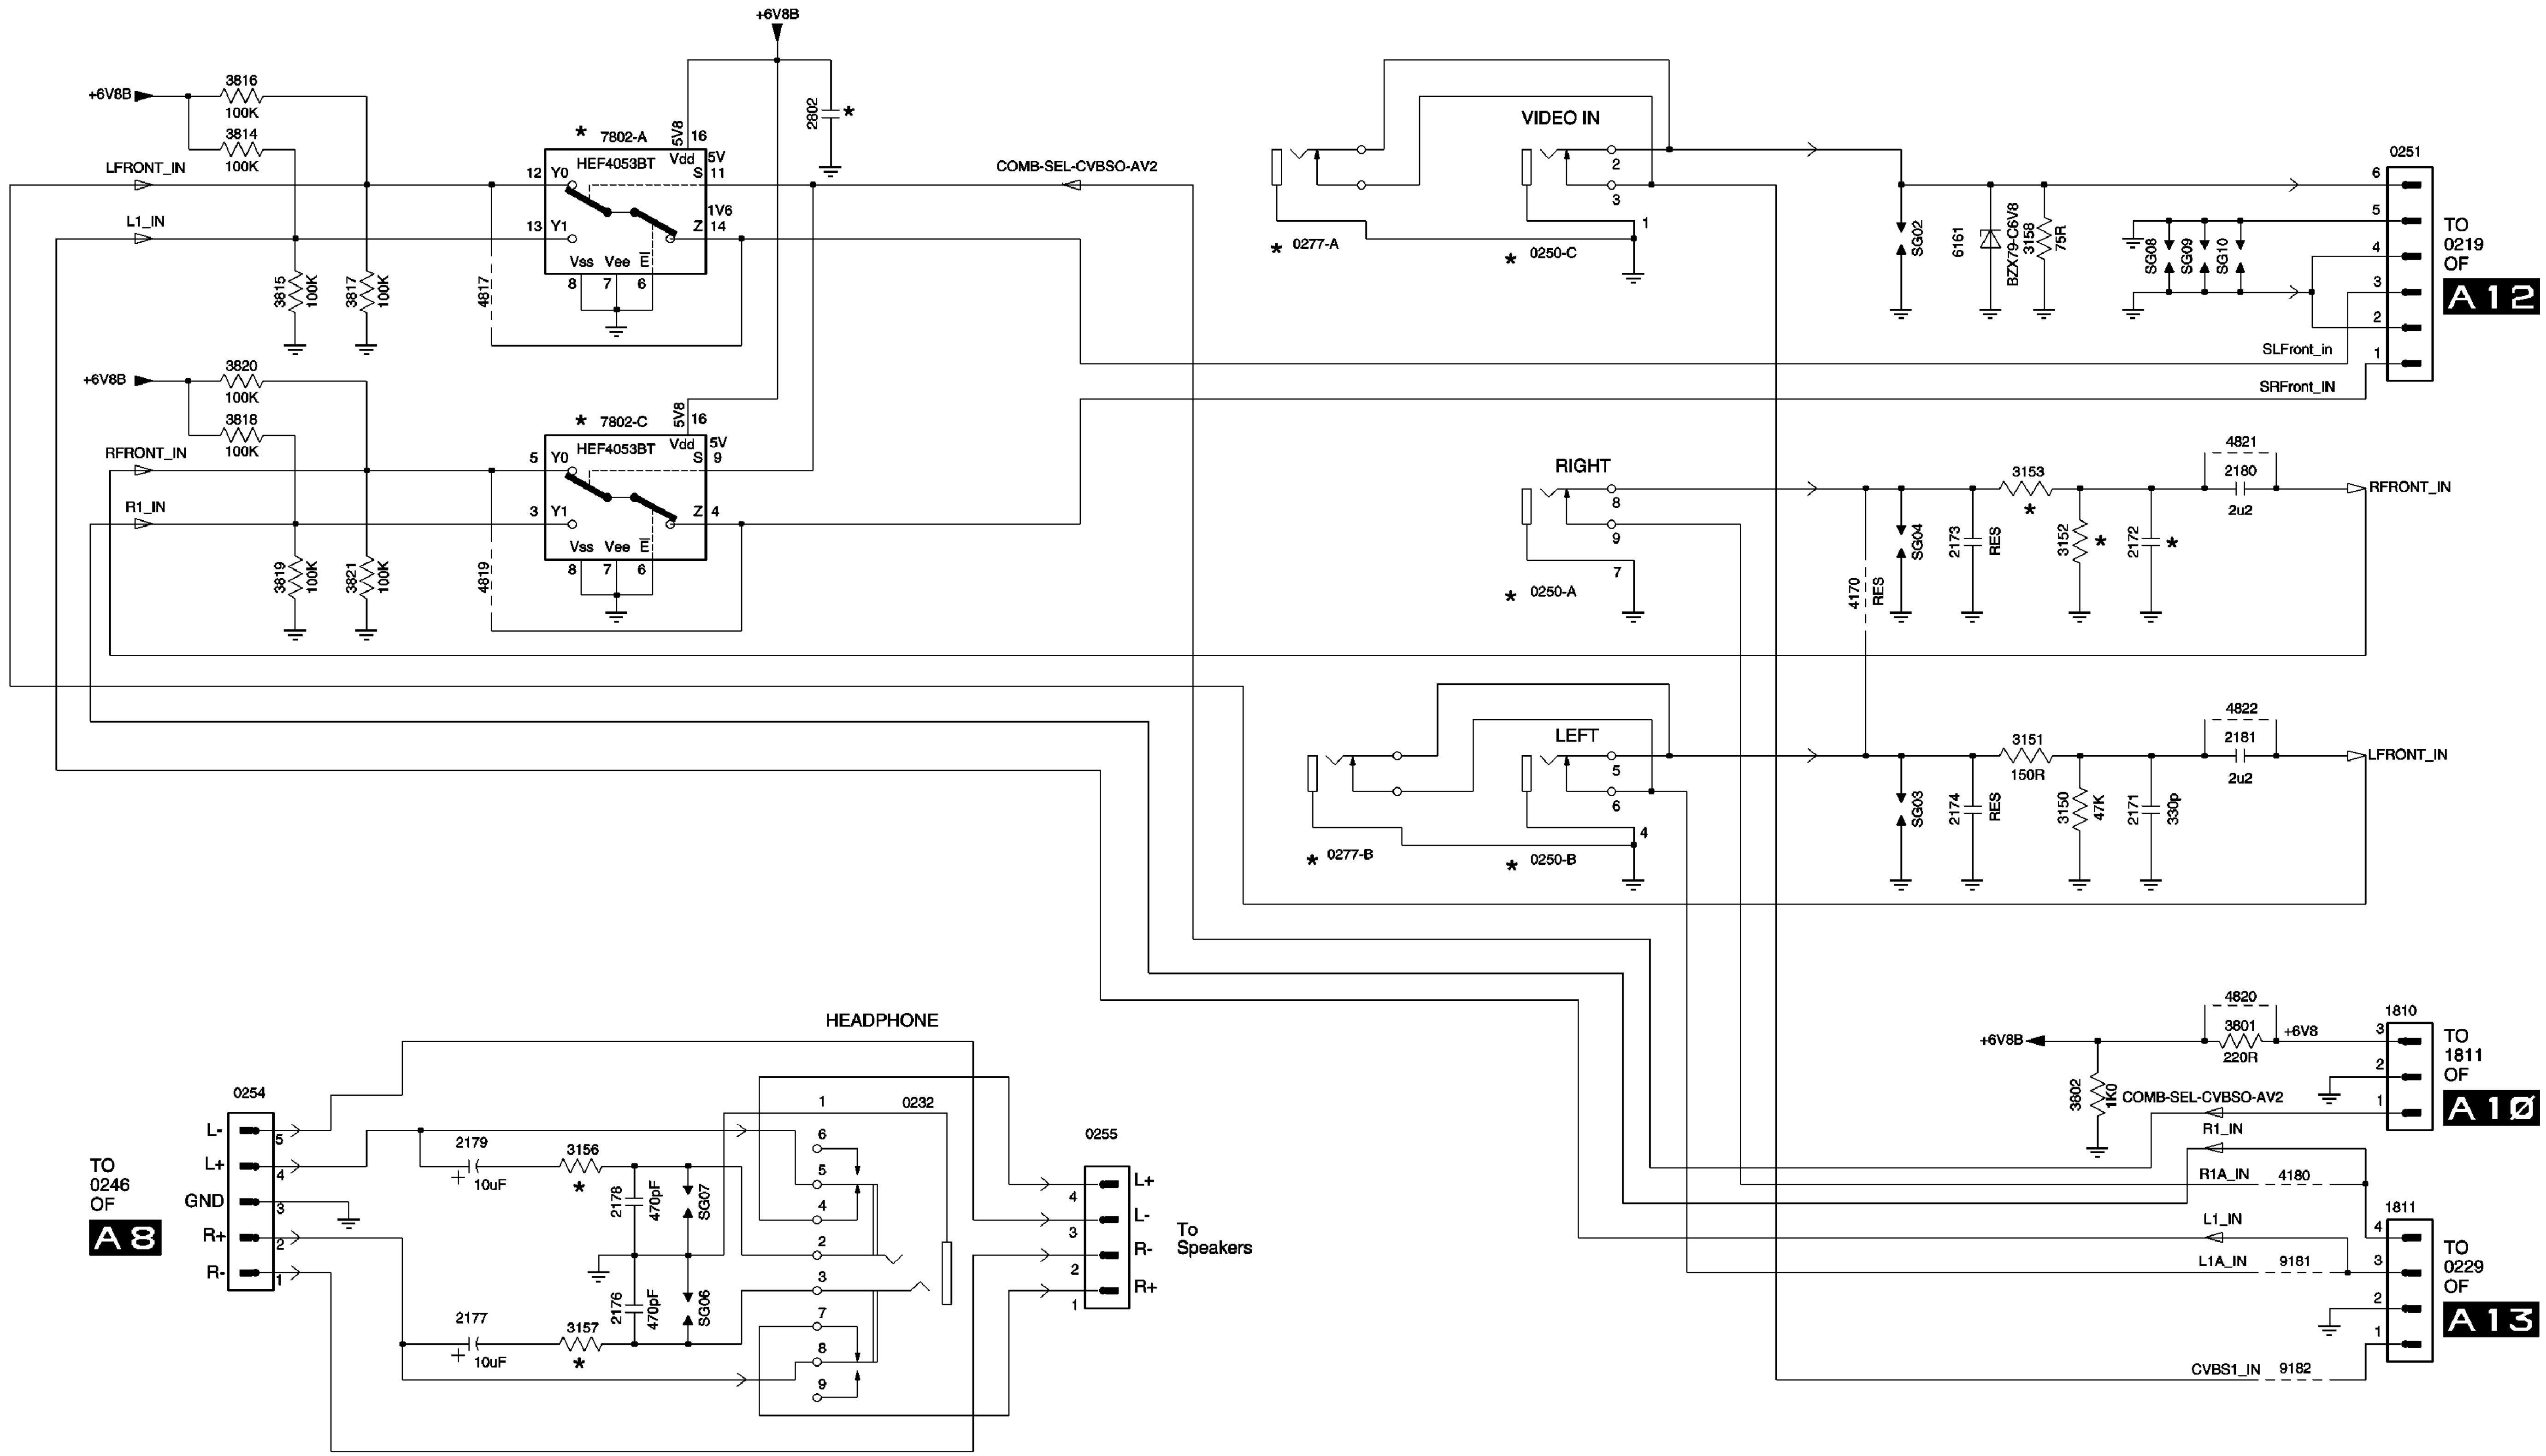


E TOP CONTROL PANEL

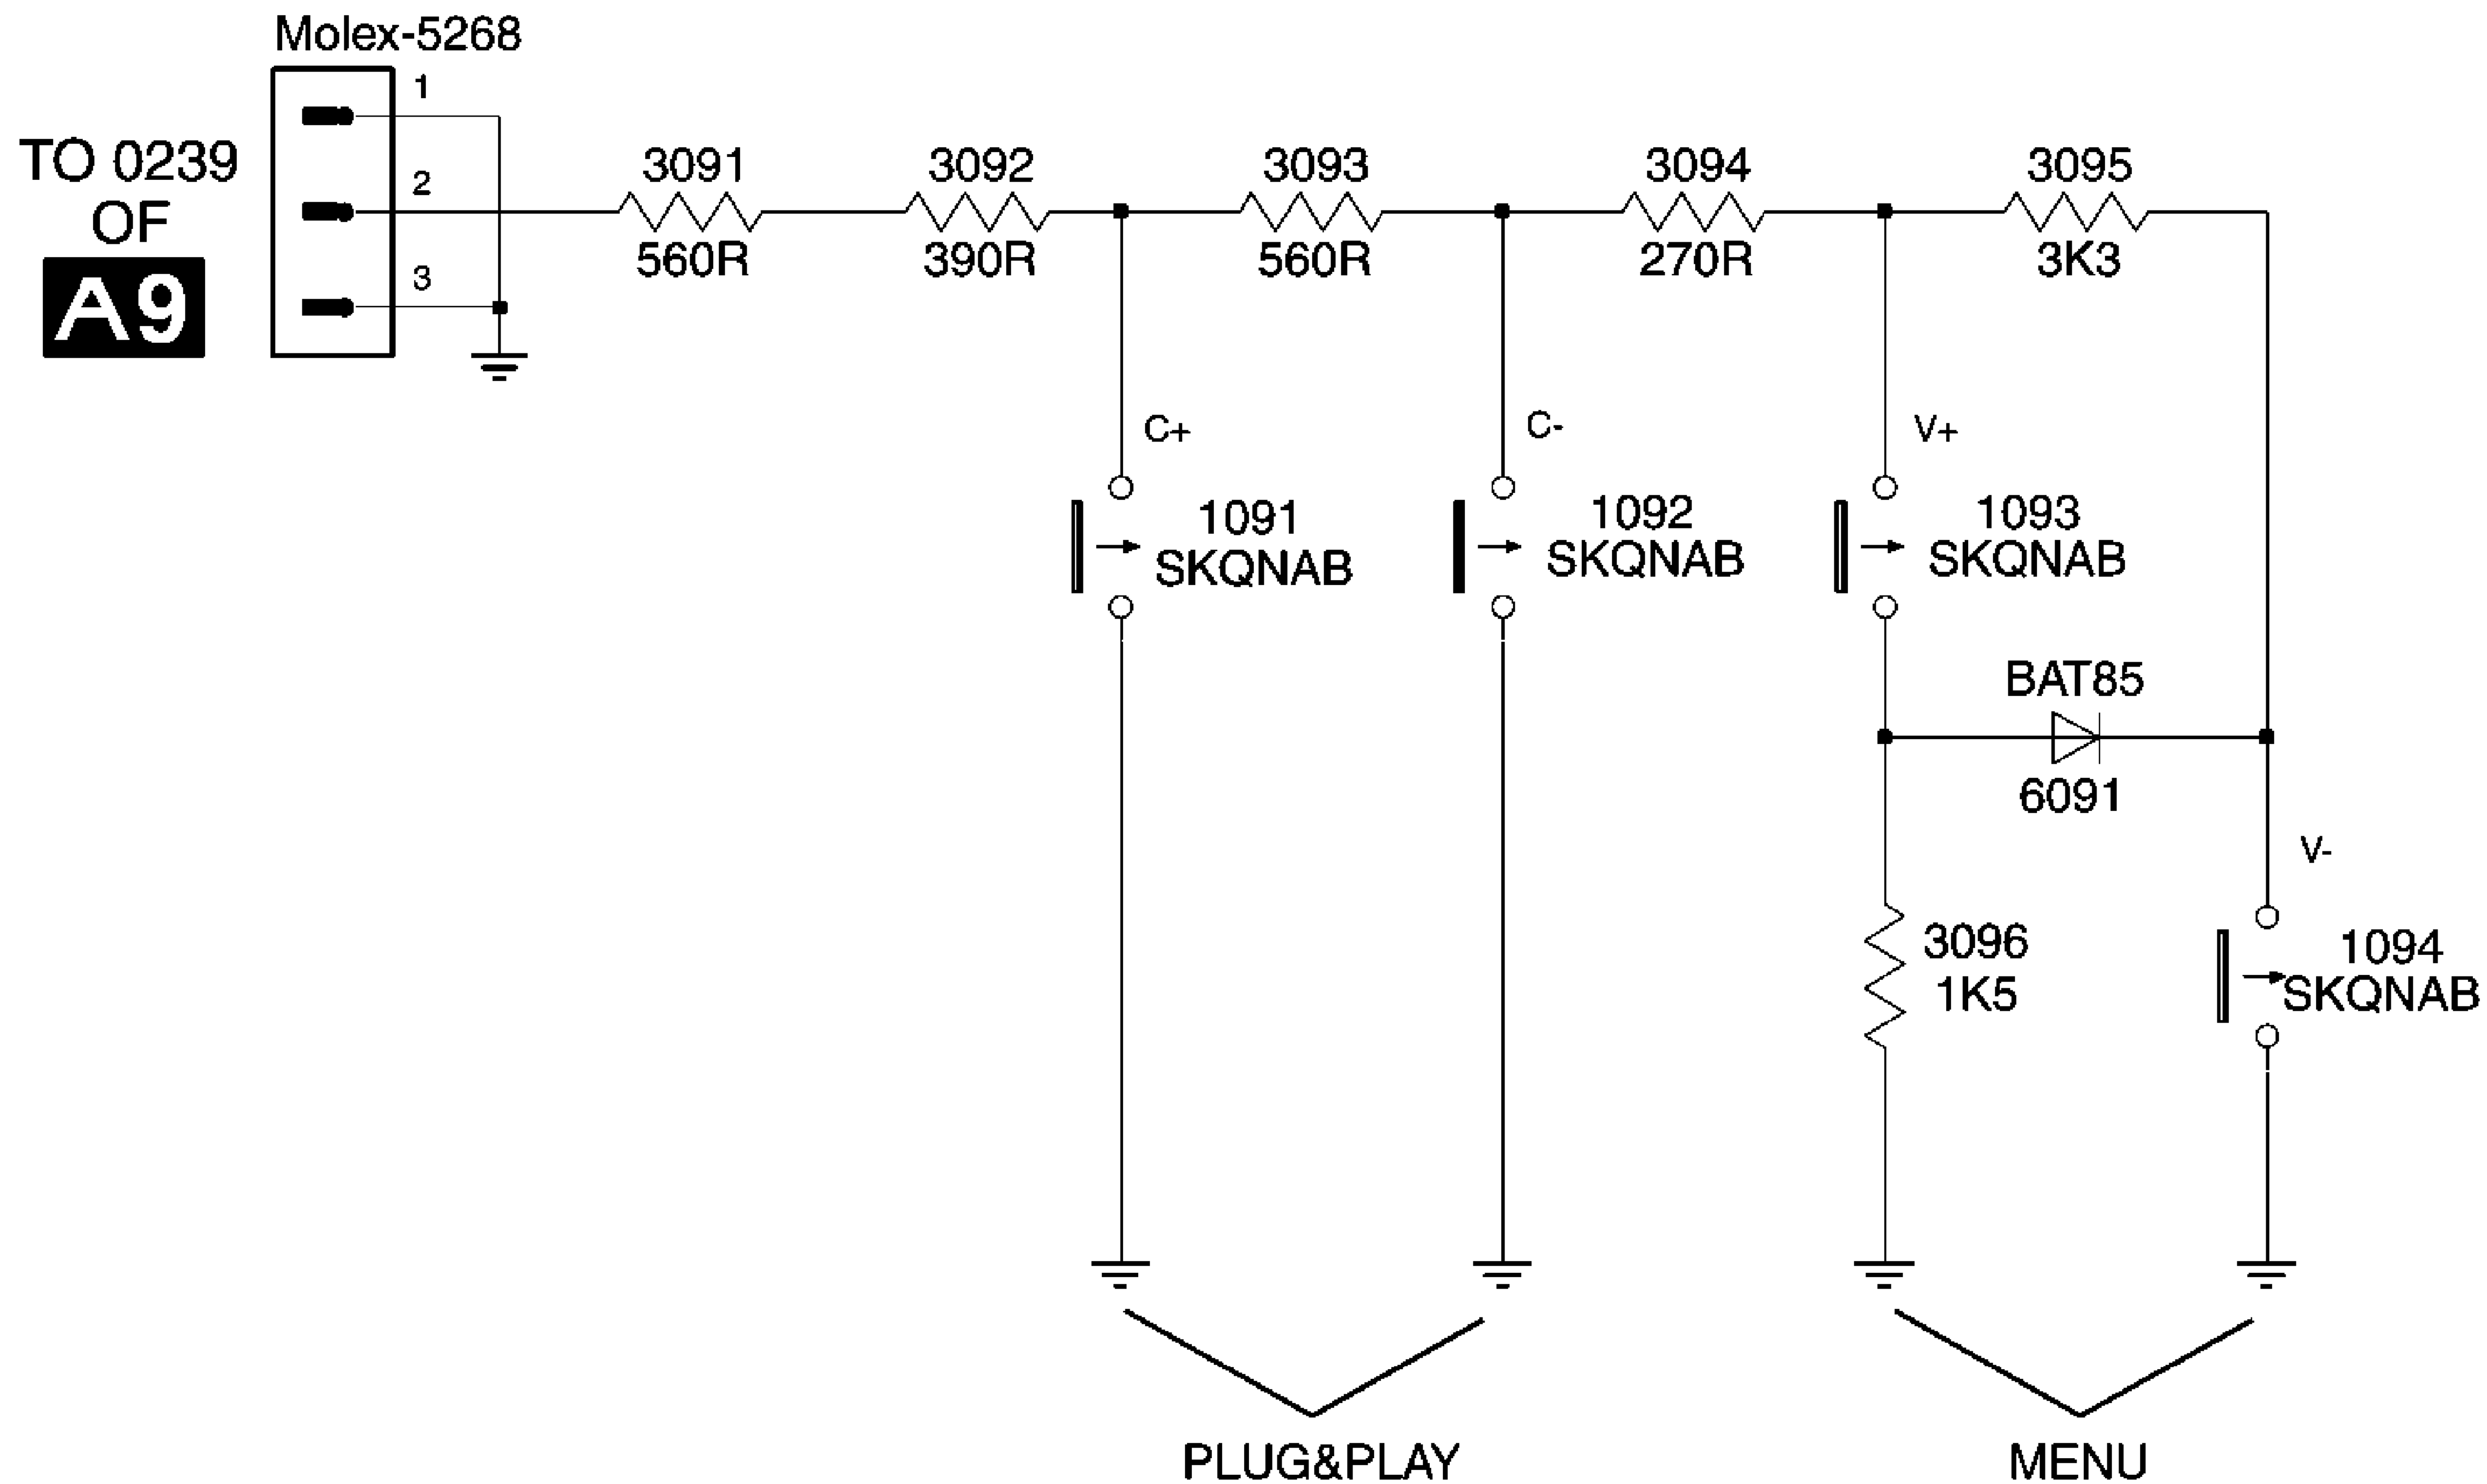


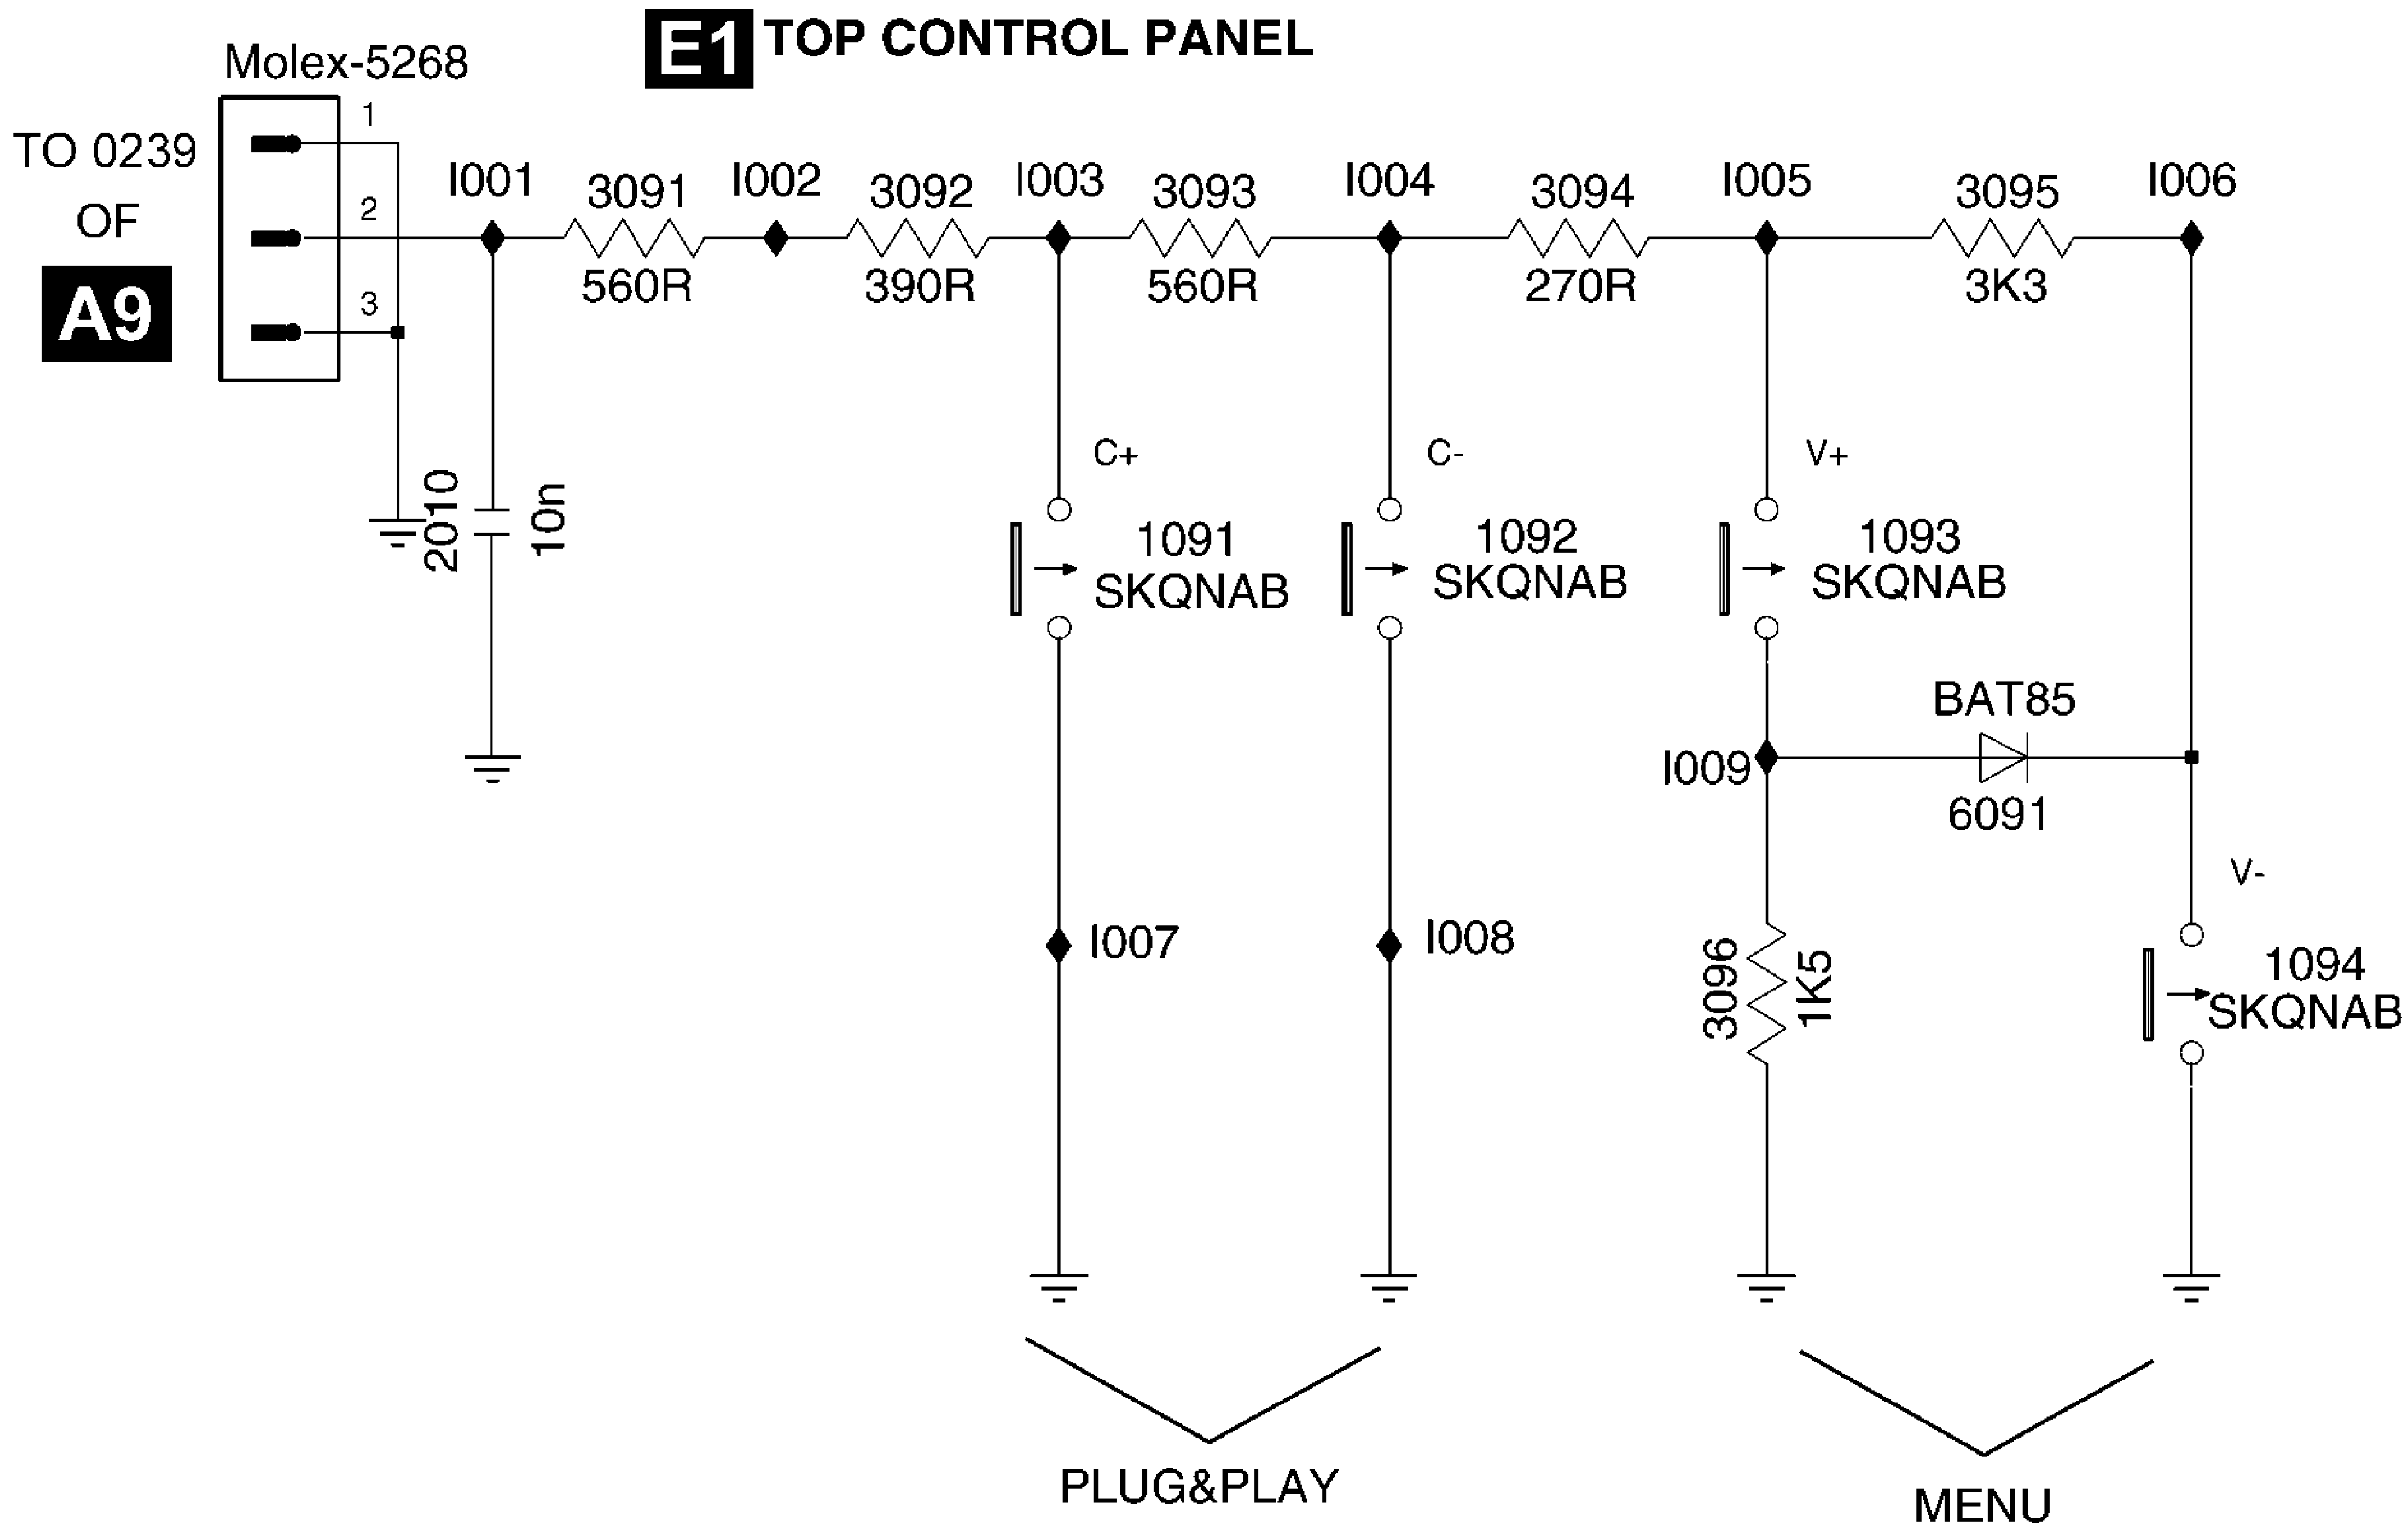
E1 TOP CONTROL PANEL
Molex-5268
TO 0239
OF
A9
1
2
3
I001
3091
560R
I002
3092
390R
I003
3093
560R
I004
3094
270R
I005
3095
3K3
I006
2010
10n
C+
1091
SKQNAB
C-
1092
SKQNAB
V+
1093
SKQNAB
BAT85
I009
6091
V-
1094
SKQNAB
I007
I008
3096
1K5
PLUG&PLAY
MENU


T TOP CONTROL PANEL

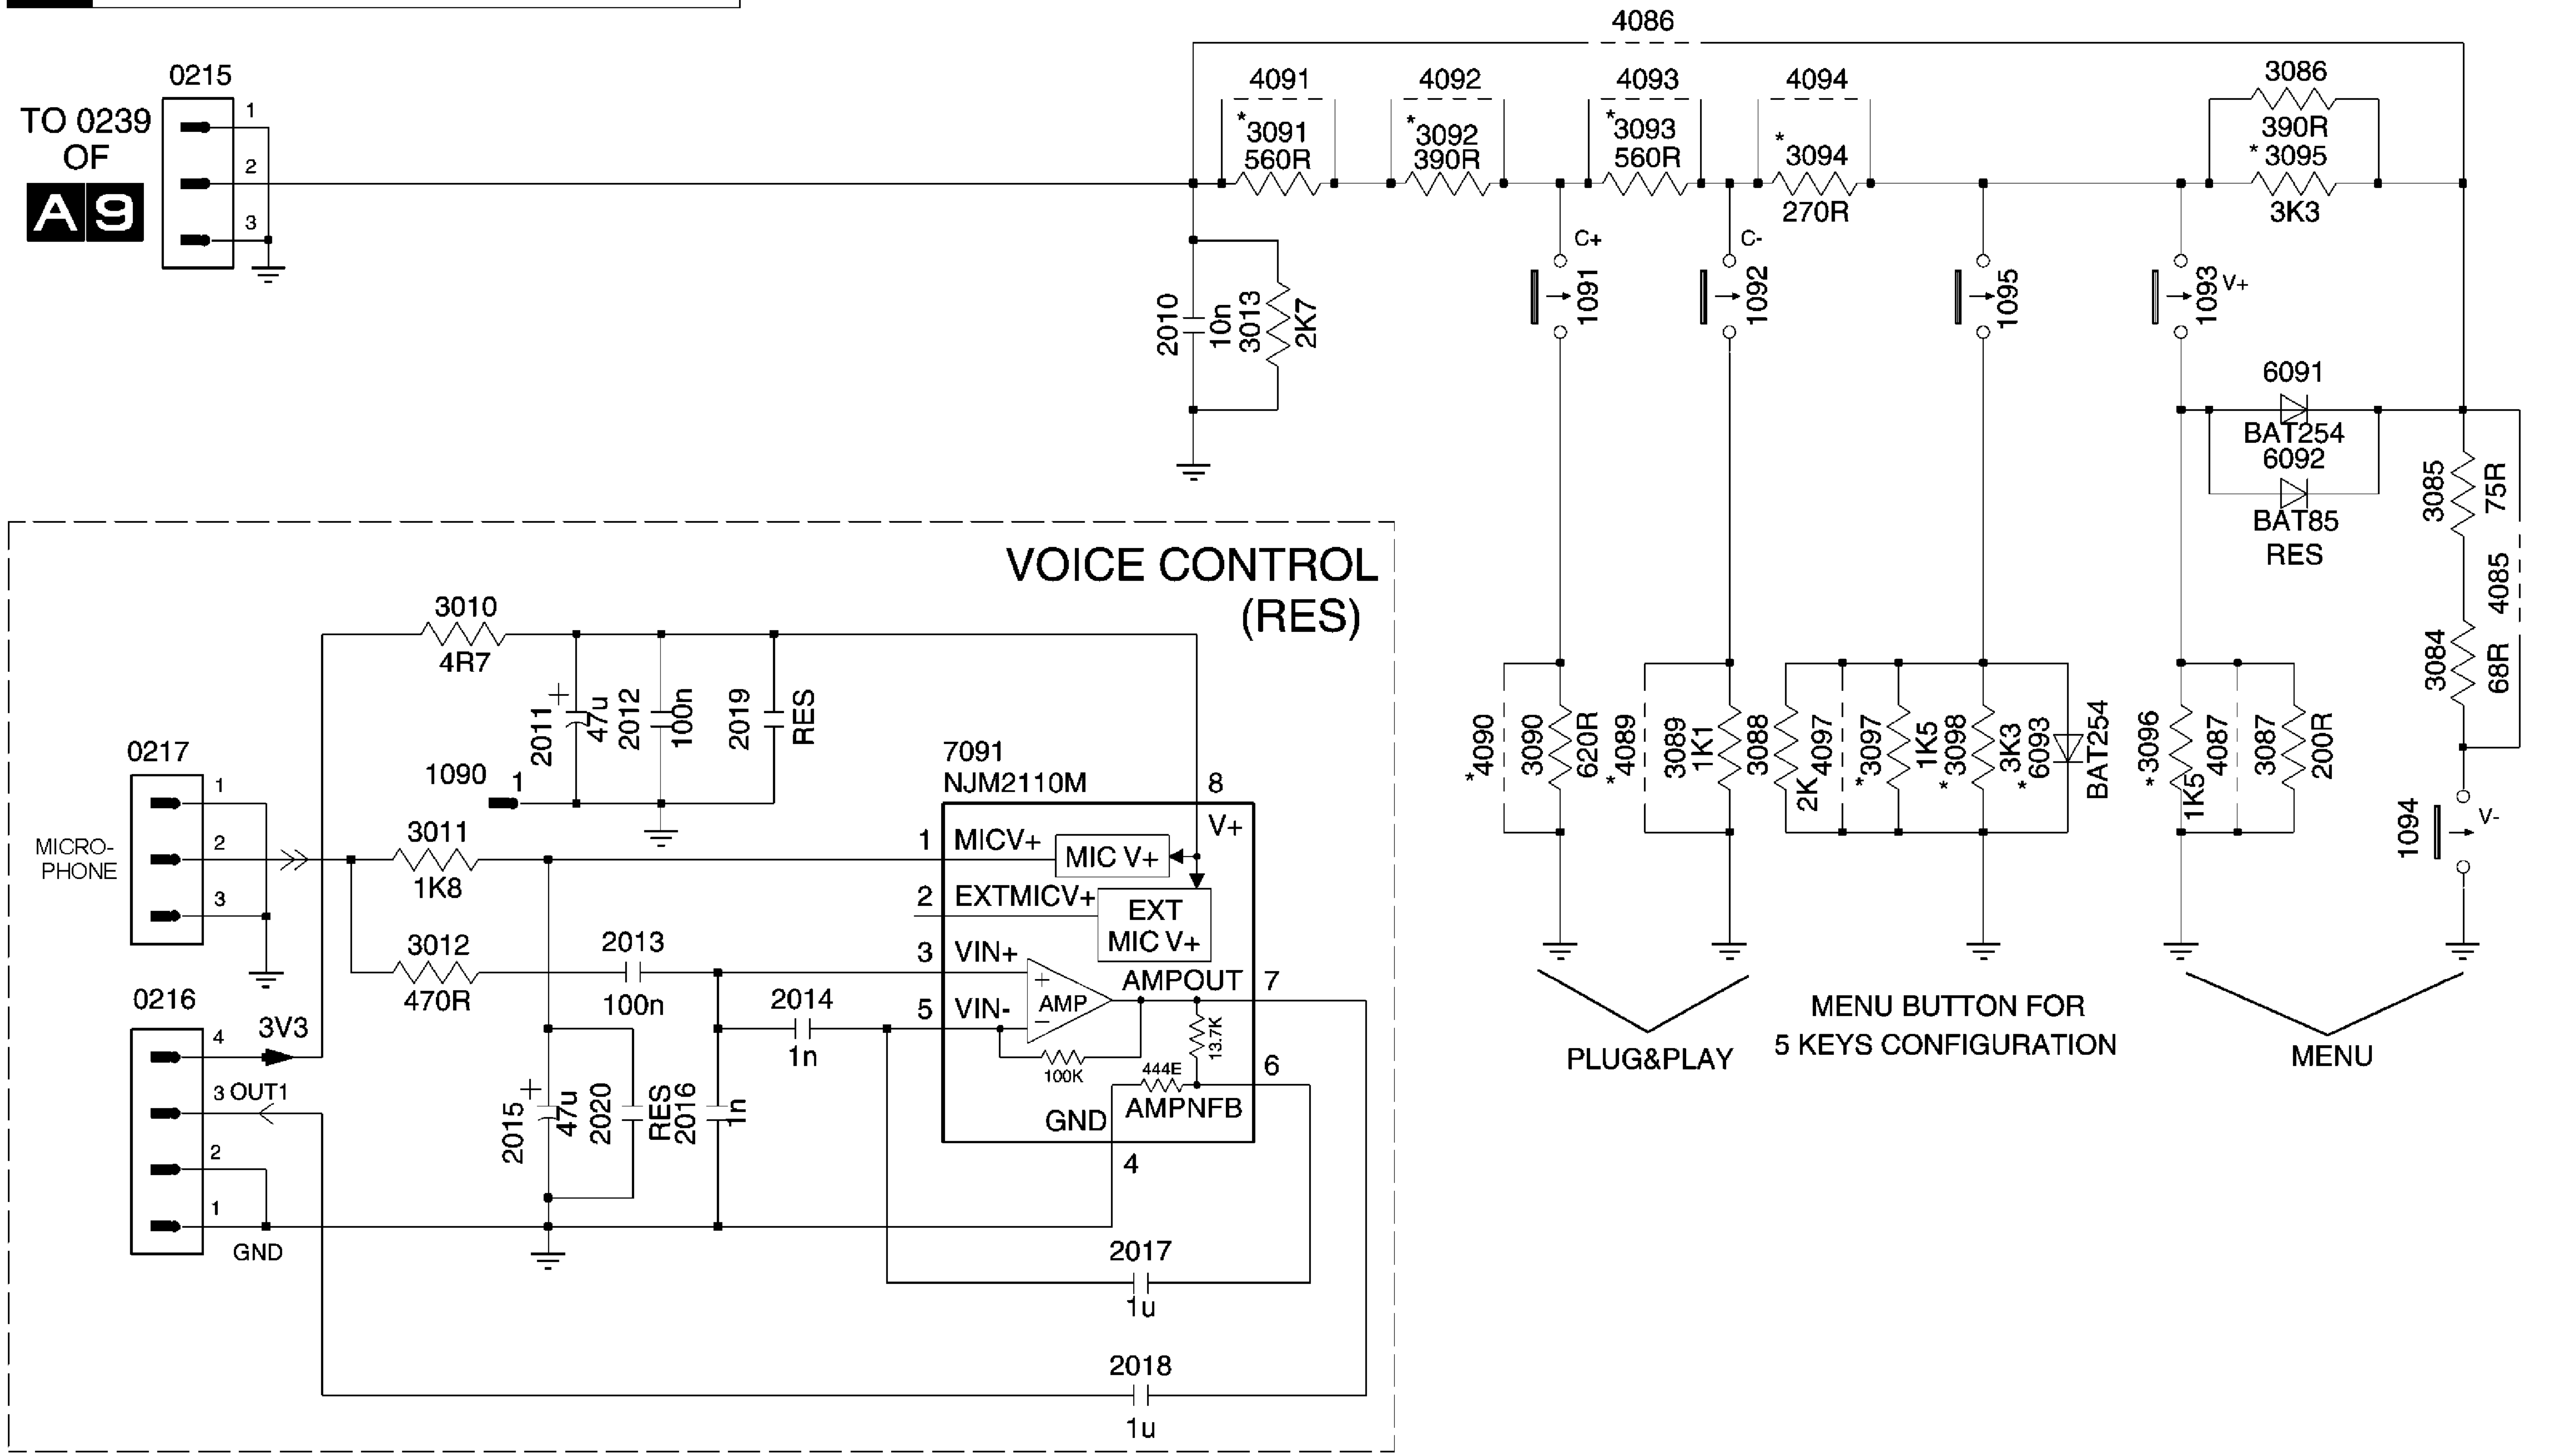


F 2D 3 LINE COMB FILTER

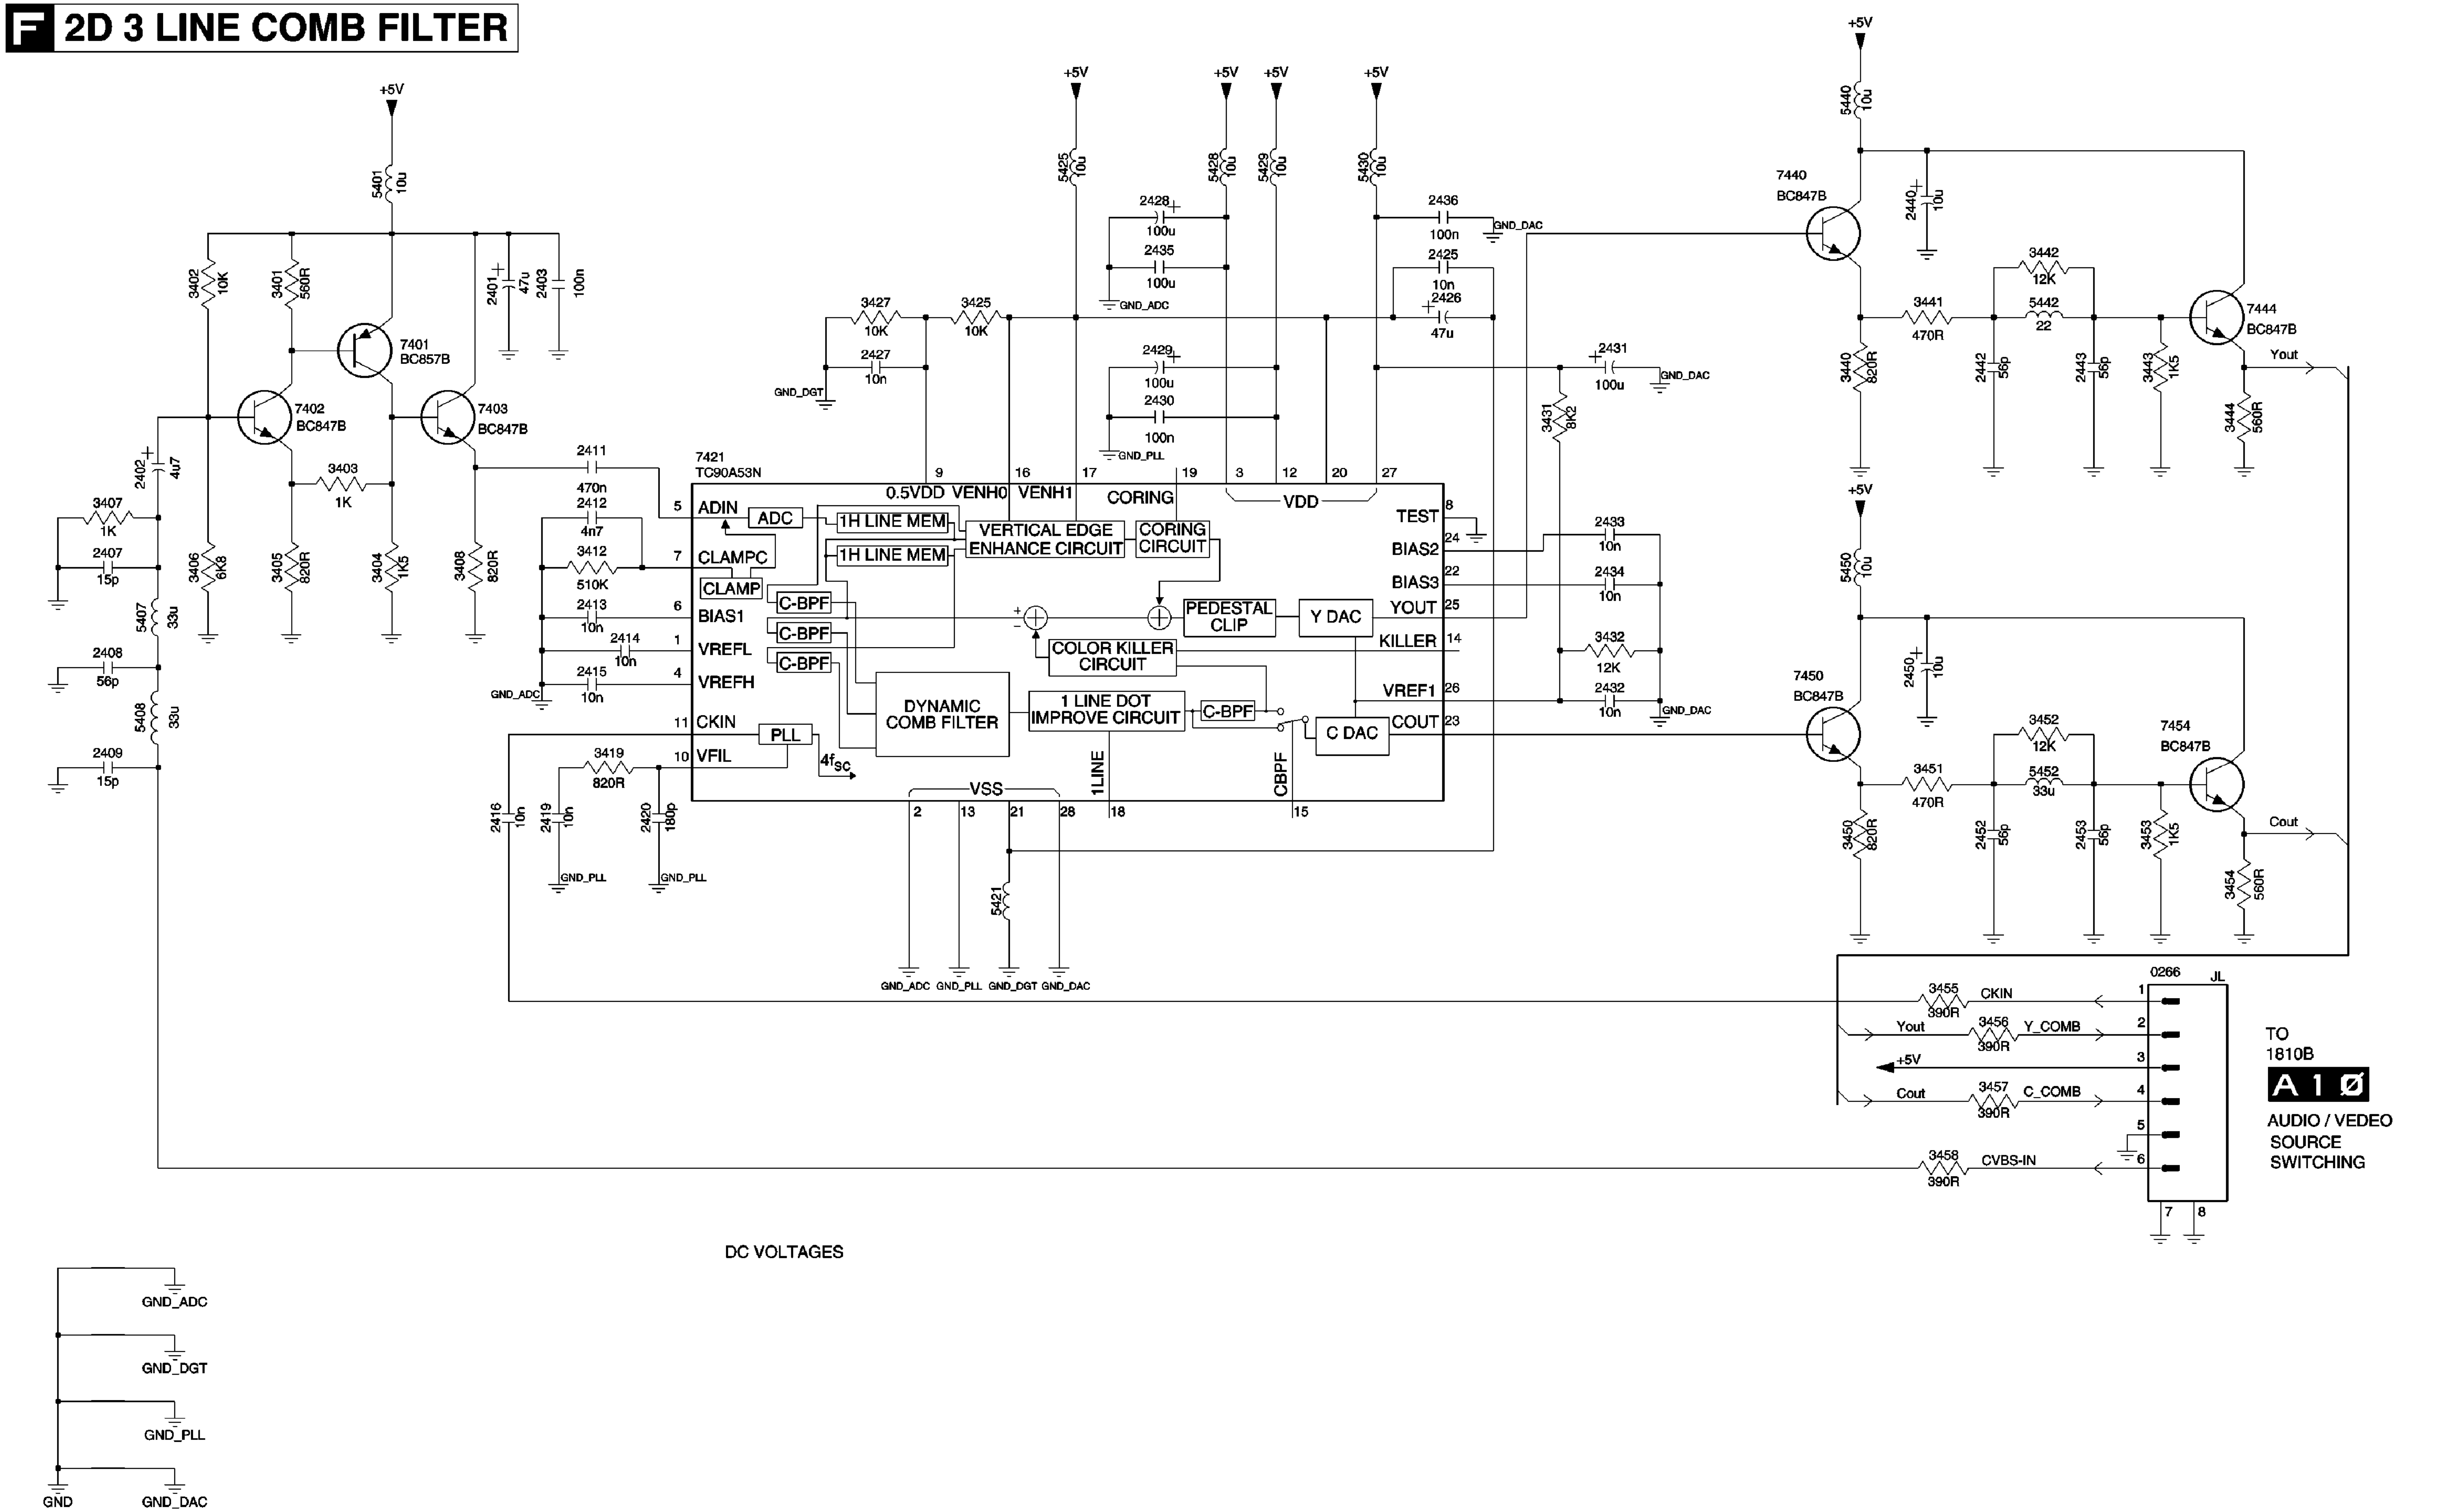


Q 1 FRONT INTERFACE PANEL

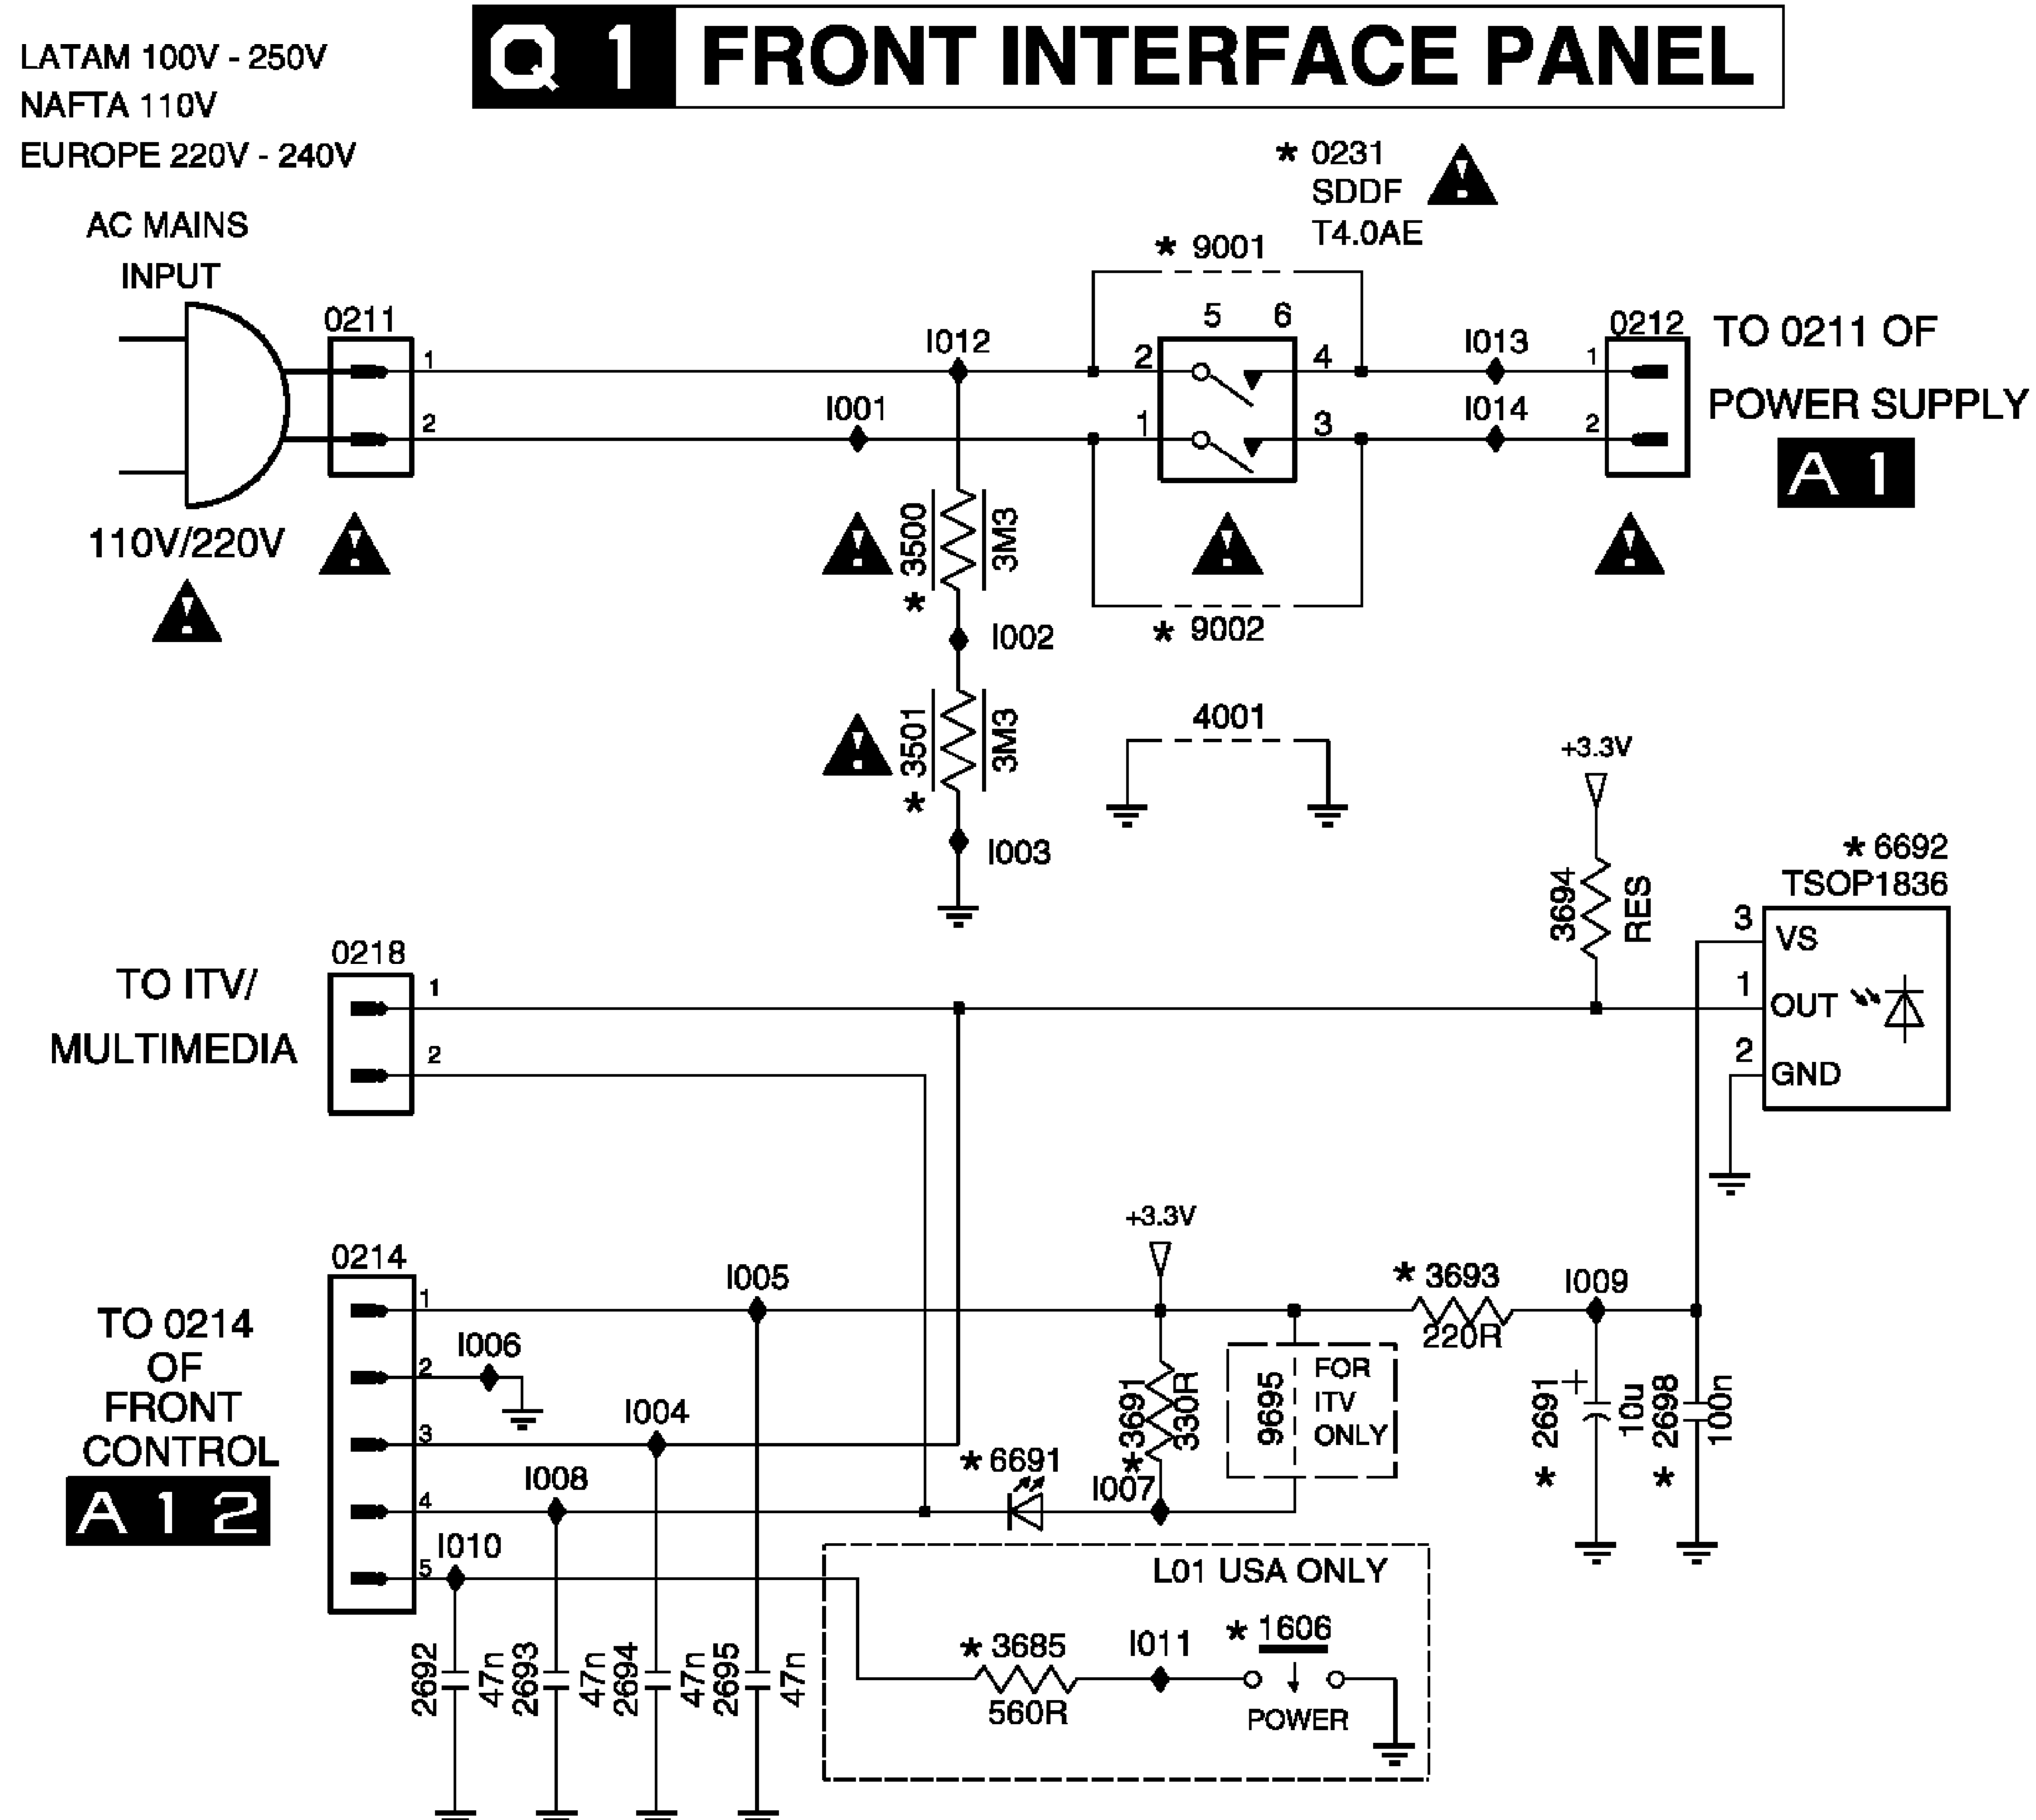


USED ONLY IN MODELS: 28PW6532/85R (7638) - [S] Matrix Surround Panel

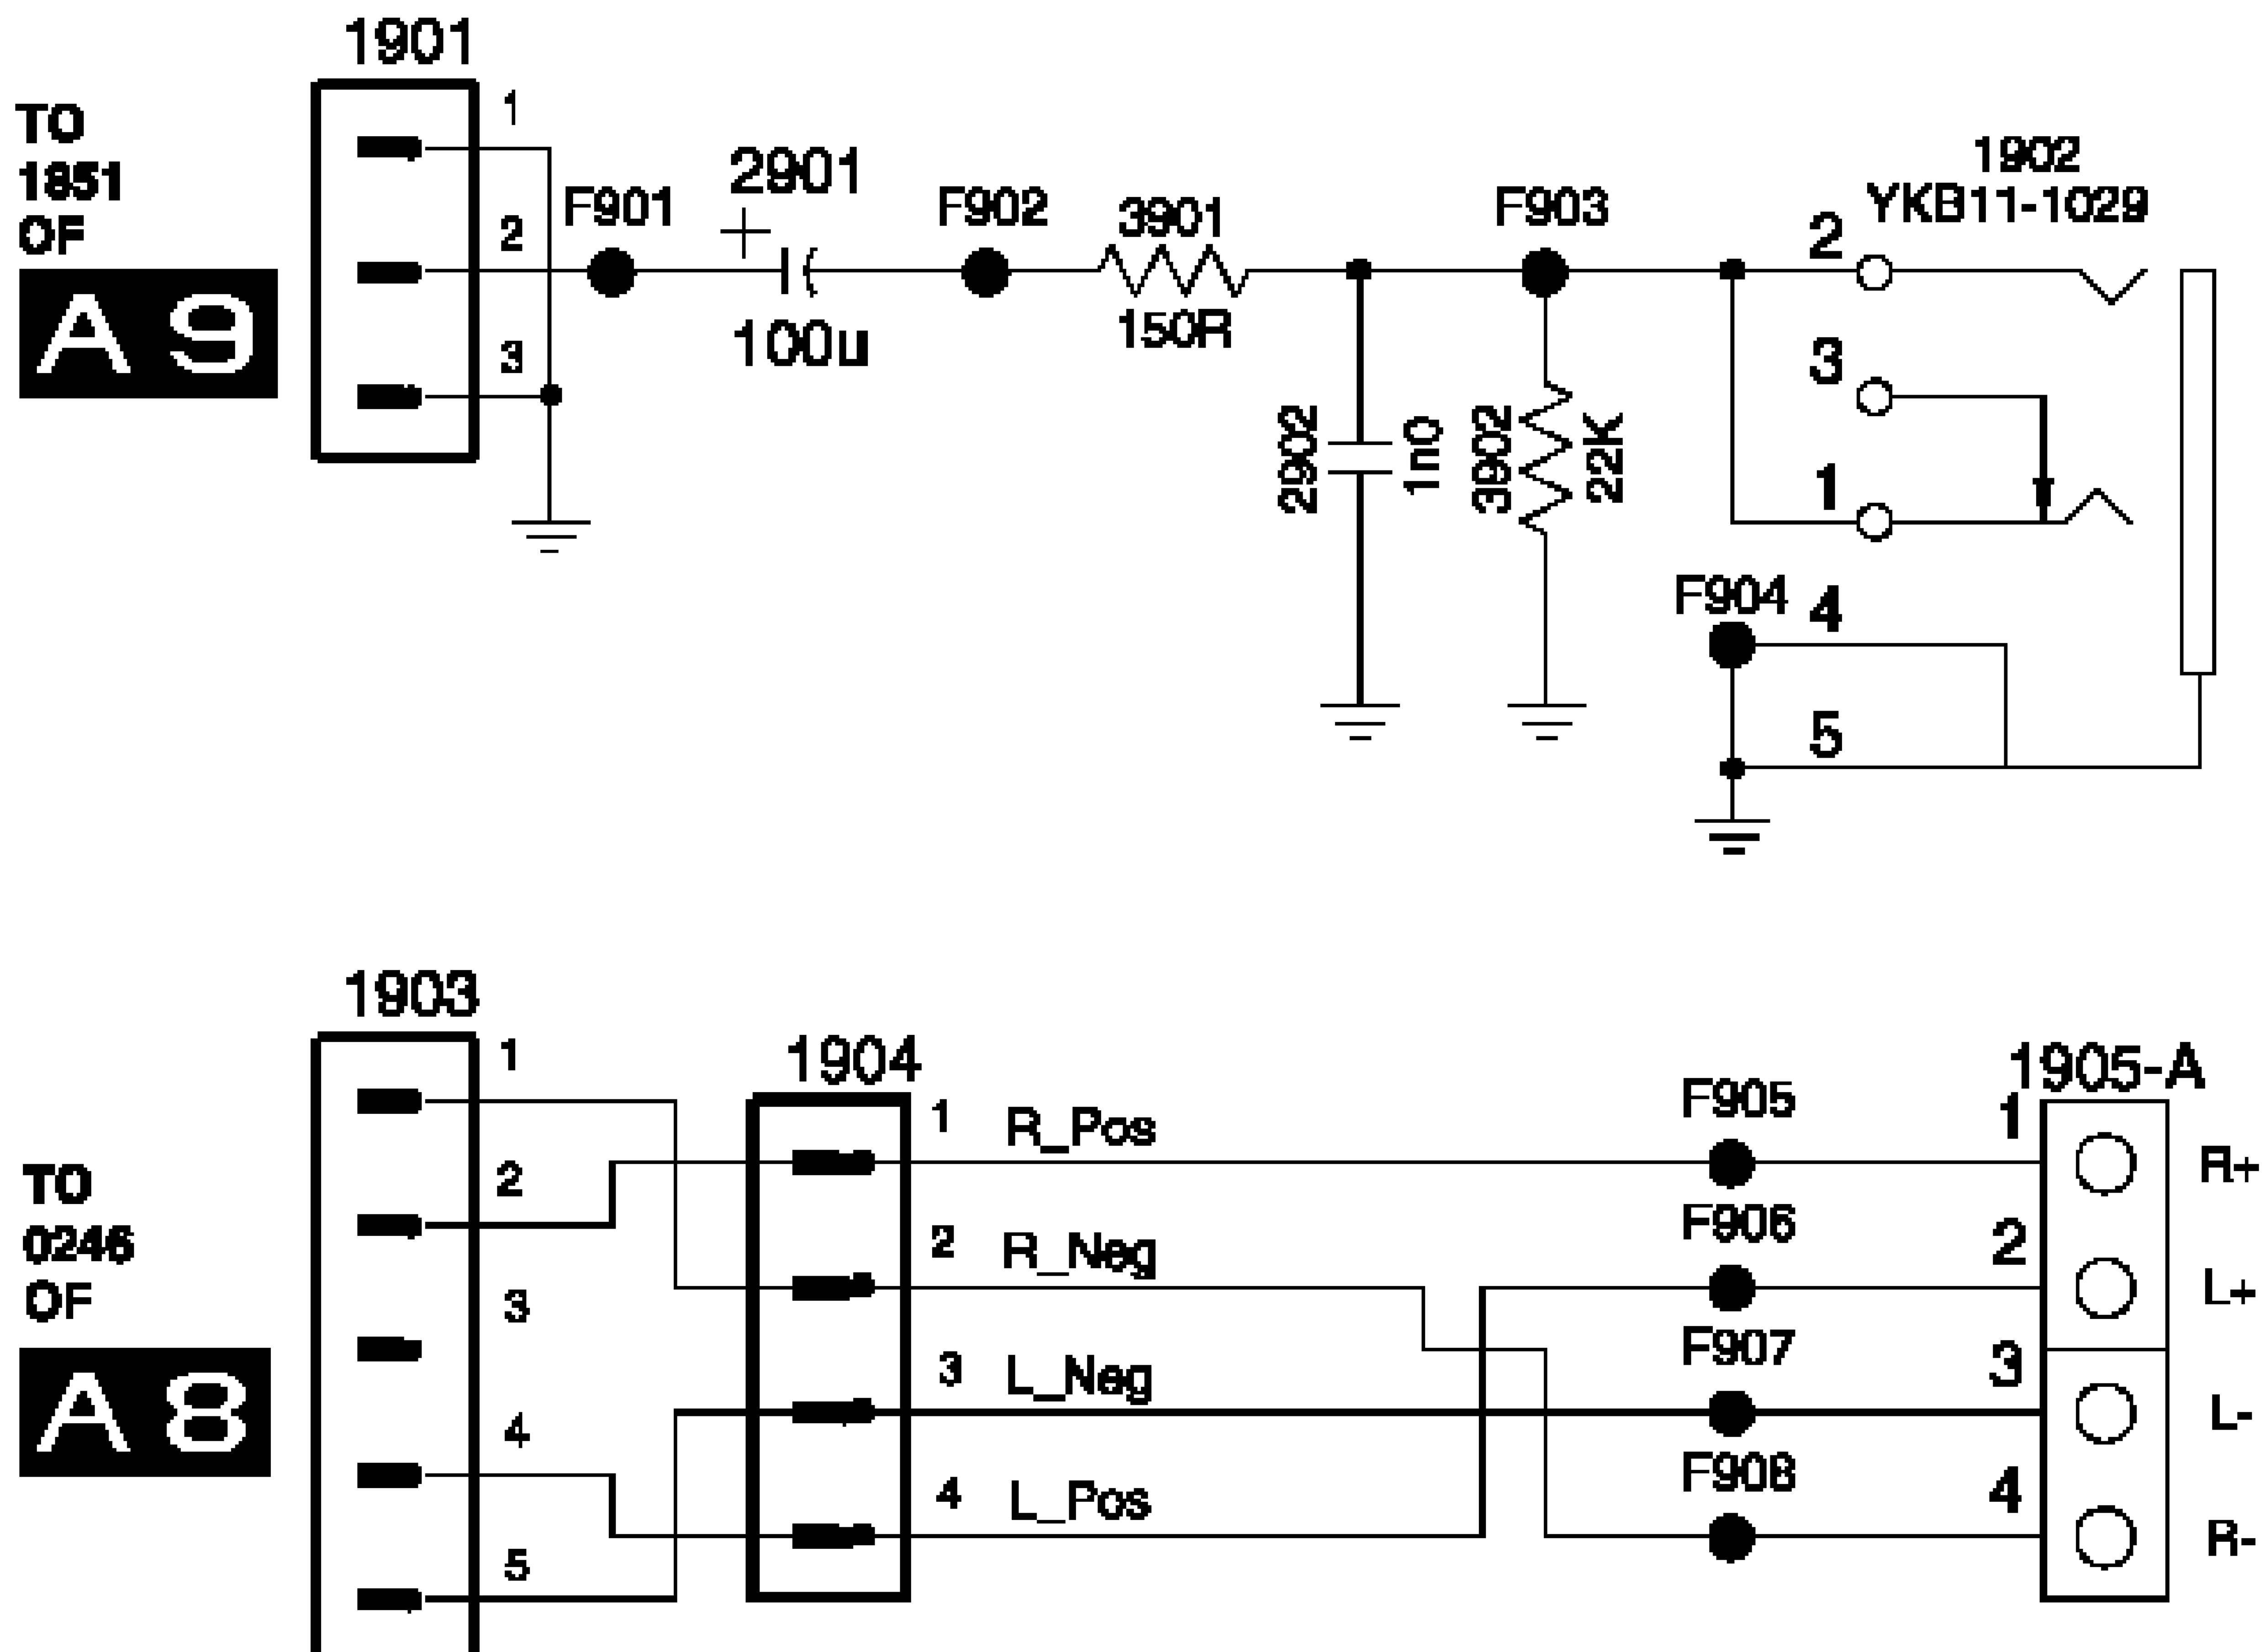


W DAF PANEL & INNER PIN CUSHION CORRECTION

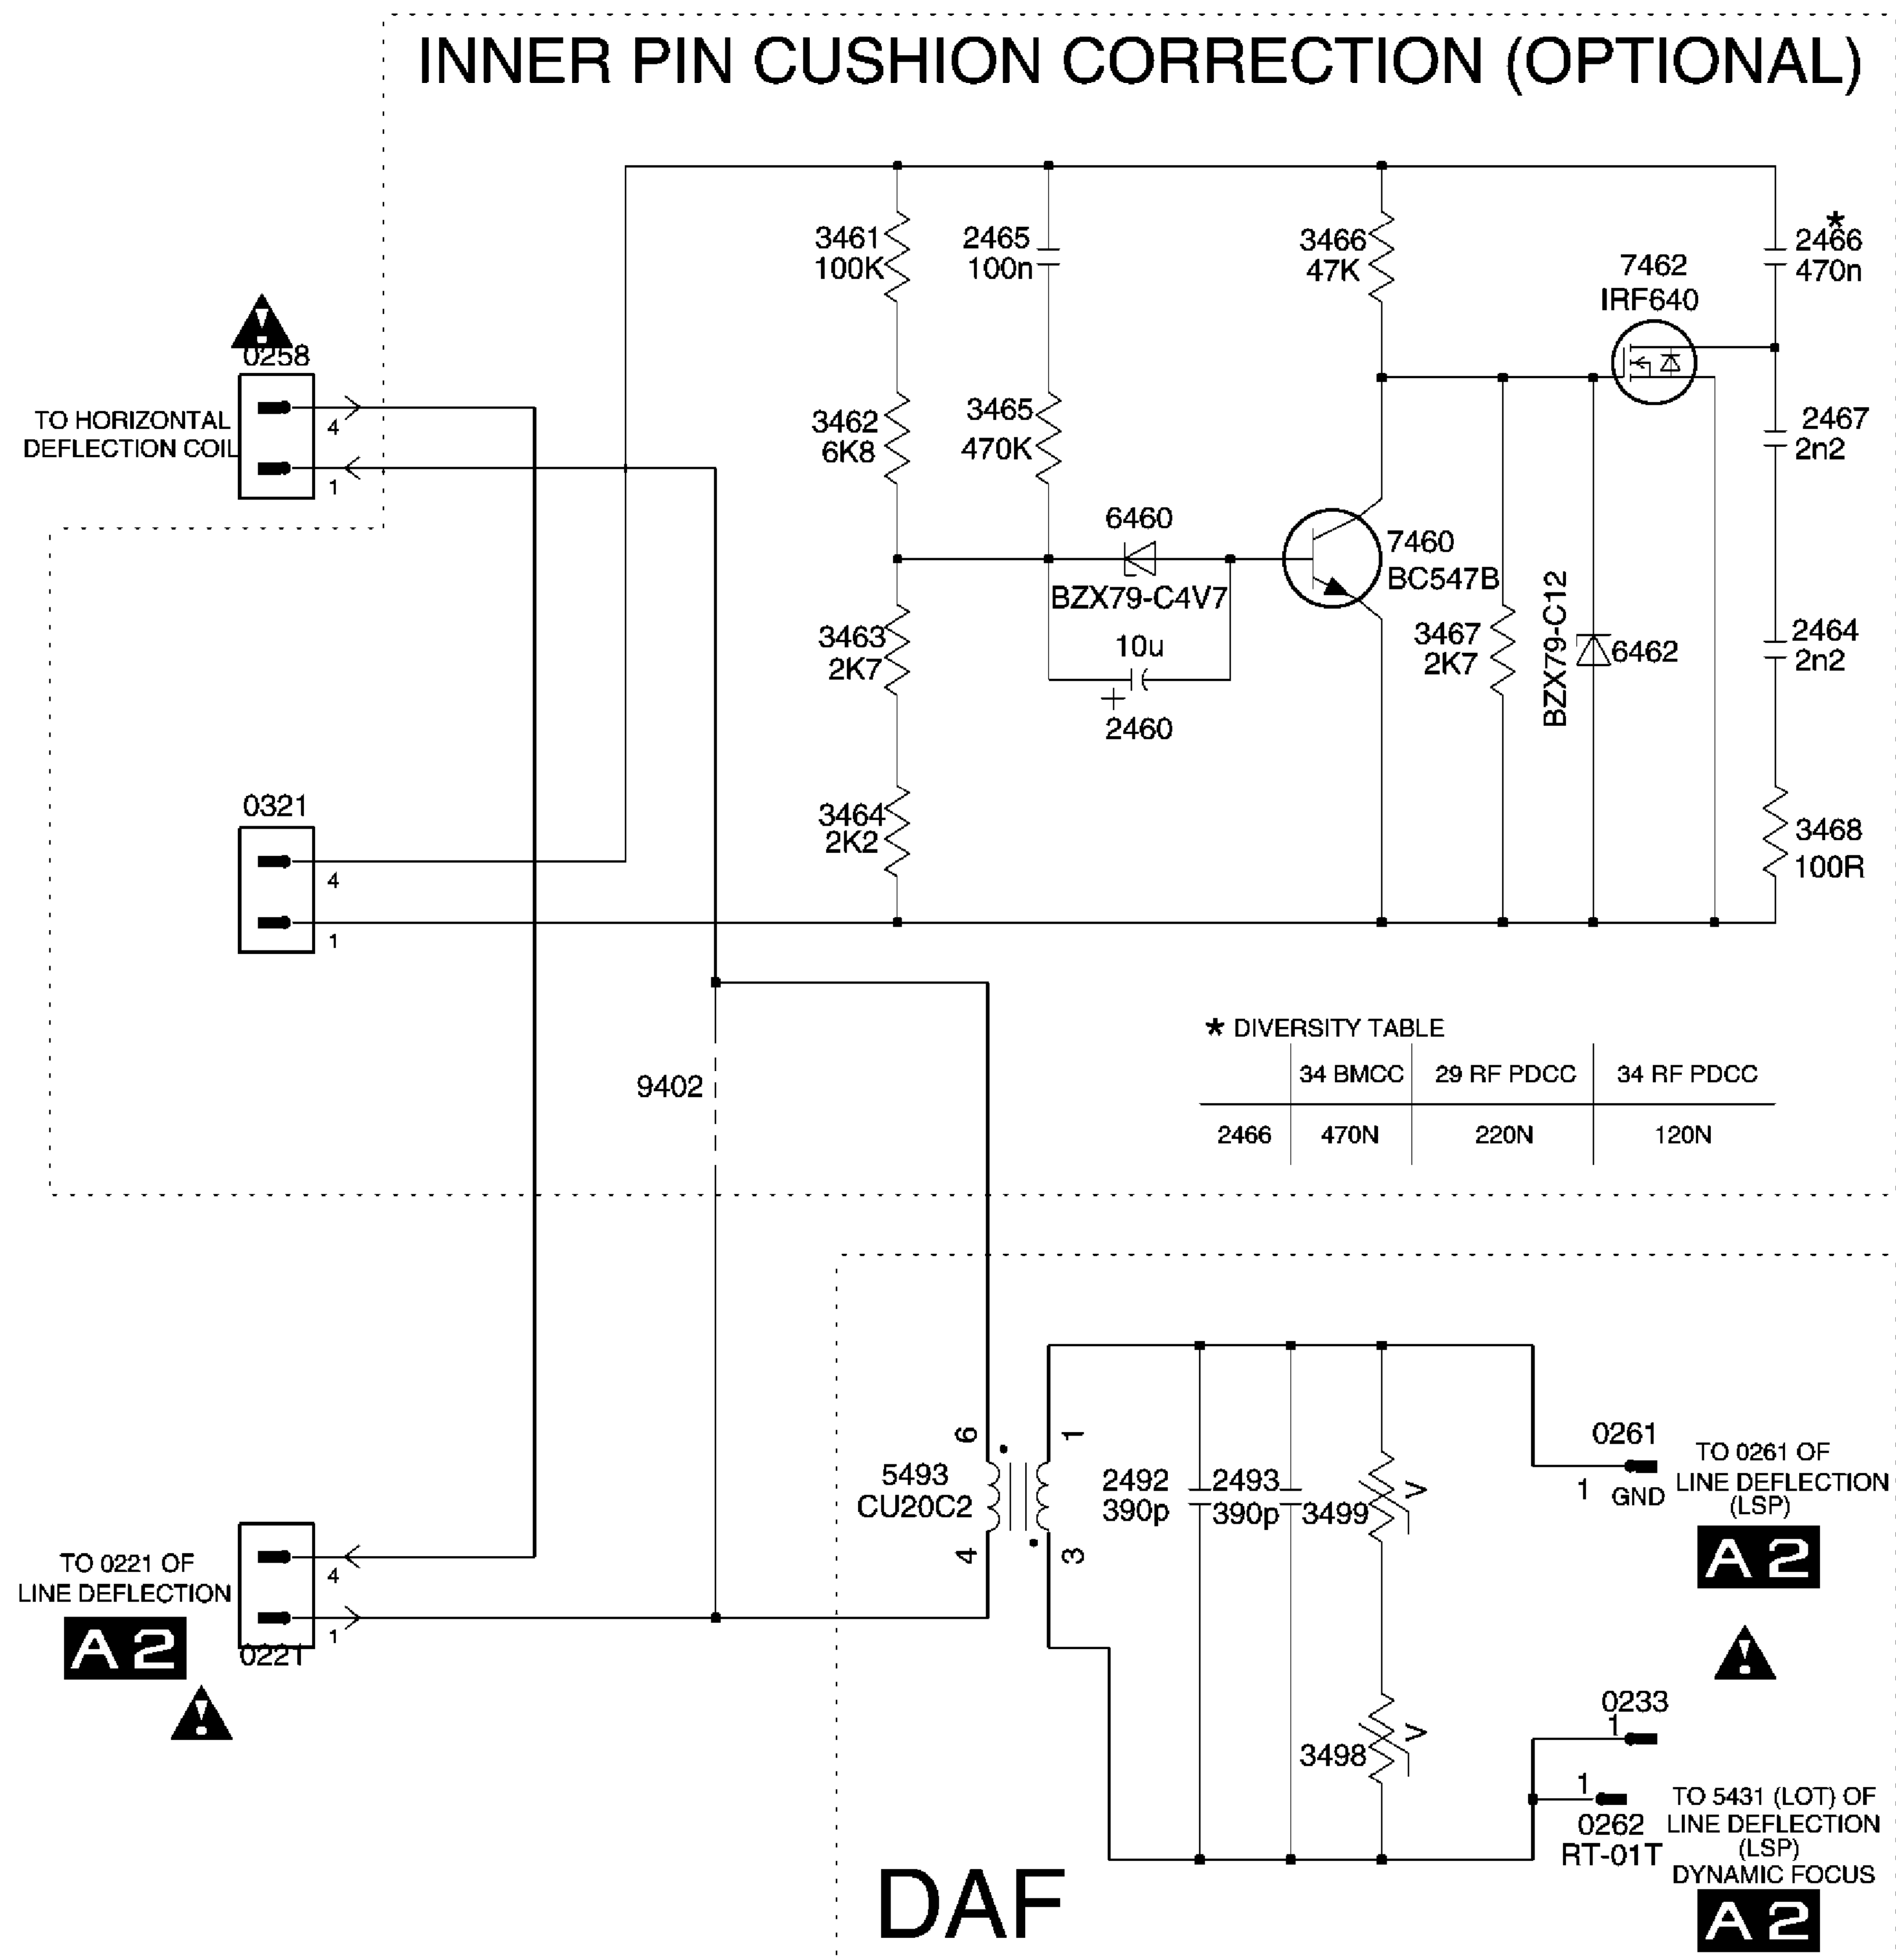


	34 BMCC	29 RF PDCC	34 RF PDCC
2466	470N	220N	120N

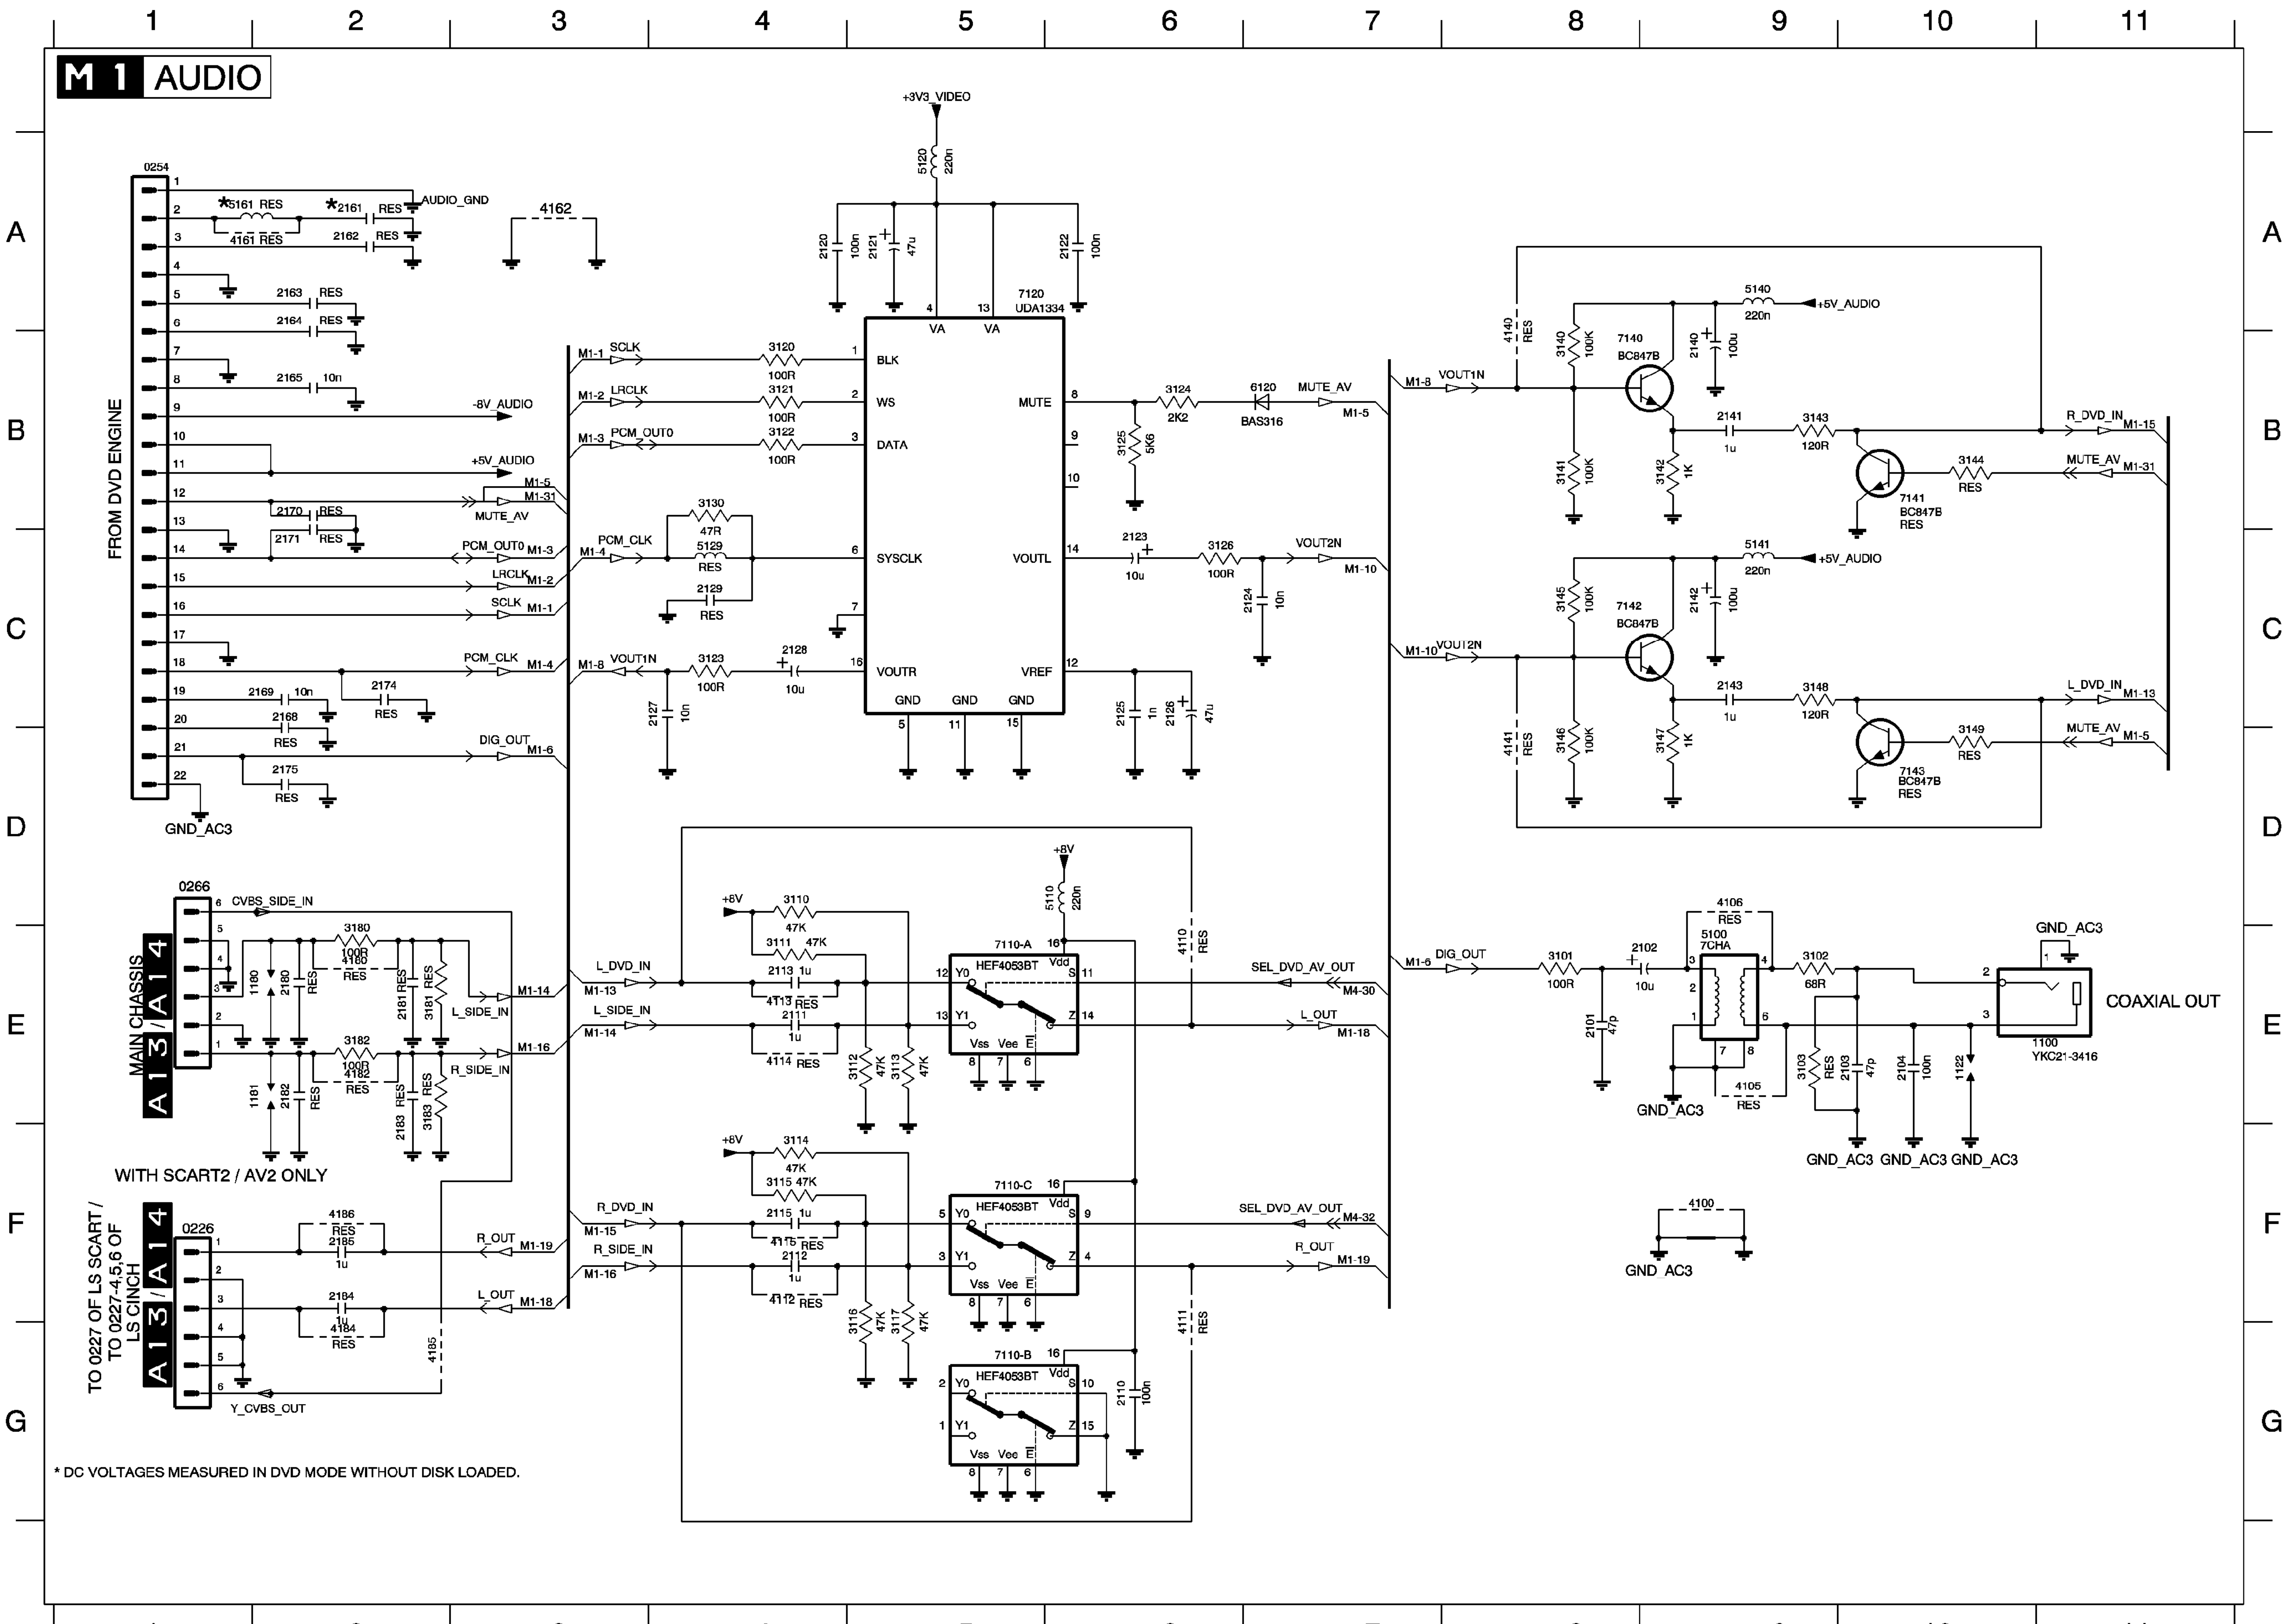


0226 F1
0254 A1
0266 D1
1100 E10
1122 E10
1180 E1
1181 E1
2101 E8
2102 E9
2103 E10
2104 E10
2110 G6
2111 E4
2112 F4
2113 E4
2115 F4
2120 A4
2121 A5
2122 A6
2123 C6
2124 C7
2125 C6
2126 C6
2127 C4
2128 C4
2129 C4
2140 B9
2141 B9
2142 C9
2143 C9
2161 A2
2162 A2
2163 A2
2164 A2
2165 B2
2168 C2
2169 C2
2170 B2
2171 C2
2174 C2
2175 D2
2180 E2
2181 E2
2182 E2
2183 F2
2184 F2
2185 F2
3101 E8
3102 E9
3103 E9
3110 D4
3111 E4
3112 E5
3113 E5
3114 F4
3115 F4
3116 F5
3117 F5
3120 B4
3121 B4
3122 B4
3123 C4
3124 B6
3125 B6
3126 C6
3130 B4
3140 B8
3141 B8
3142 B9
3143 B9
3144 B10
3145 C8
3146 D8
3147 D9
3148 C9
3149 D10
3180 E2
3181 E2
3182 E2
3183 E2
4100 F9
4105 E9
4106 D9
4110 E6
4111 F6
4112 F4
4113 E4
4114 E4
4115 F4
4140 A8
4141 D8
4161 A1
4162 A3
4180 E2
4182 E2
4184 G2
4185 G2
4186 F2
5100 E9
5110 D6
5120 A5
5129 C4
5140 A9
5141 C9
5161 A1
6120 B7
7110-A E5
7110-B G5
7110-C F5
7120 A5
7140 B8
7141 B10
7142 C8
7143 D10

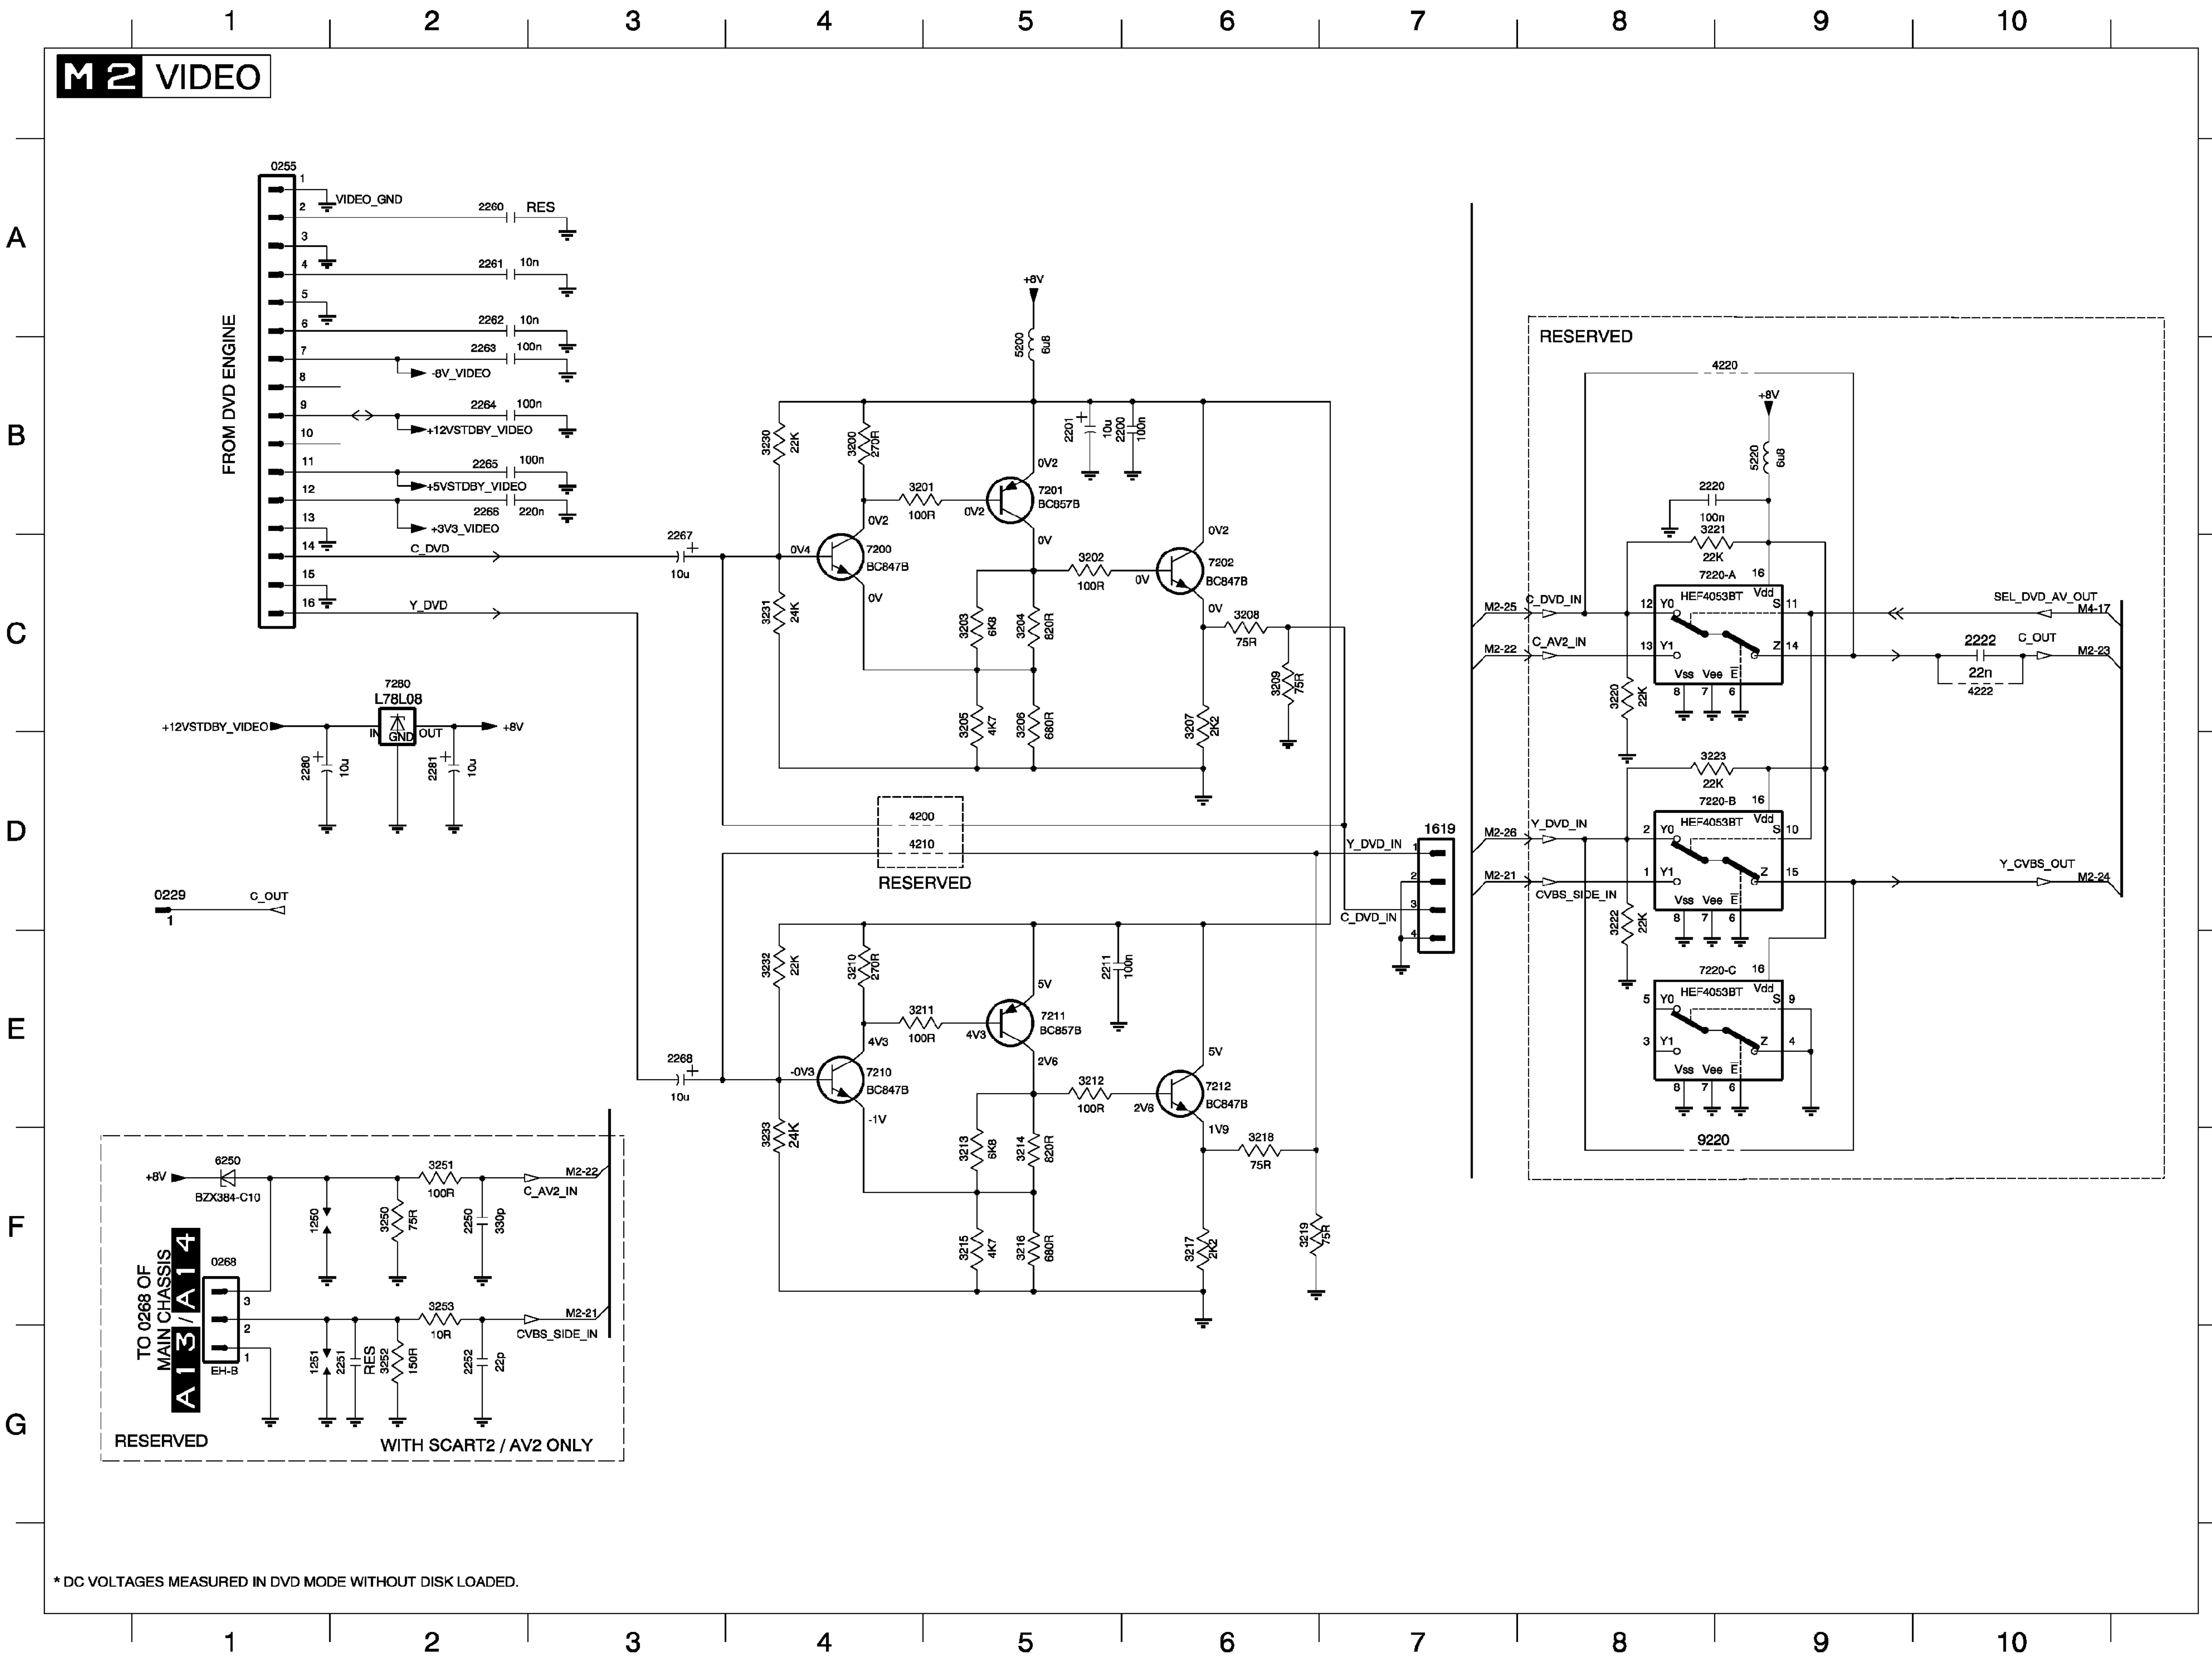

0229	D1
0255	A1
0268	F1
1250	F1
1251	G1
1619	D7
2200	B6
2201	B5
2211	E5
2220	B8
2222	C10
2250	F2
2251	G2
2252	G2
2260	A2
2261	A2
2262	A2
2263	B2
2264	B2
2265	B2
2266	B2
2267	C3
2268	E3
2280	D1
2281	D2
3200	B4
3201	B4
3202	C5
3203	C5
3204	C5
3205	C5
3206	C5
3207	C6
3208	C6
3209	C6
3210	E4
3211	E4
3212	E5
3213	F5
3214	F5
3215	F5
3216	F5
3217	F6
3218	F6
3219	F6
3220	C8
3221	B8
3222	D8
3223	D8
3230	B4
3231	C4
3232	E4
3233	F4
3250	F2
3251	F2
3252	G2
3253	F2
4200	D4
4210	D4
4220	B9
4222	C10
5200	B5
5220	B9
6250	F1
7200	C4
7201	B5
7202	C6
7210	E4
7211	E5
7212	E6
7220-A	C9
7220-B	D9
7220-C	E9
7280	C2
9220	F8

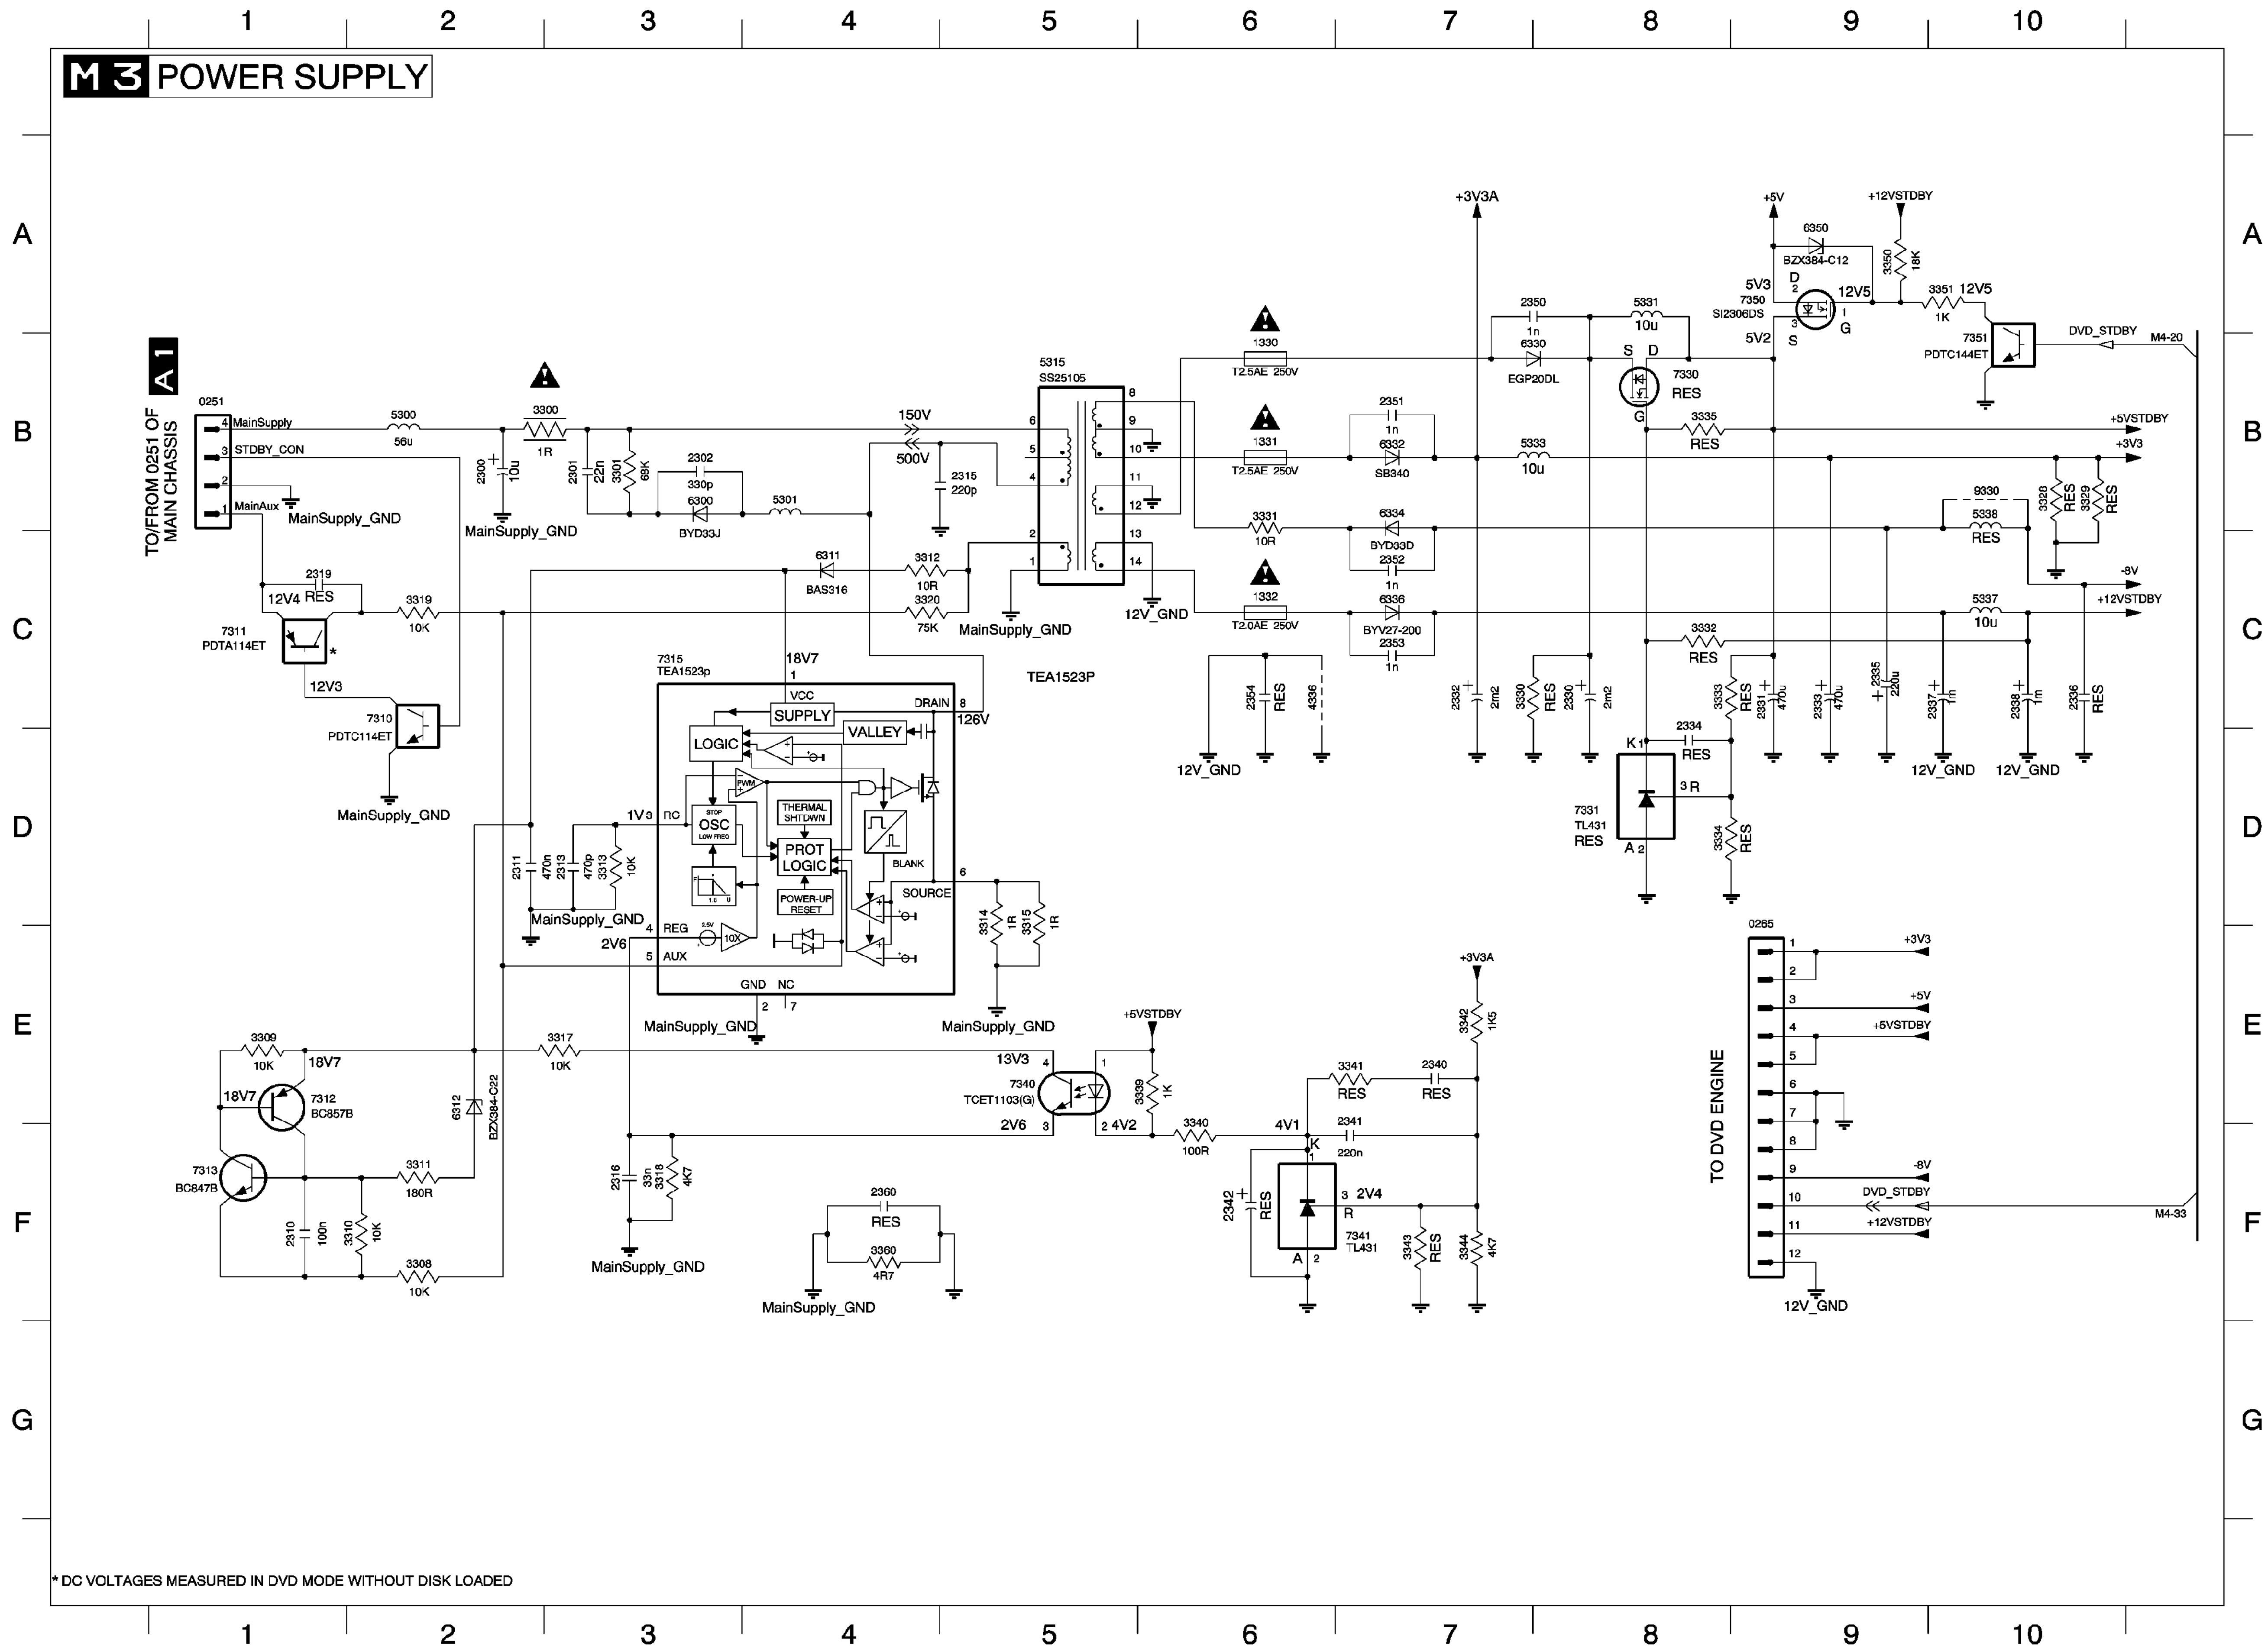


0251 B1
0265 E9
1330 B6
1331 B6
1332 C6
2300 B2
2301 B3
2302 B3
2310 F1
2311 D2
2313 D3
2315 B5
2316 F3
2319 C1
2330 C8
2331 C9
2332 C7
2333 C9
2334 D8
2335 C9
2336 C10
2337 C10
2338 C10
2340 E7
2341 F7
2342 F6
2350 A8
2351 B7
2352 C7
2353 C7
2354 C6
2360 F4
3300 B3
3301 B3
3308 F2
3309 E1
3310 F2
3311 F2
3312 C4
3313 D3
3314 D5
3315 D5
3317 E3
3318 F3
3319 C2
3320 C4
3328 B10
3329 B10
3330 C7
3331 B6
3332 C8
3333 C8
3334 D8
3335 B8
3339 E6
3340 F6
3341 E7
3342 E7
3343 F7
3344 F7
3350 A9
3351 A10
3360 F4
4336 C6
5300 B2
5301 B4
5315 B5
5331 A8
5333 B8
5337 C10
5338 B10
6300 B3
6311 C4
6312 E2
6330 B8
6332 B7
6334 B7
6336 C7
6350 A9
7310 C2
7311 C1
7312 E1
7313 F1
7315 C3
7330 B8
7331 D8
7340 E5
7341 F7
7350 A9
7351 B10
9330 B10

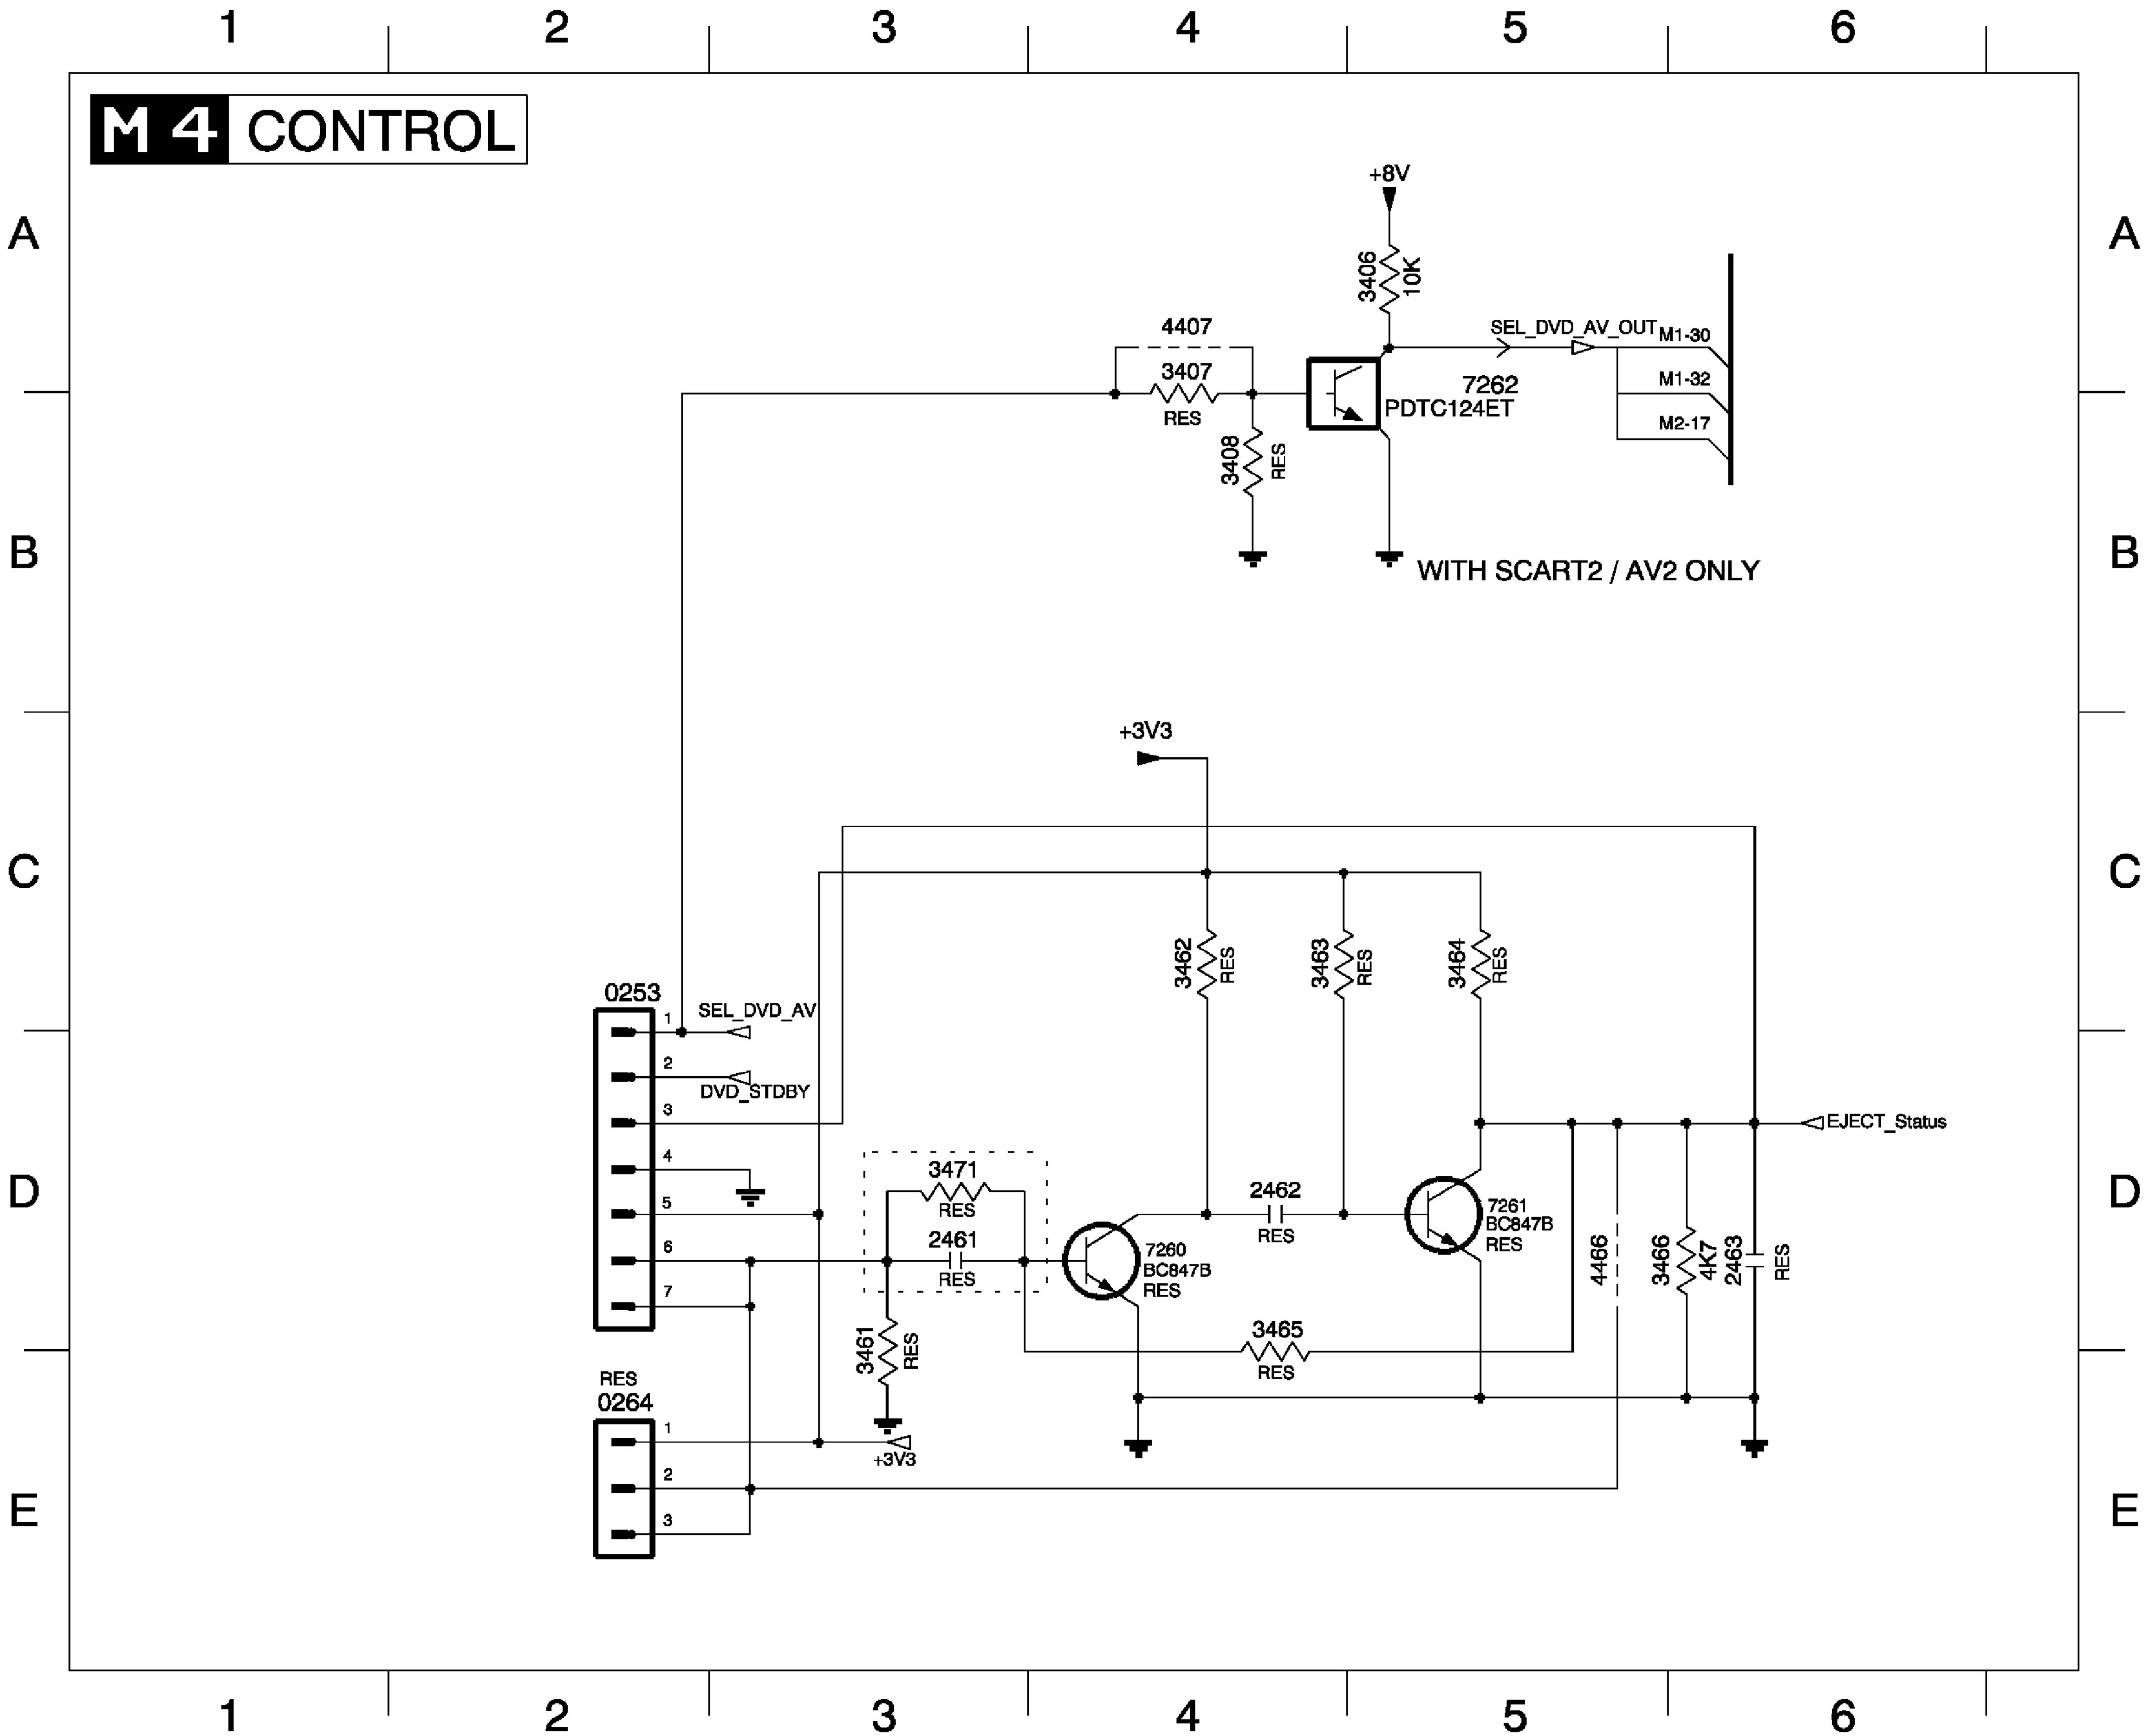



0253	C2
0264	E2
2461	D3
2462	D4
2463	D6
3406	A5
3407	A4
3408	B4
3461	D3
3462	C4
3463	C4
3464	C5
3465	D4
3466	D6
3471	D3
4407	A4
4466	D5
7260	D4
7261	D5
7262	A5

M1 VIDEO AUDIO SWITCH

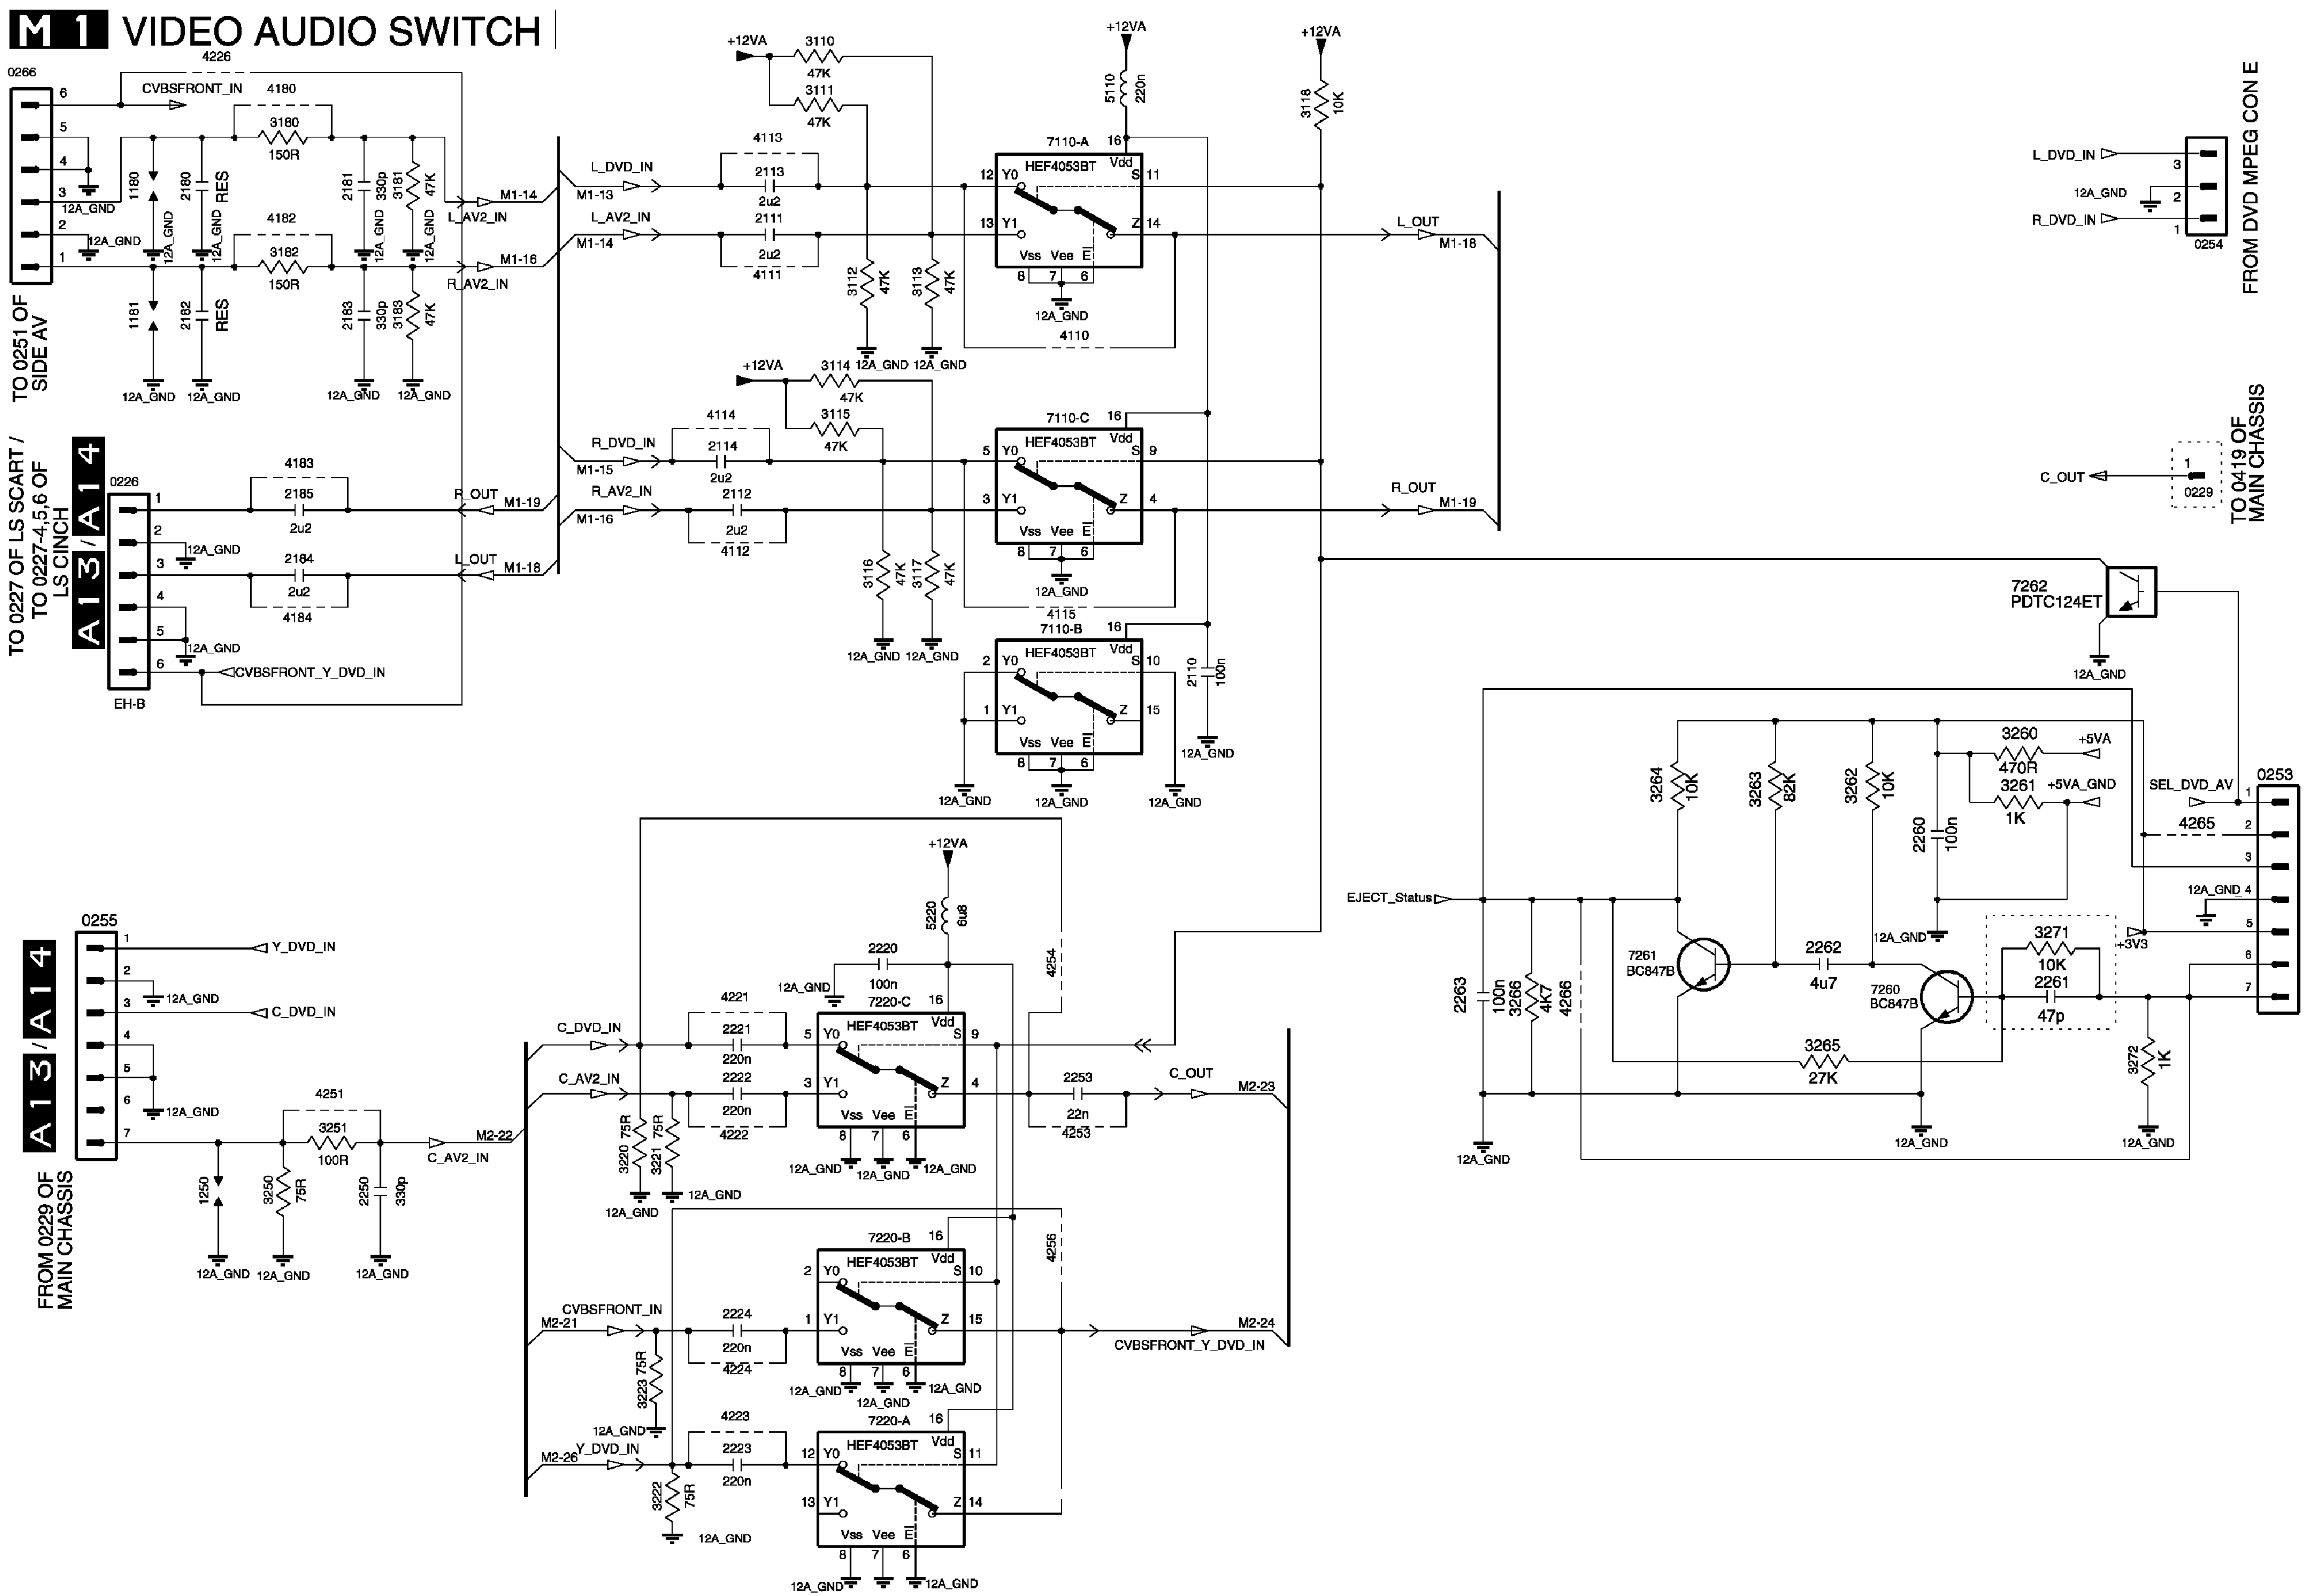


M3 POWER SUPPLY

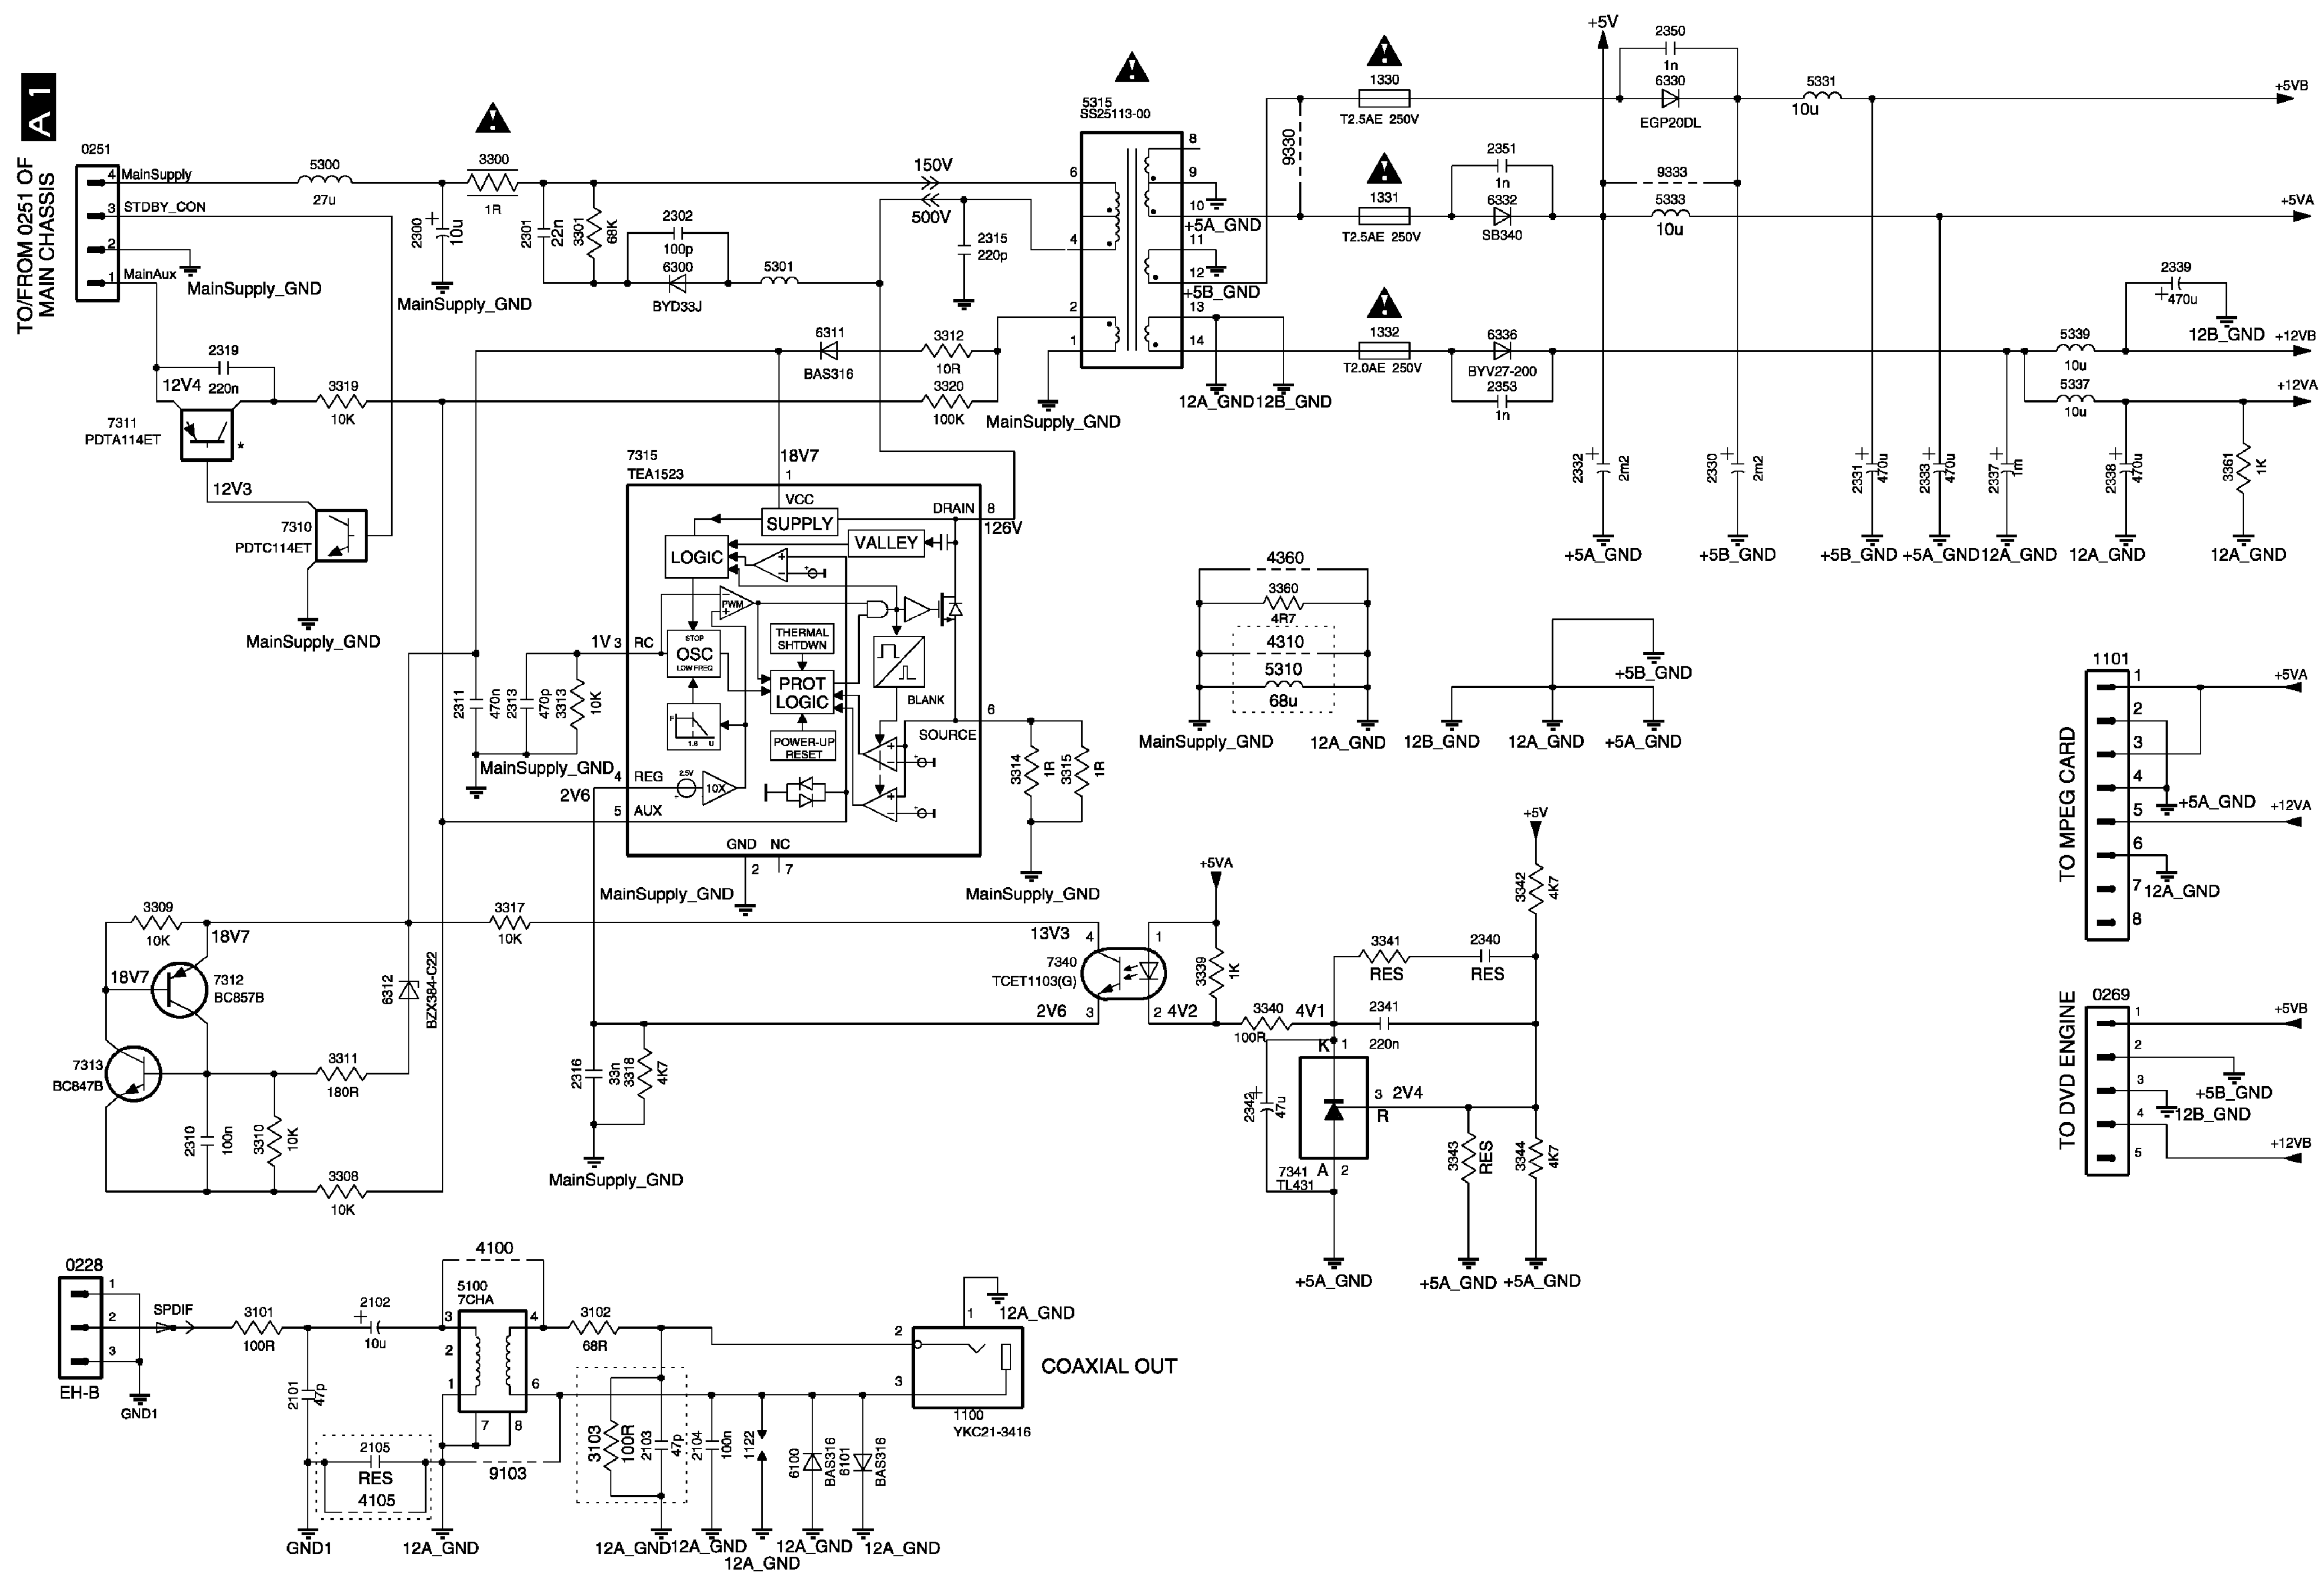

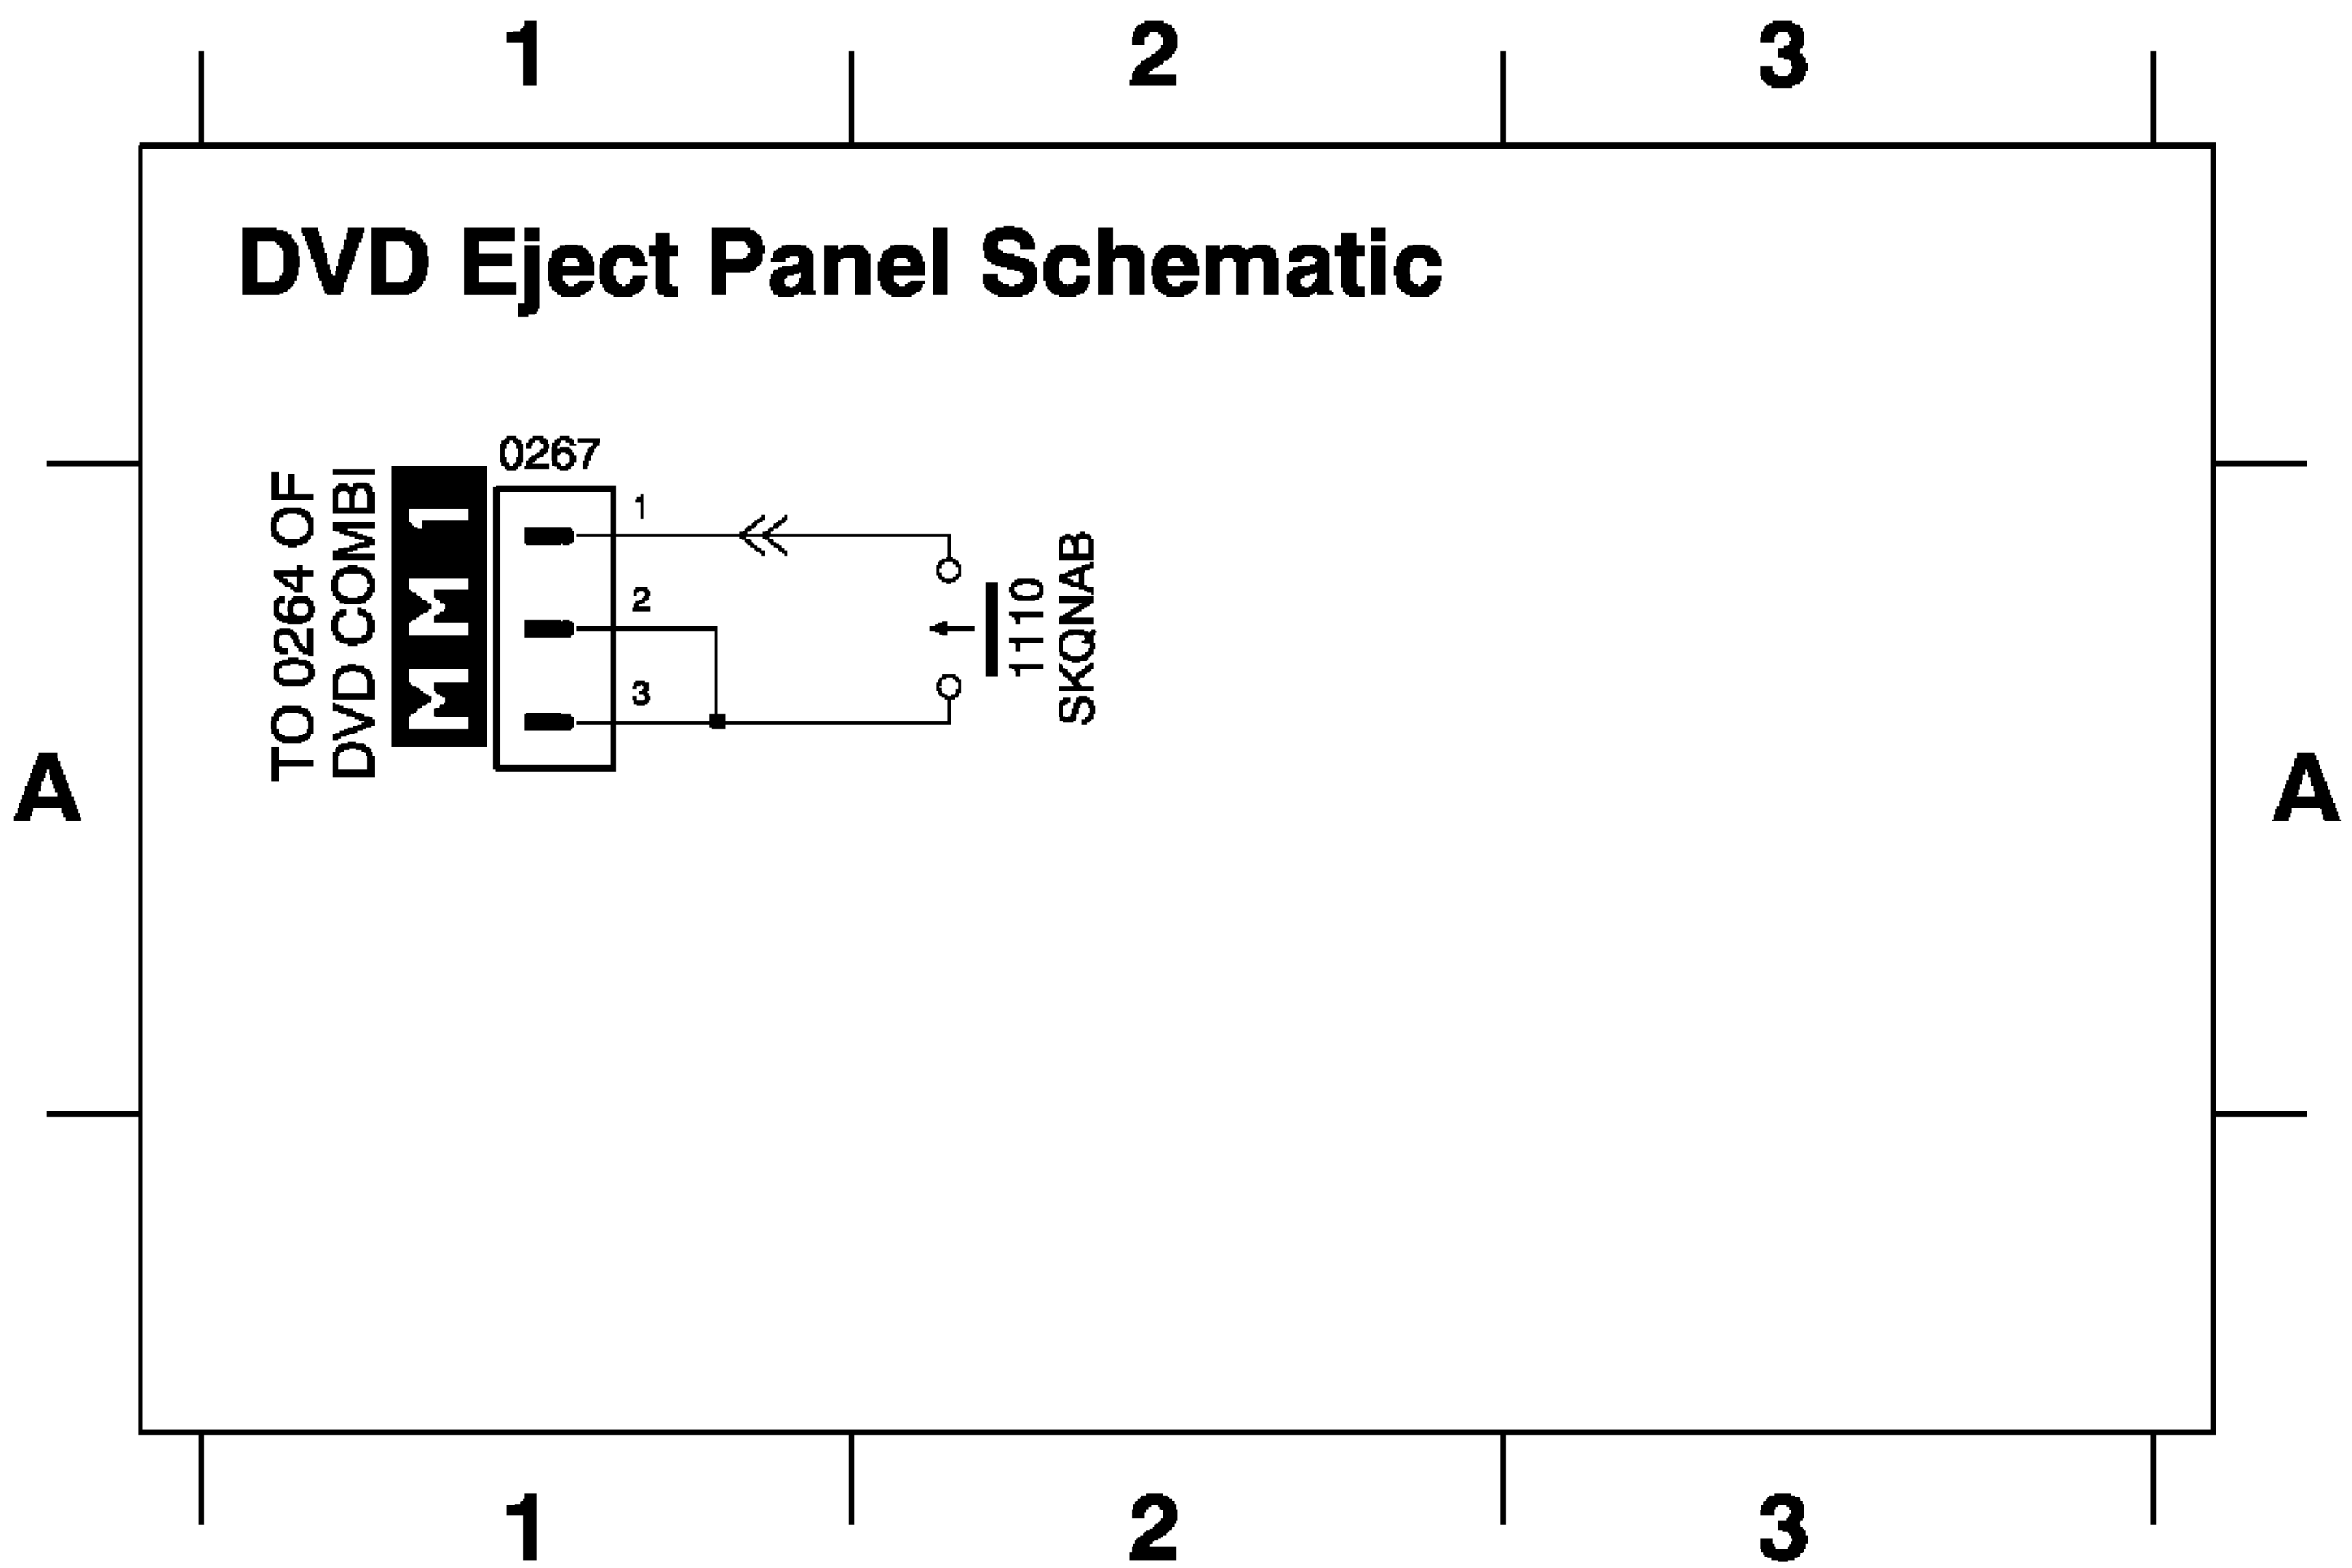



0267 A1
1110 A2

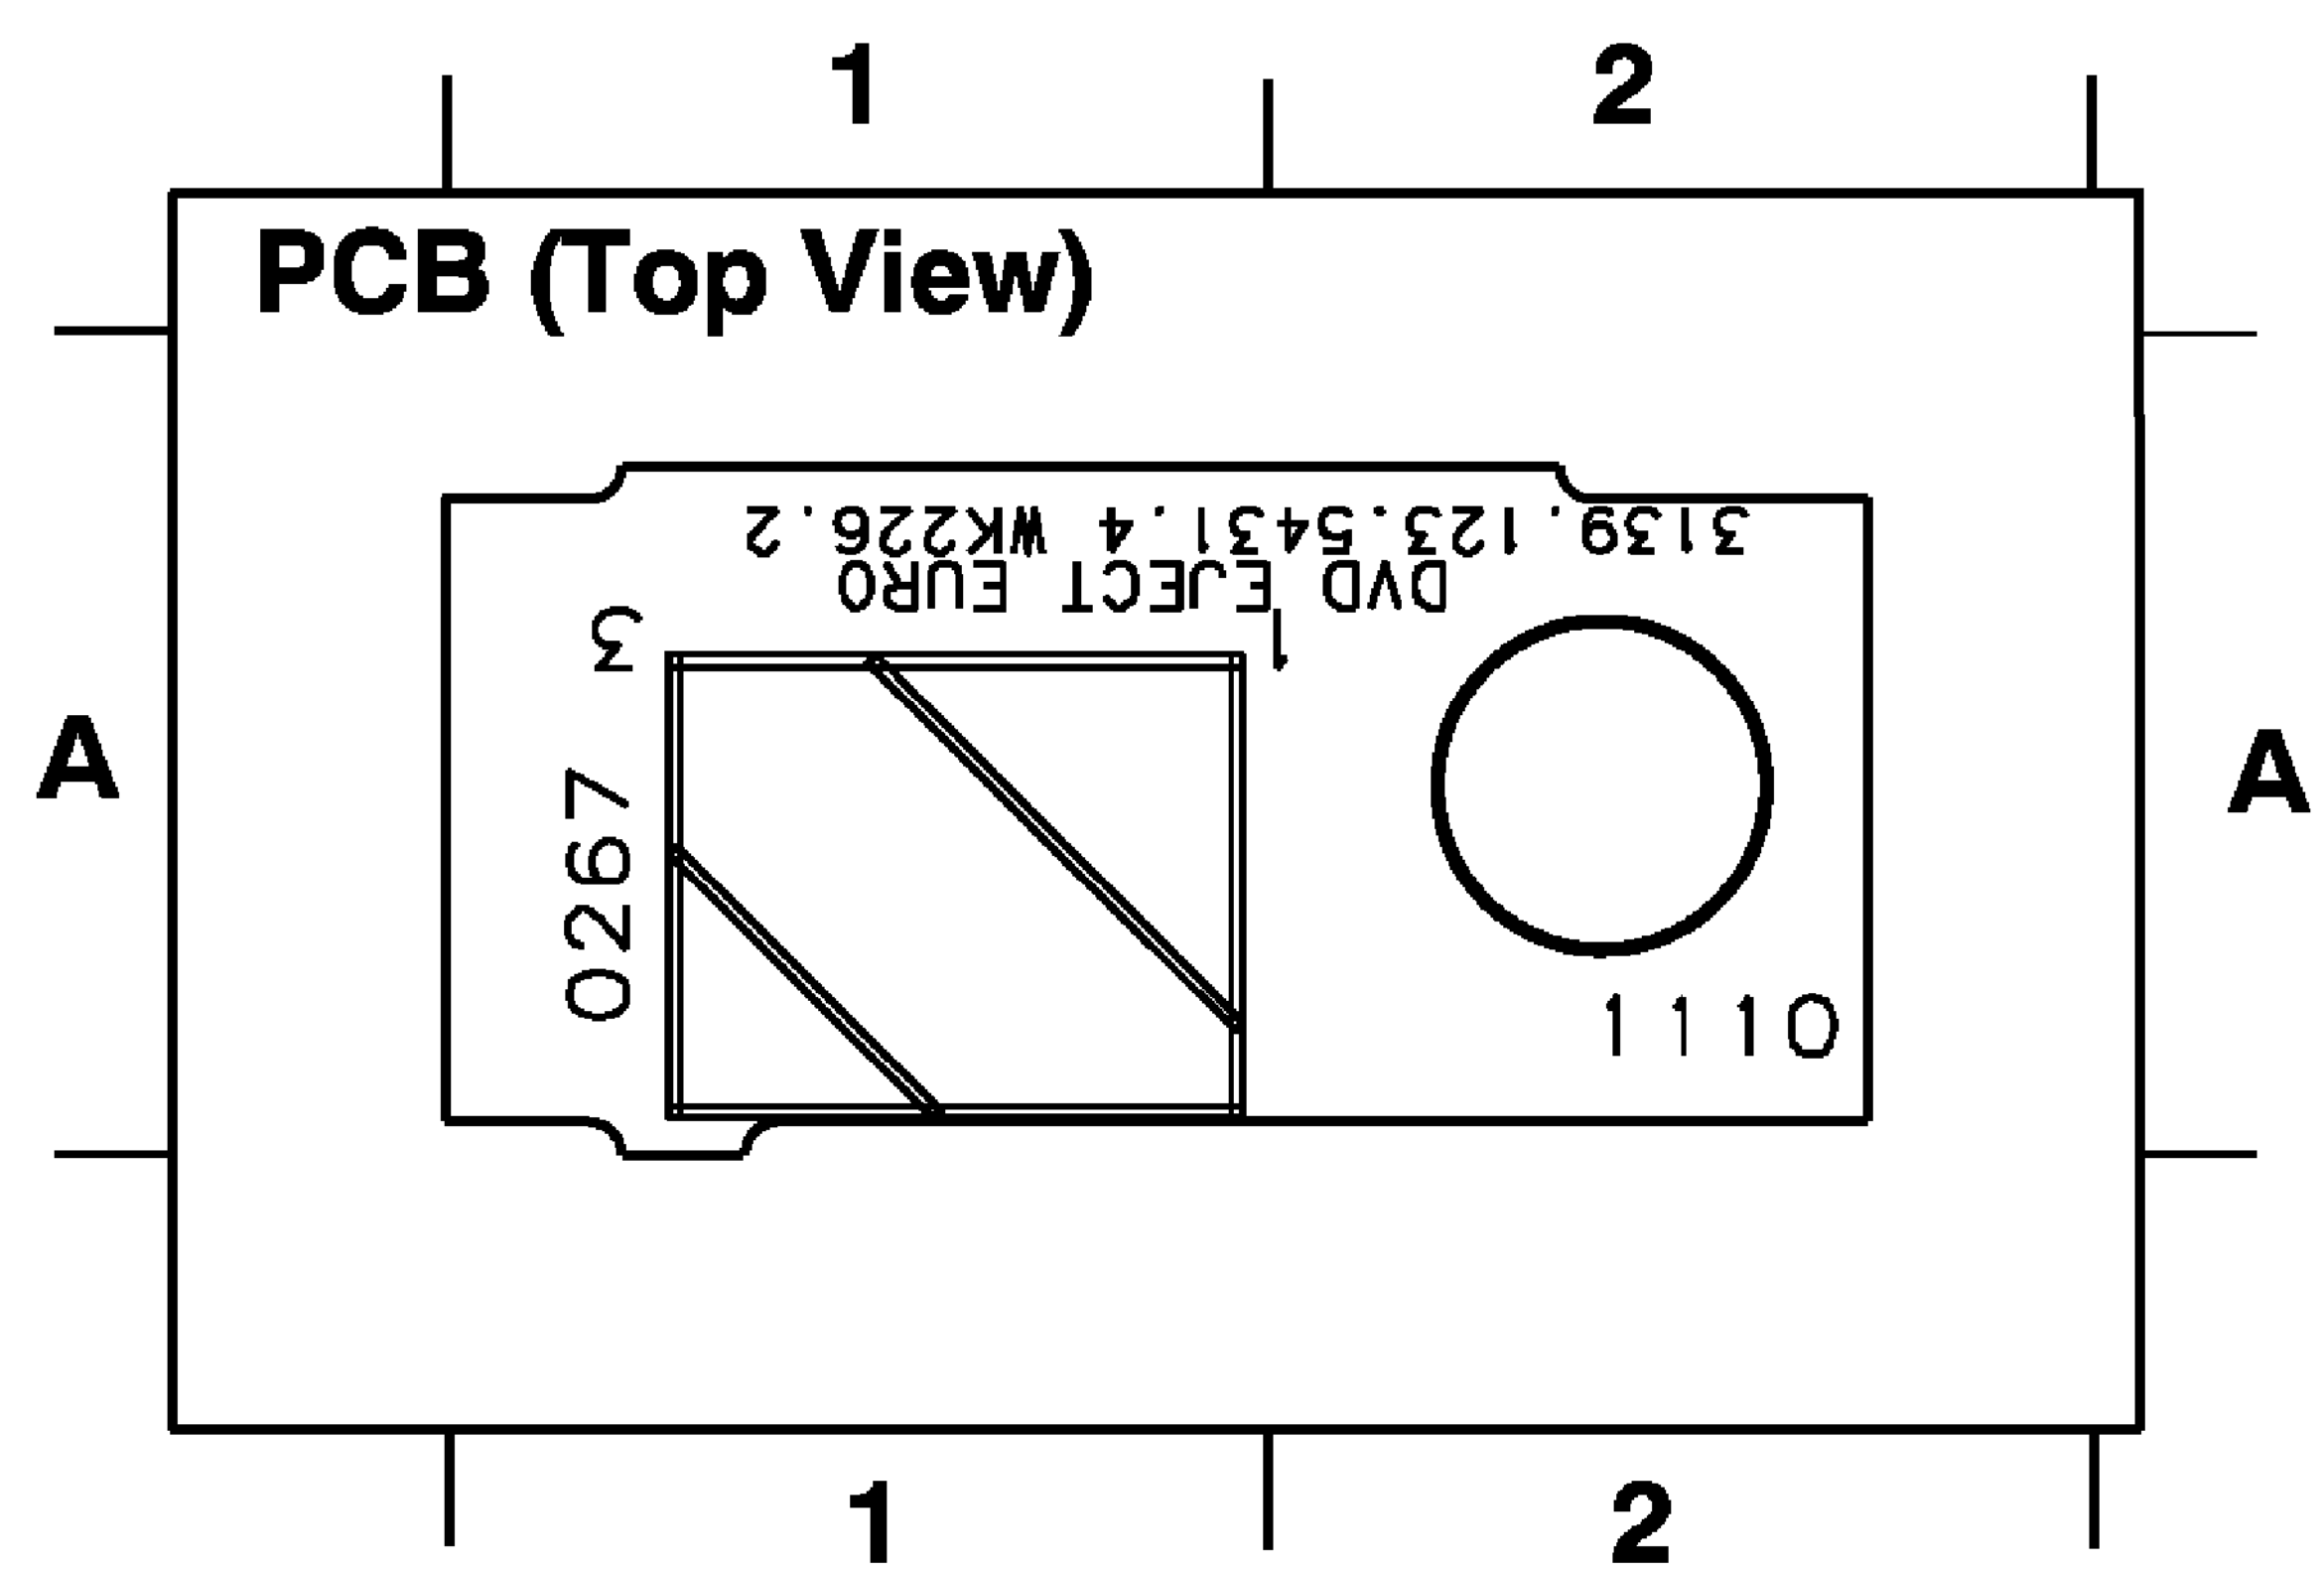


0267 A1
1110 A2

Channel One Card Schematic

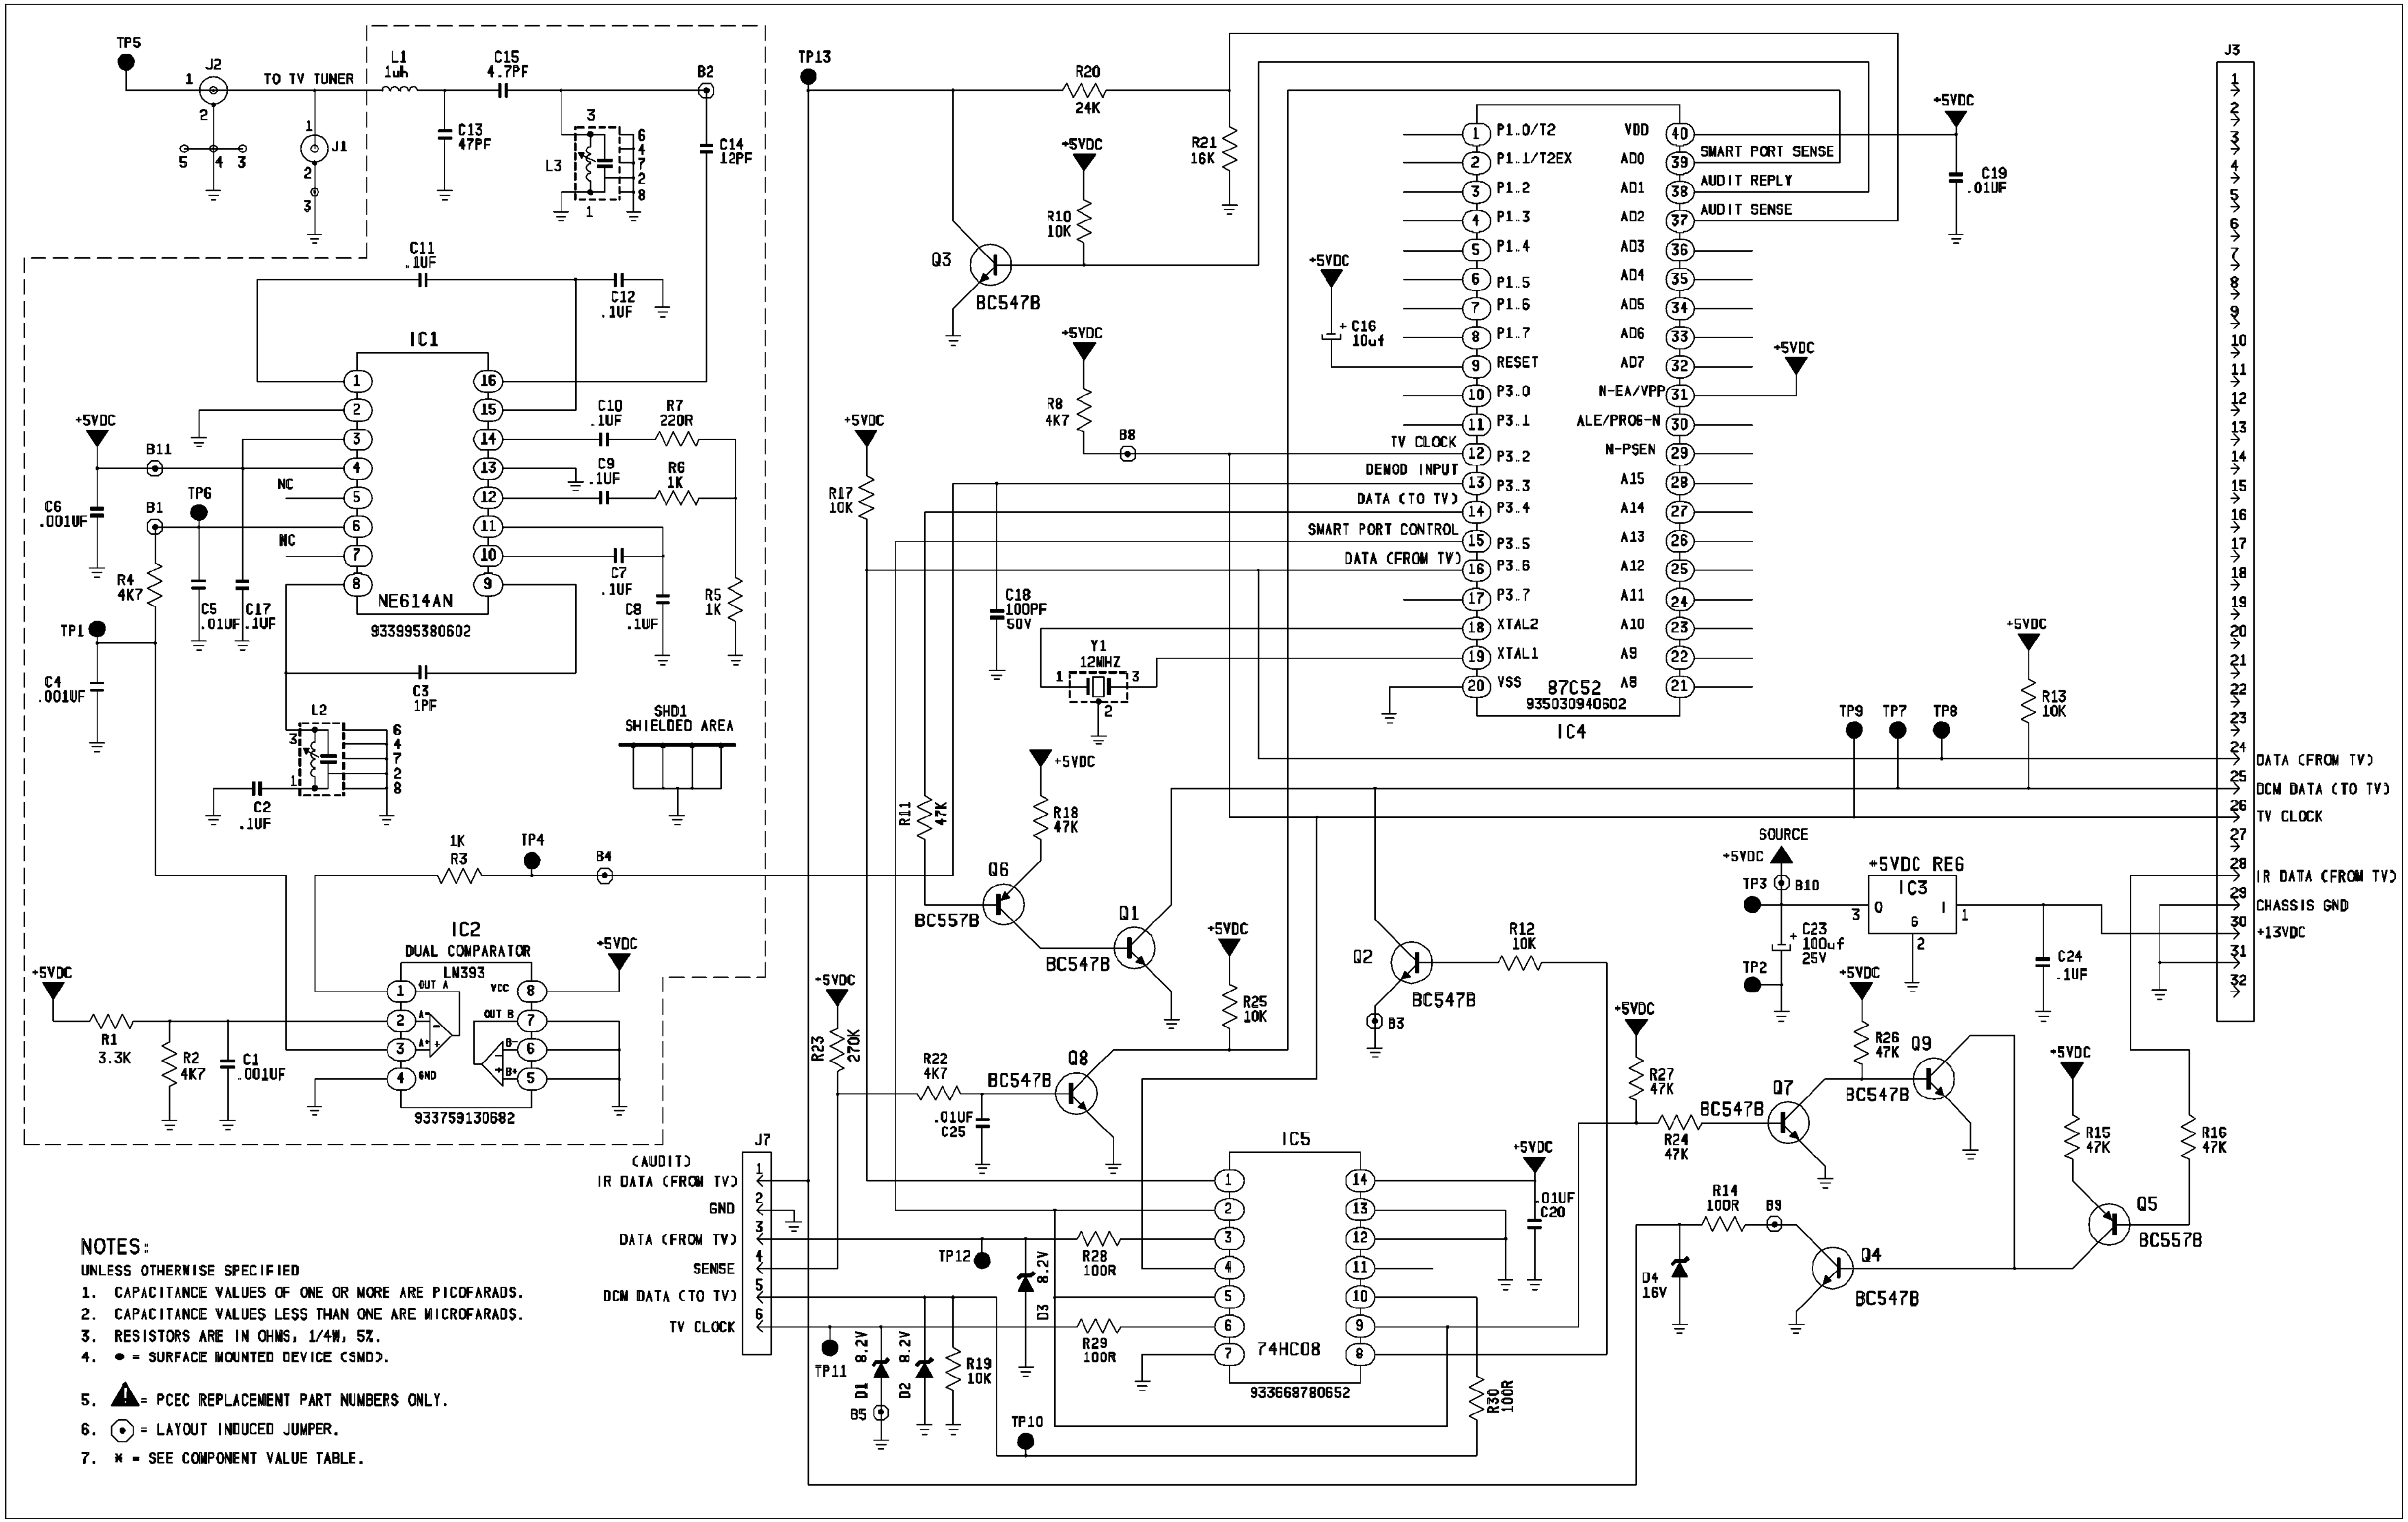


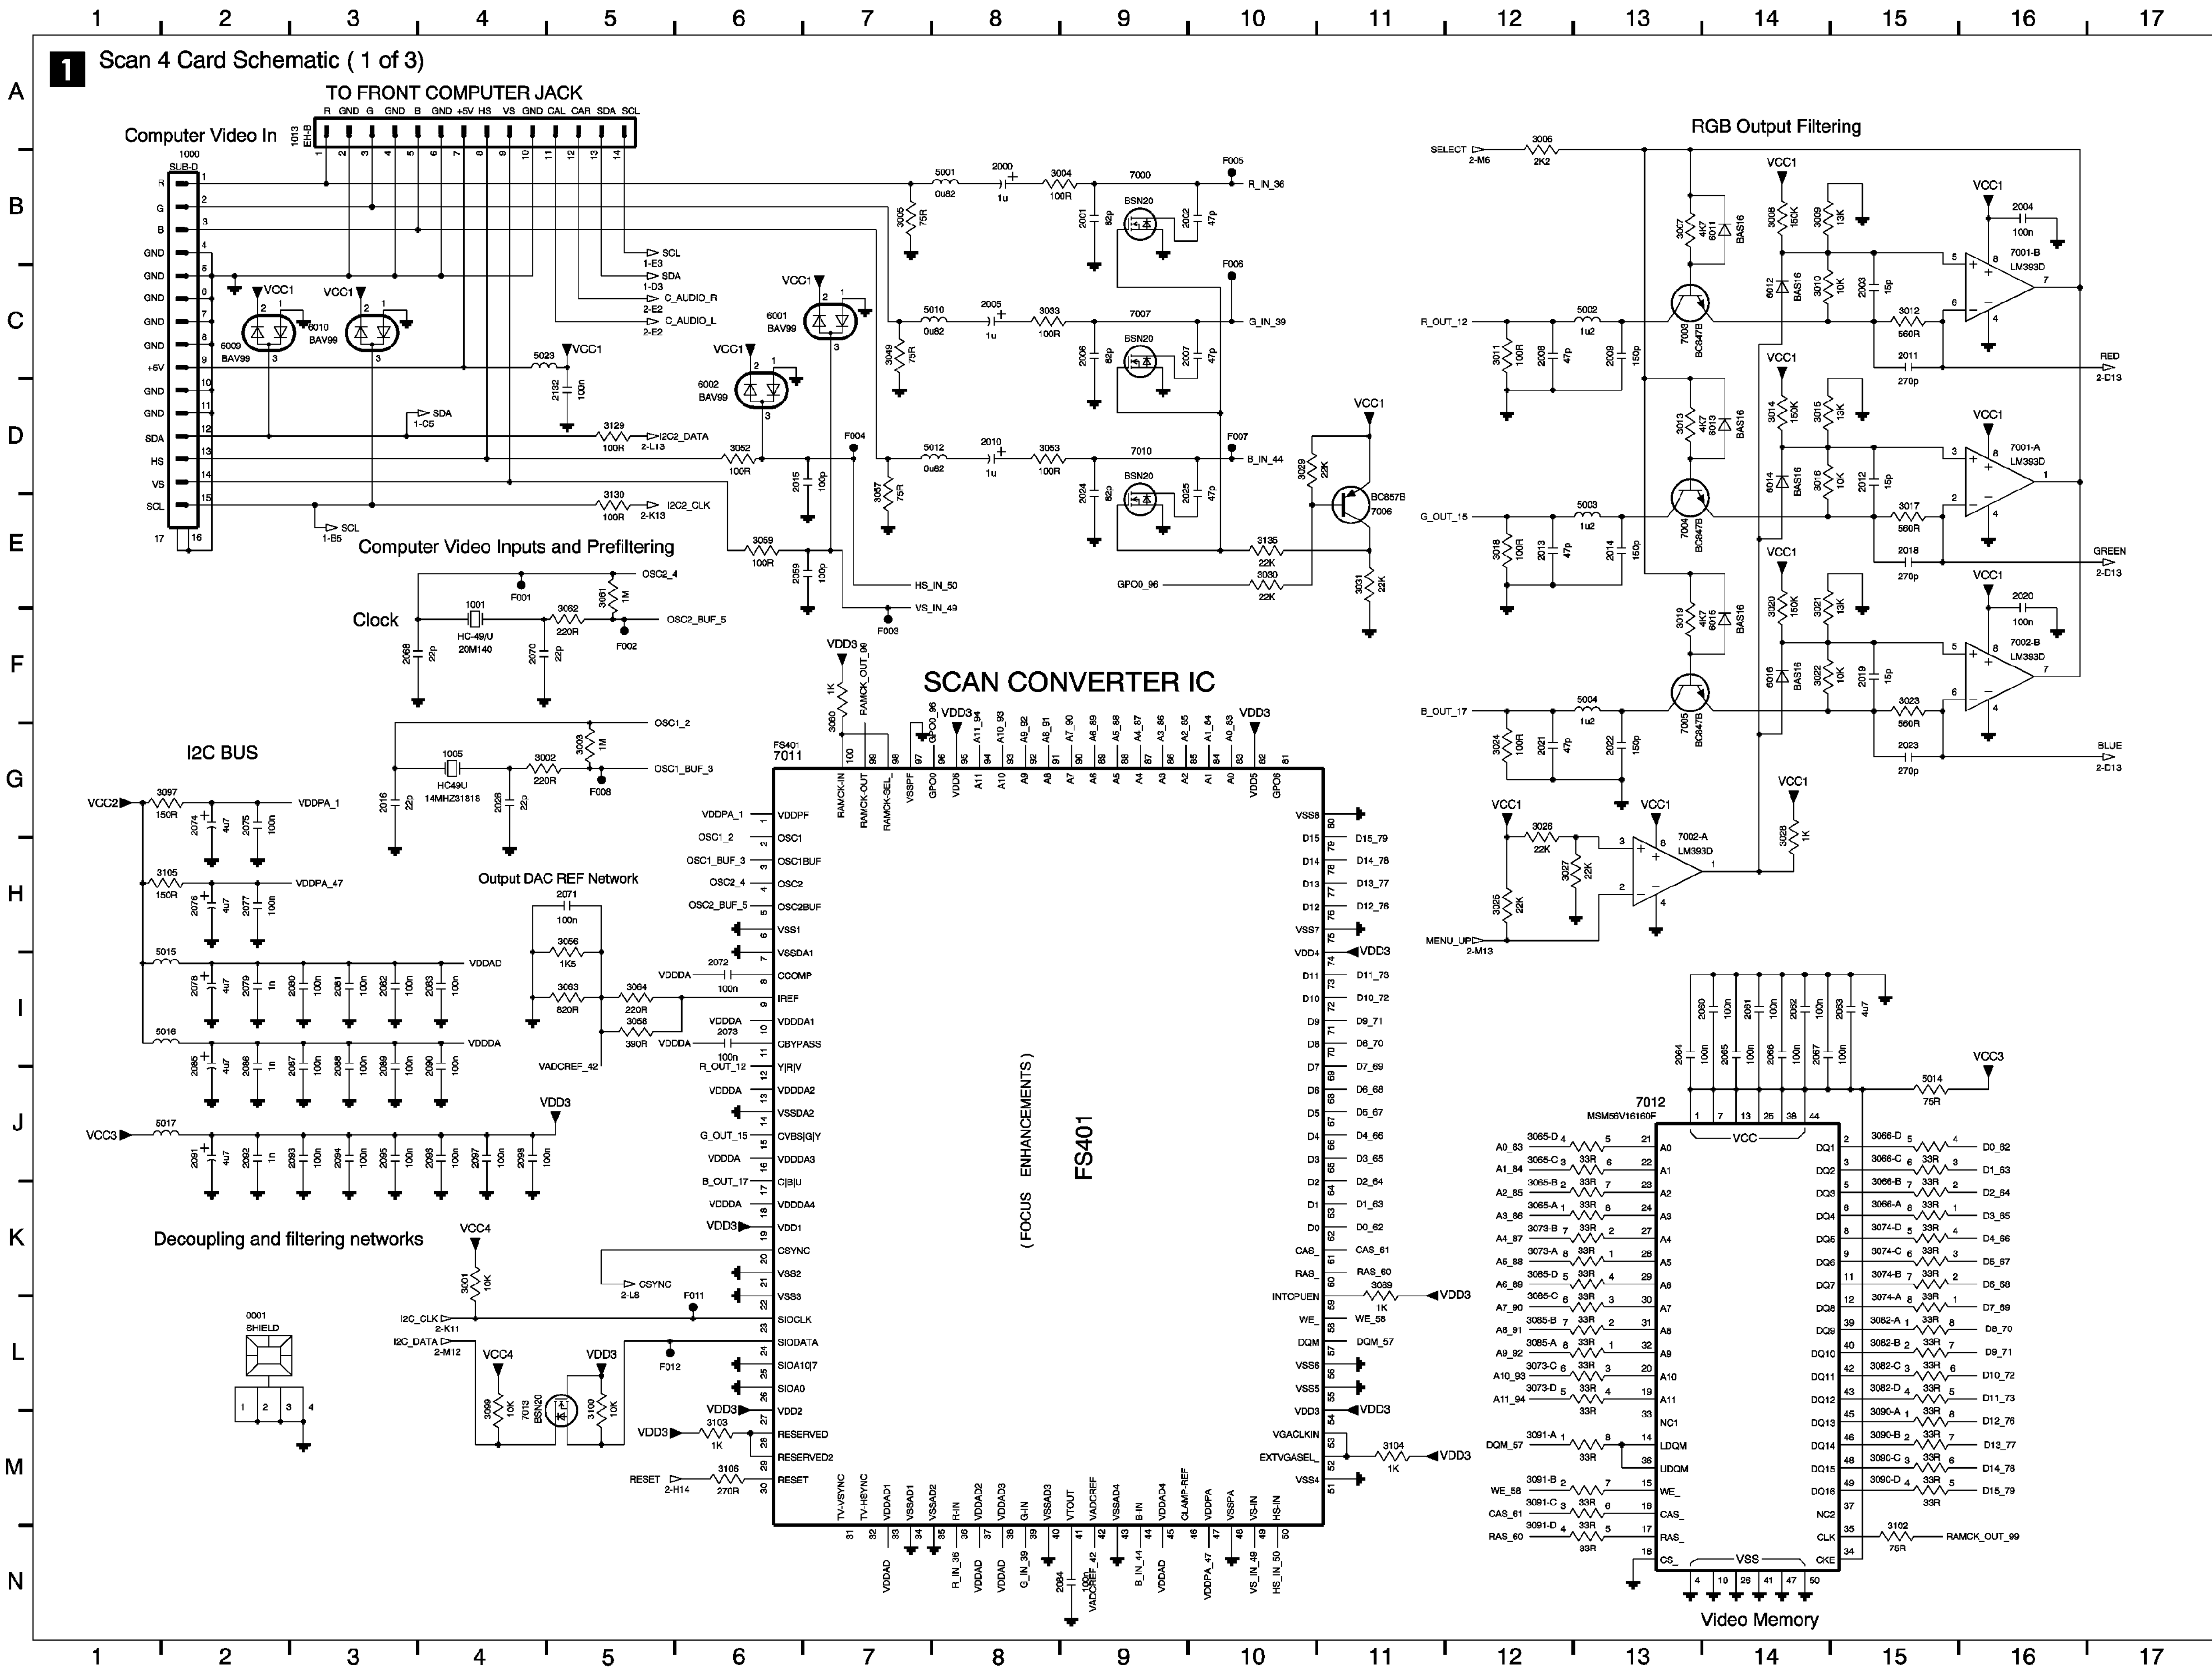
Scan 4 Card Schematic (1 of 3)
TO FRONT COMPUTER JACK
Computer Video In
RGB Output Filtering
Computer Video Inputs and Prefiltering
Clock
SCAN CONVERTER IC
I2C BUS
Output DAC REF Network
Decoupling and filtering networks
FS401
(FOCUS ENHANCEMENTS)
Video Memory


2 Scan 4 Card Schematic (2 of 3)

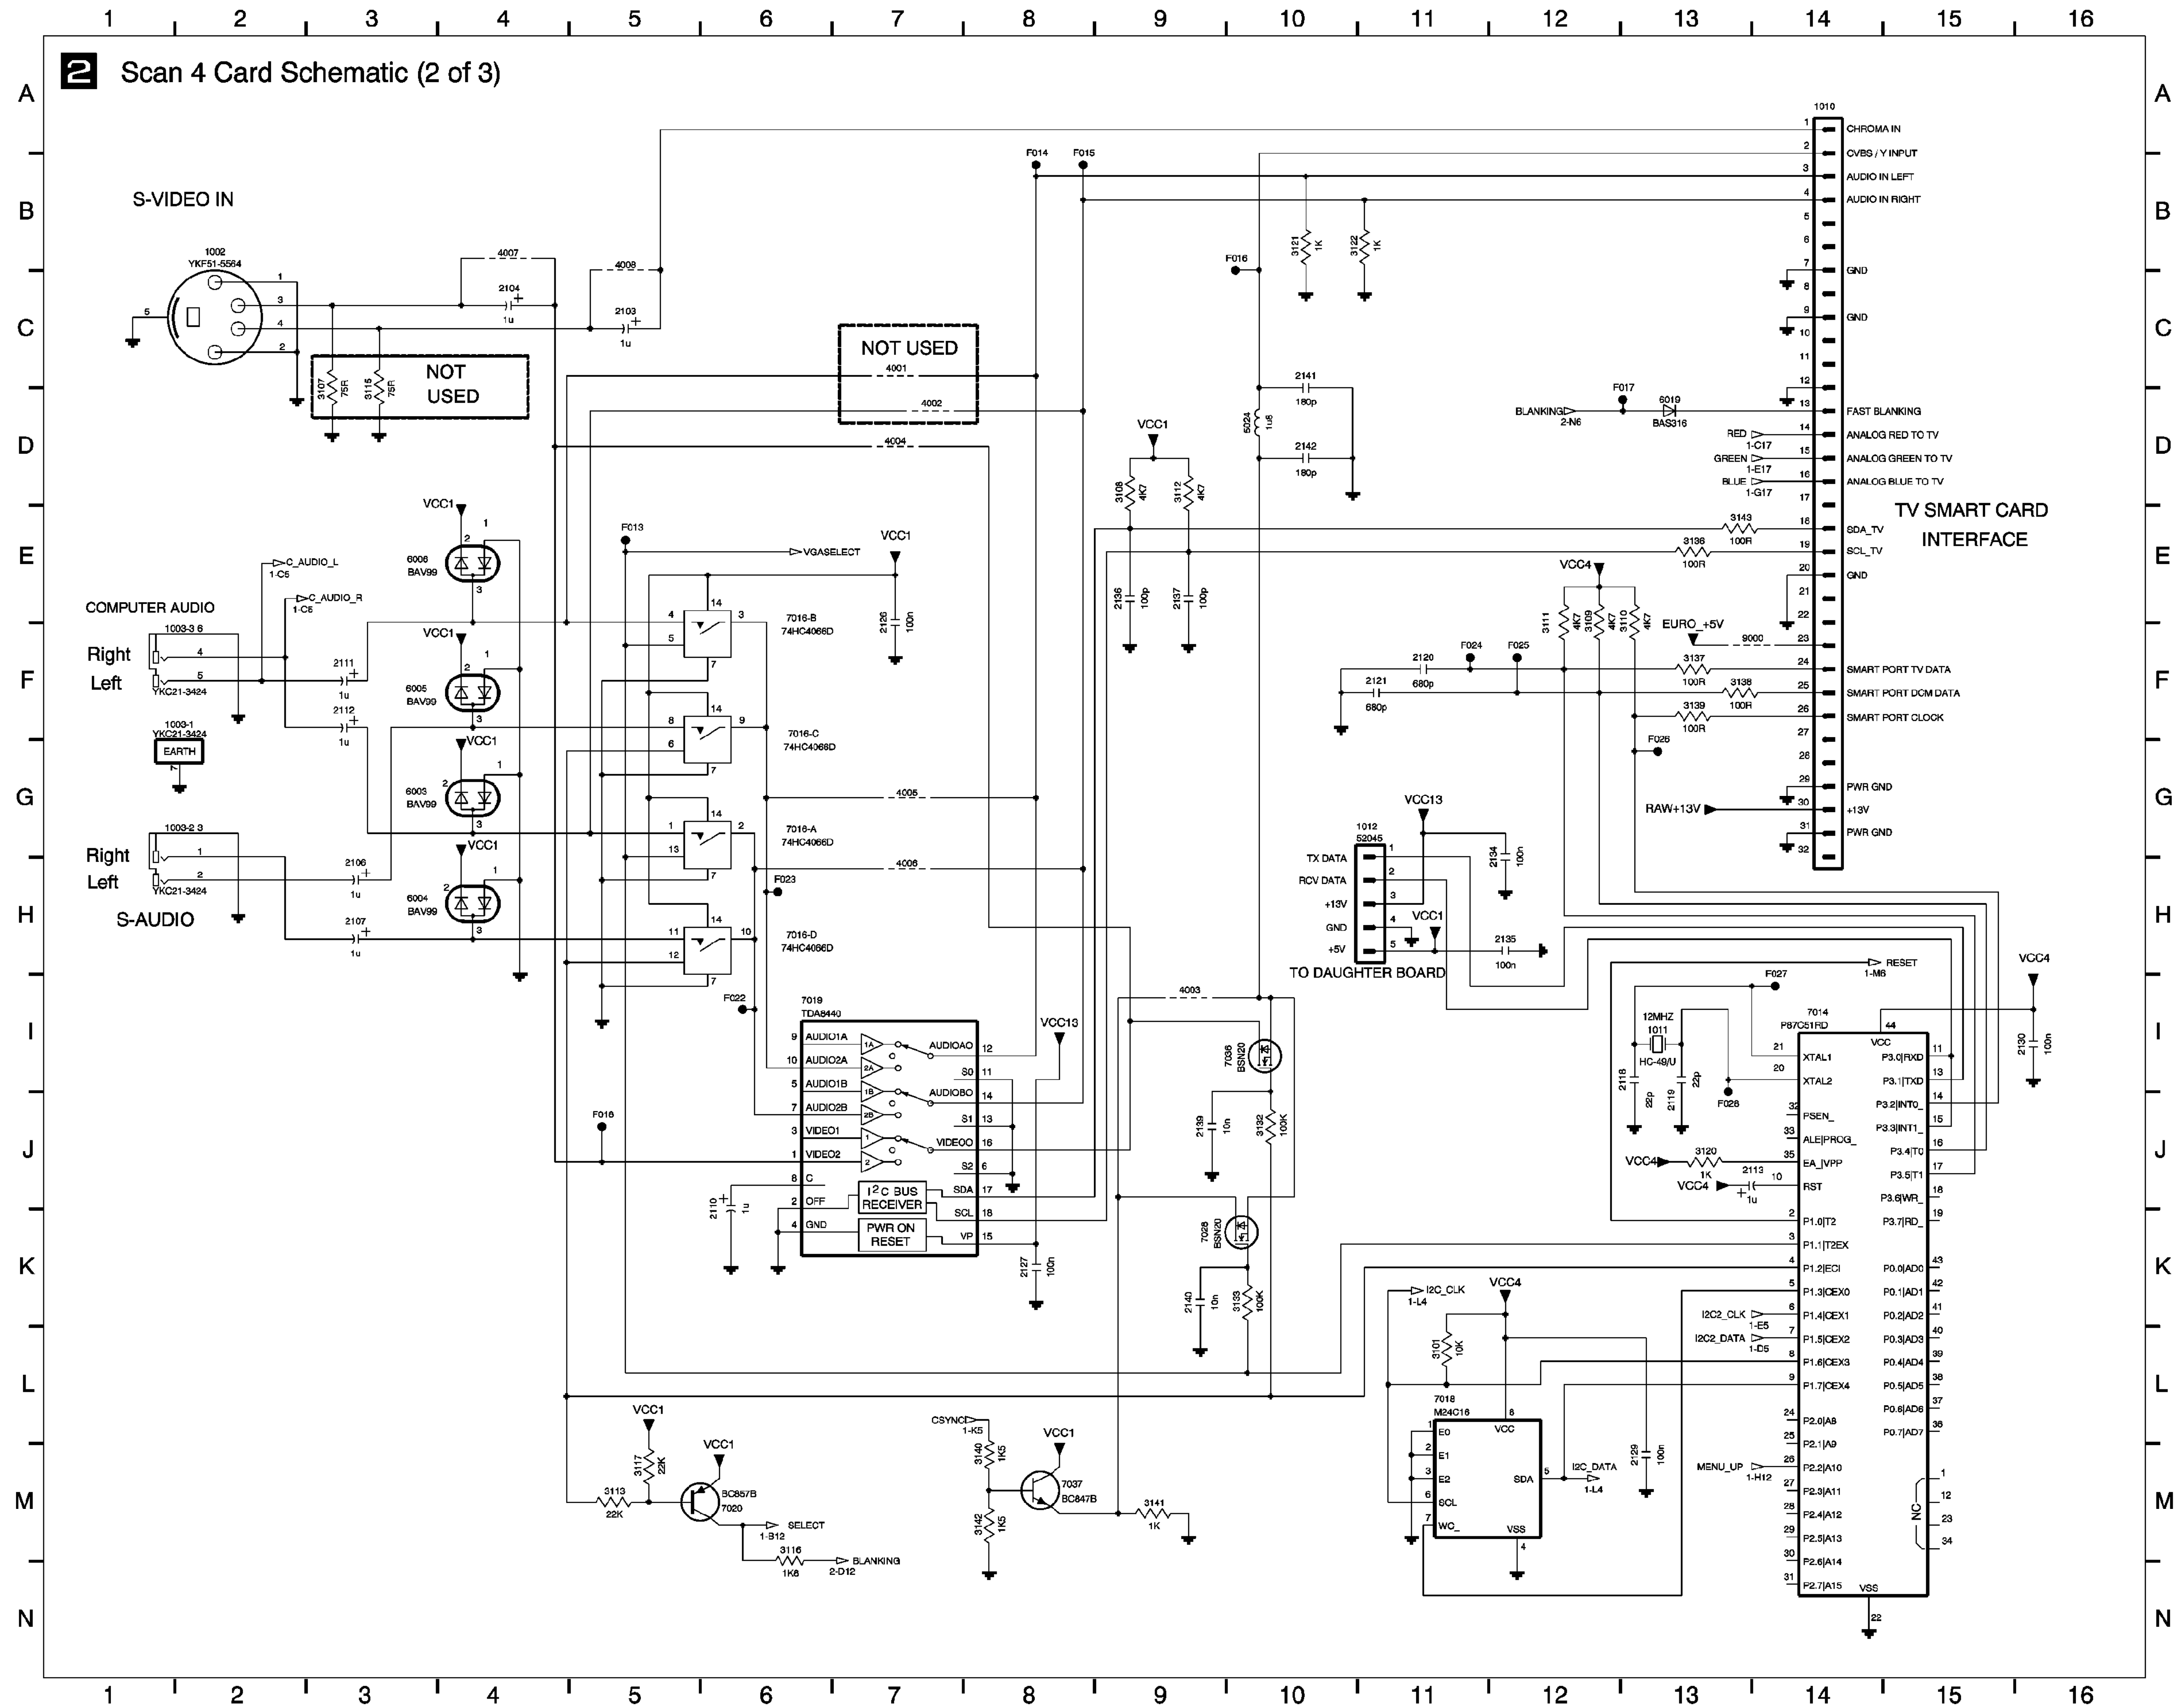


Scan 4 Card Schematic (3 of 3)

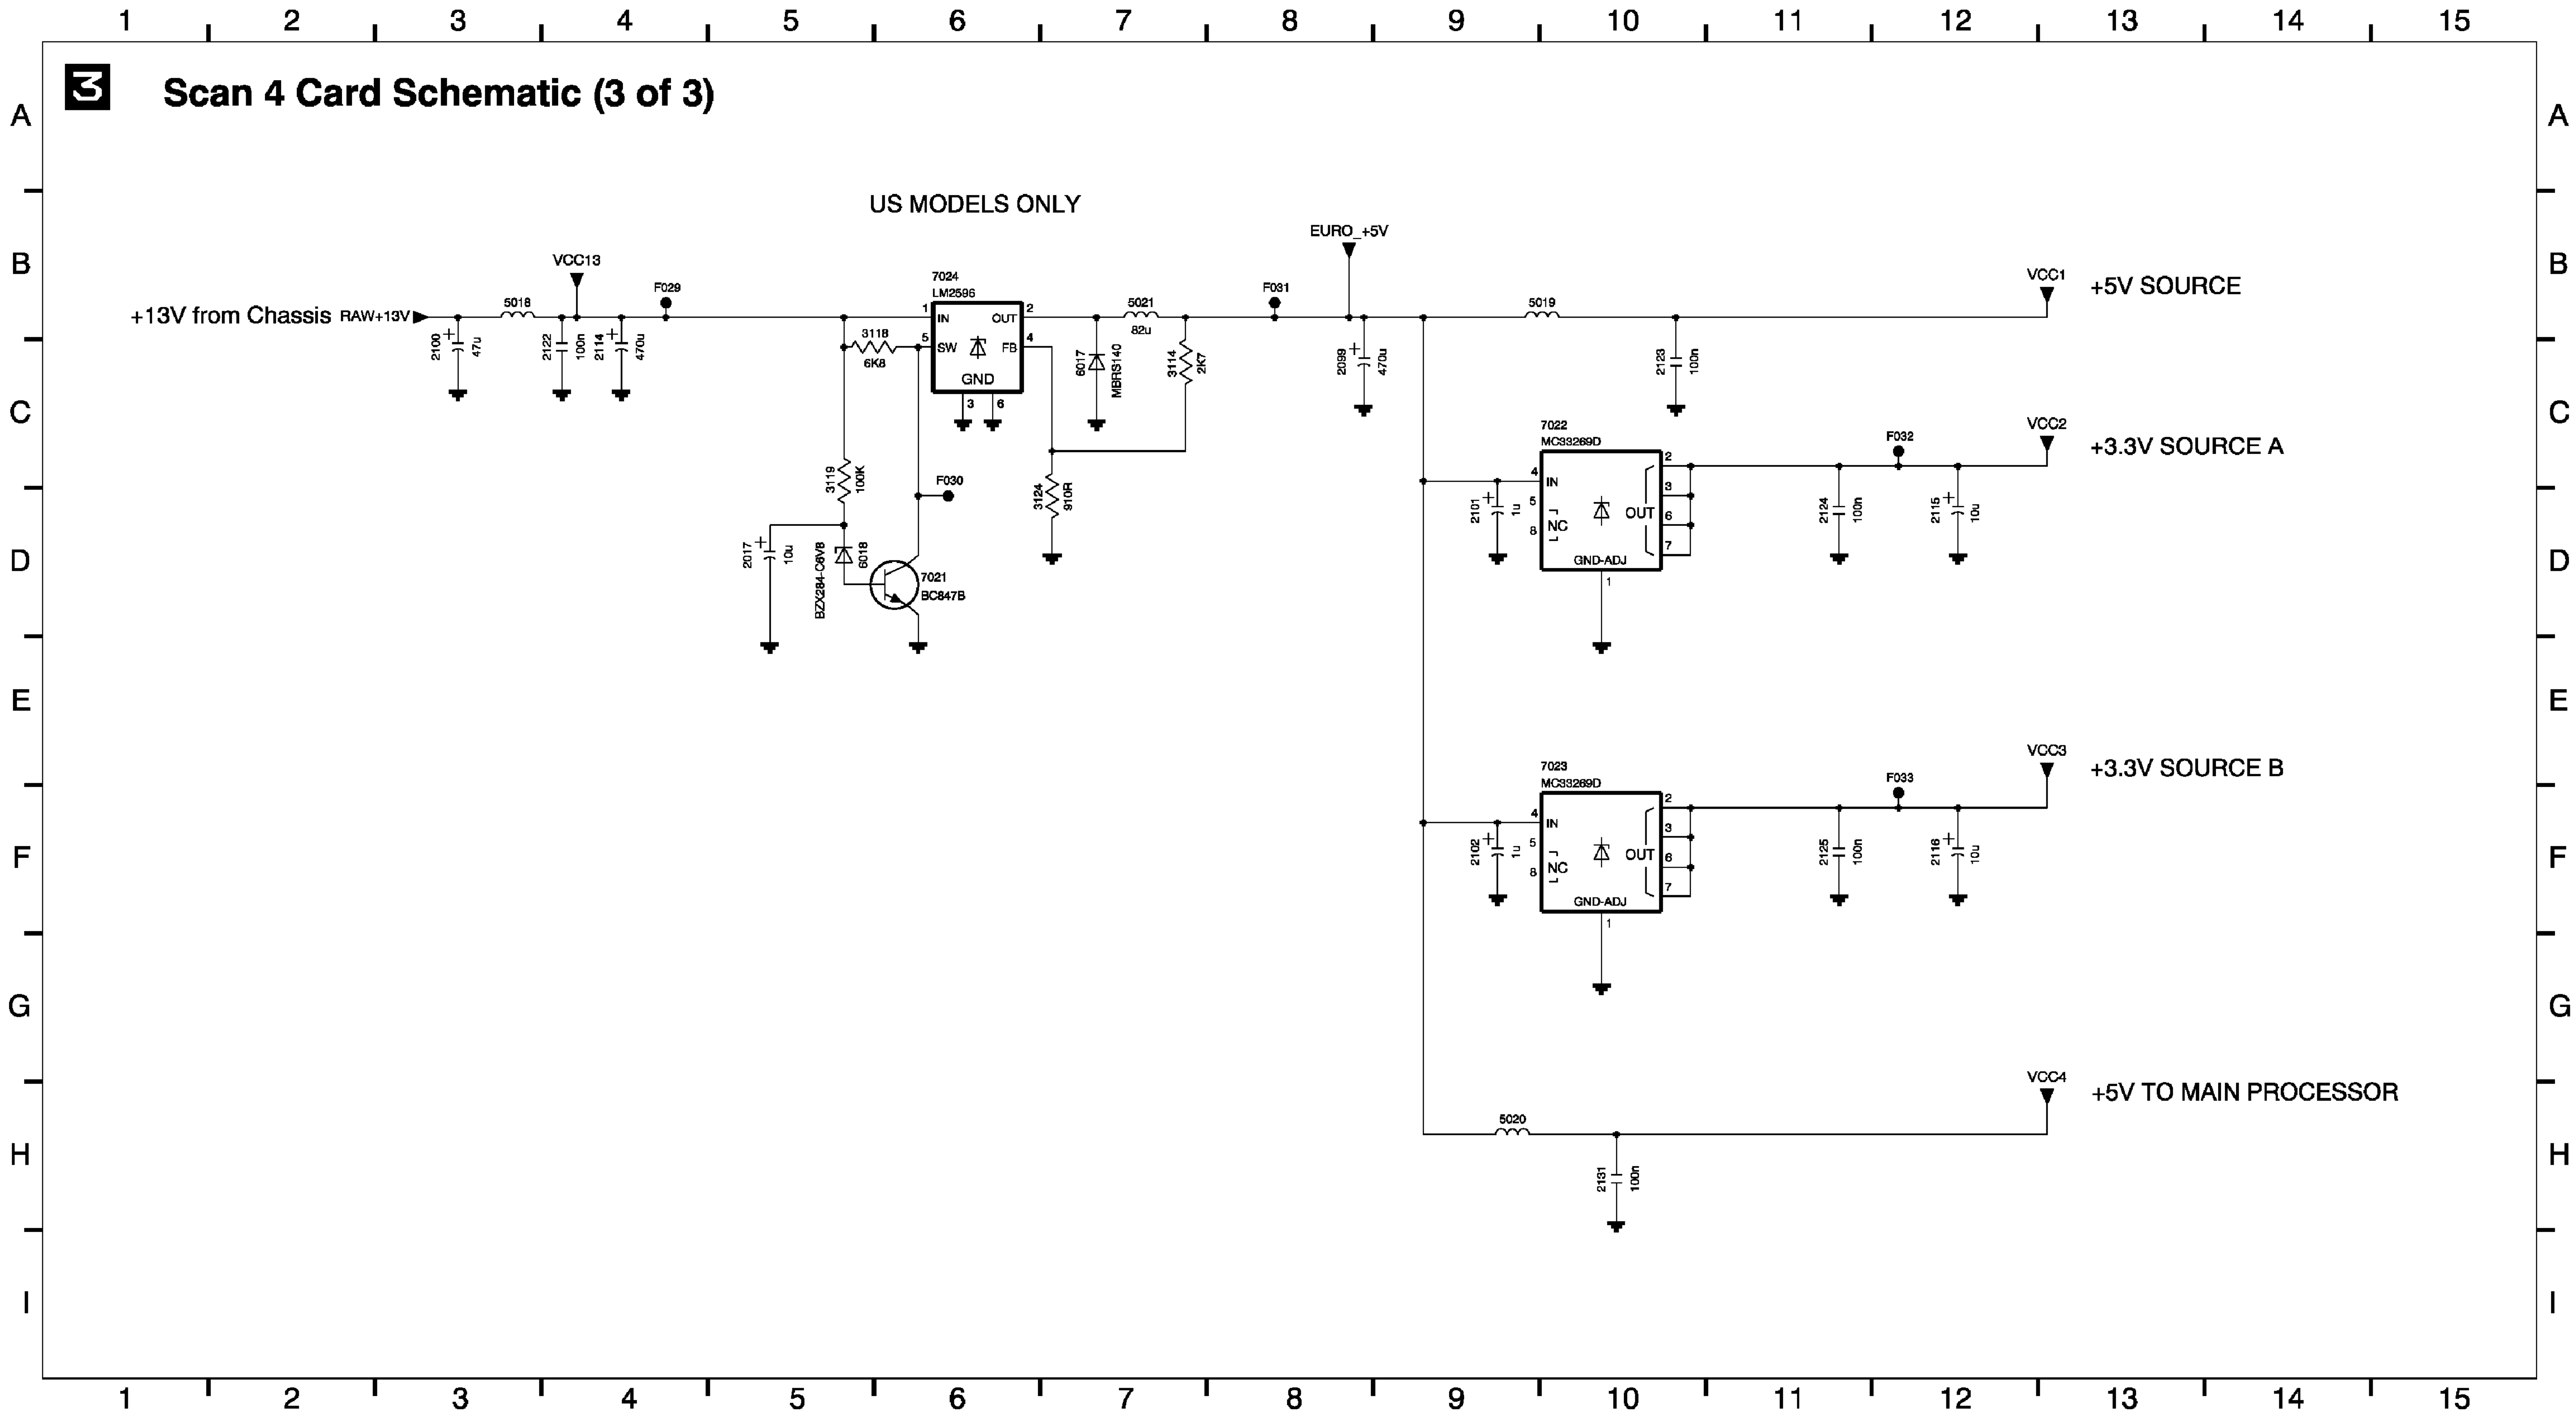

Net 1 Panel Schematic

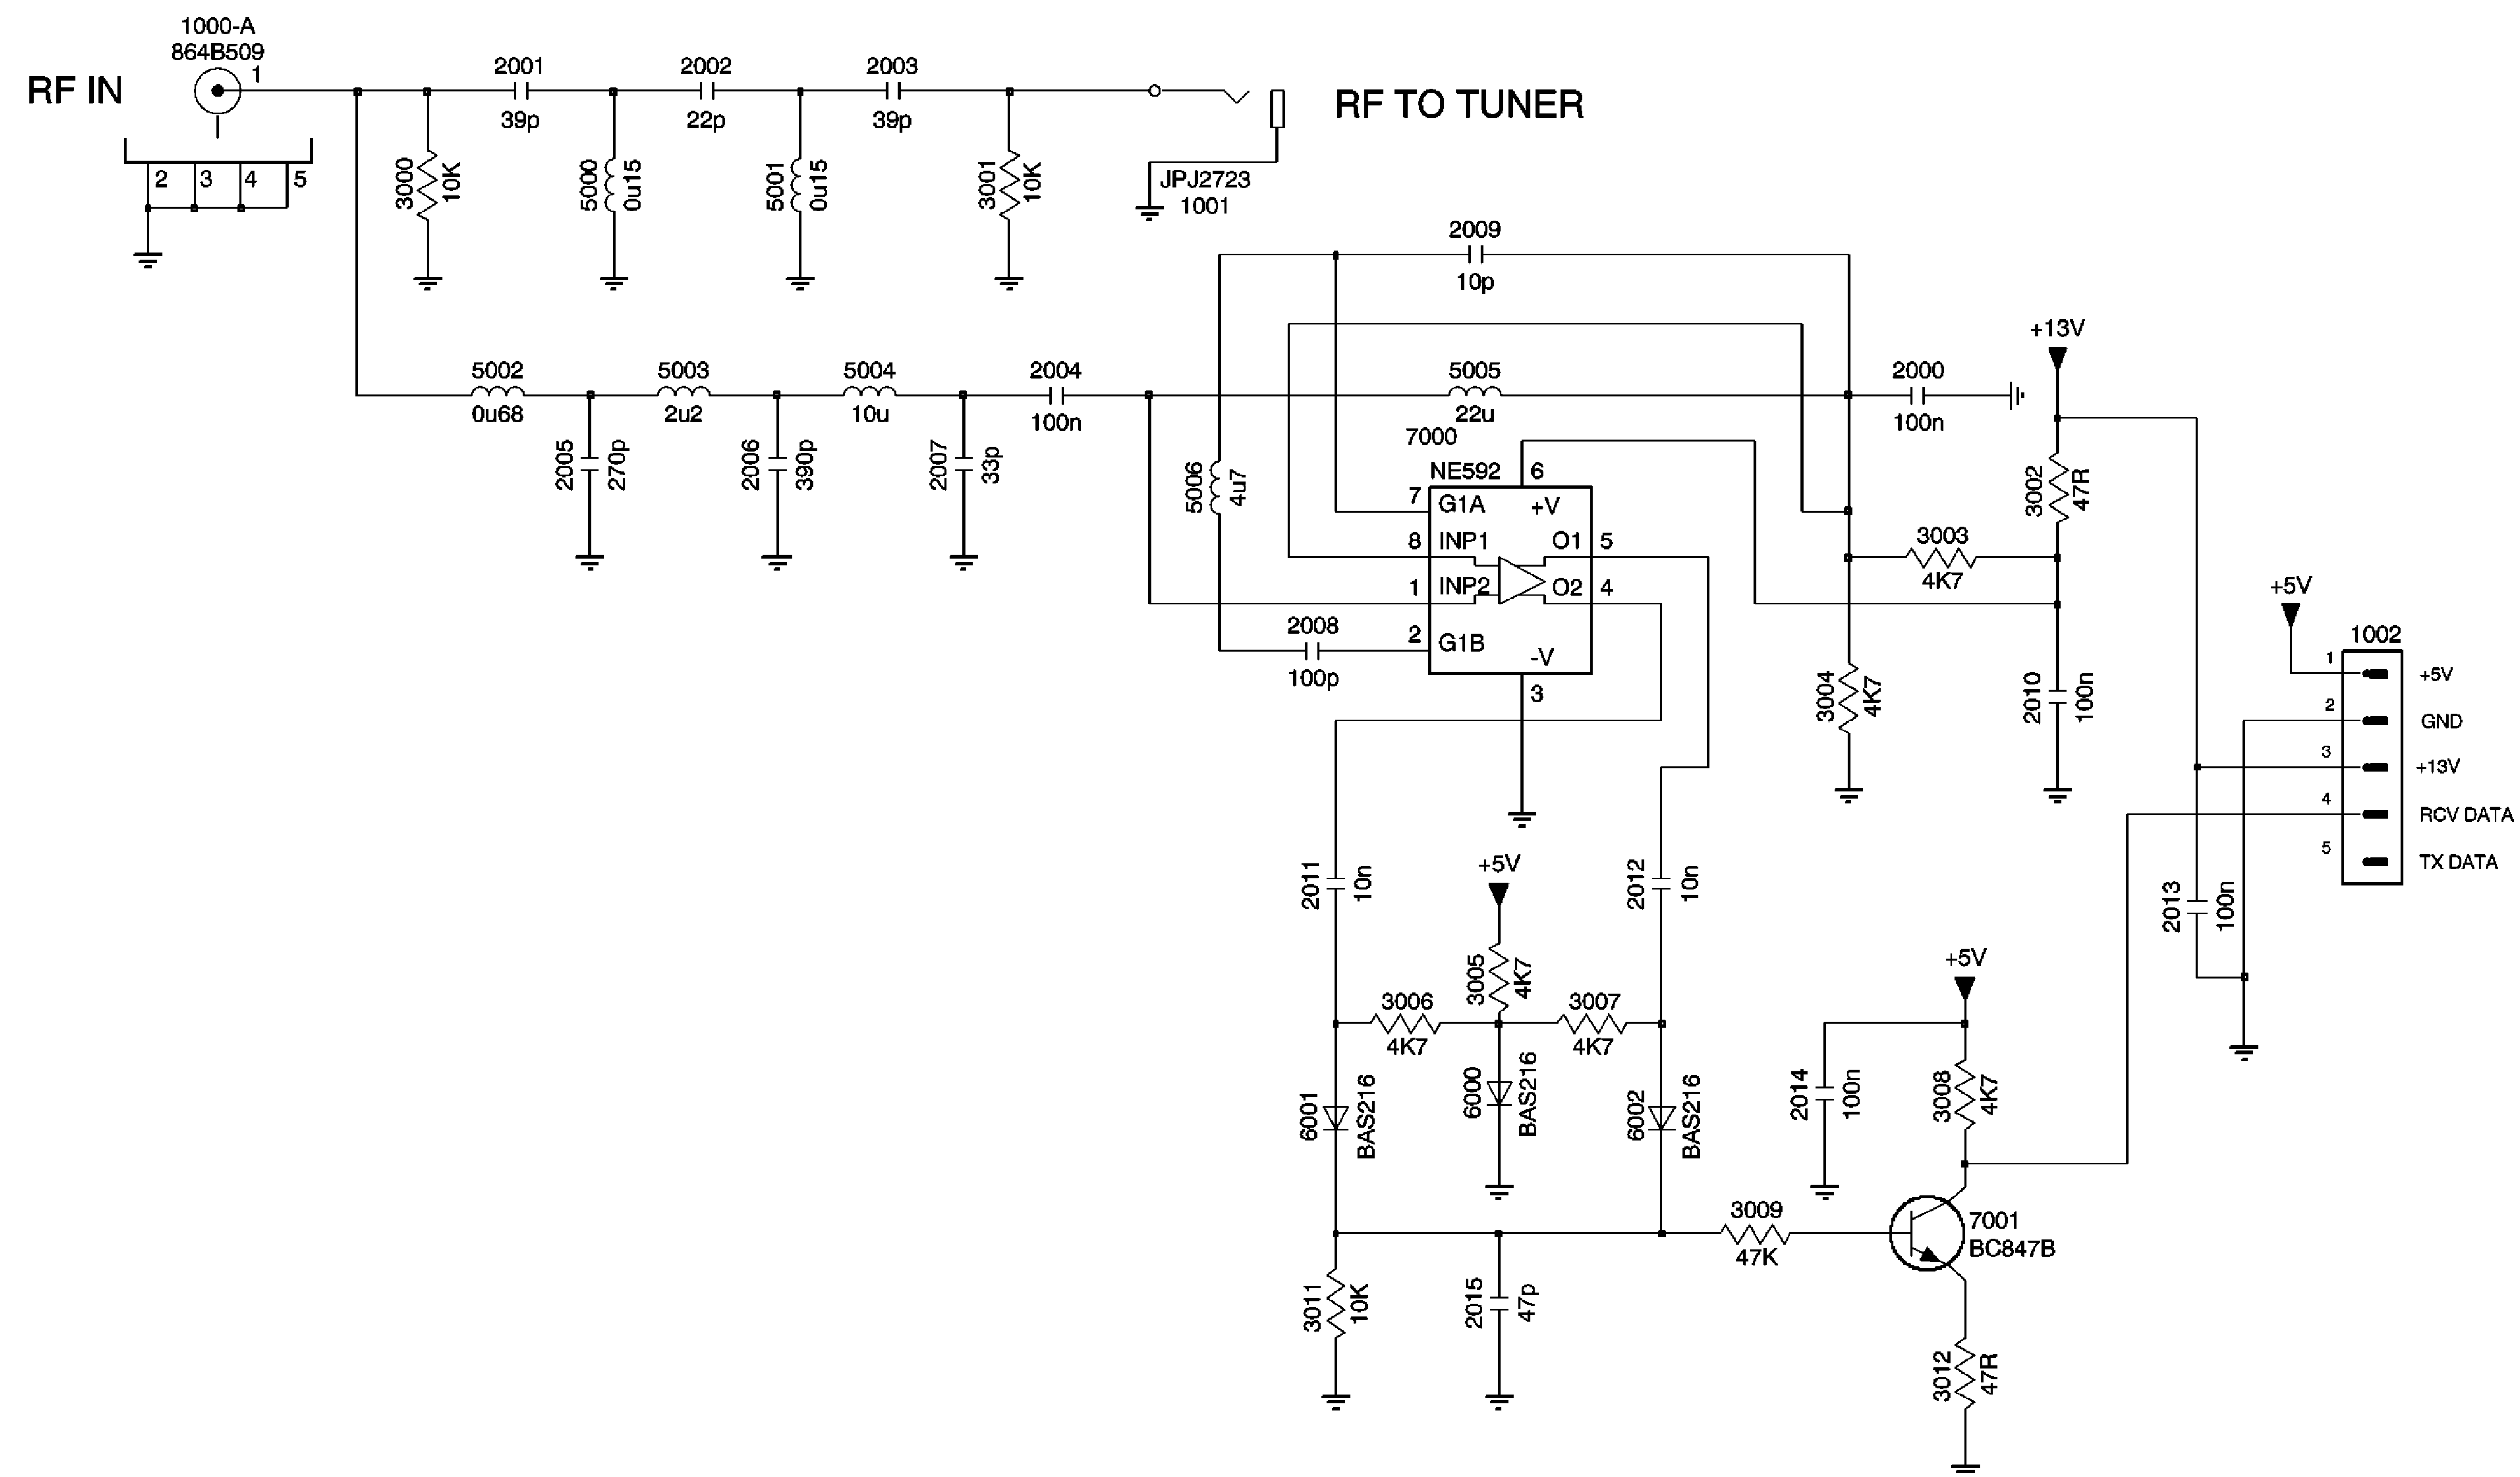


ITV Front Jack Panel

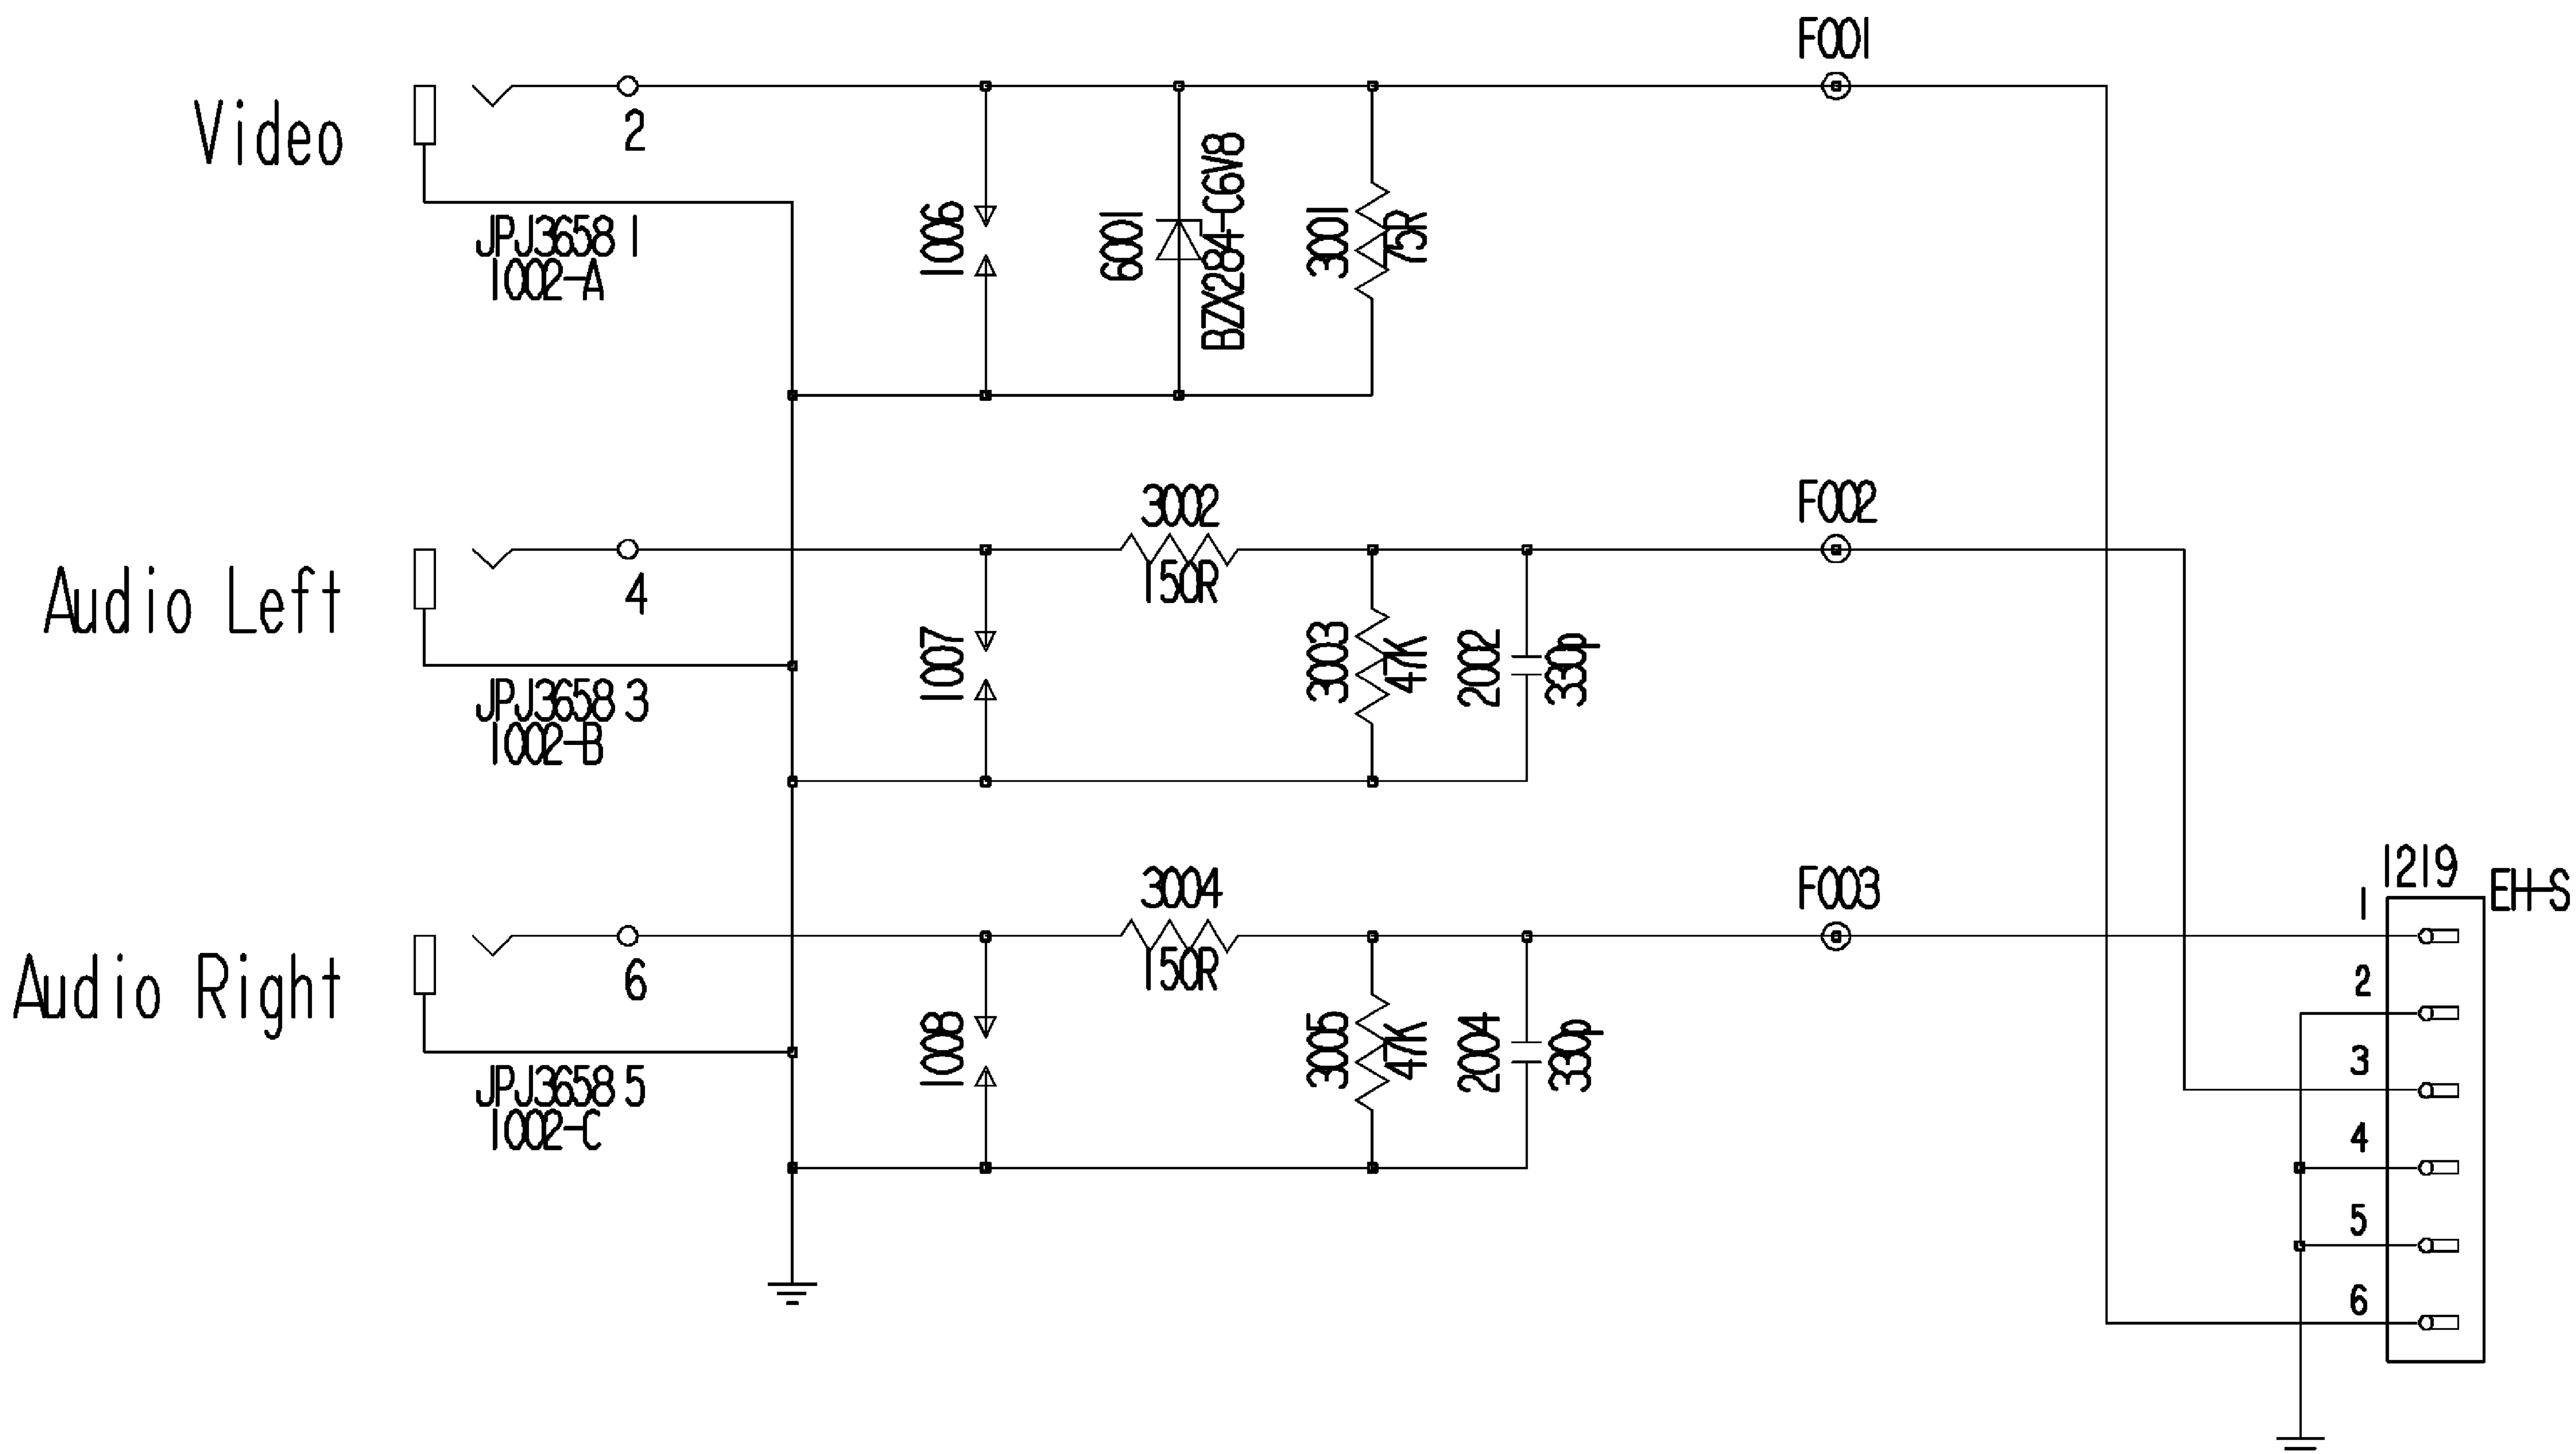


EPS PANEL SCHEMATIC

Parts Notice:
No component parts are available for this board assembly. Replace with the complete board assembly part number. Type "CBA" (no quote marks), to access board assembly part numbers.

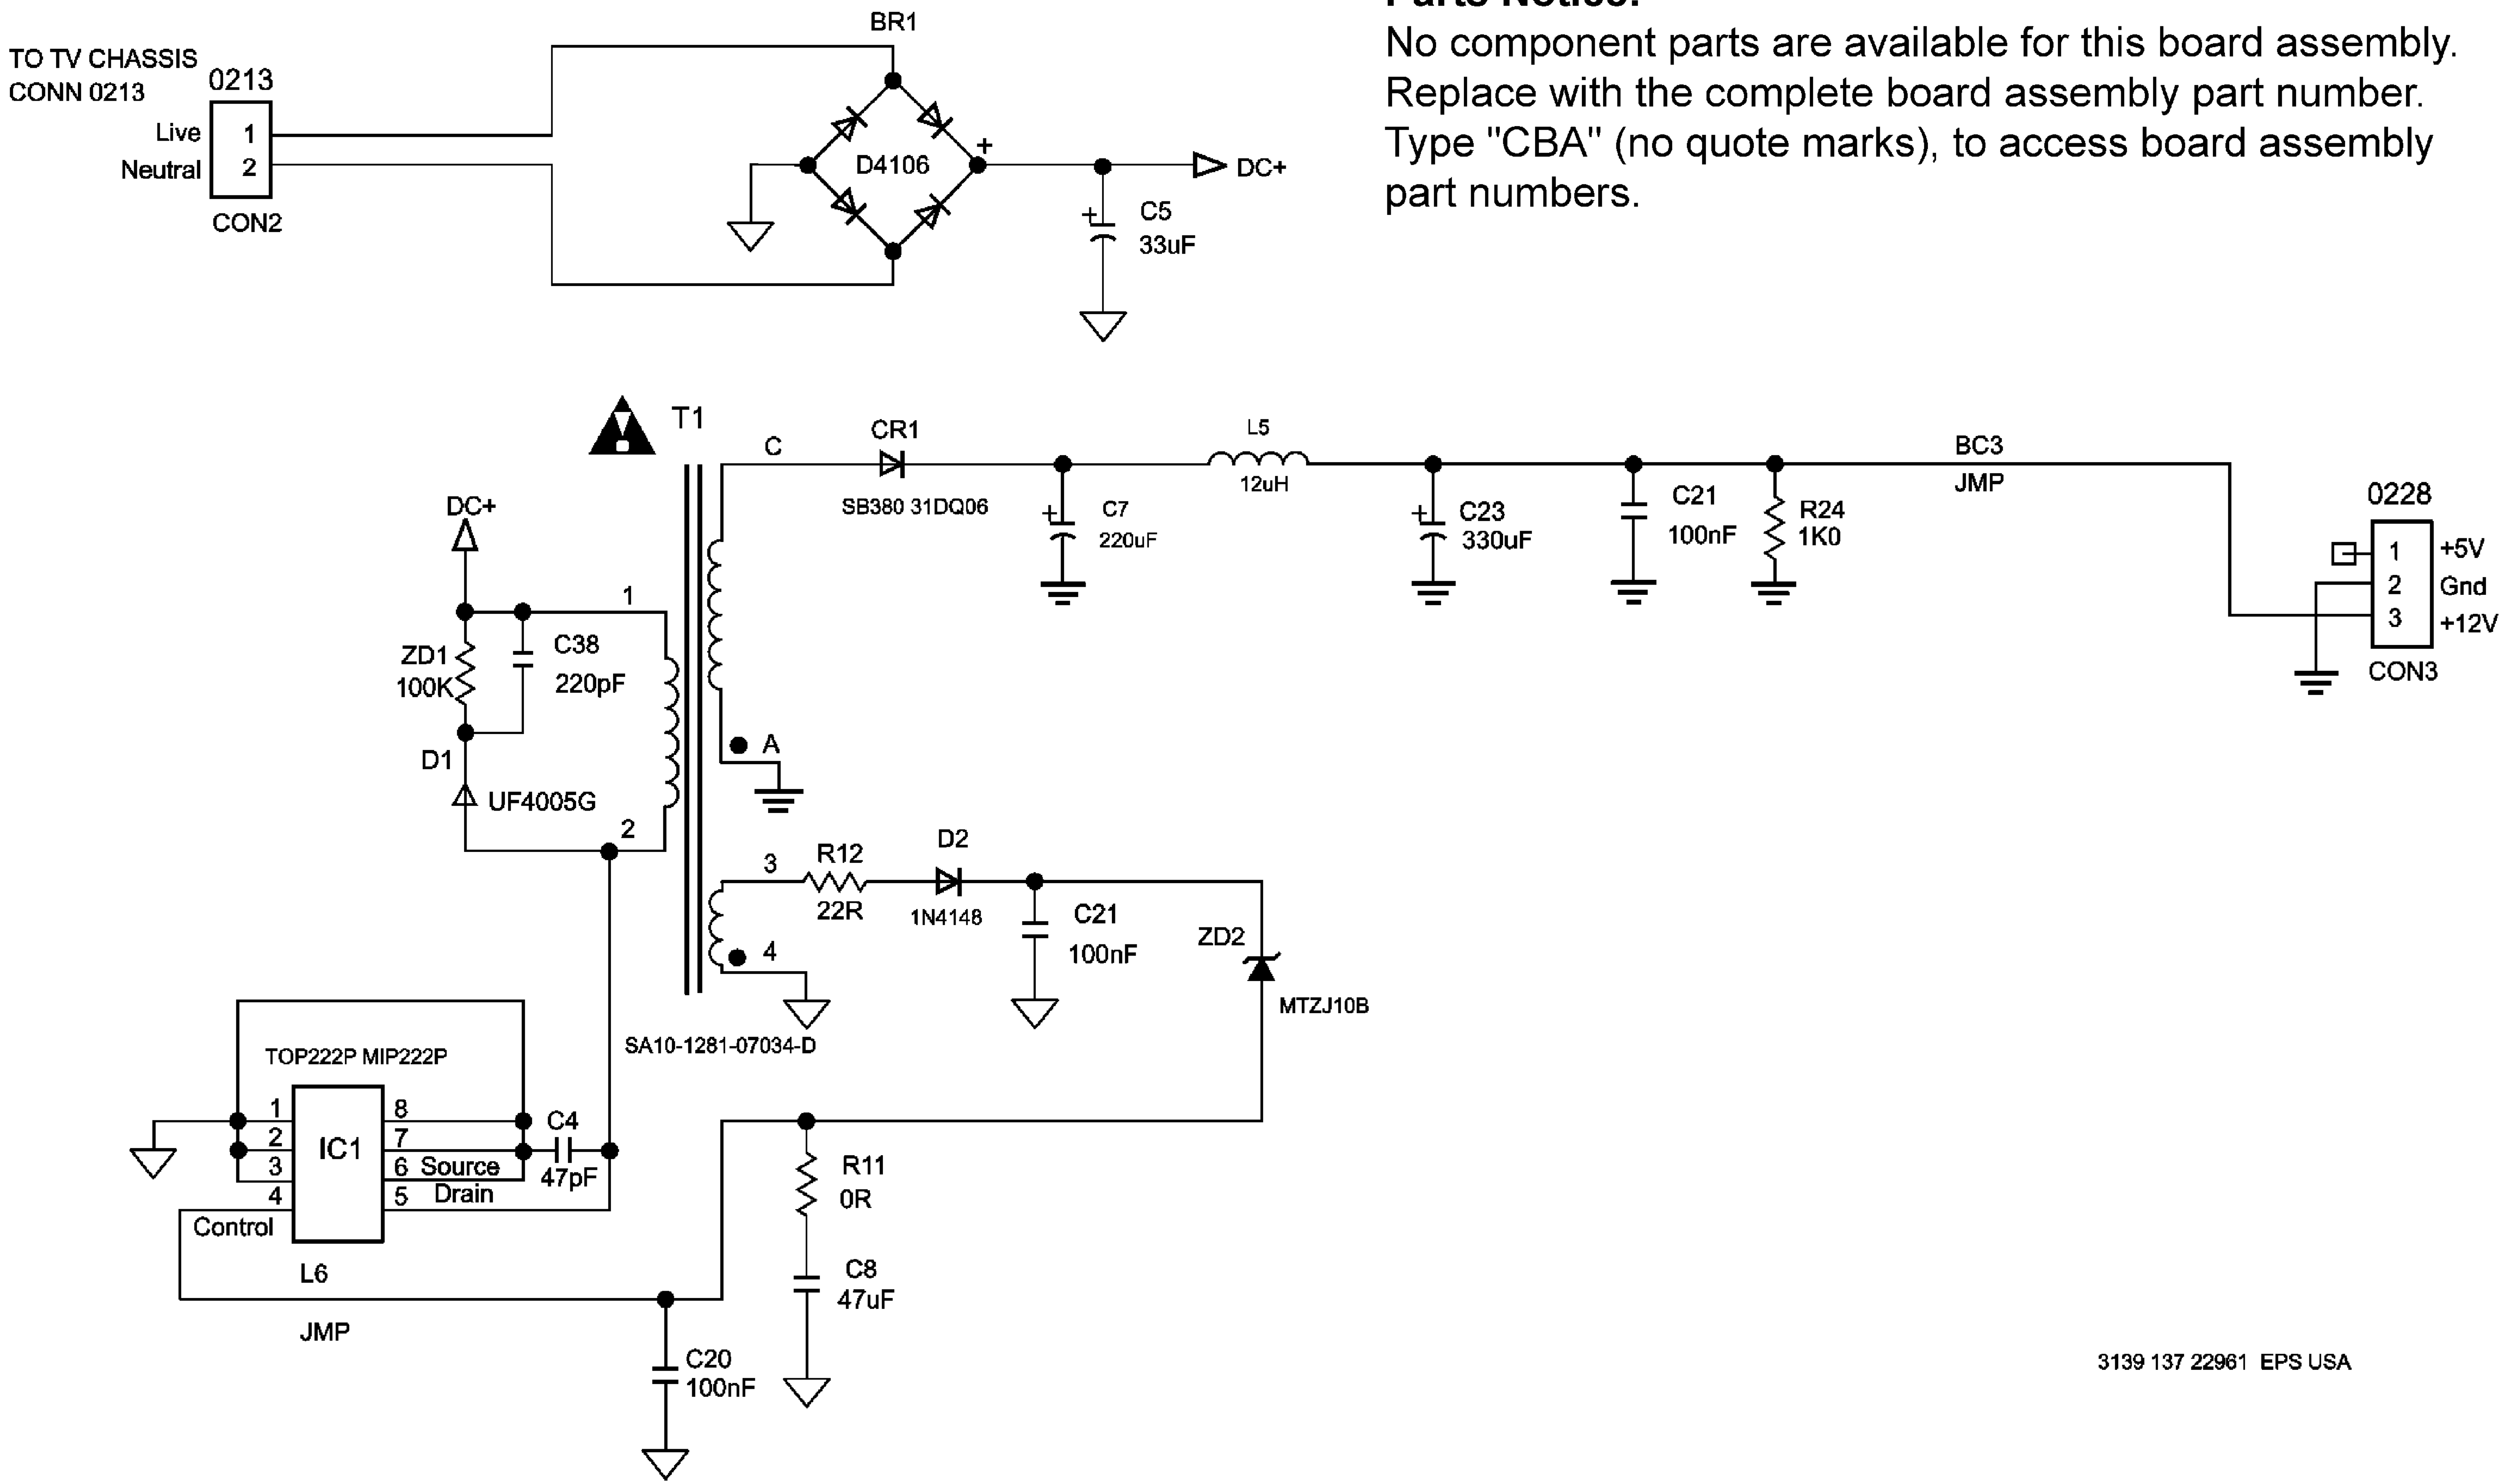

SP / LS Module, Vertical

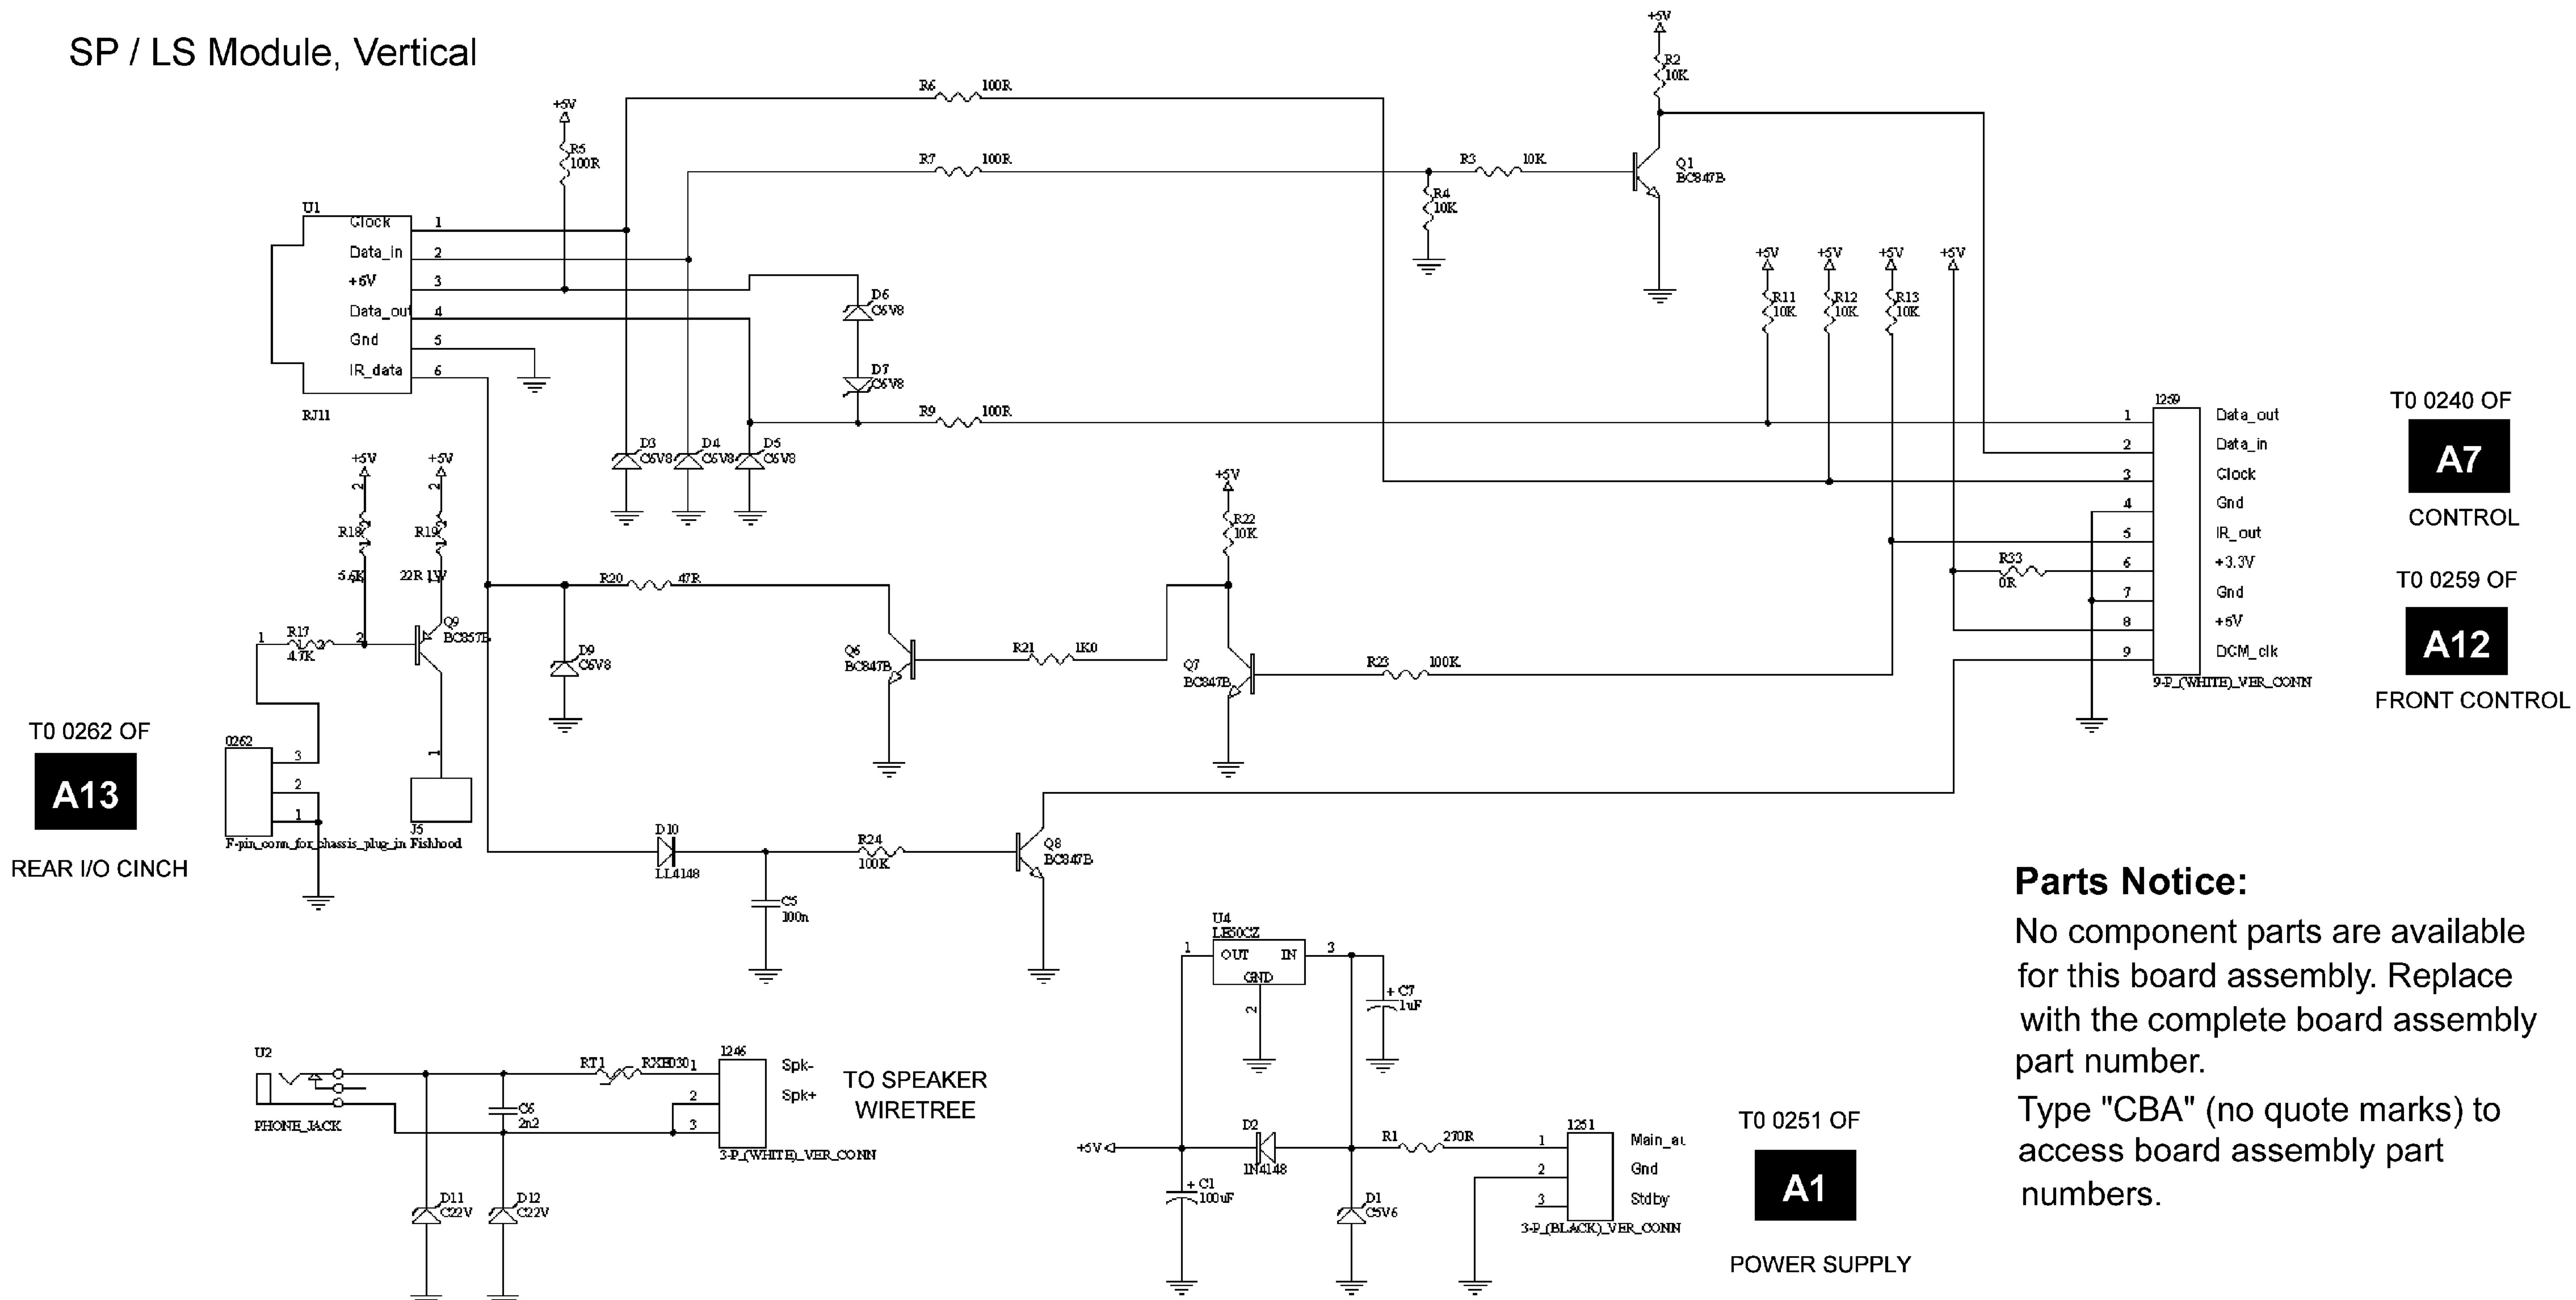


Parts Notice:

No component parts are available for this board assembly. Replace with the complete board assembly part number.


Type "CBA" (no quote marks) to access board assembly part numbers.

INTERFACE PANEL SCHEMATIC


Parts Notice:
No component parts are available for this board assembly. Replace with the complete board assembly part number. Type "CBA" (no quote marks), to access board assembly part numbers.

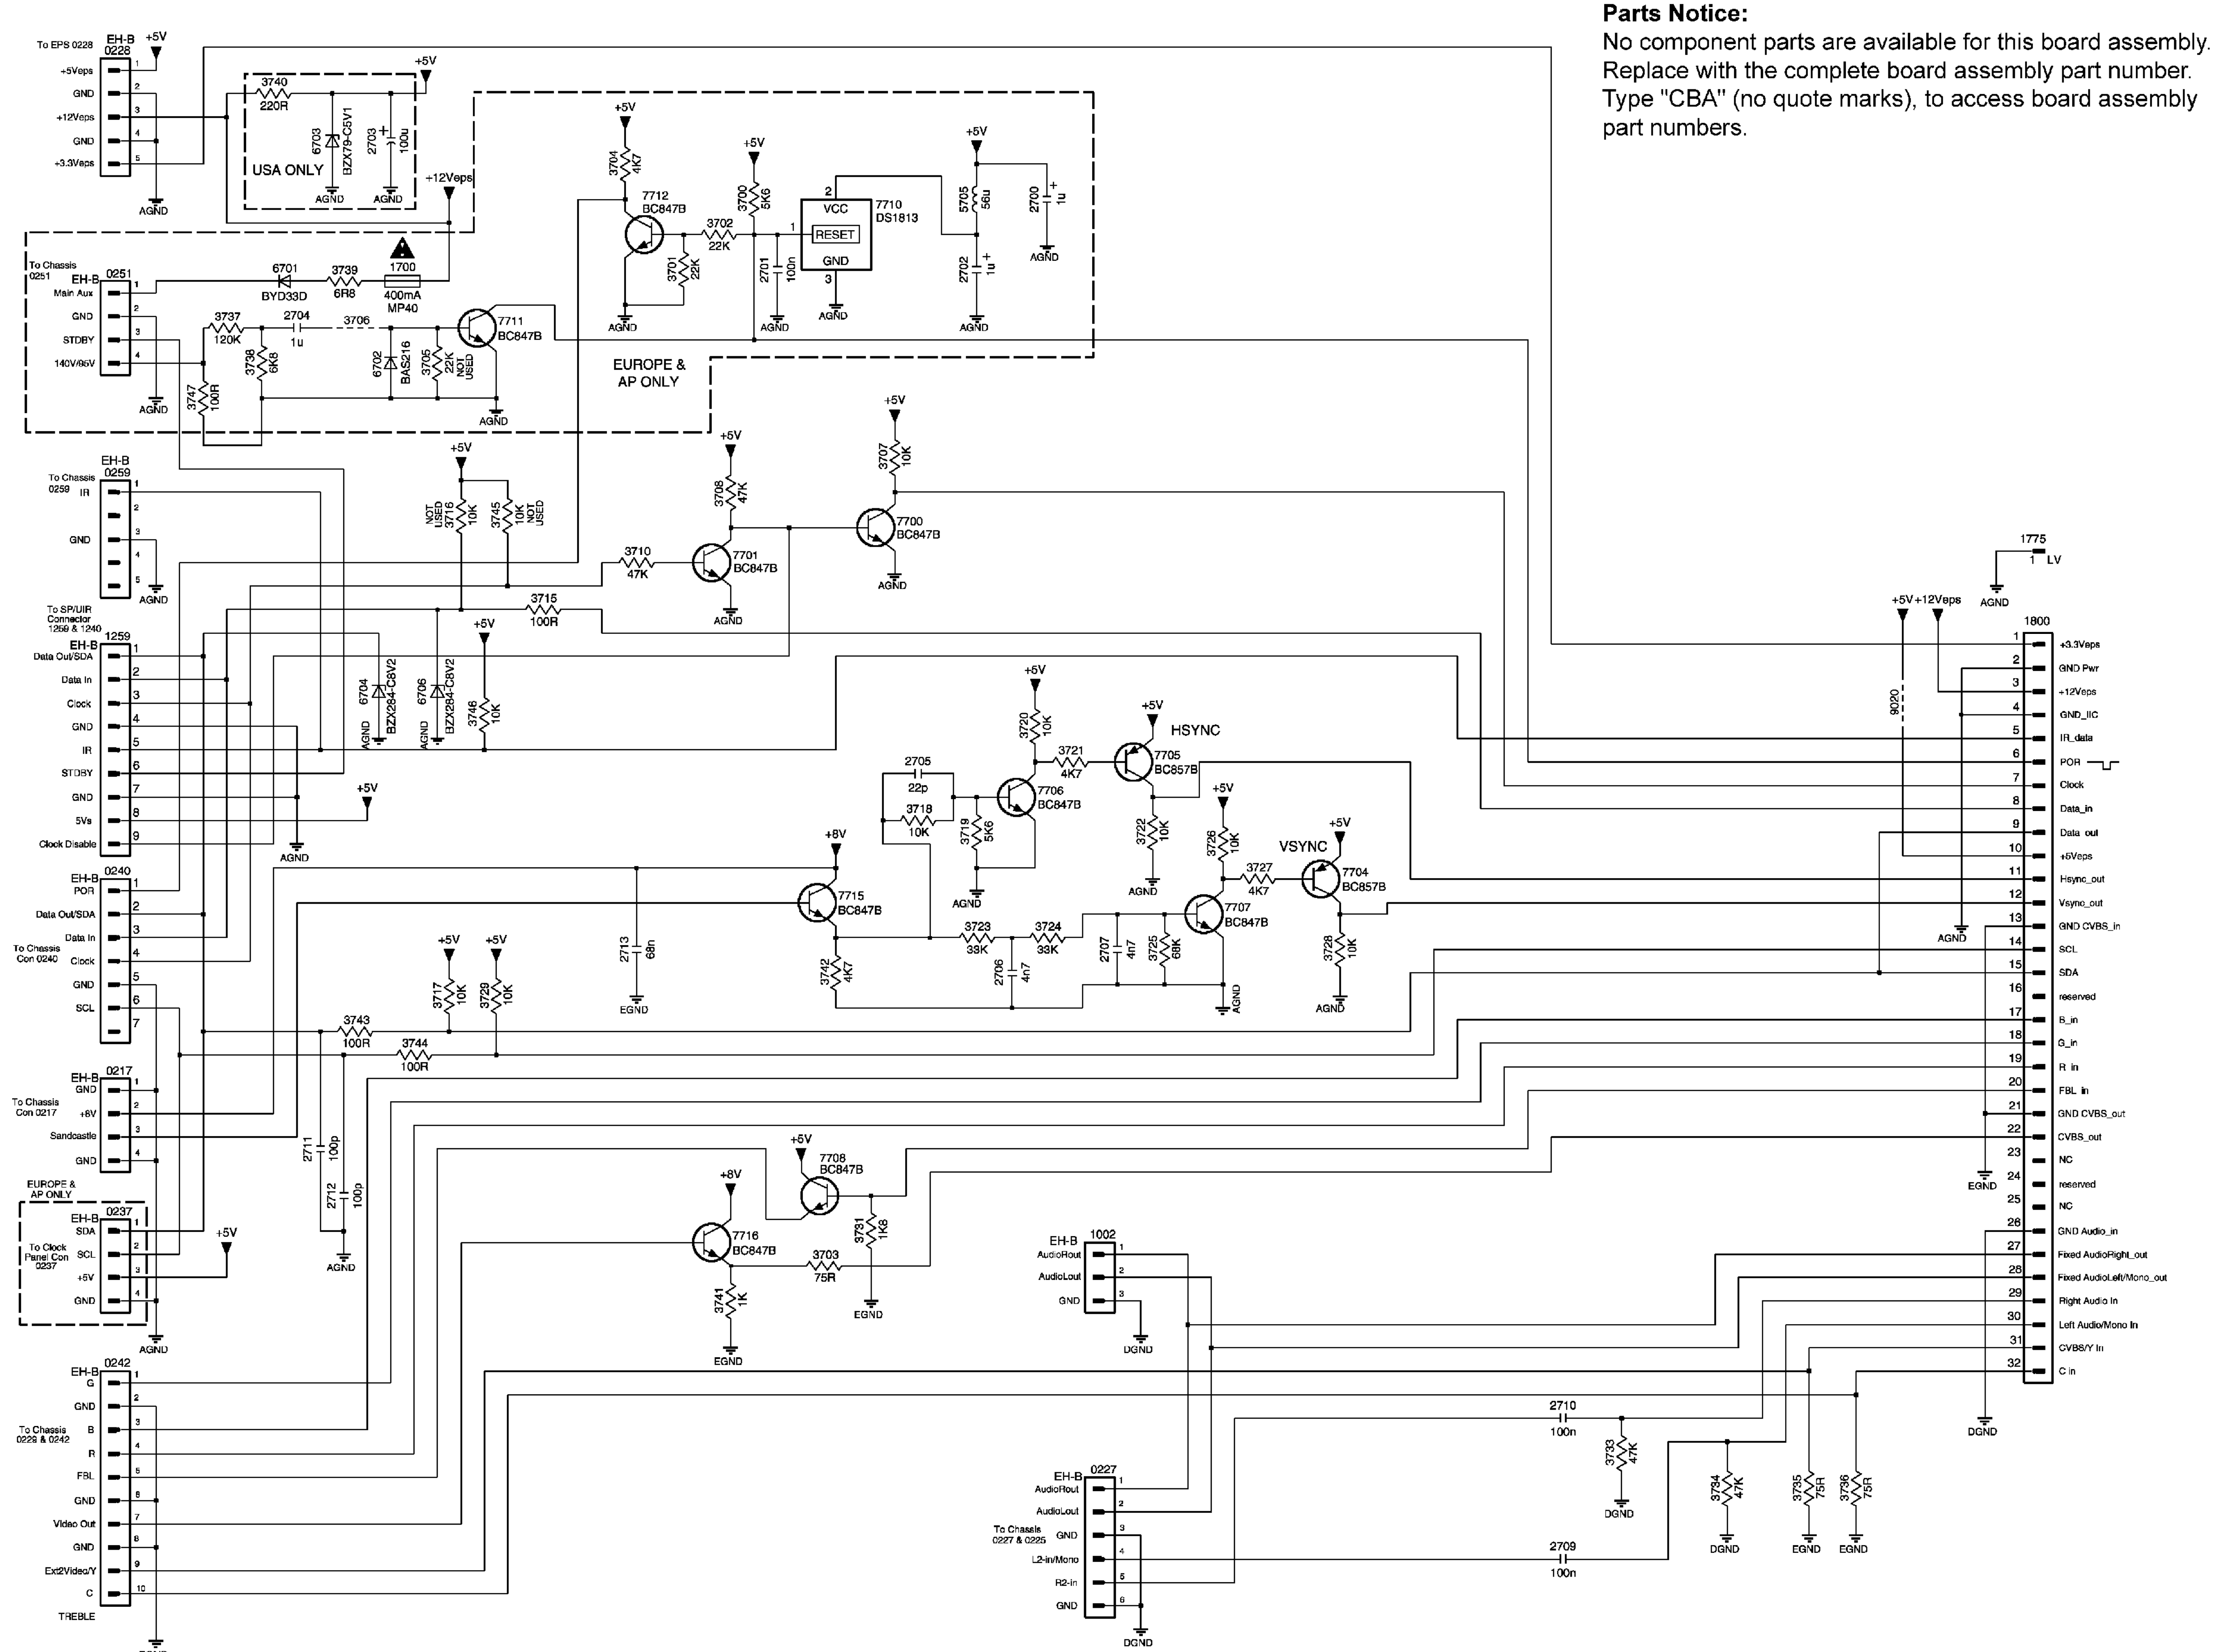


All Models (7638) - Main Chassis (Component Side)

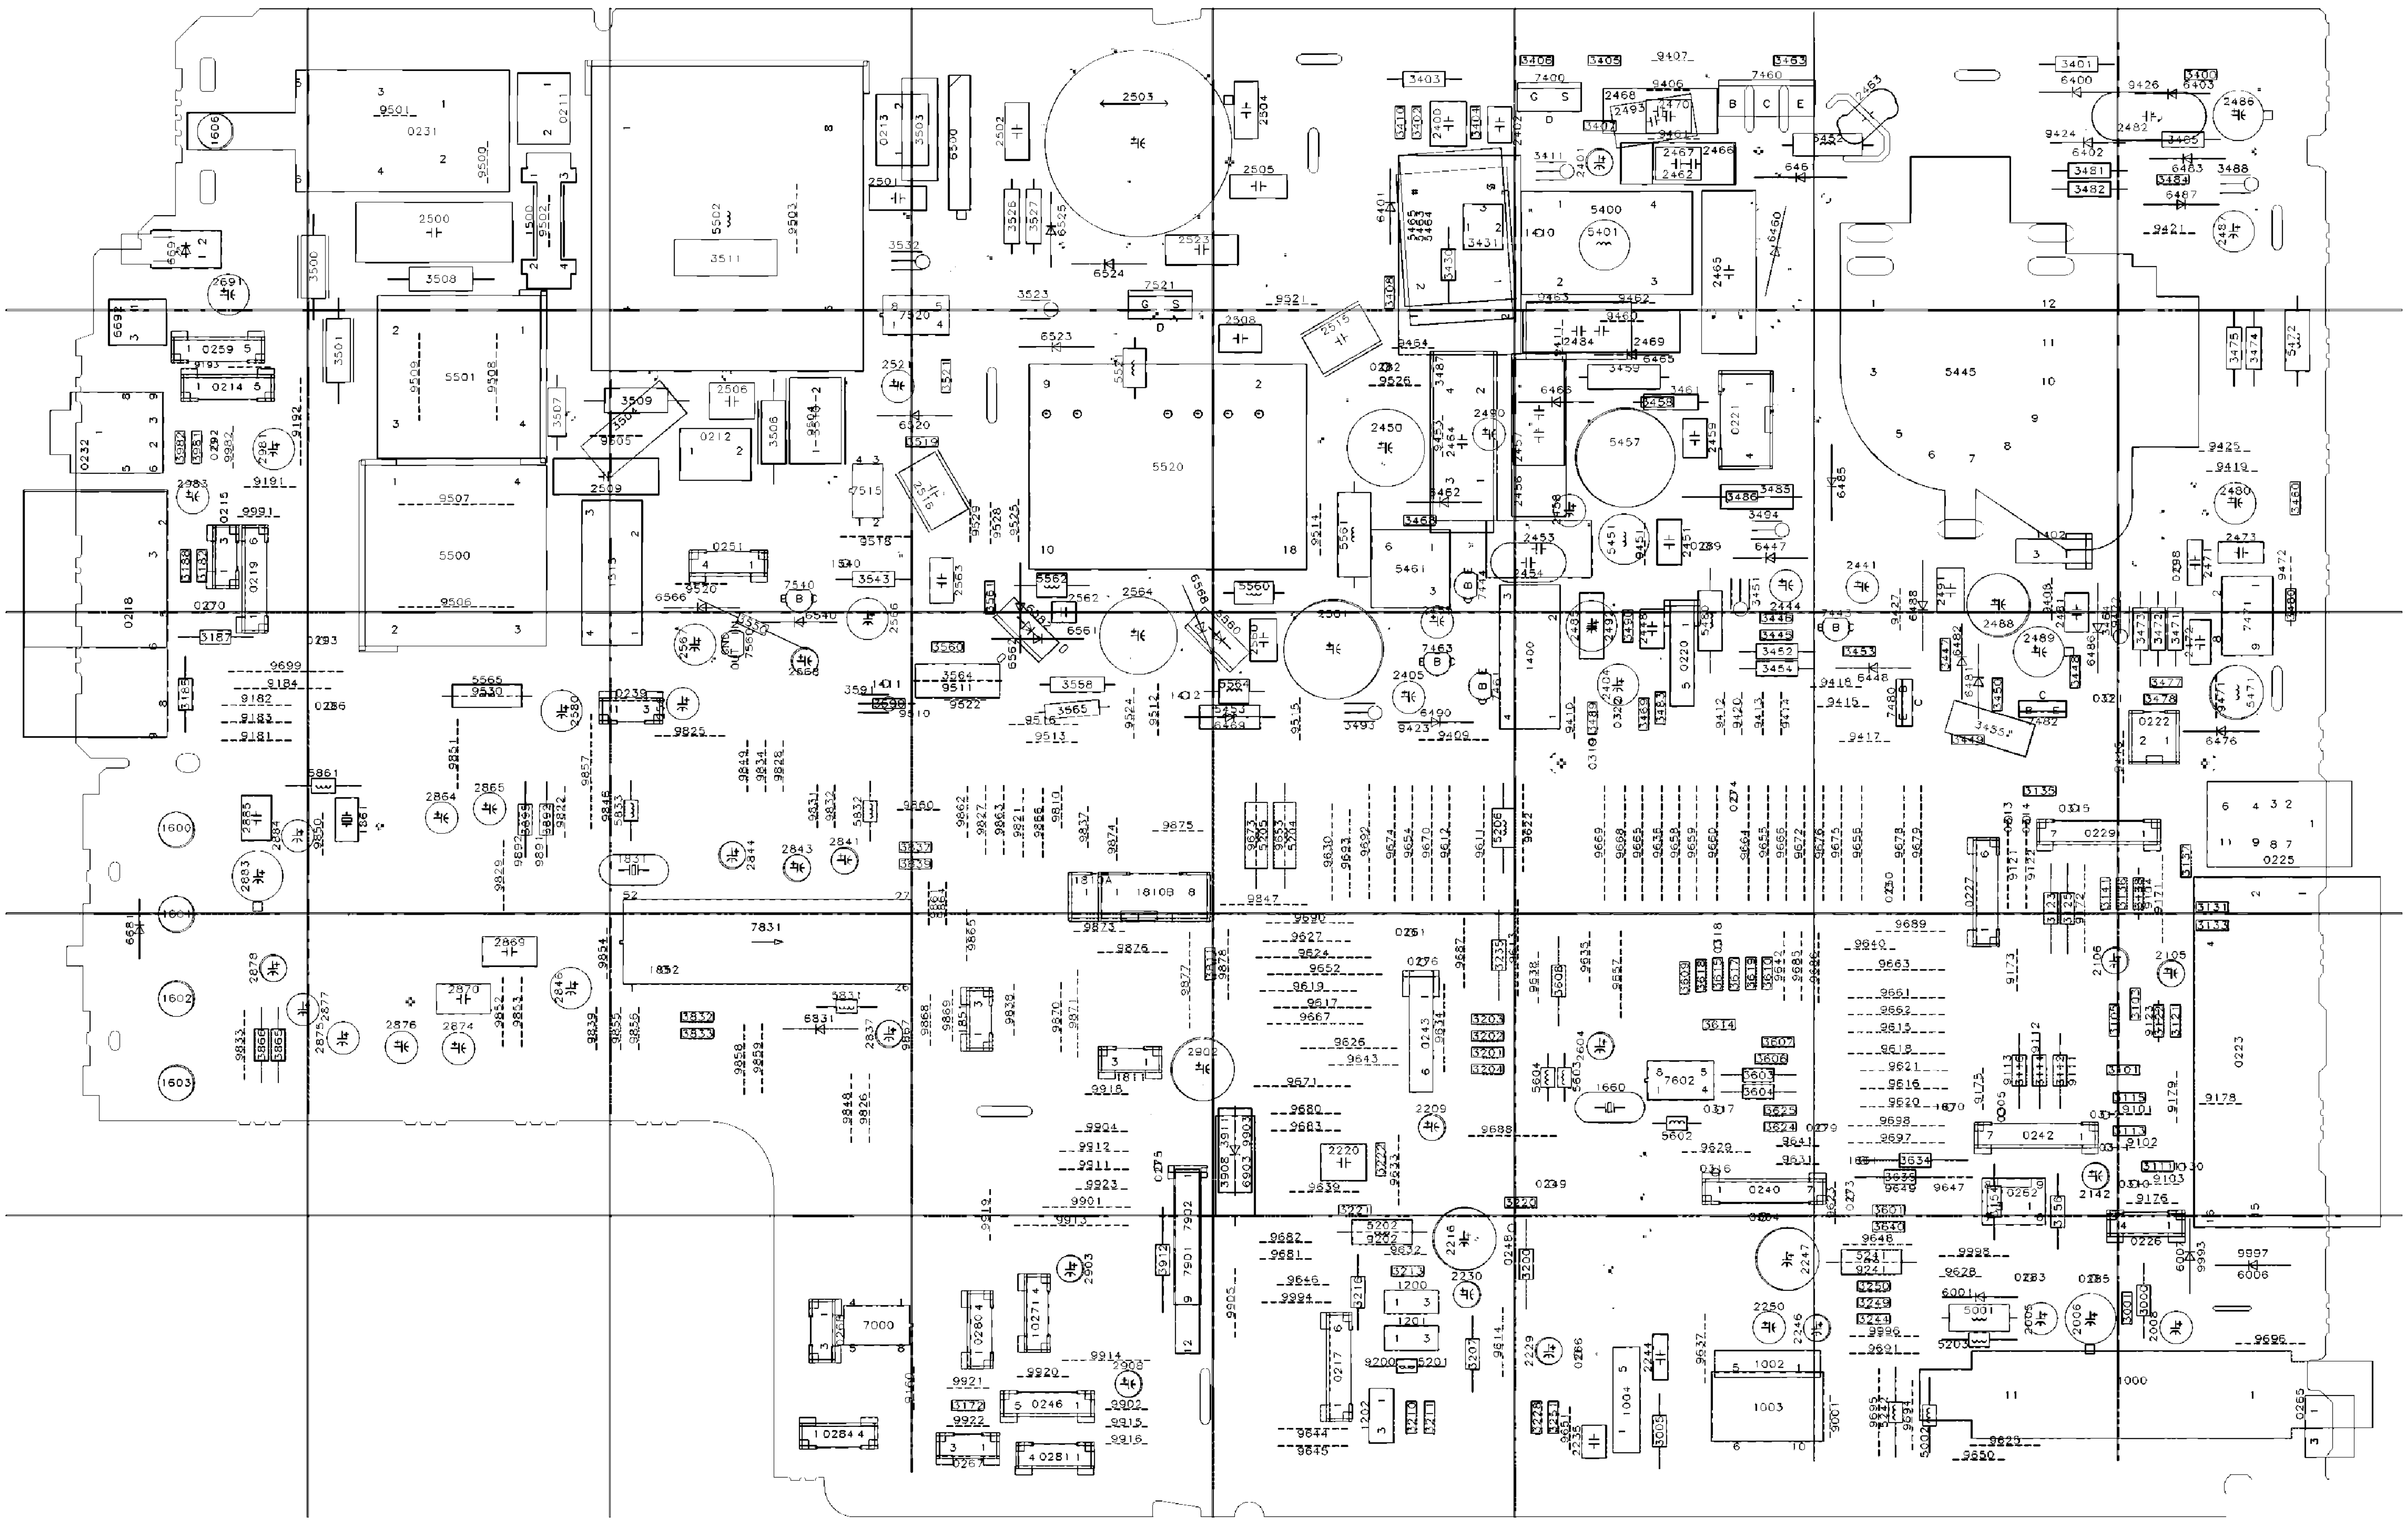


All Models (7638) - Main Chassis (Copper Side)

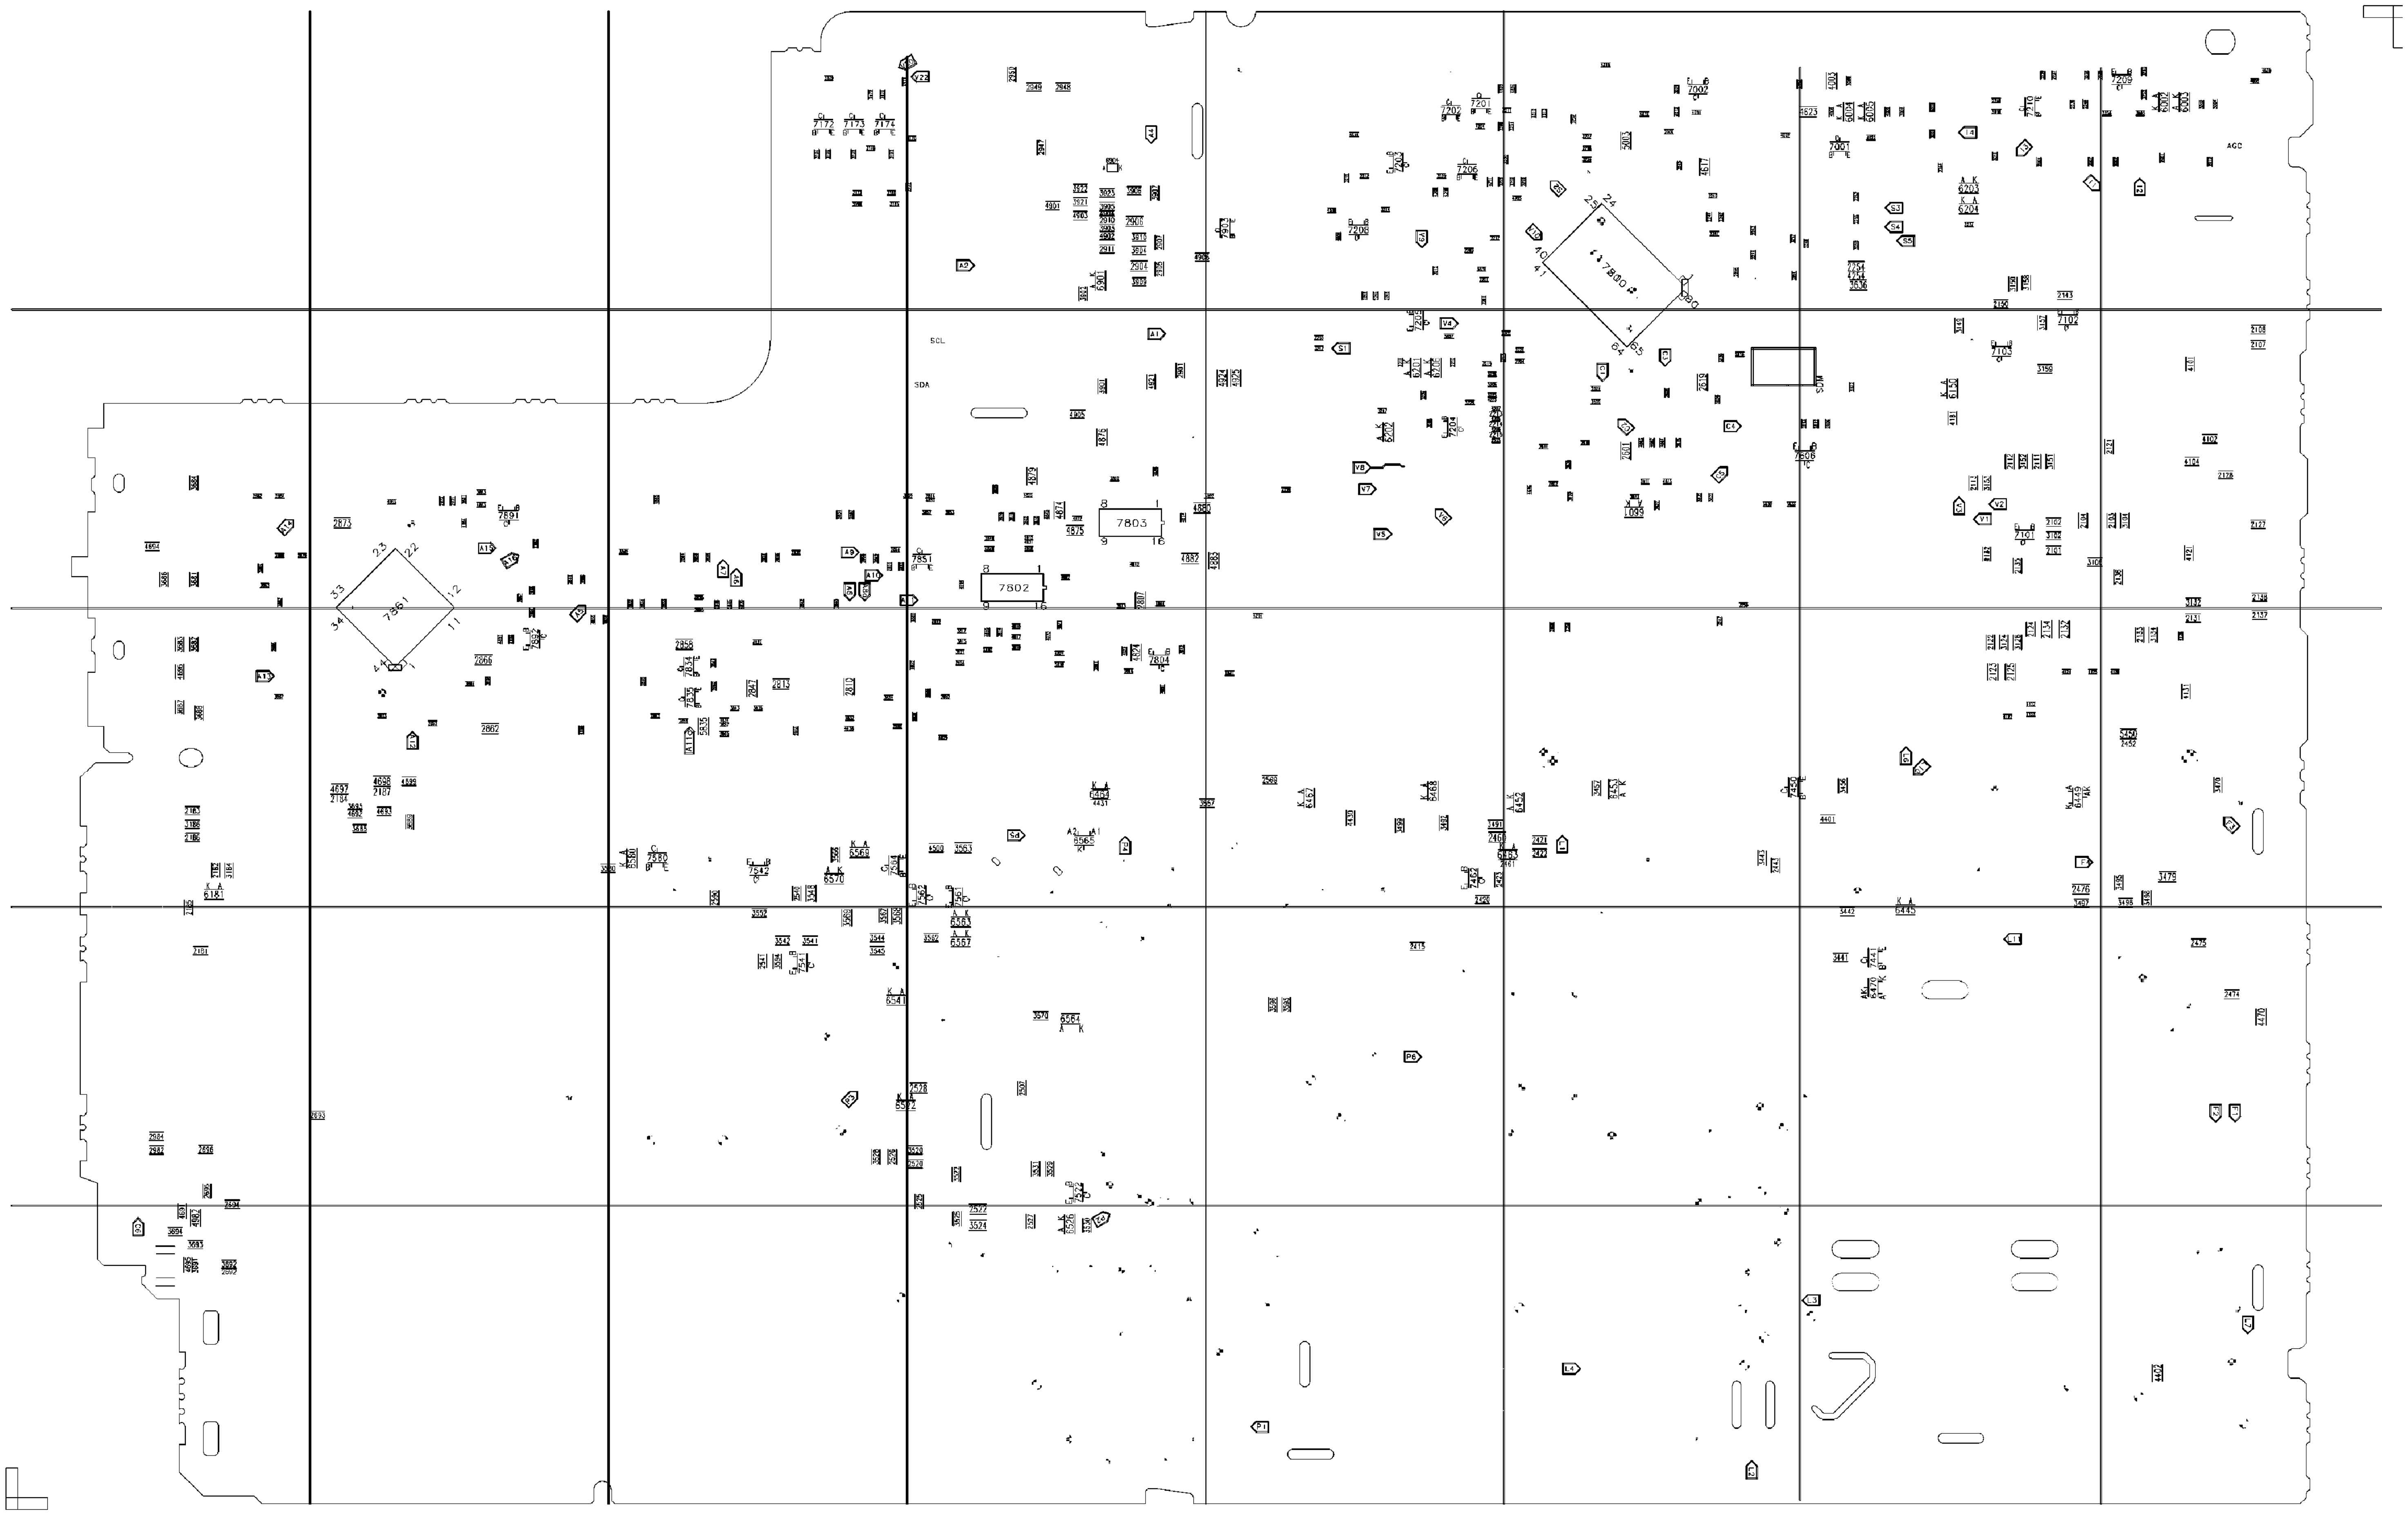


All Models (7638) - CRT Panel (Component Side)

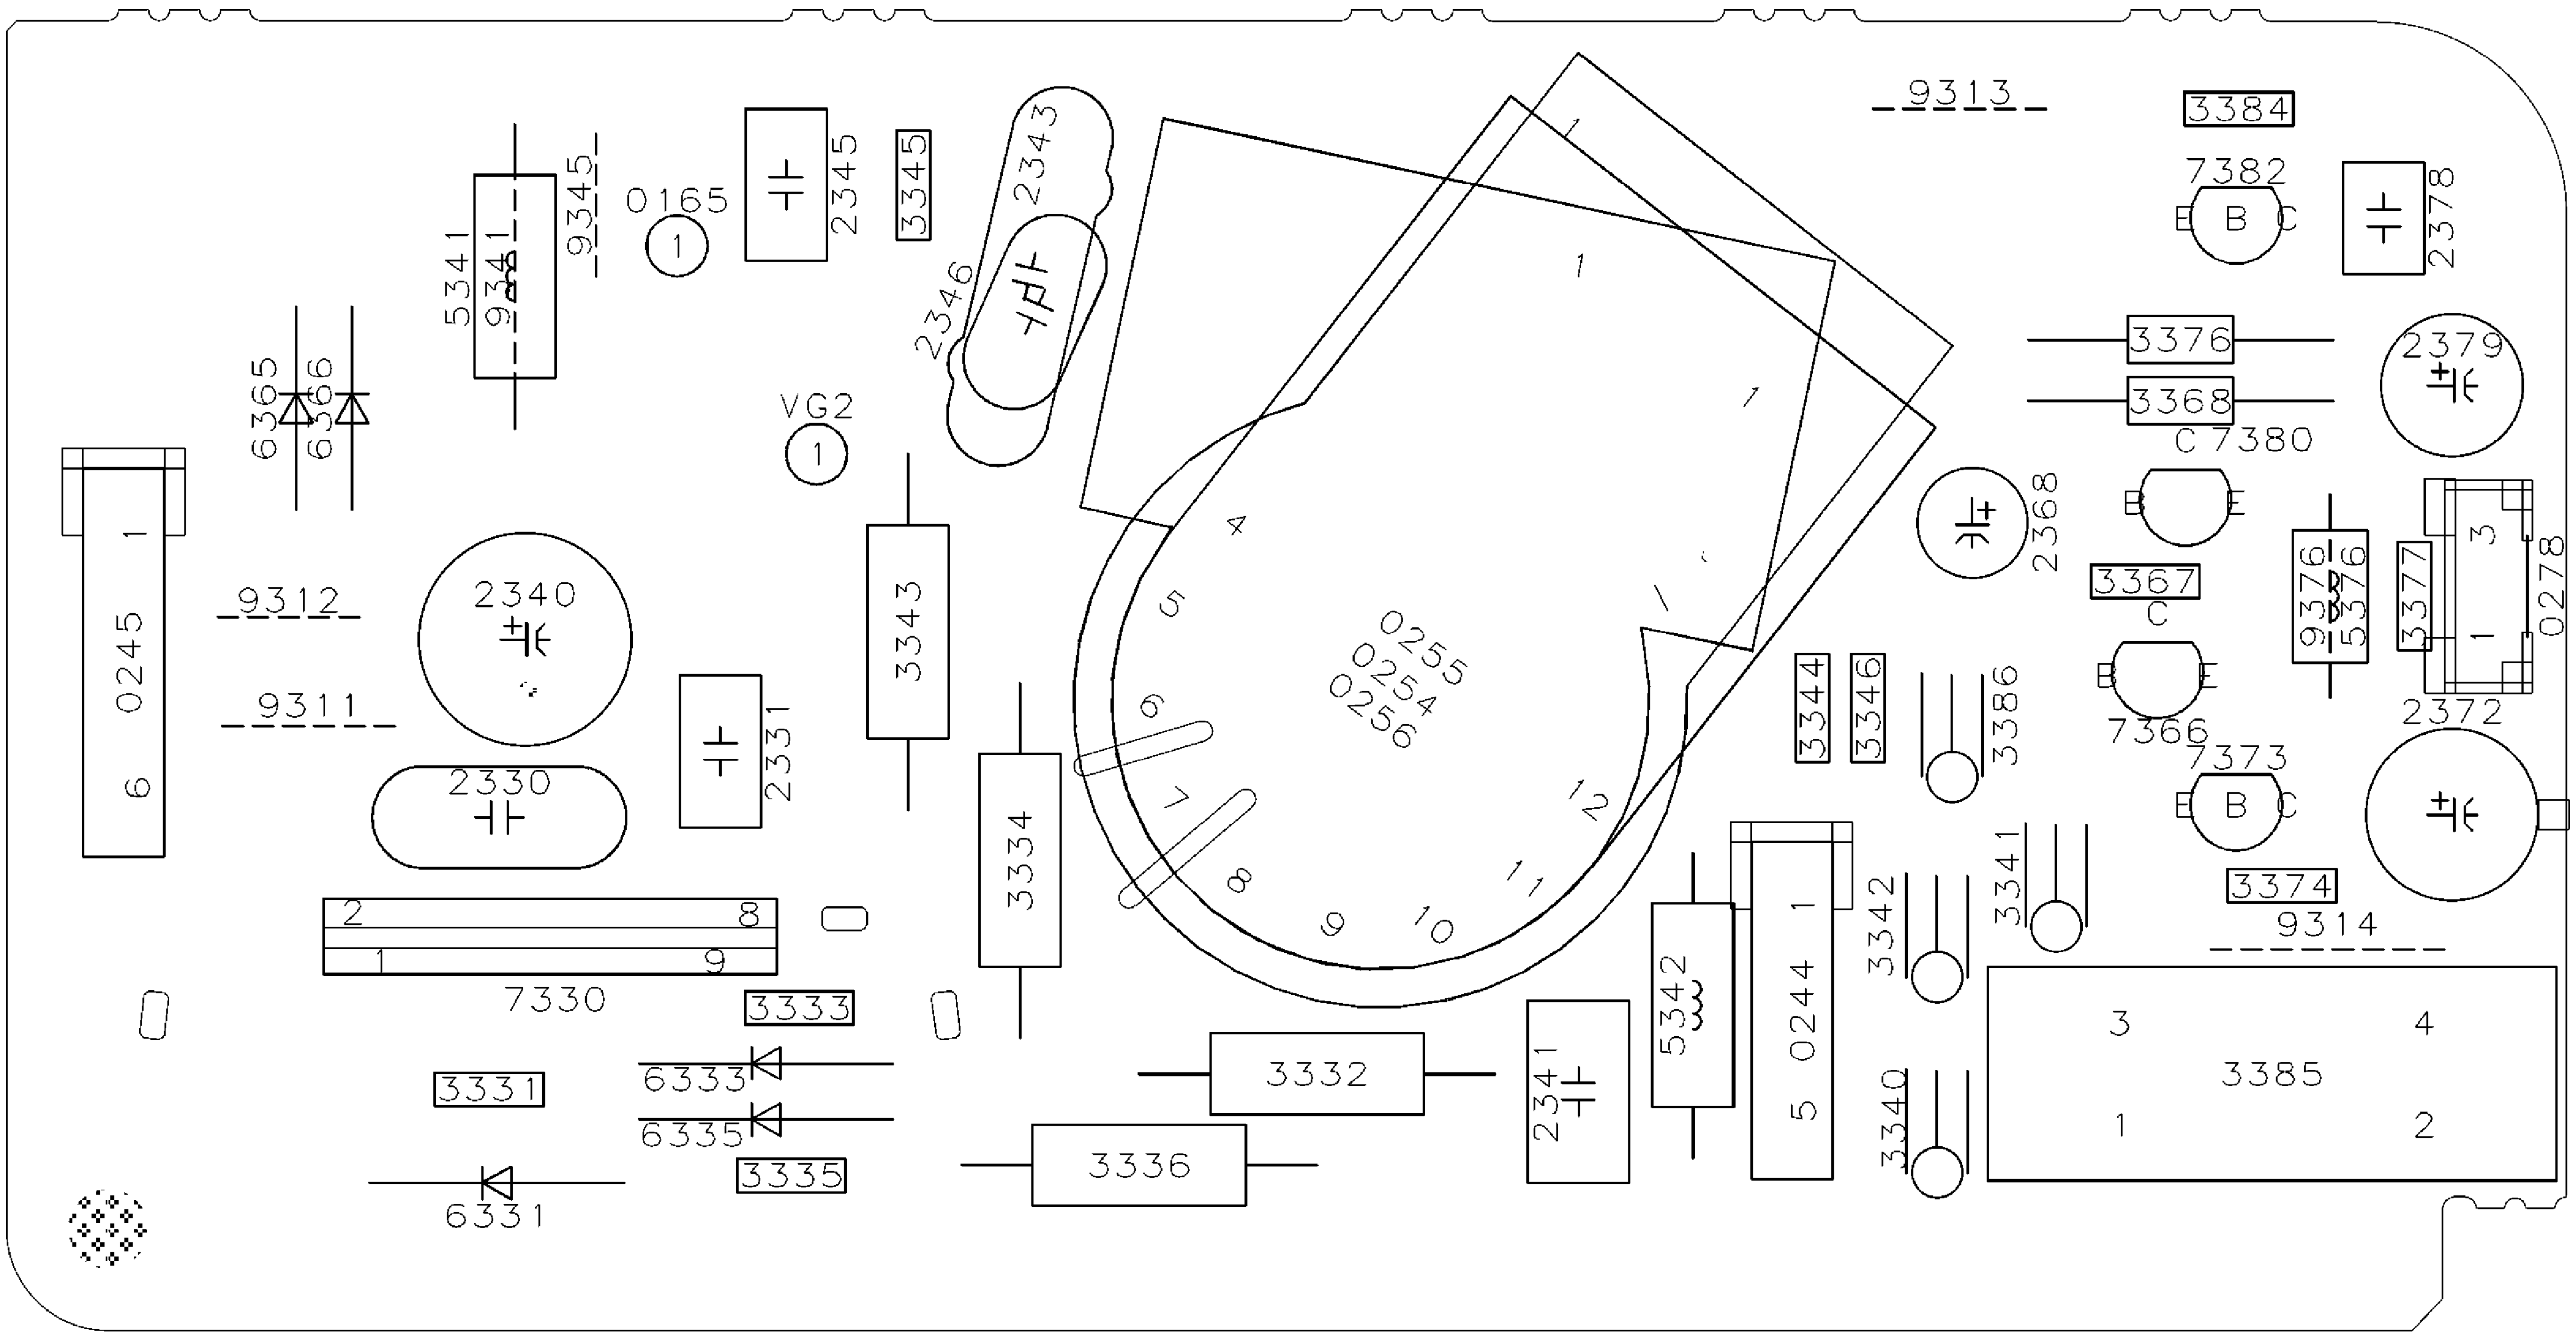


All Models (7638) - CRT Panel (Copper Side)

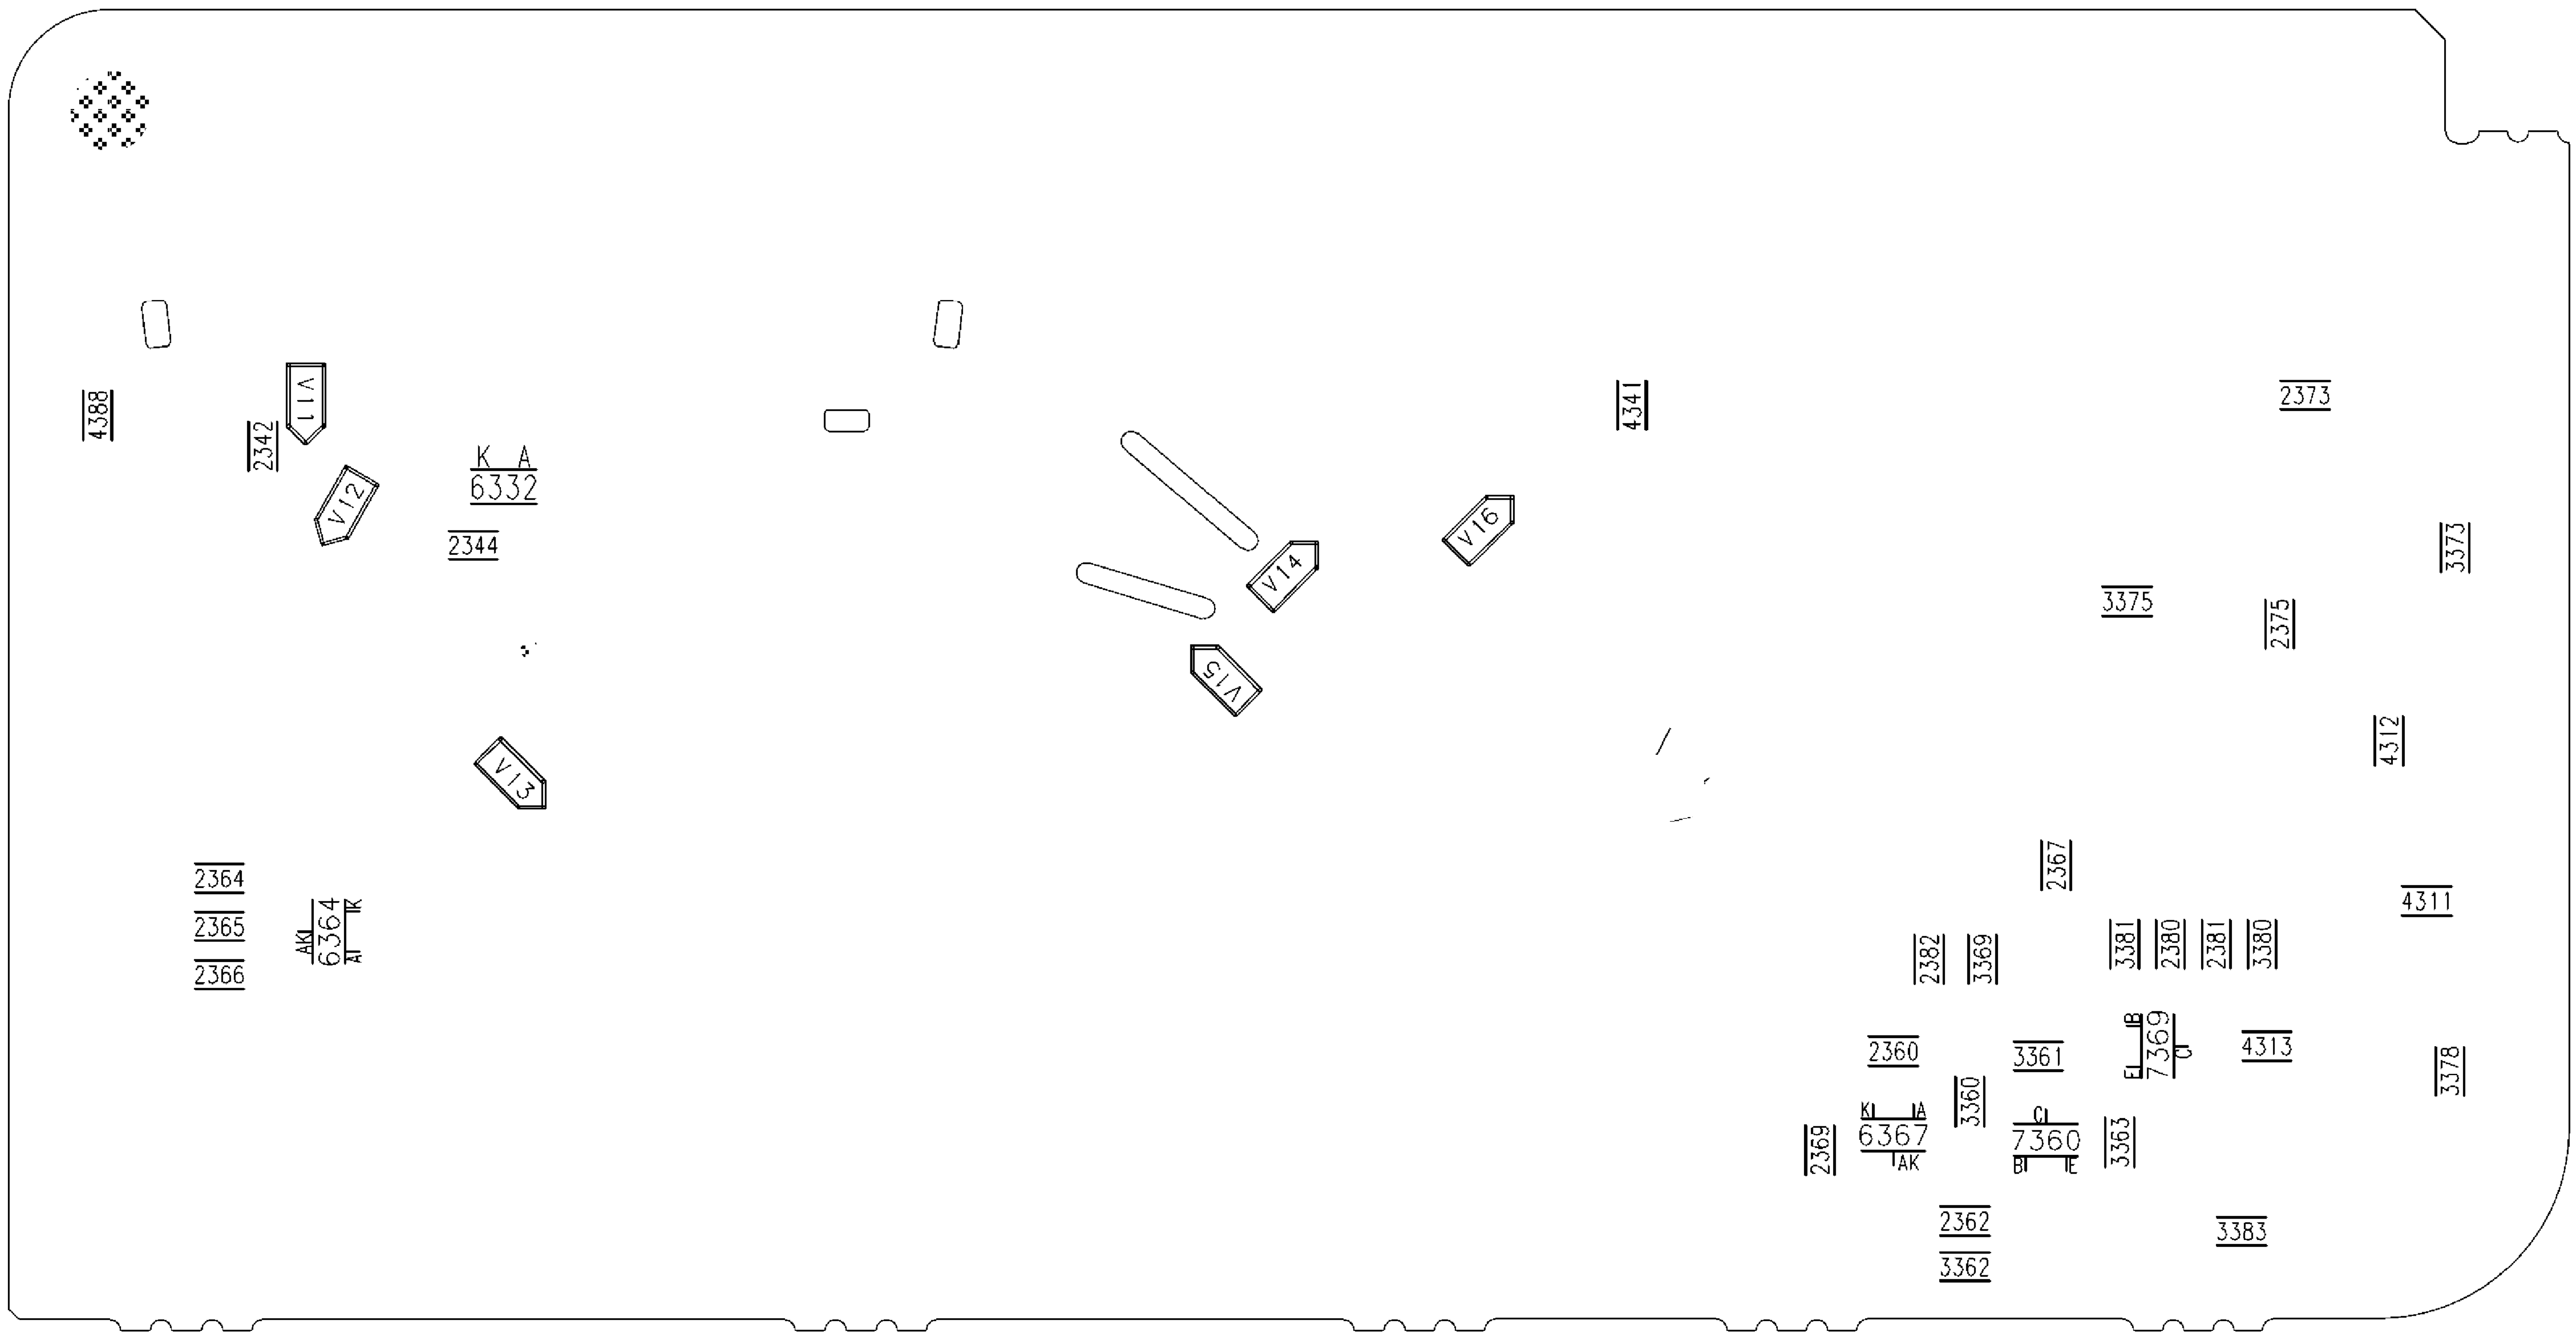


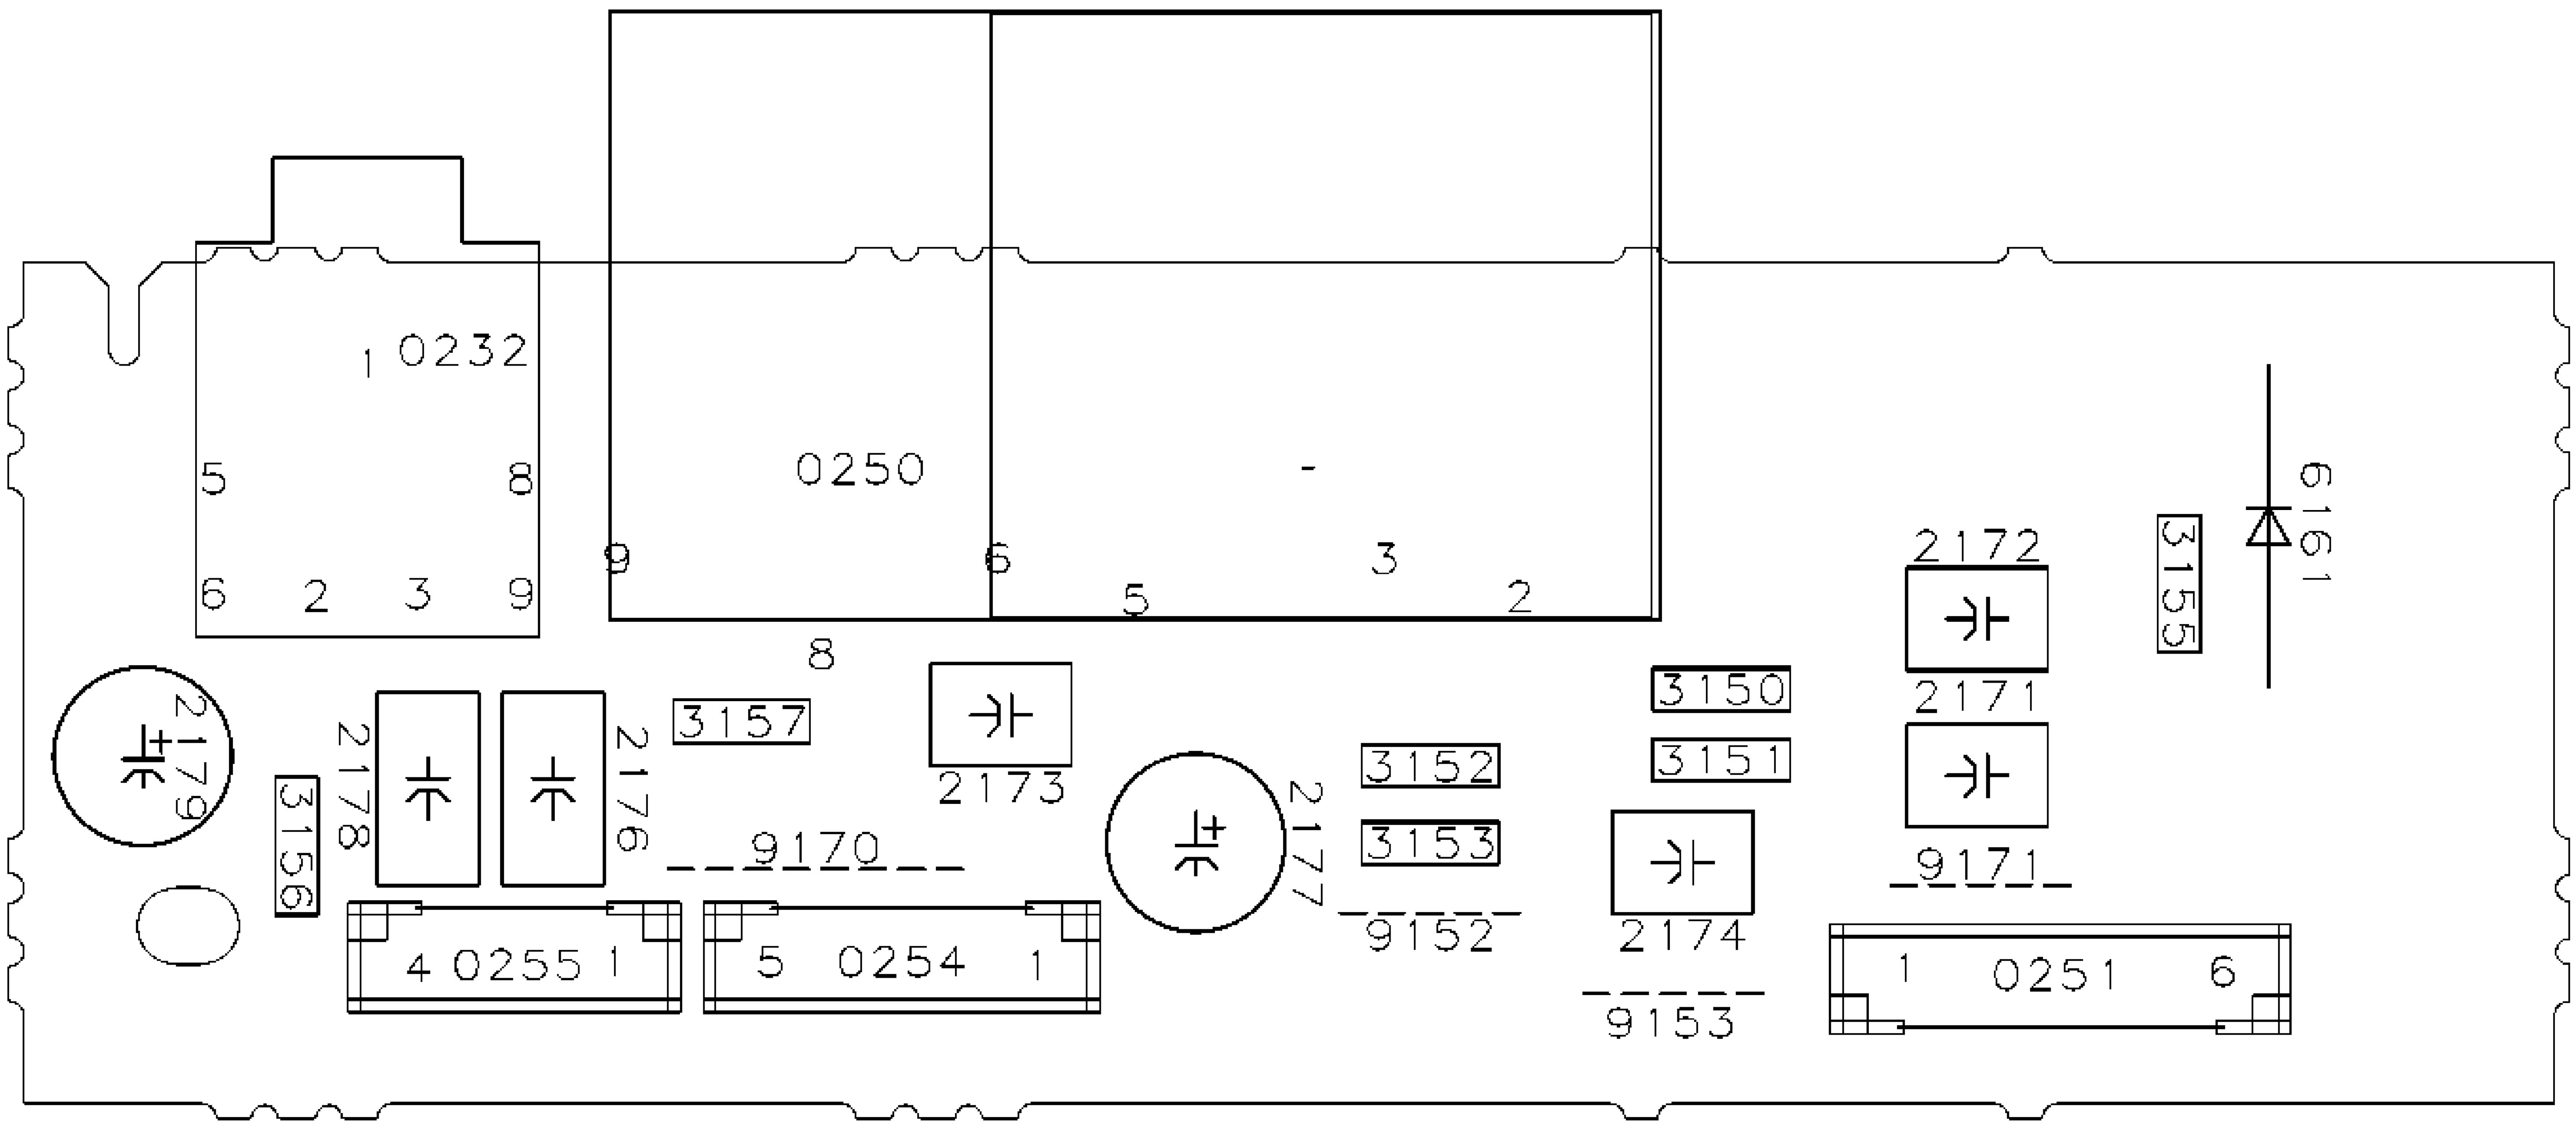
0232
0250
2172
2171
3155
6161
2179
3156
2178
2176
3157
2173
2177
3152
3153
3150
3151
2174
9170
9152
9153
9171
0255
0254
0251


NOT USED IN MODELS: , 20DV6932/37R, 20DV693R02, 20DV693R01, 20MS334R/37, 20MS334R01, 20PT633R/37, 20PT643F/35R, 20PT643R01, 21PT6331/44R, 21PT633R85C (7638) - Side AV + HP Panel , Slim Profile (Com
21PT6431/44R, 21PT643R85C, 24PT633F/35R, 24PT633R37, 25LT220L/17, 25PT633R85C, 25ST220L/17, 27DV693R37A, 27LT220L/17, 27MS3404/17, 27ST110P/35, 27ST220L/17, 27ST220L17, 27ST240P/35, 27ST230P/35, 27S

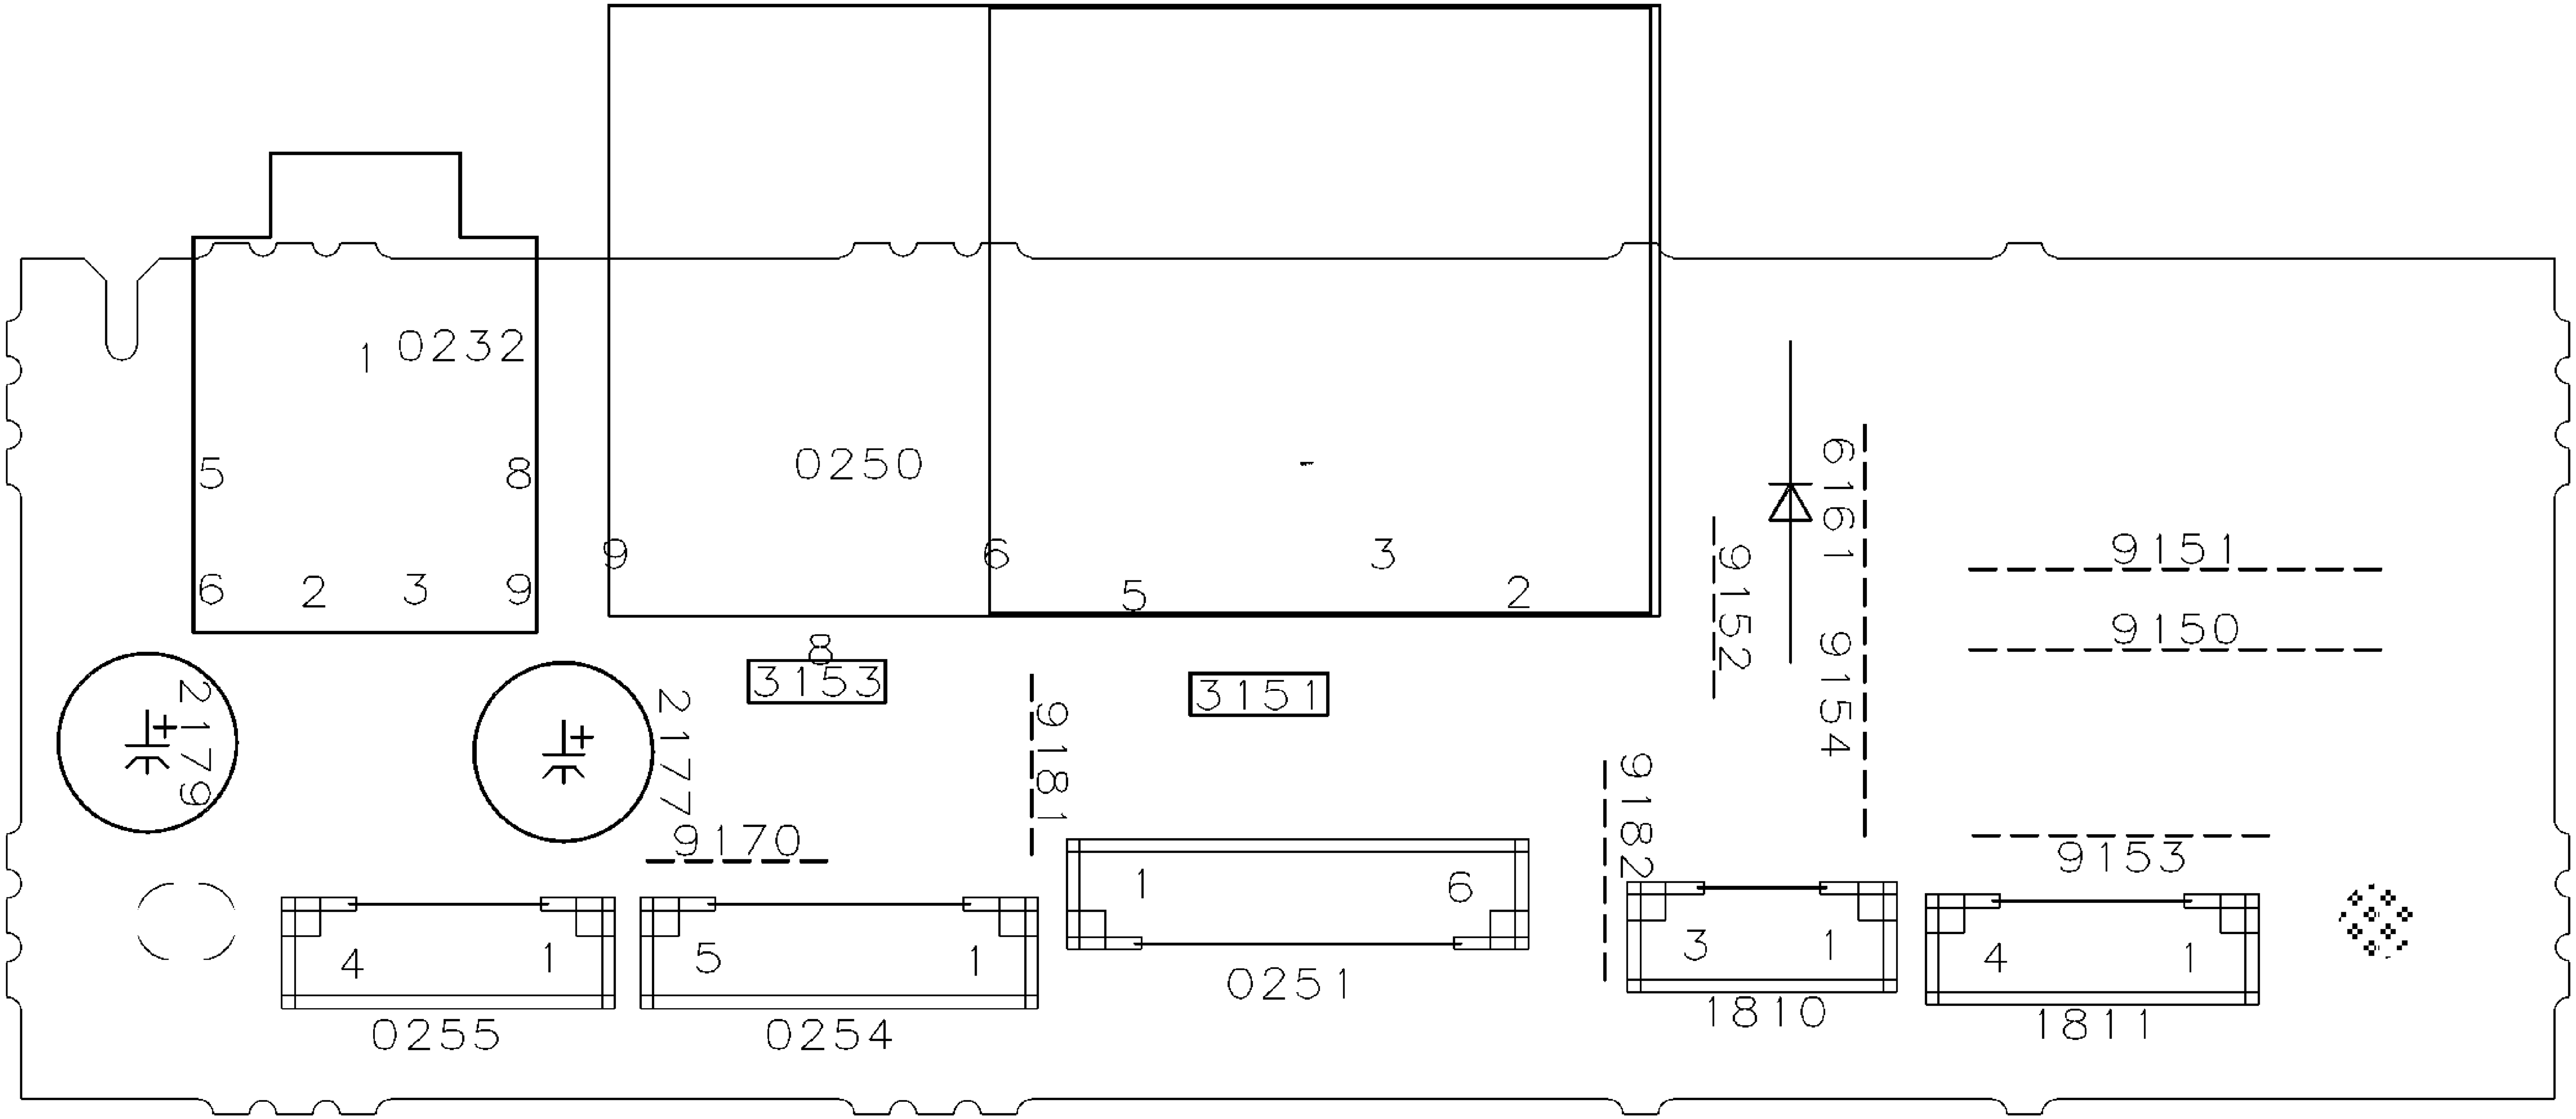


NOT USED IN MODELS: , 20DV6932/37R, 20DV693R02, 20DV693R01, 20MS334R/37, 20MS334R01, 20PT633R/37, 20PT643F/35R, 20PT643R01, 21PT6331/44R, 21PT633R85C (7638) - Side AV + HP Panel, Slim Profile (Copp
21PT6431/44R, 21PT643R85C, 24PT633F/35R, 24PT633R37, 25LT220L/17, 25PT633R85C, 25ST220L/17, 27DV693R37A, 27LT220L/17, 27MS3404/17, 27ST110P/35, 27ST220L/17, 27ST220L17, 27ST240P/35, 27ST230P/35, 27S

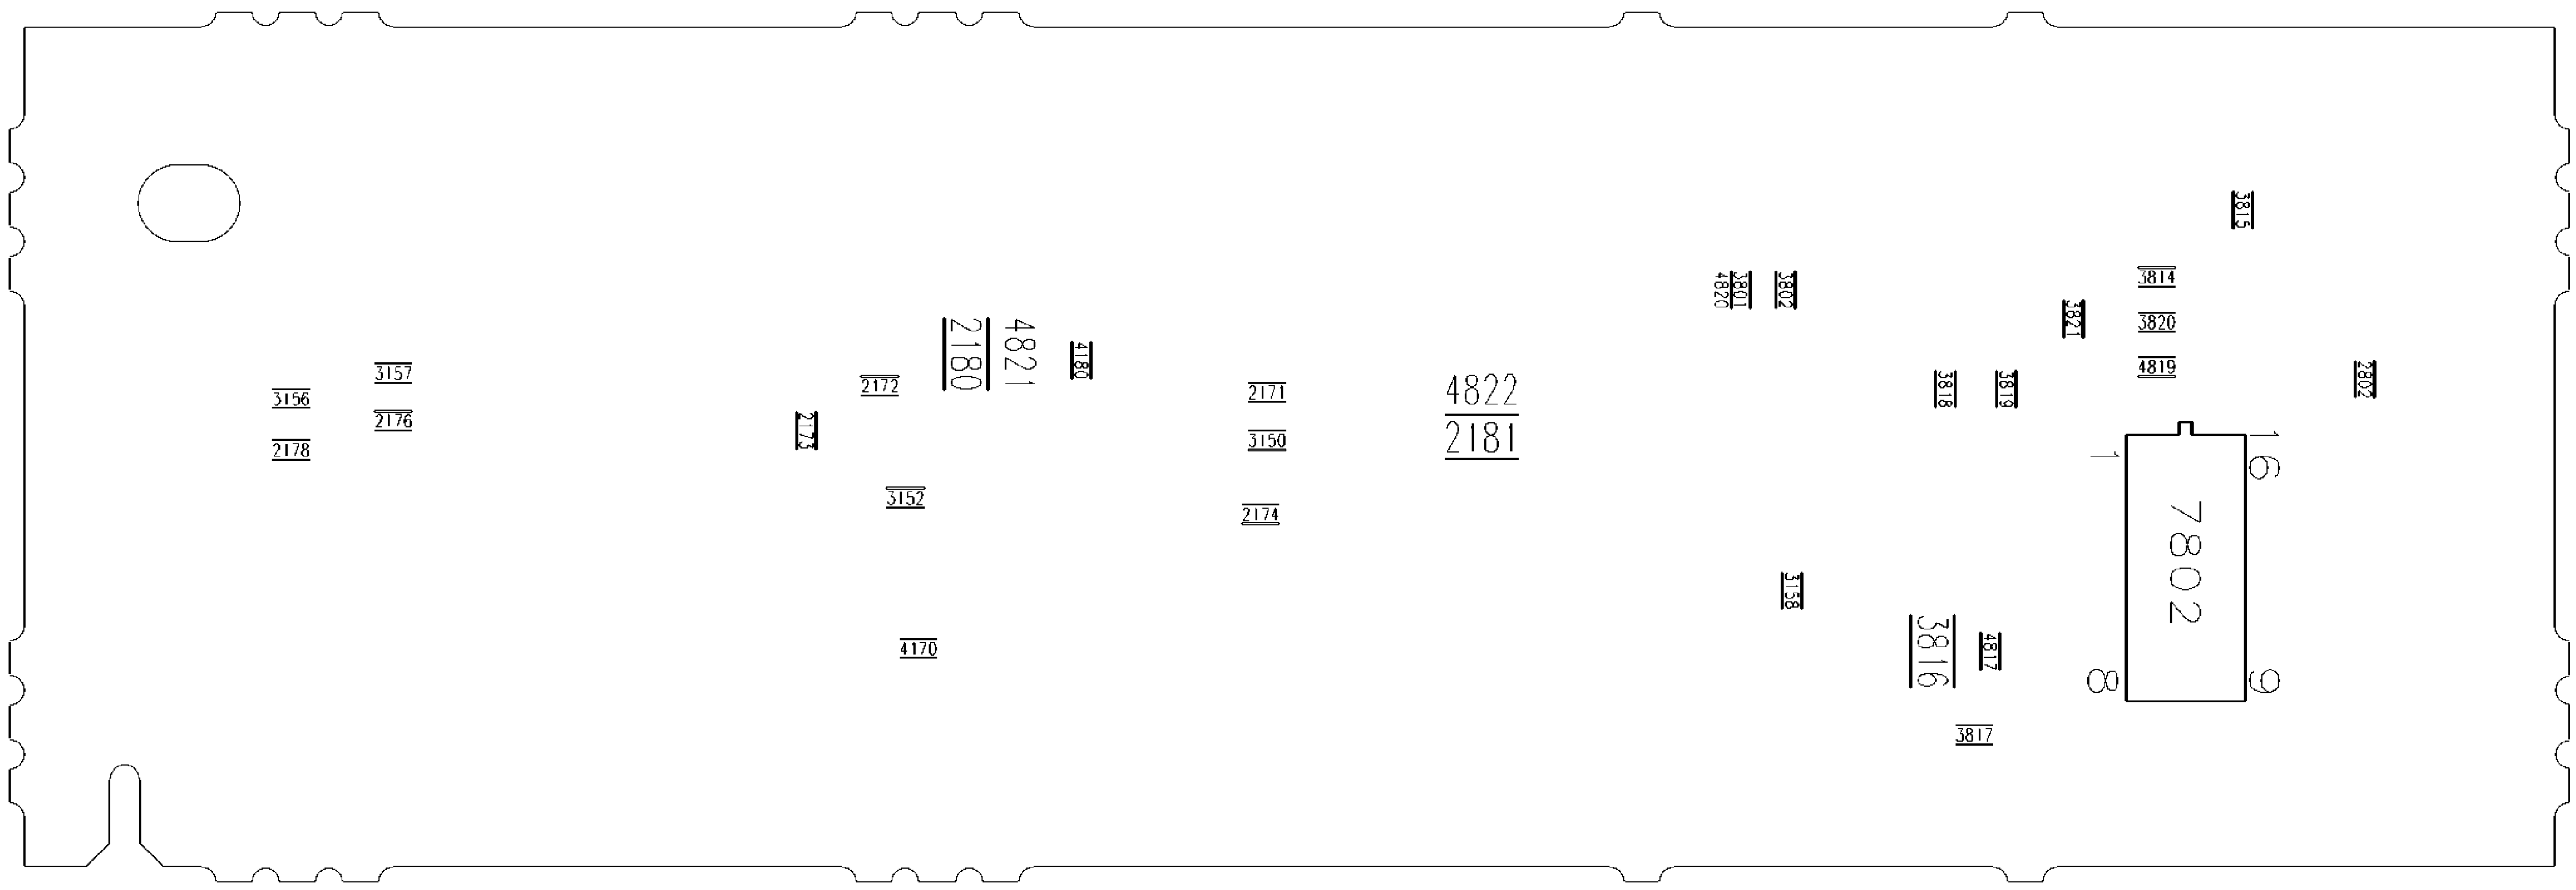


USED ONLY IN MODELS: 32PT543S37A, 32PT543S37G, 32PT553S37A, 32PT553S37G, 25PT633R85C, 24PT633R37, 32PT541S37G, MS3252S431, MS3652S427, 24PT633F/35R (7638) - Side AV Panel + HP Panel, Wide Profile (27MS3404/17

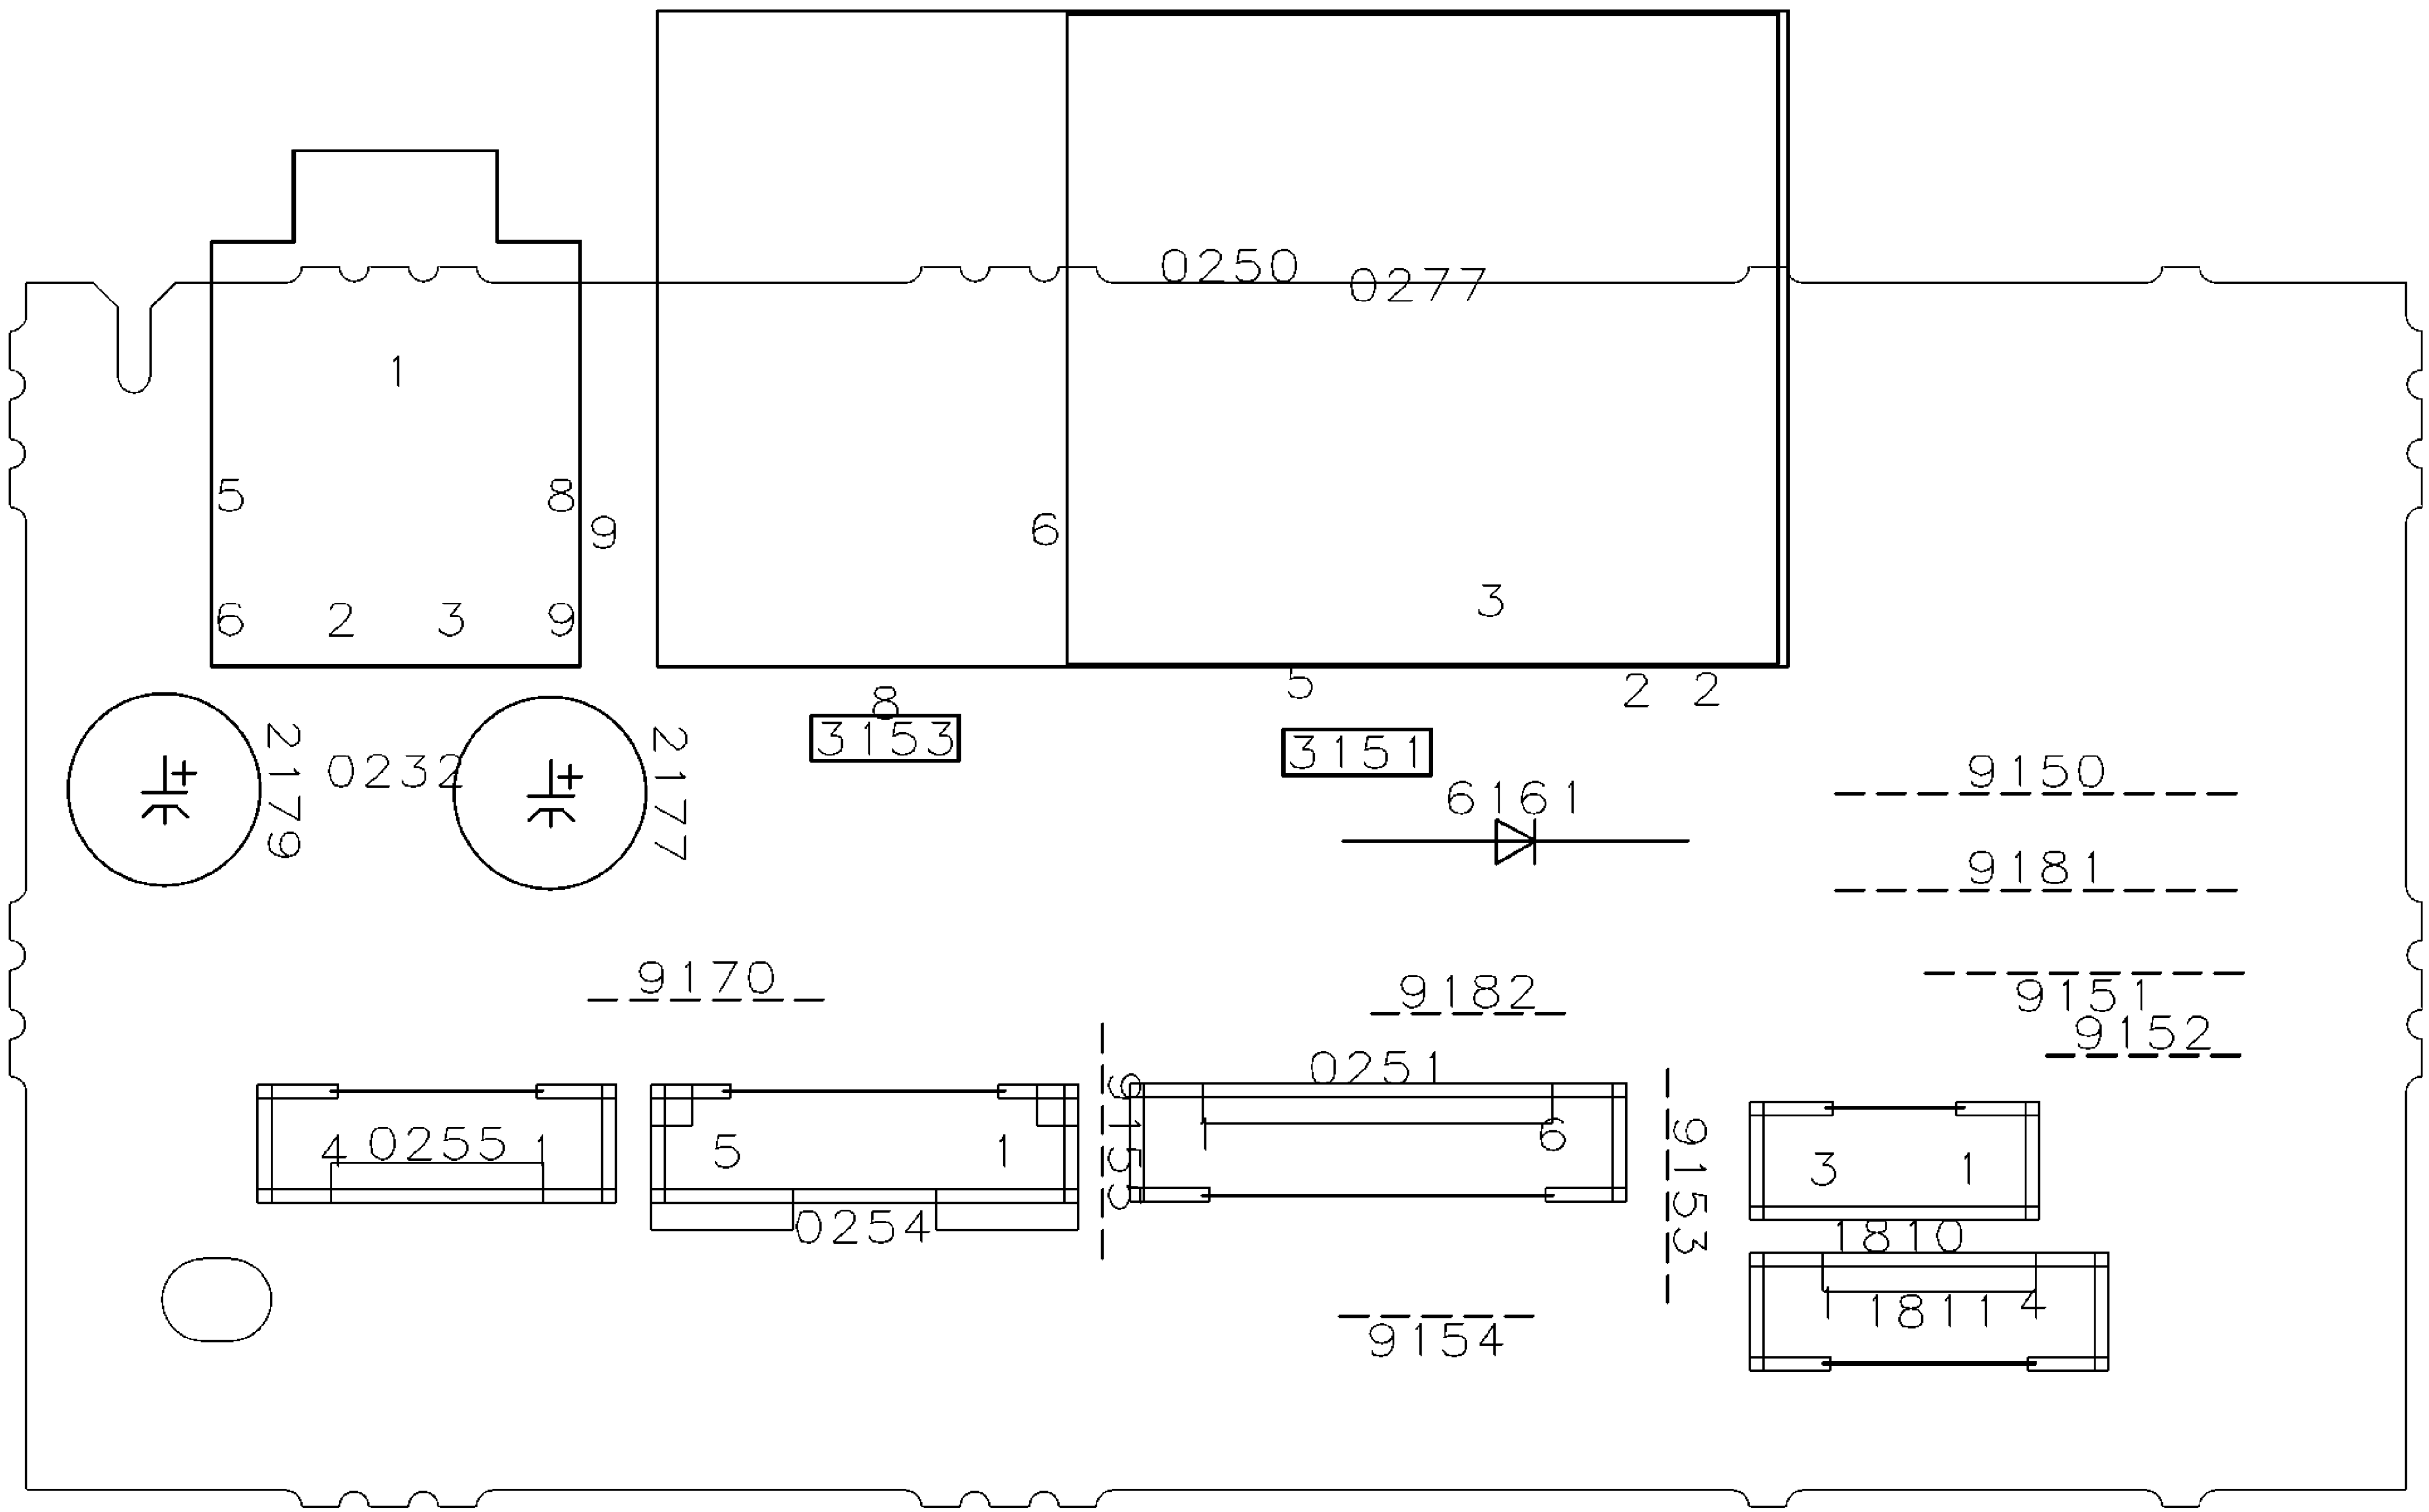


USED ONLY IN MODELS: 32PT543S37A, 32PT543S37G, 32PT553S37A, 32PT553S37G, 25PT633R85C, 24PT633R37, 32PT541S37G, MS3252S431, MS3652S427, 24PT633F/35R (7638) - Side AV Panel + HP Panel, Wide Profile (
27MS3404/17

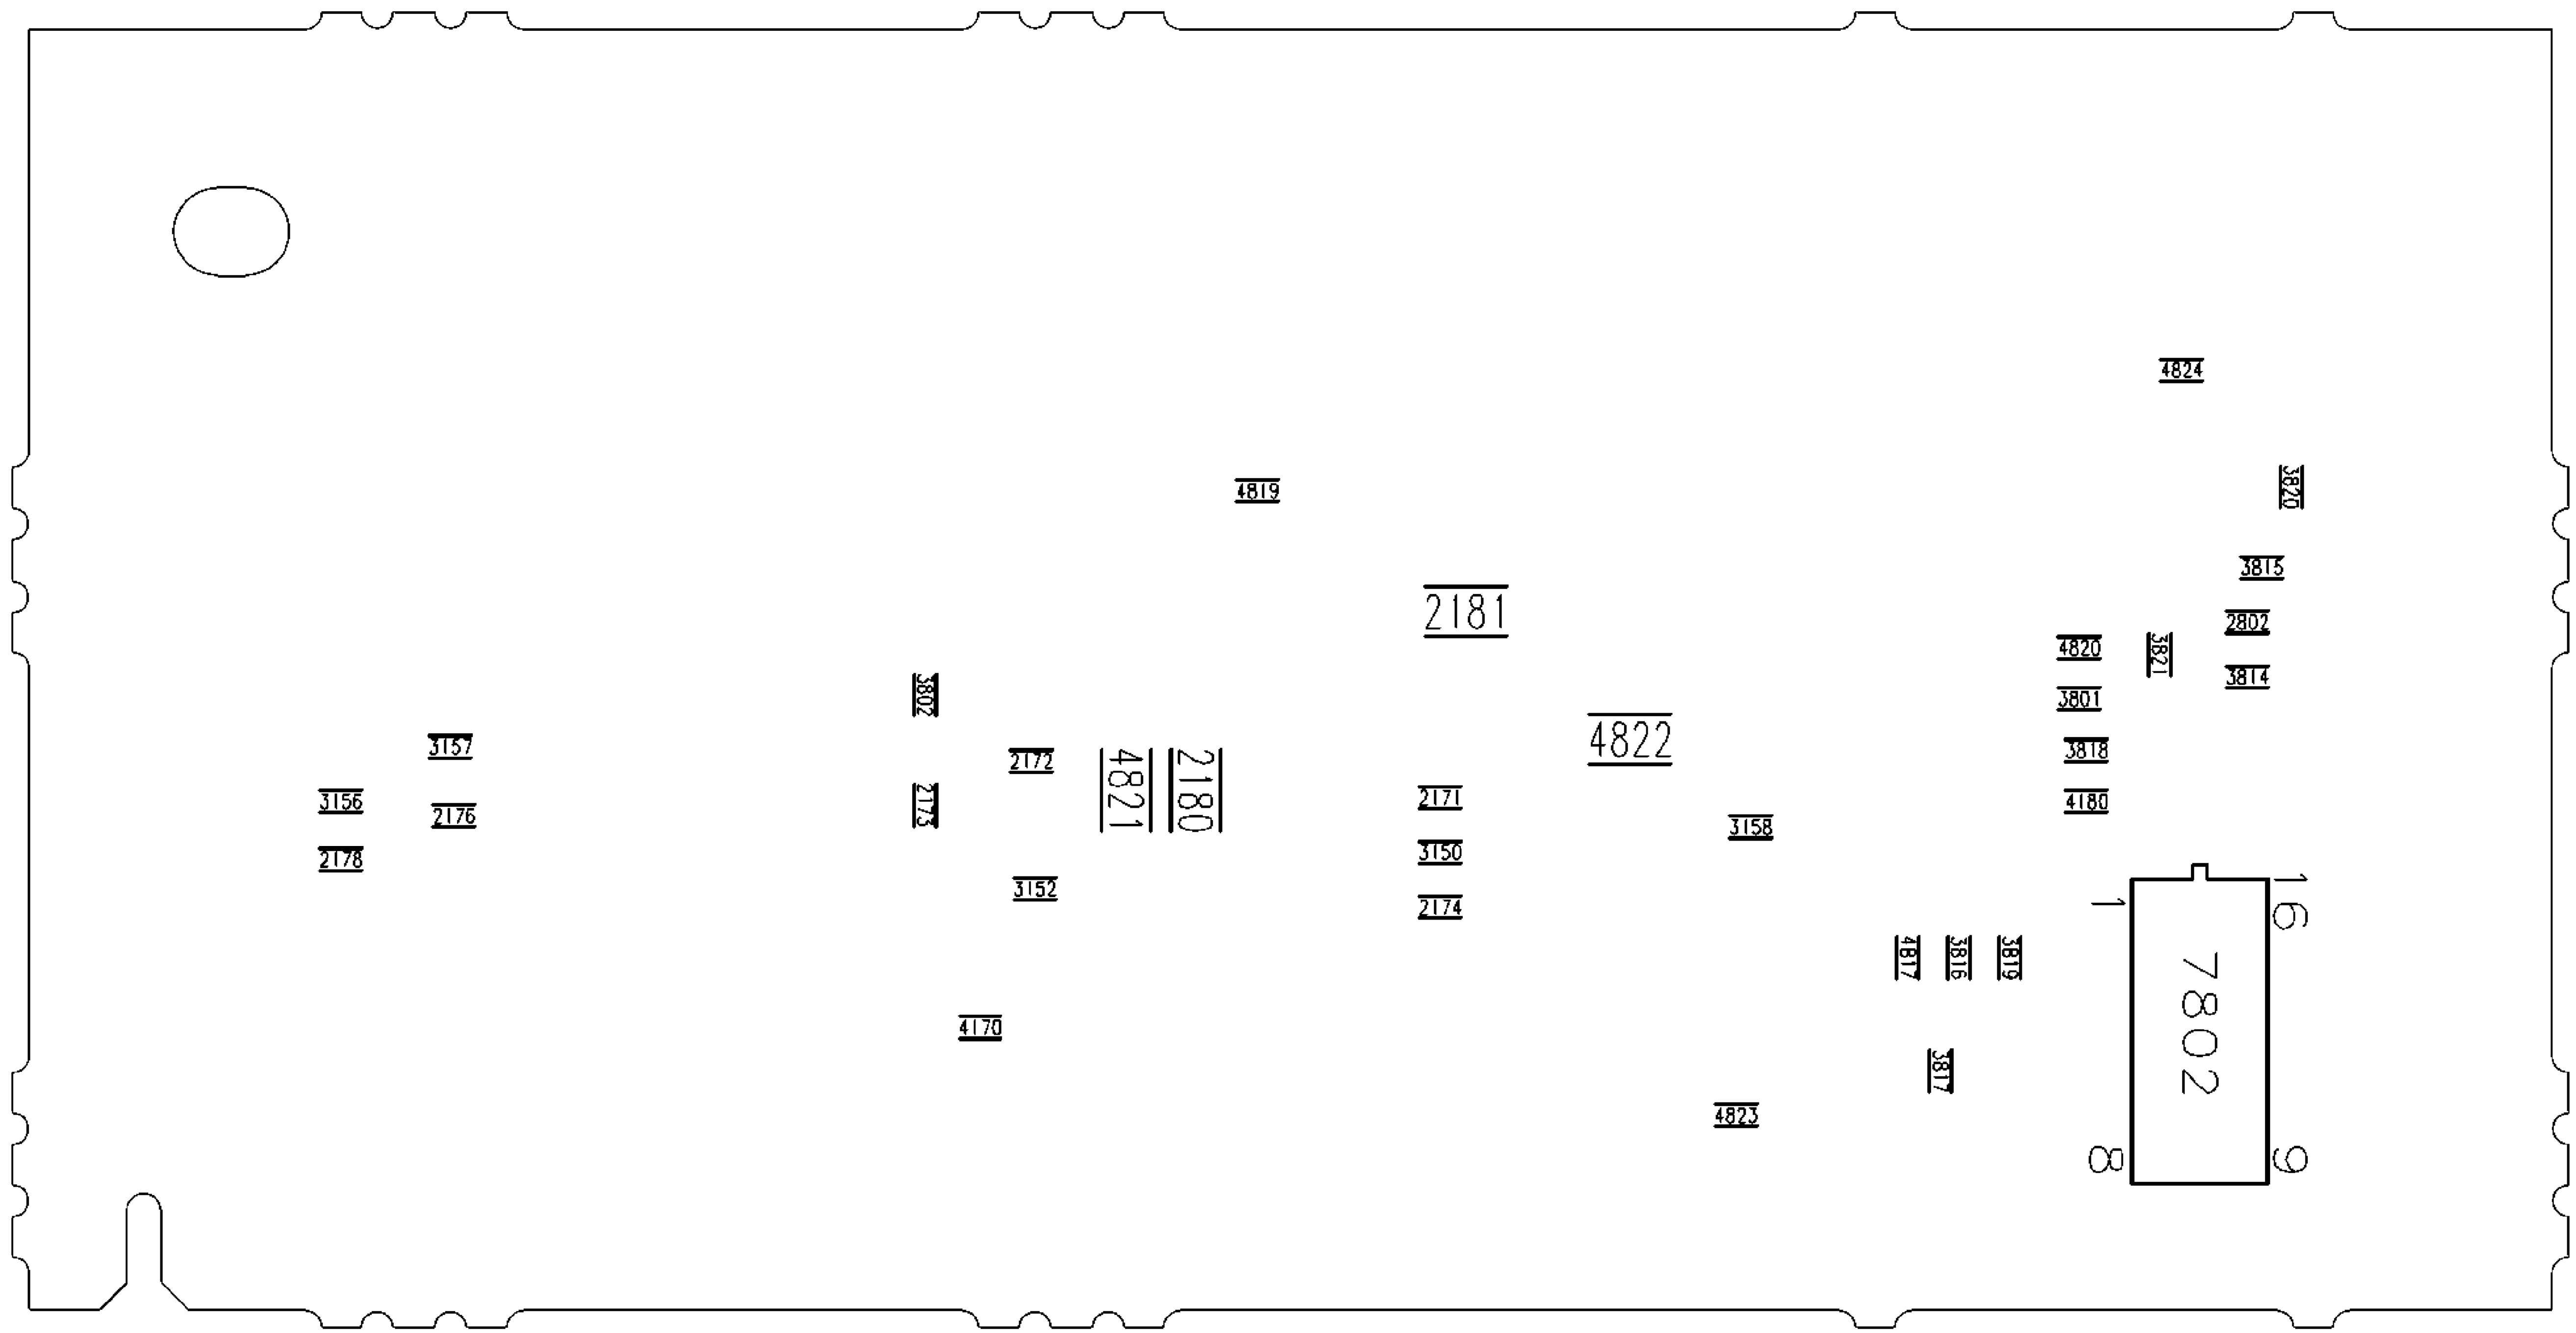


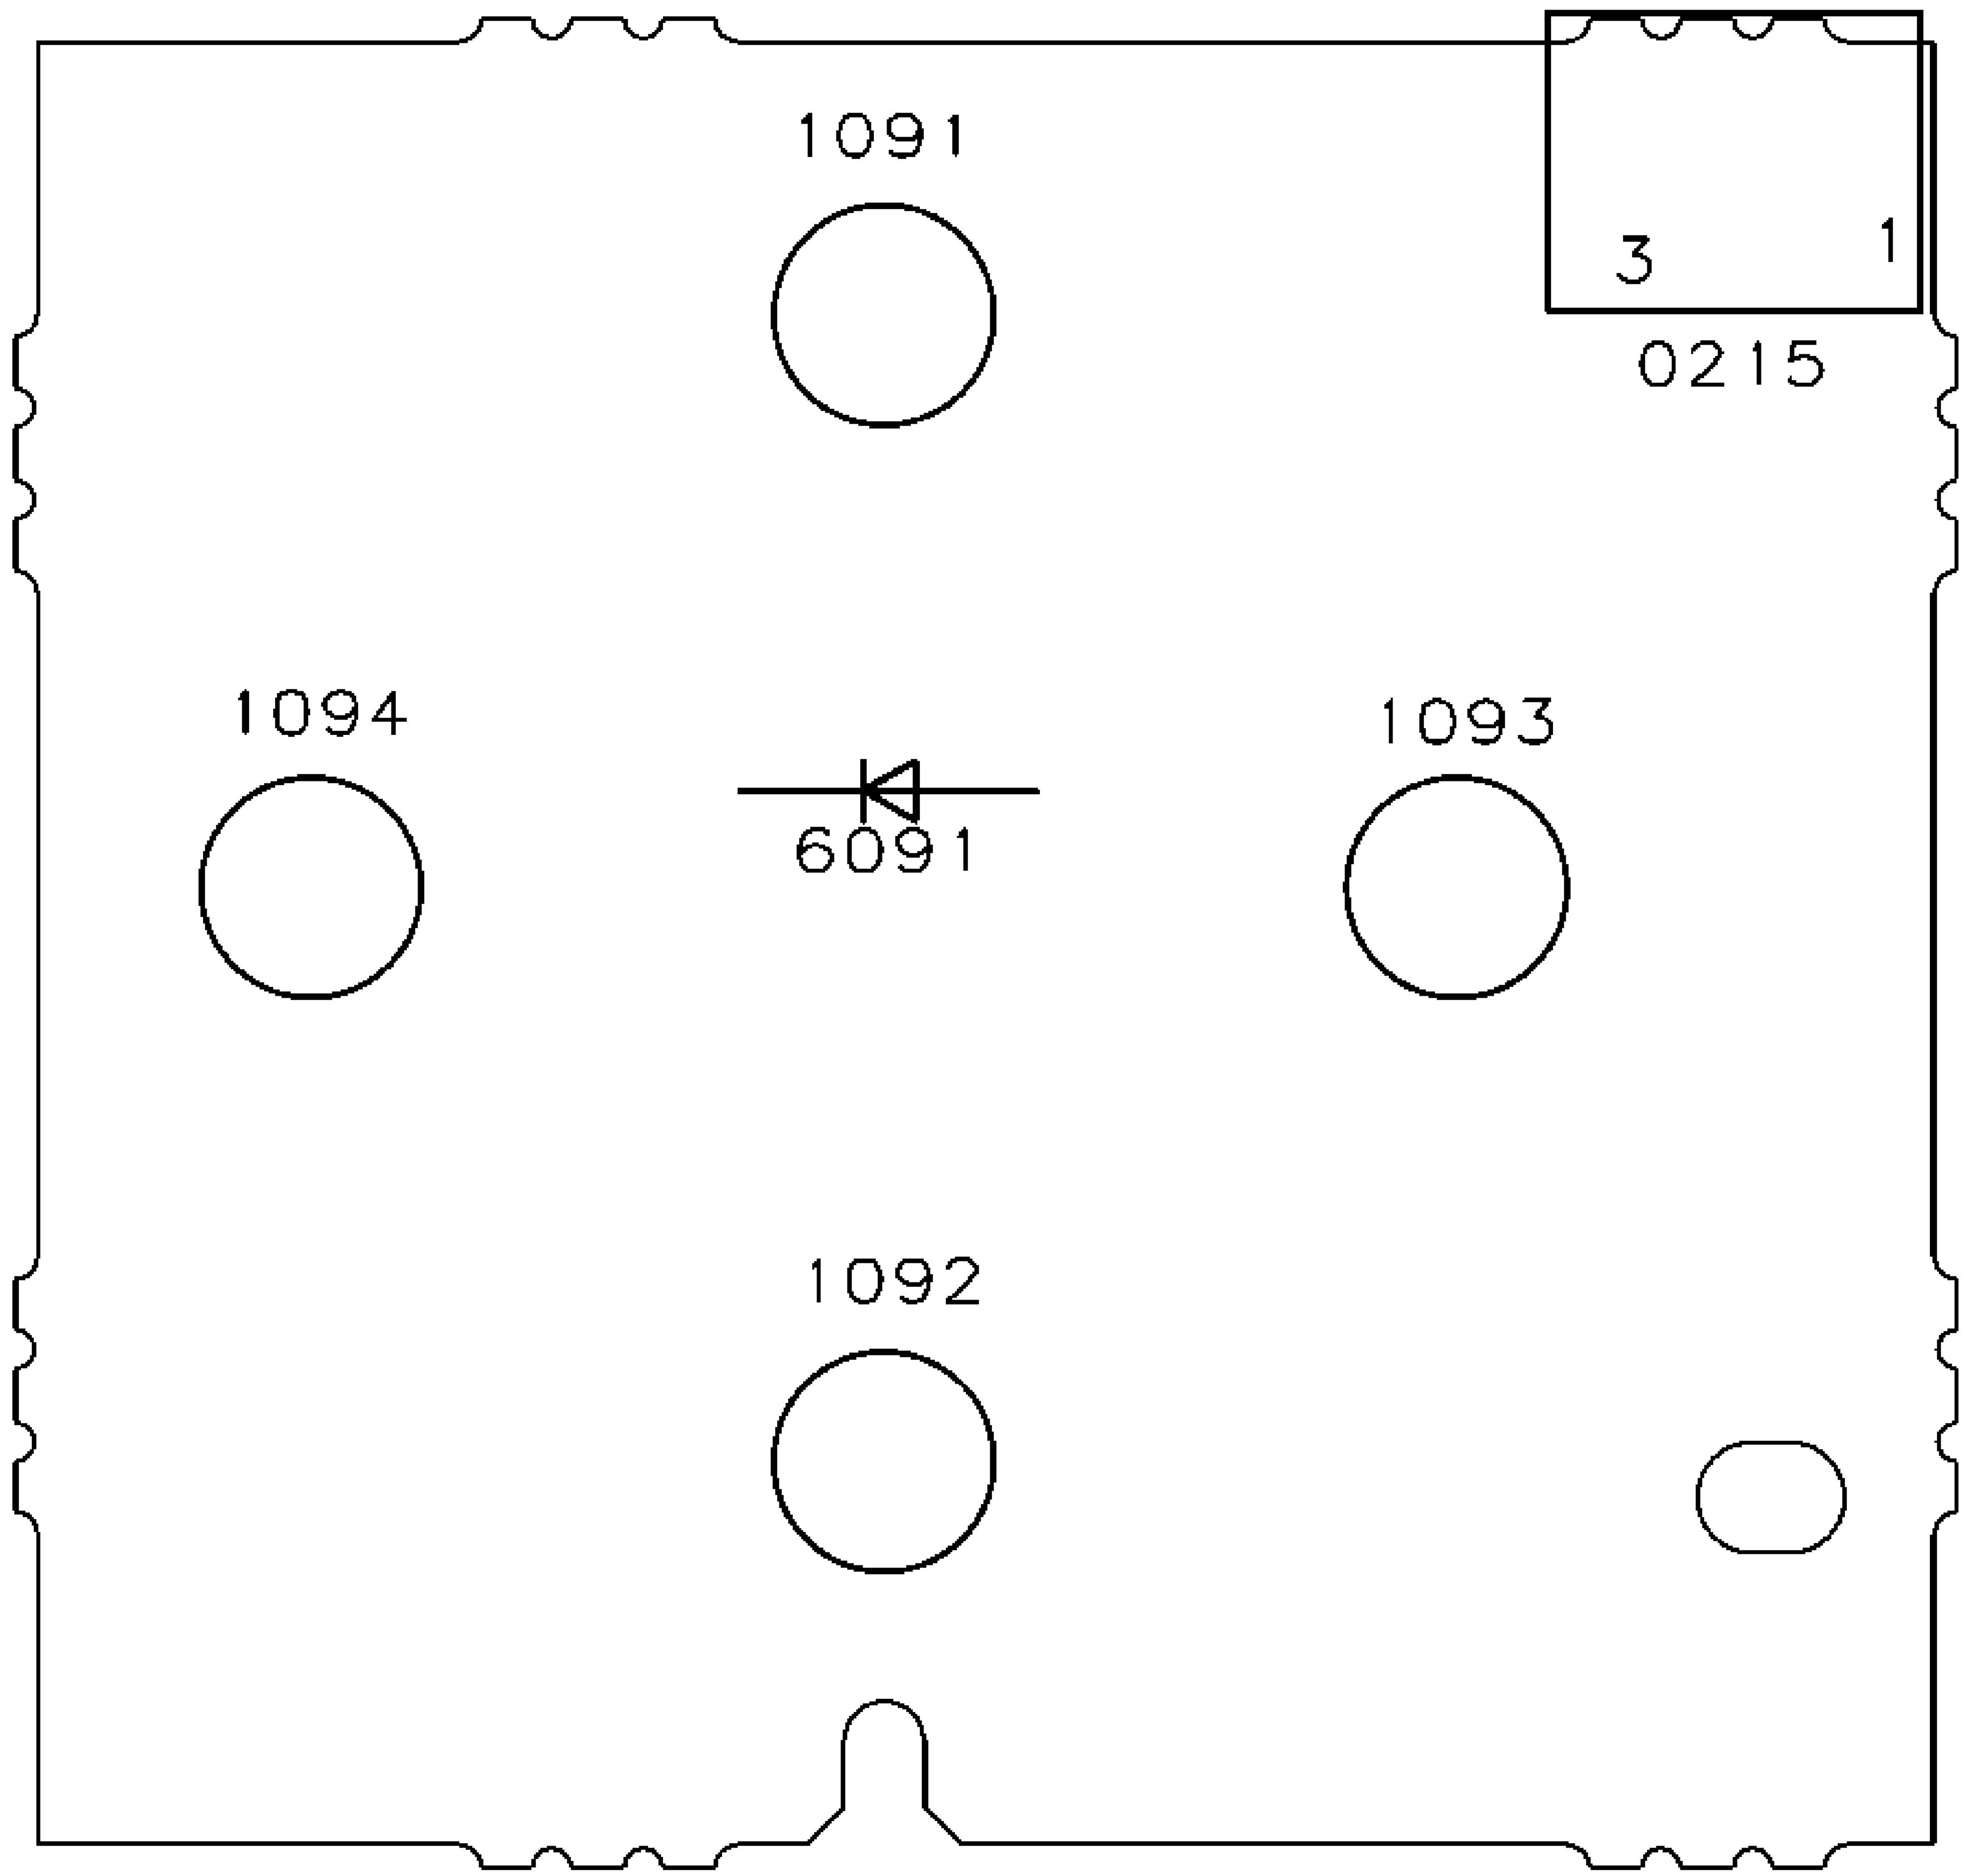
1091
3
1
0215
1094
1093
6091
1092


USED ONLY IN MODELS: 21PT643R85C, 27PT633R37C, 29PT633R85A, 29PT633R85C, 20PT643R01, 27LT621L/17, 32LT621L/17, 20PT643F/35R, 27MS4504/17, 21PT6431/44R (7638) - Top Control Panel, Round (Copper Side

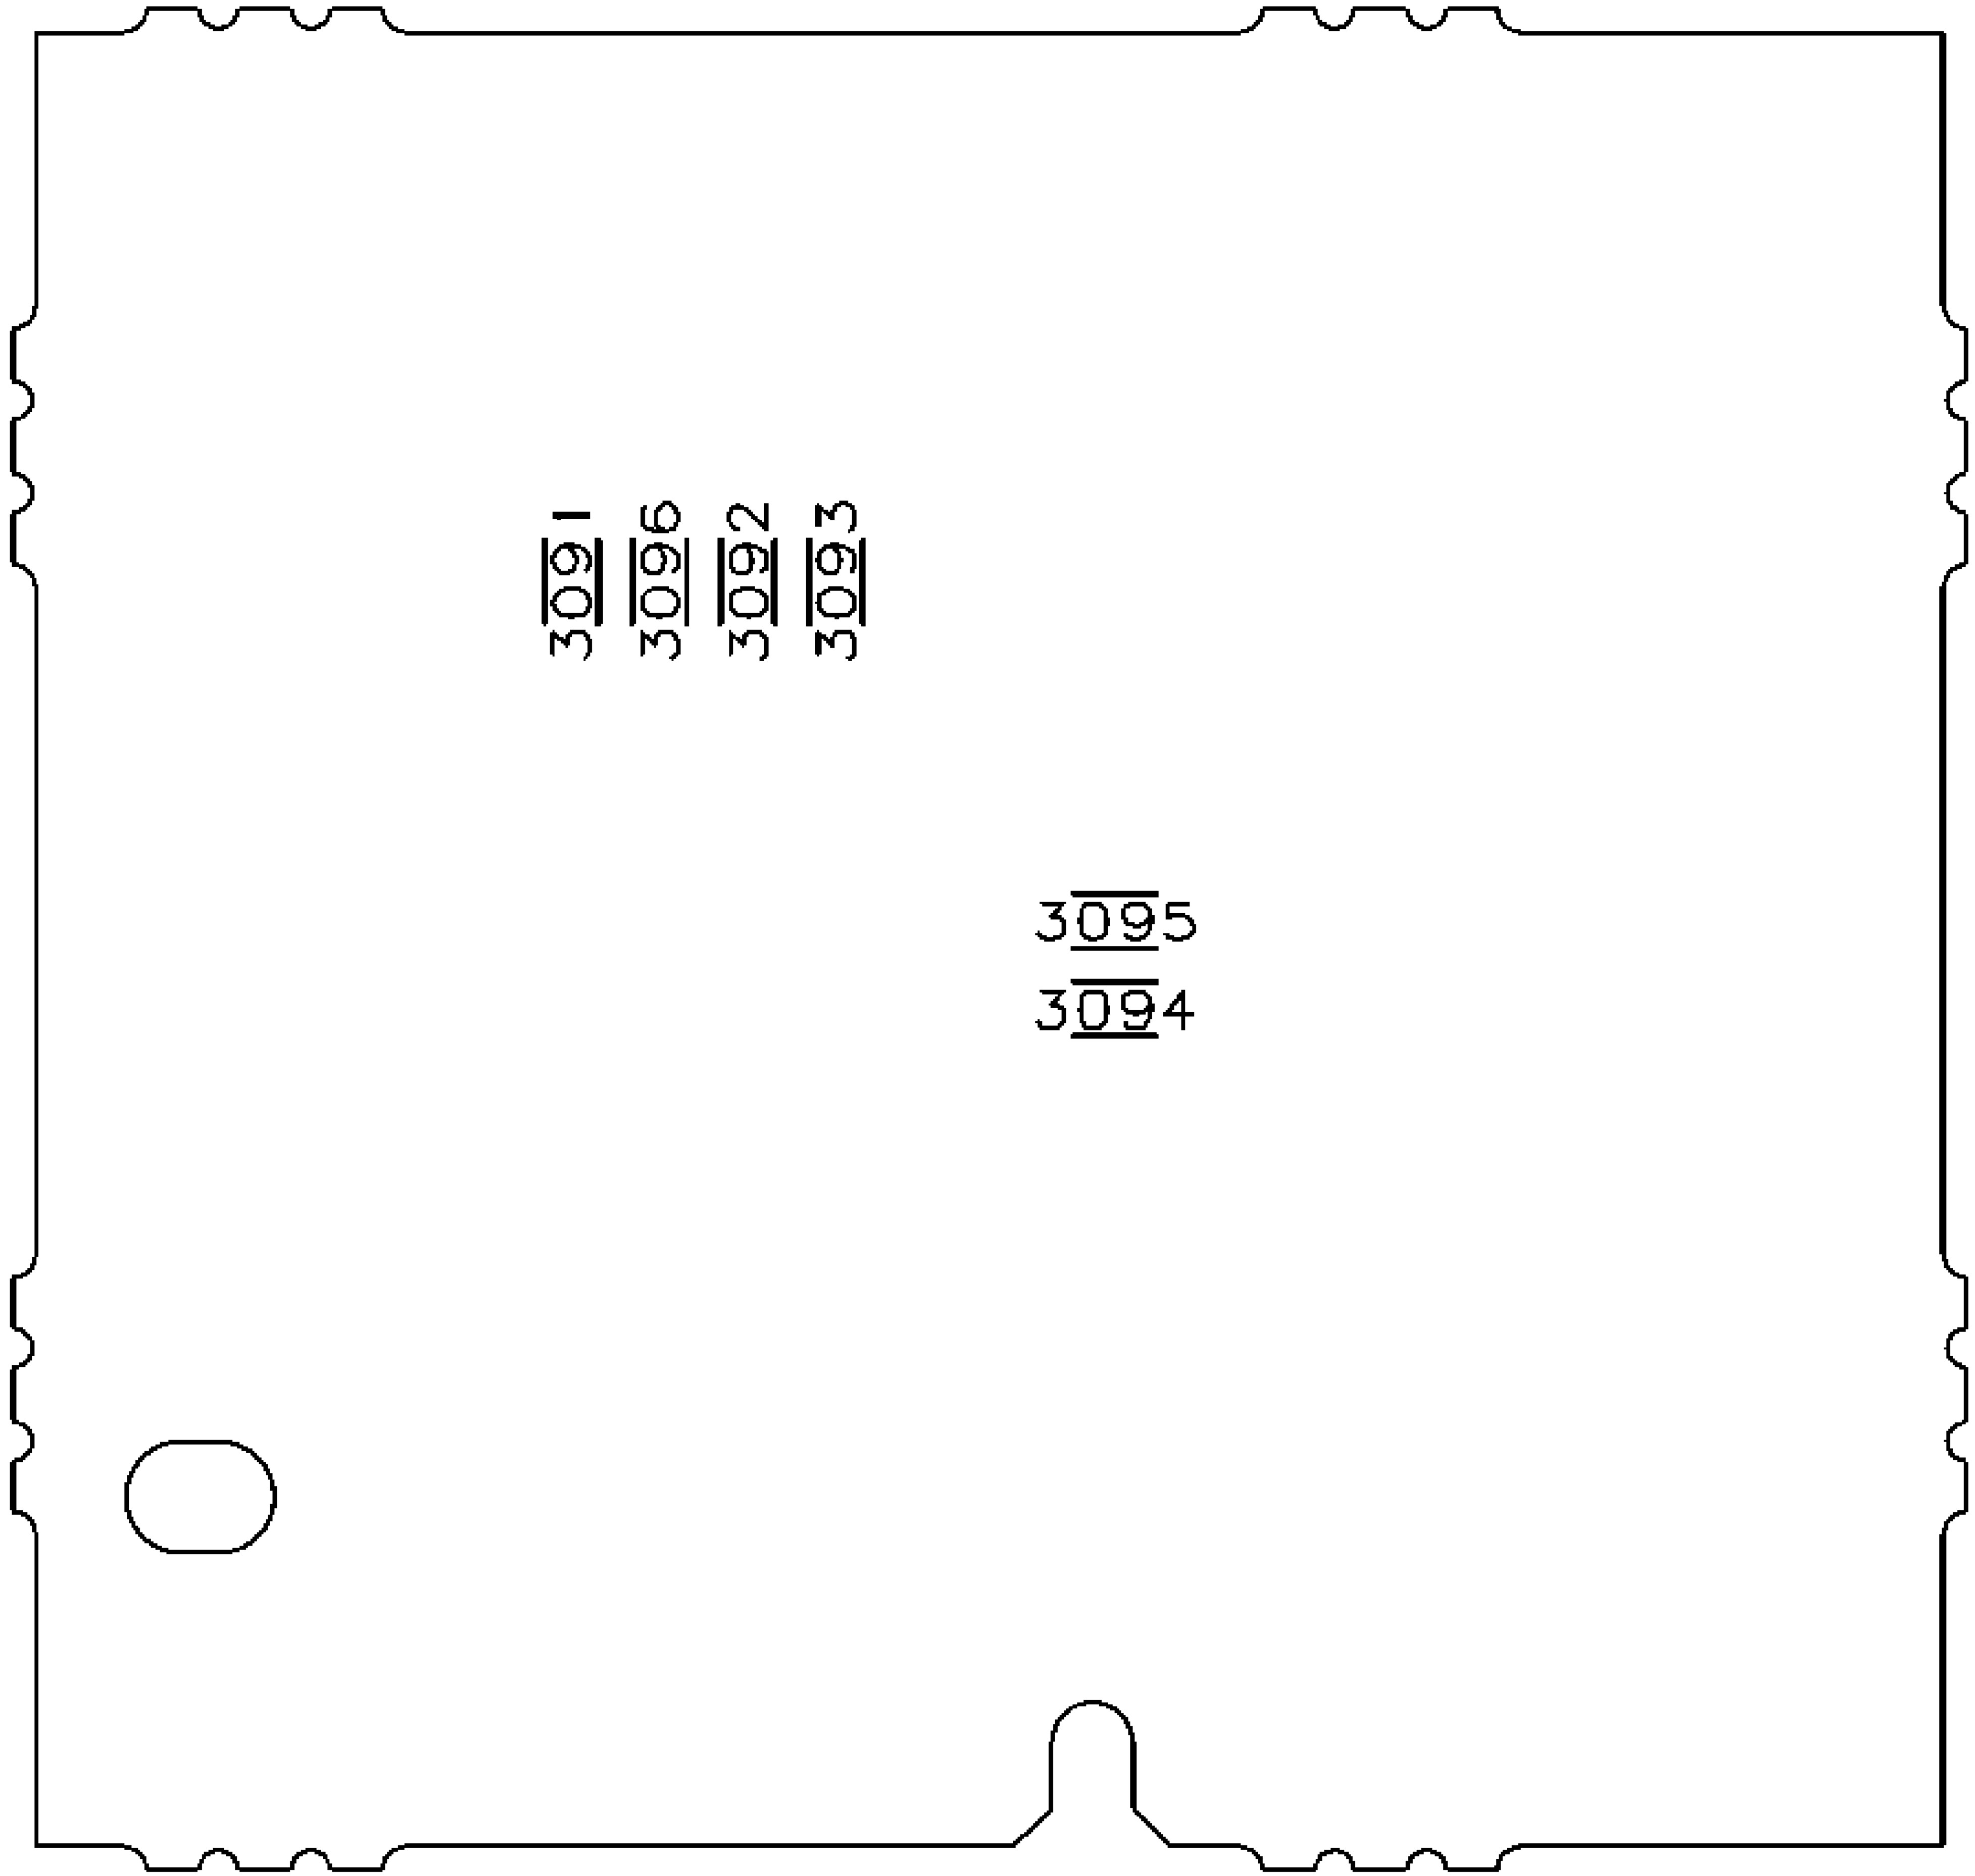


USED ONLY IN MODELS: 32PT553S37A, 32PT553S37G (7638) - Top Control Panel, Oval (Component Side)

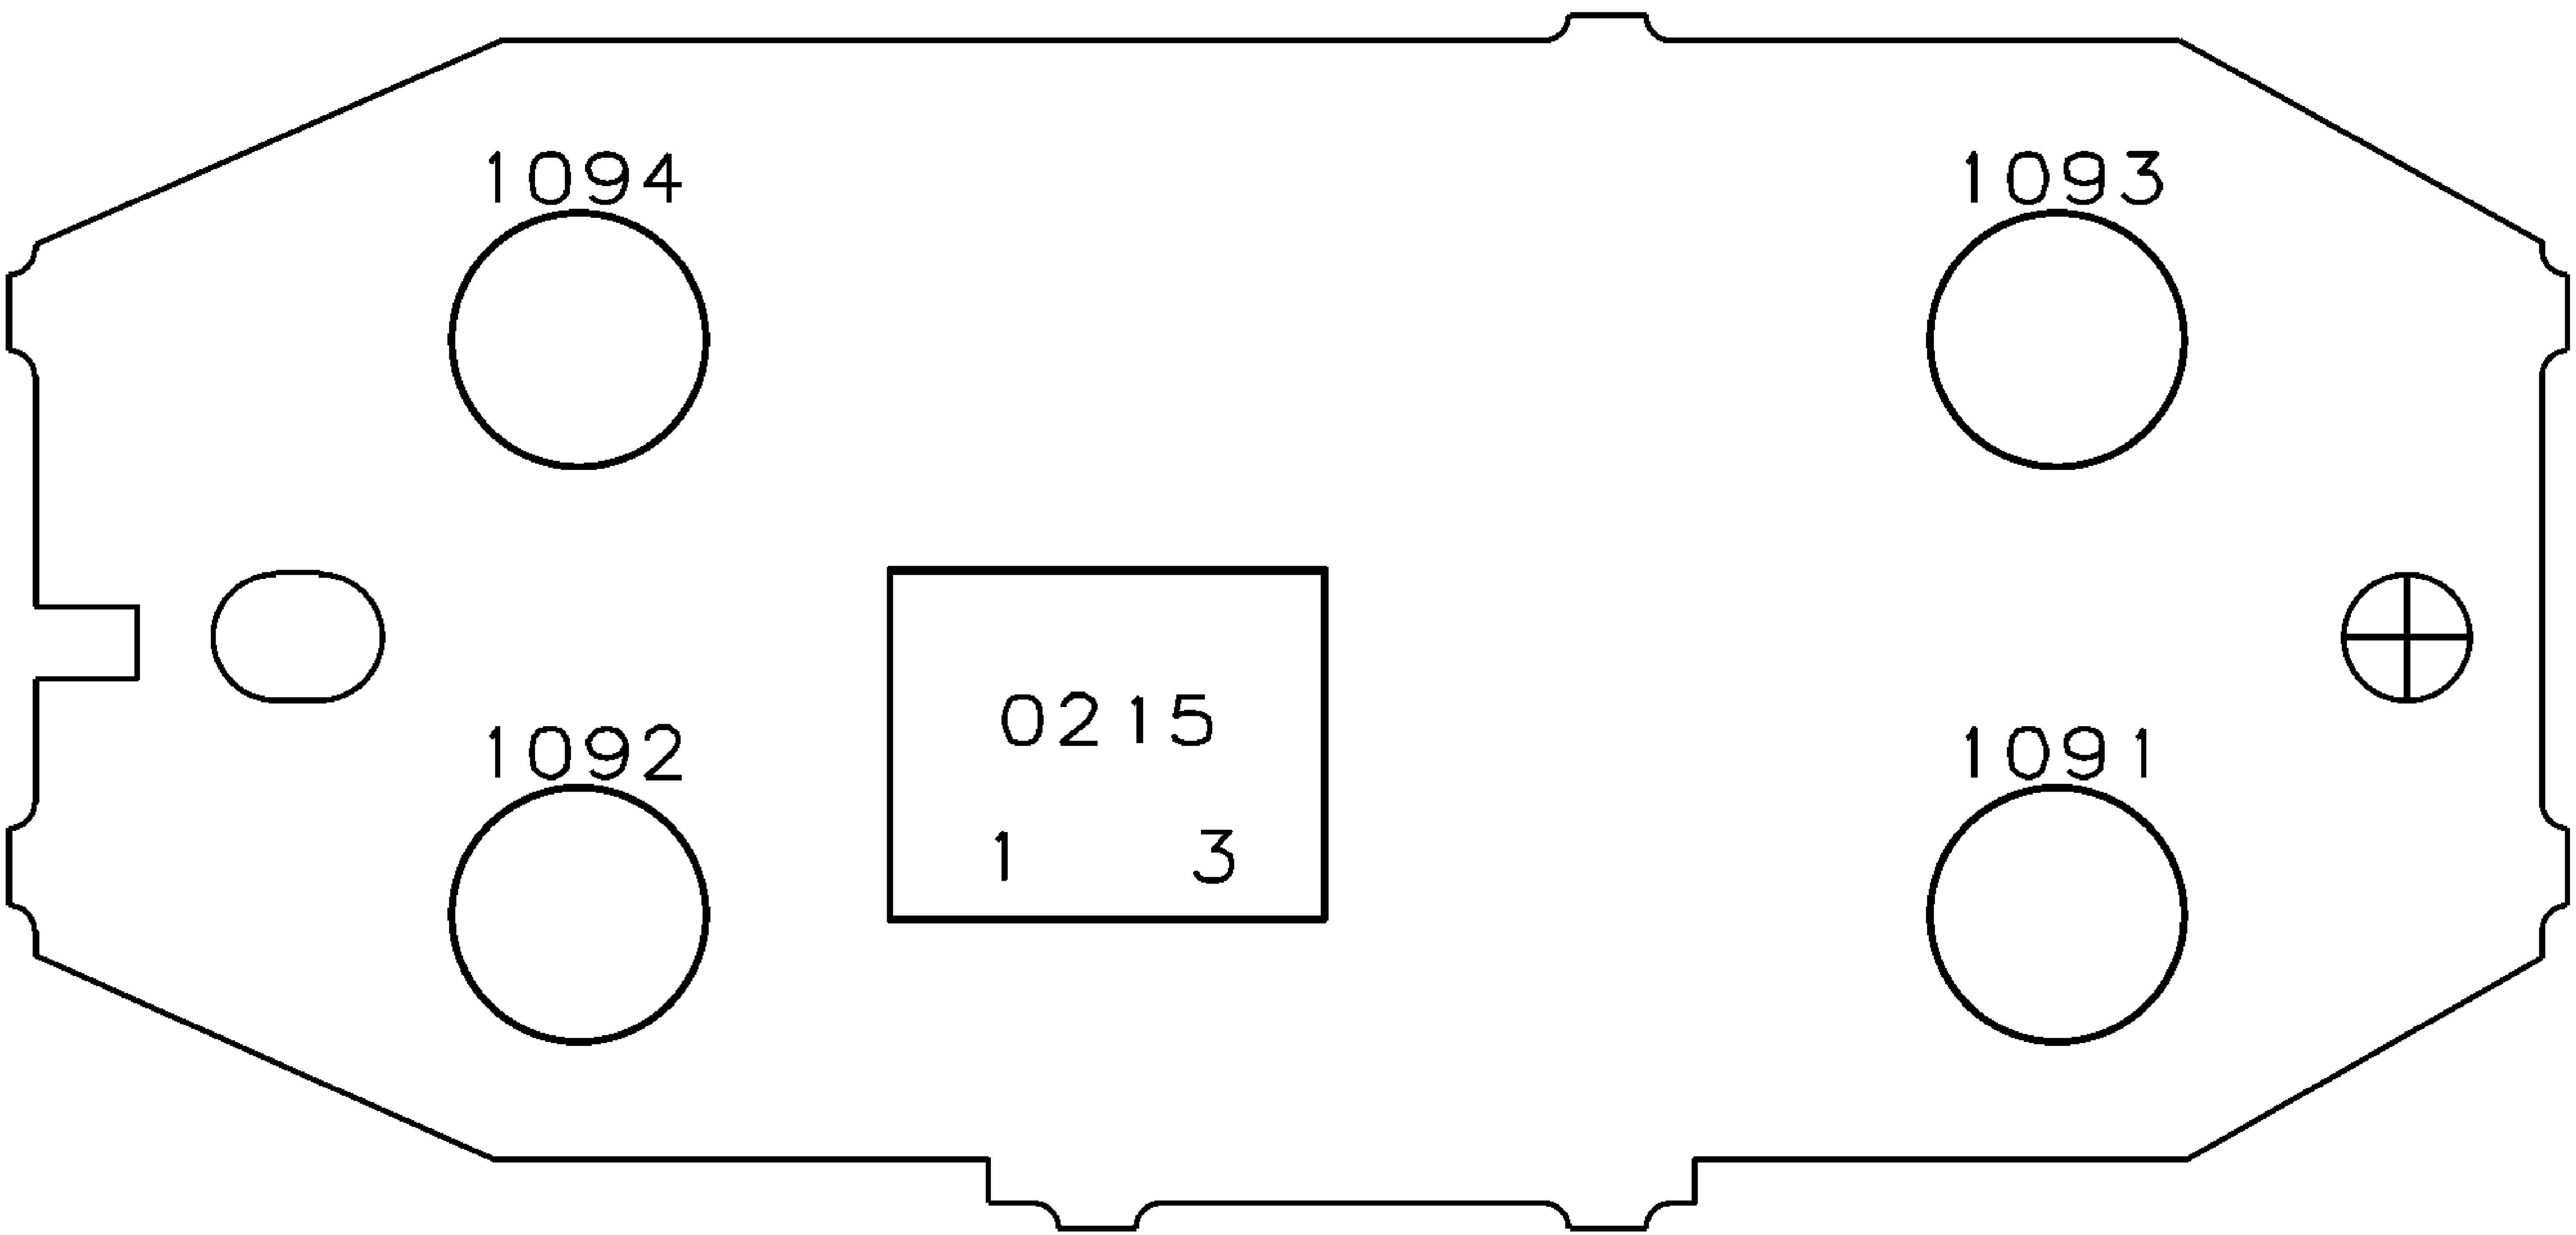


USED ONLY IN MODELS: 32PT553S37A, 32PT553S37G (7638) - Top Control Panel, Oval (Copper Side)

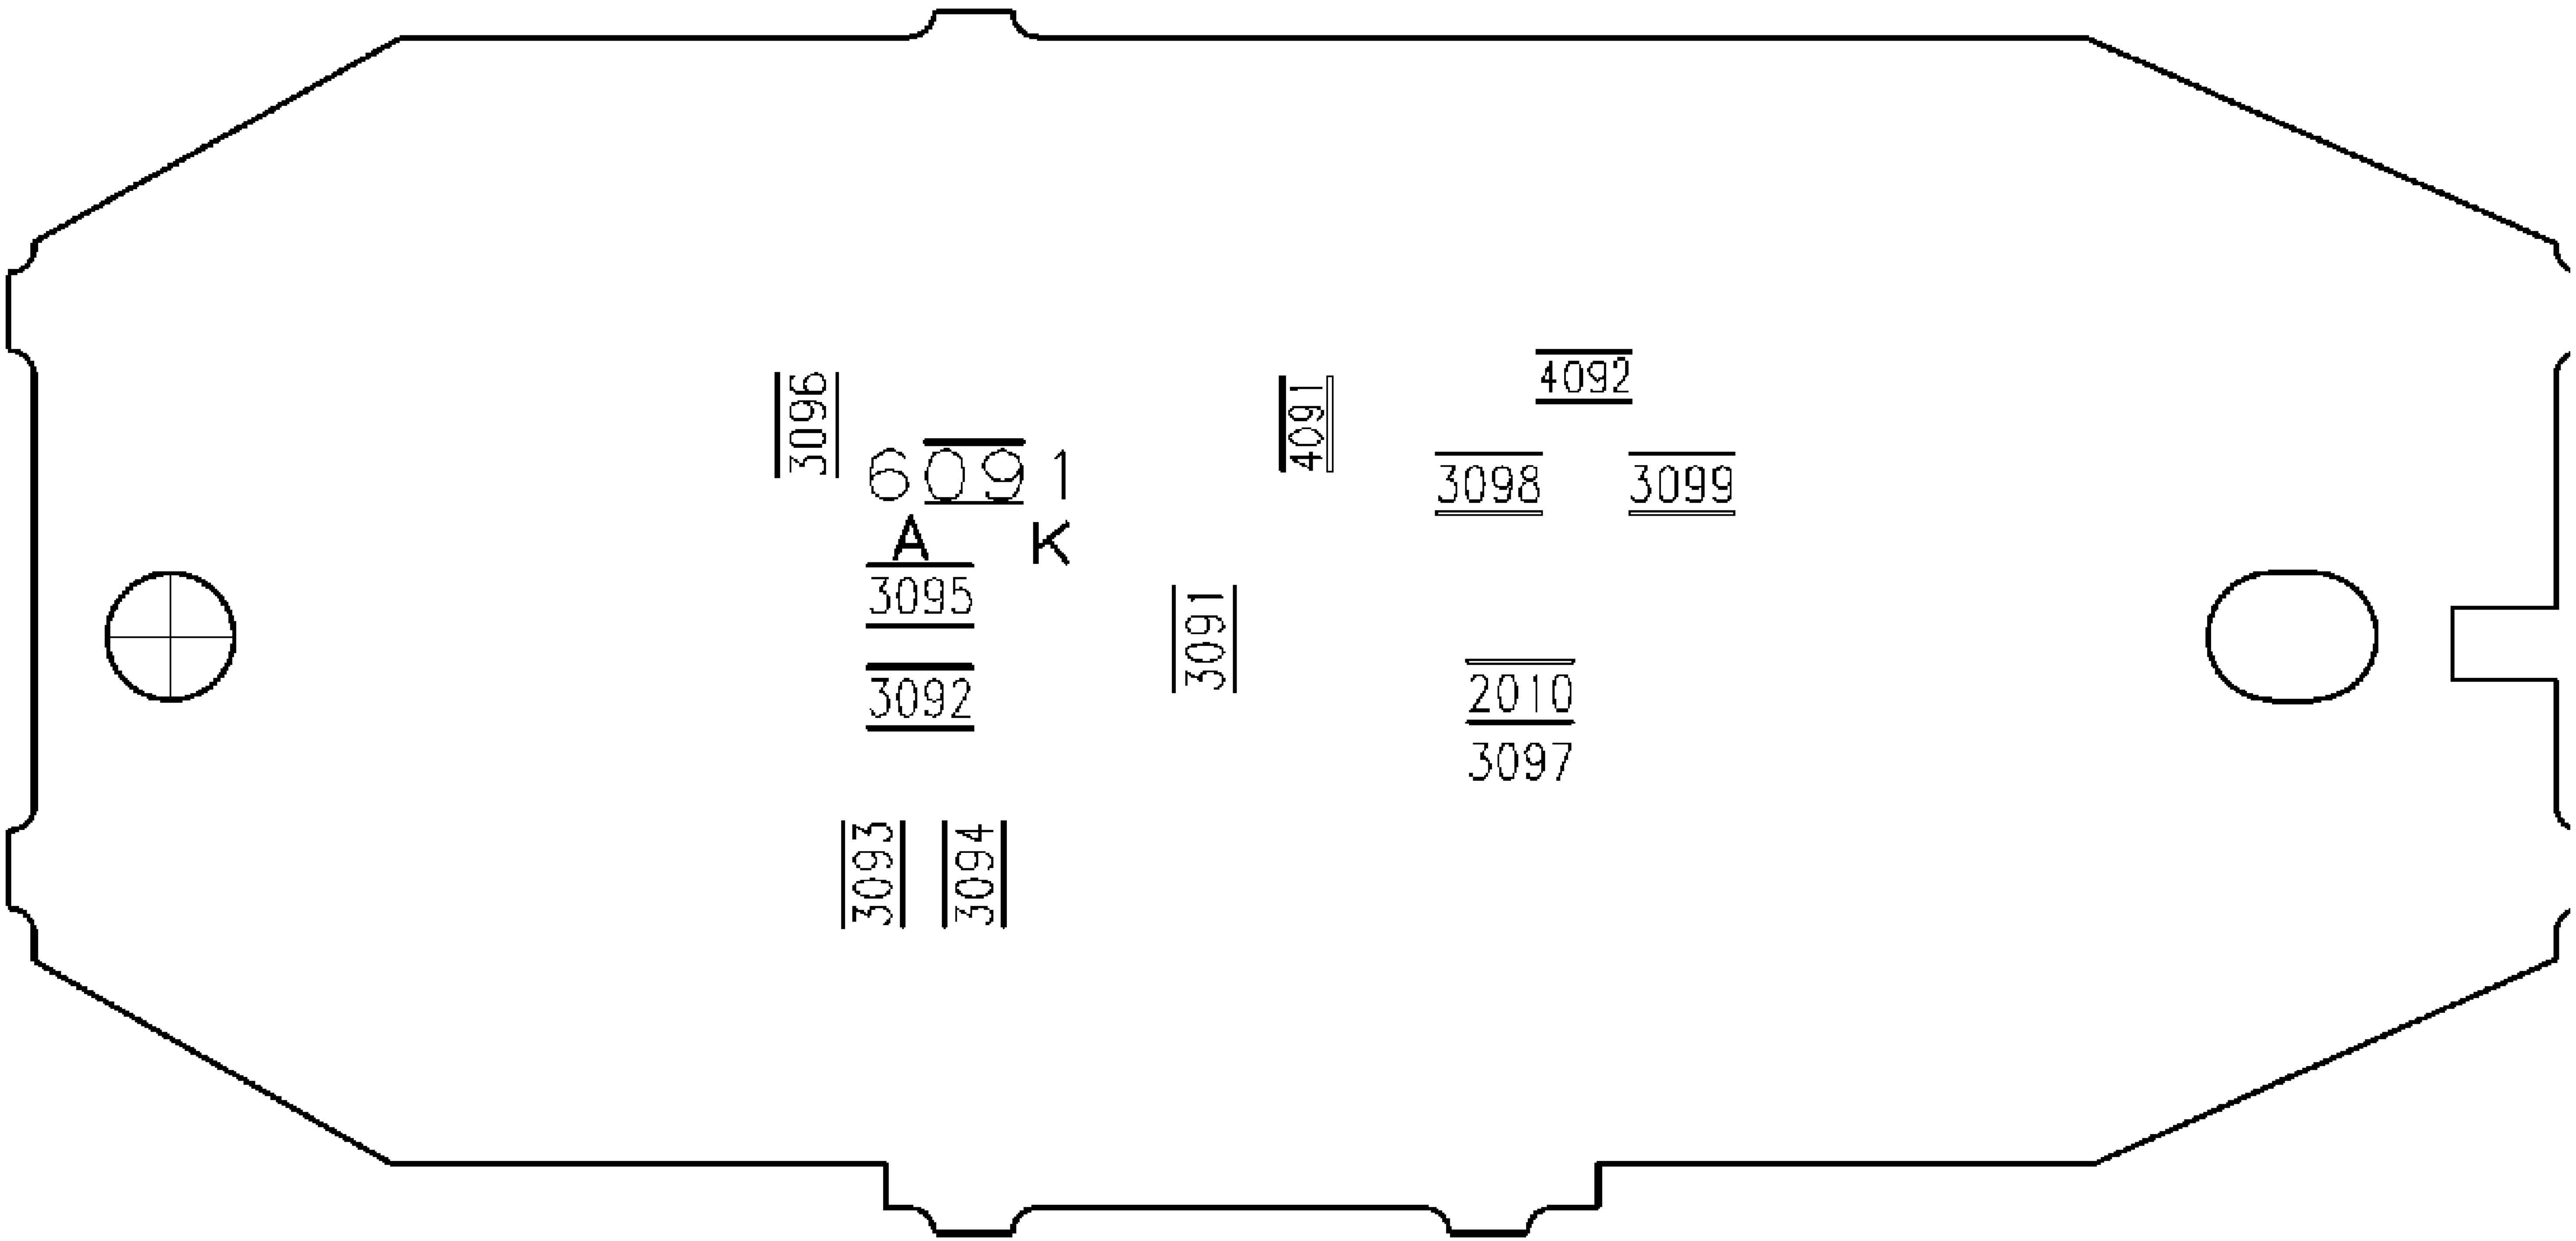


USED ONLY IN MODELS: 27PT663R37A, 27PT663R37C, 29PT563S85A, 29PT663R85A, 29PT663R85C, 32PT633R37D, 32PT663R37A, 27PT563S37A, 30PW633F35A, 32LT621L/17 (7638) - 2D 3 Line Comb Filter (Component Side)
32PT563S37A, 32PT563S37G, 32PW633R85C, 29PT663S85A, 36ST220P/35, 36ST230P/35, 32ST230P/35, 32ST220P/17, 32PT563R85G, 29PT6631/44

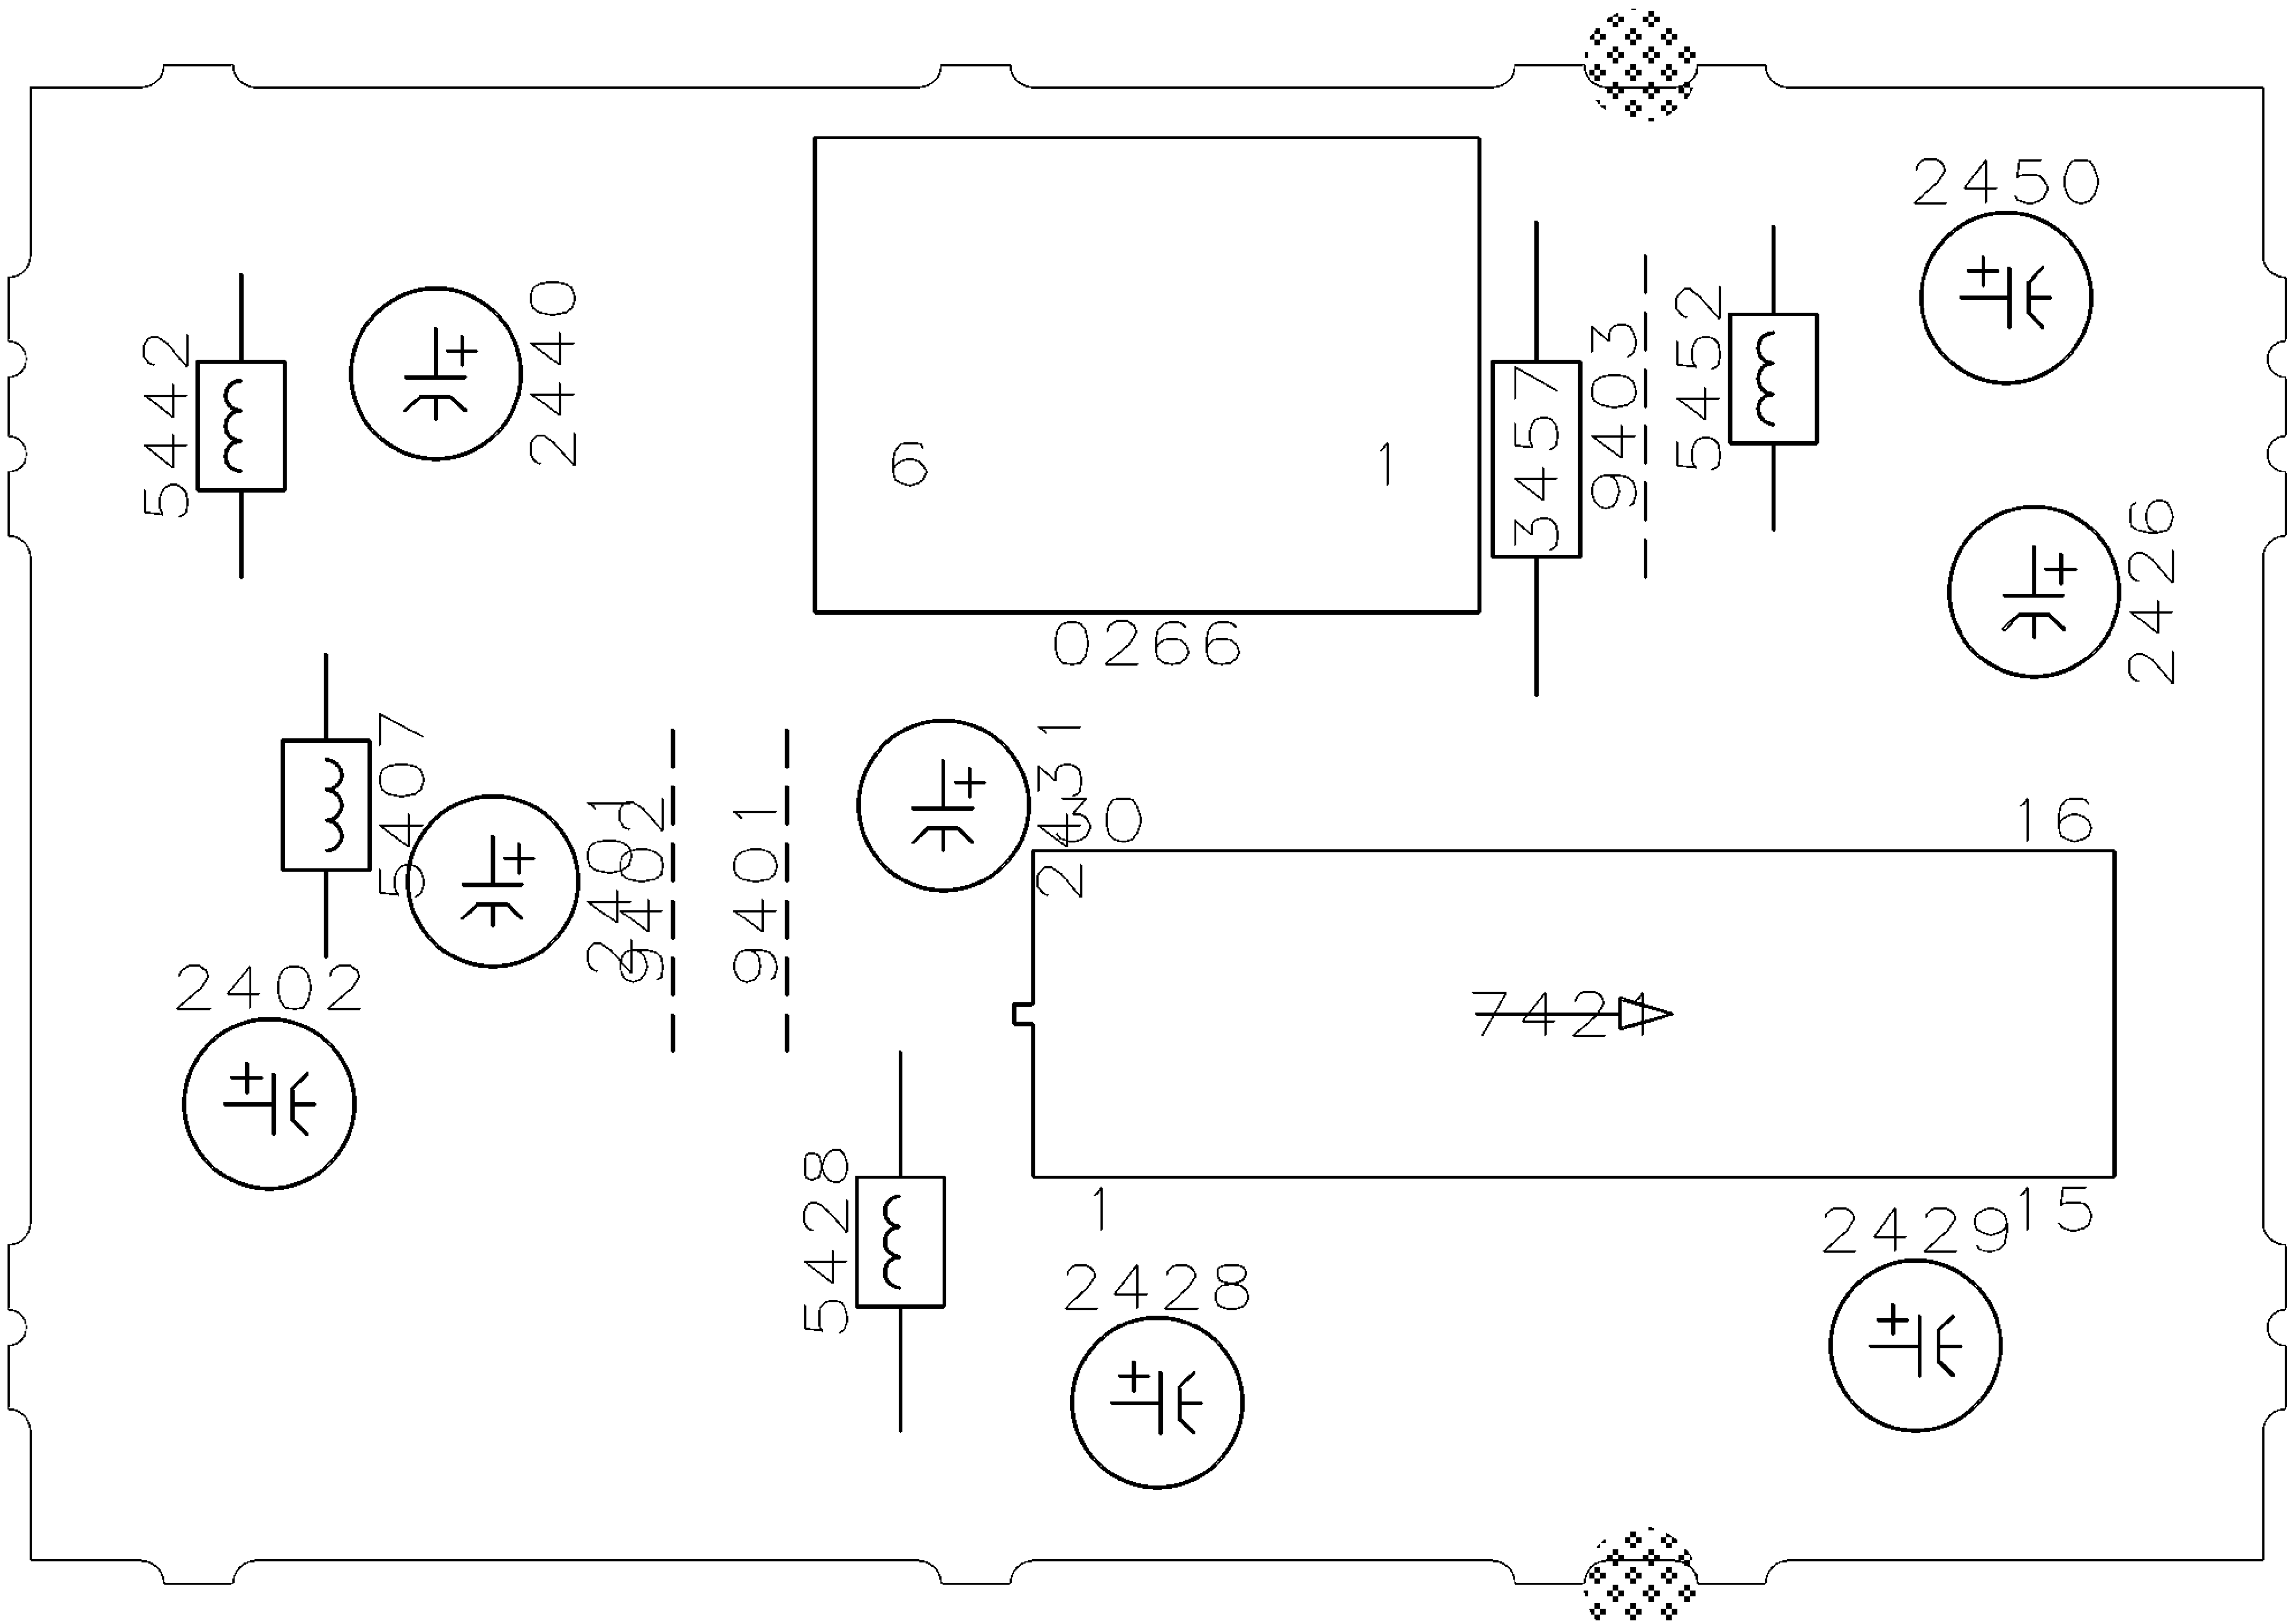


USED ONLY IN MODELS: 27PT663R37A, 27PT663R37C, 29PT563S85A, 29PT663R85A, 29PT663R85C, 32PT633R37D, 32PT663R37A, 27PT563S37A, 30PW633F35A, 32LT621L/17 (7638) - 2D 3 Line Comb Filter (Copper Side)
32PT563S37A, 32PT563S37G, 32PW633R85C, 29PT663S85A, 36ST220P/35, 36ST230P/35, 32ST230P/35, 32ST220P/17, 32PT563R85G, 29PT6631/44

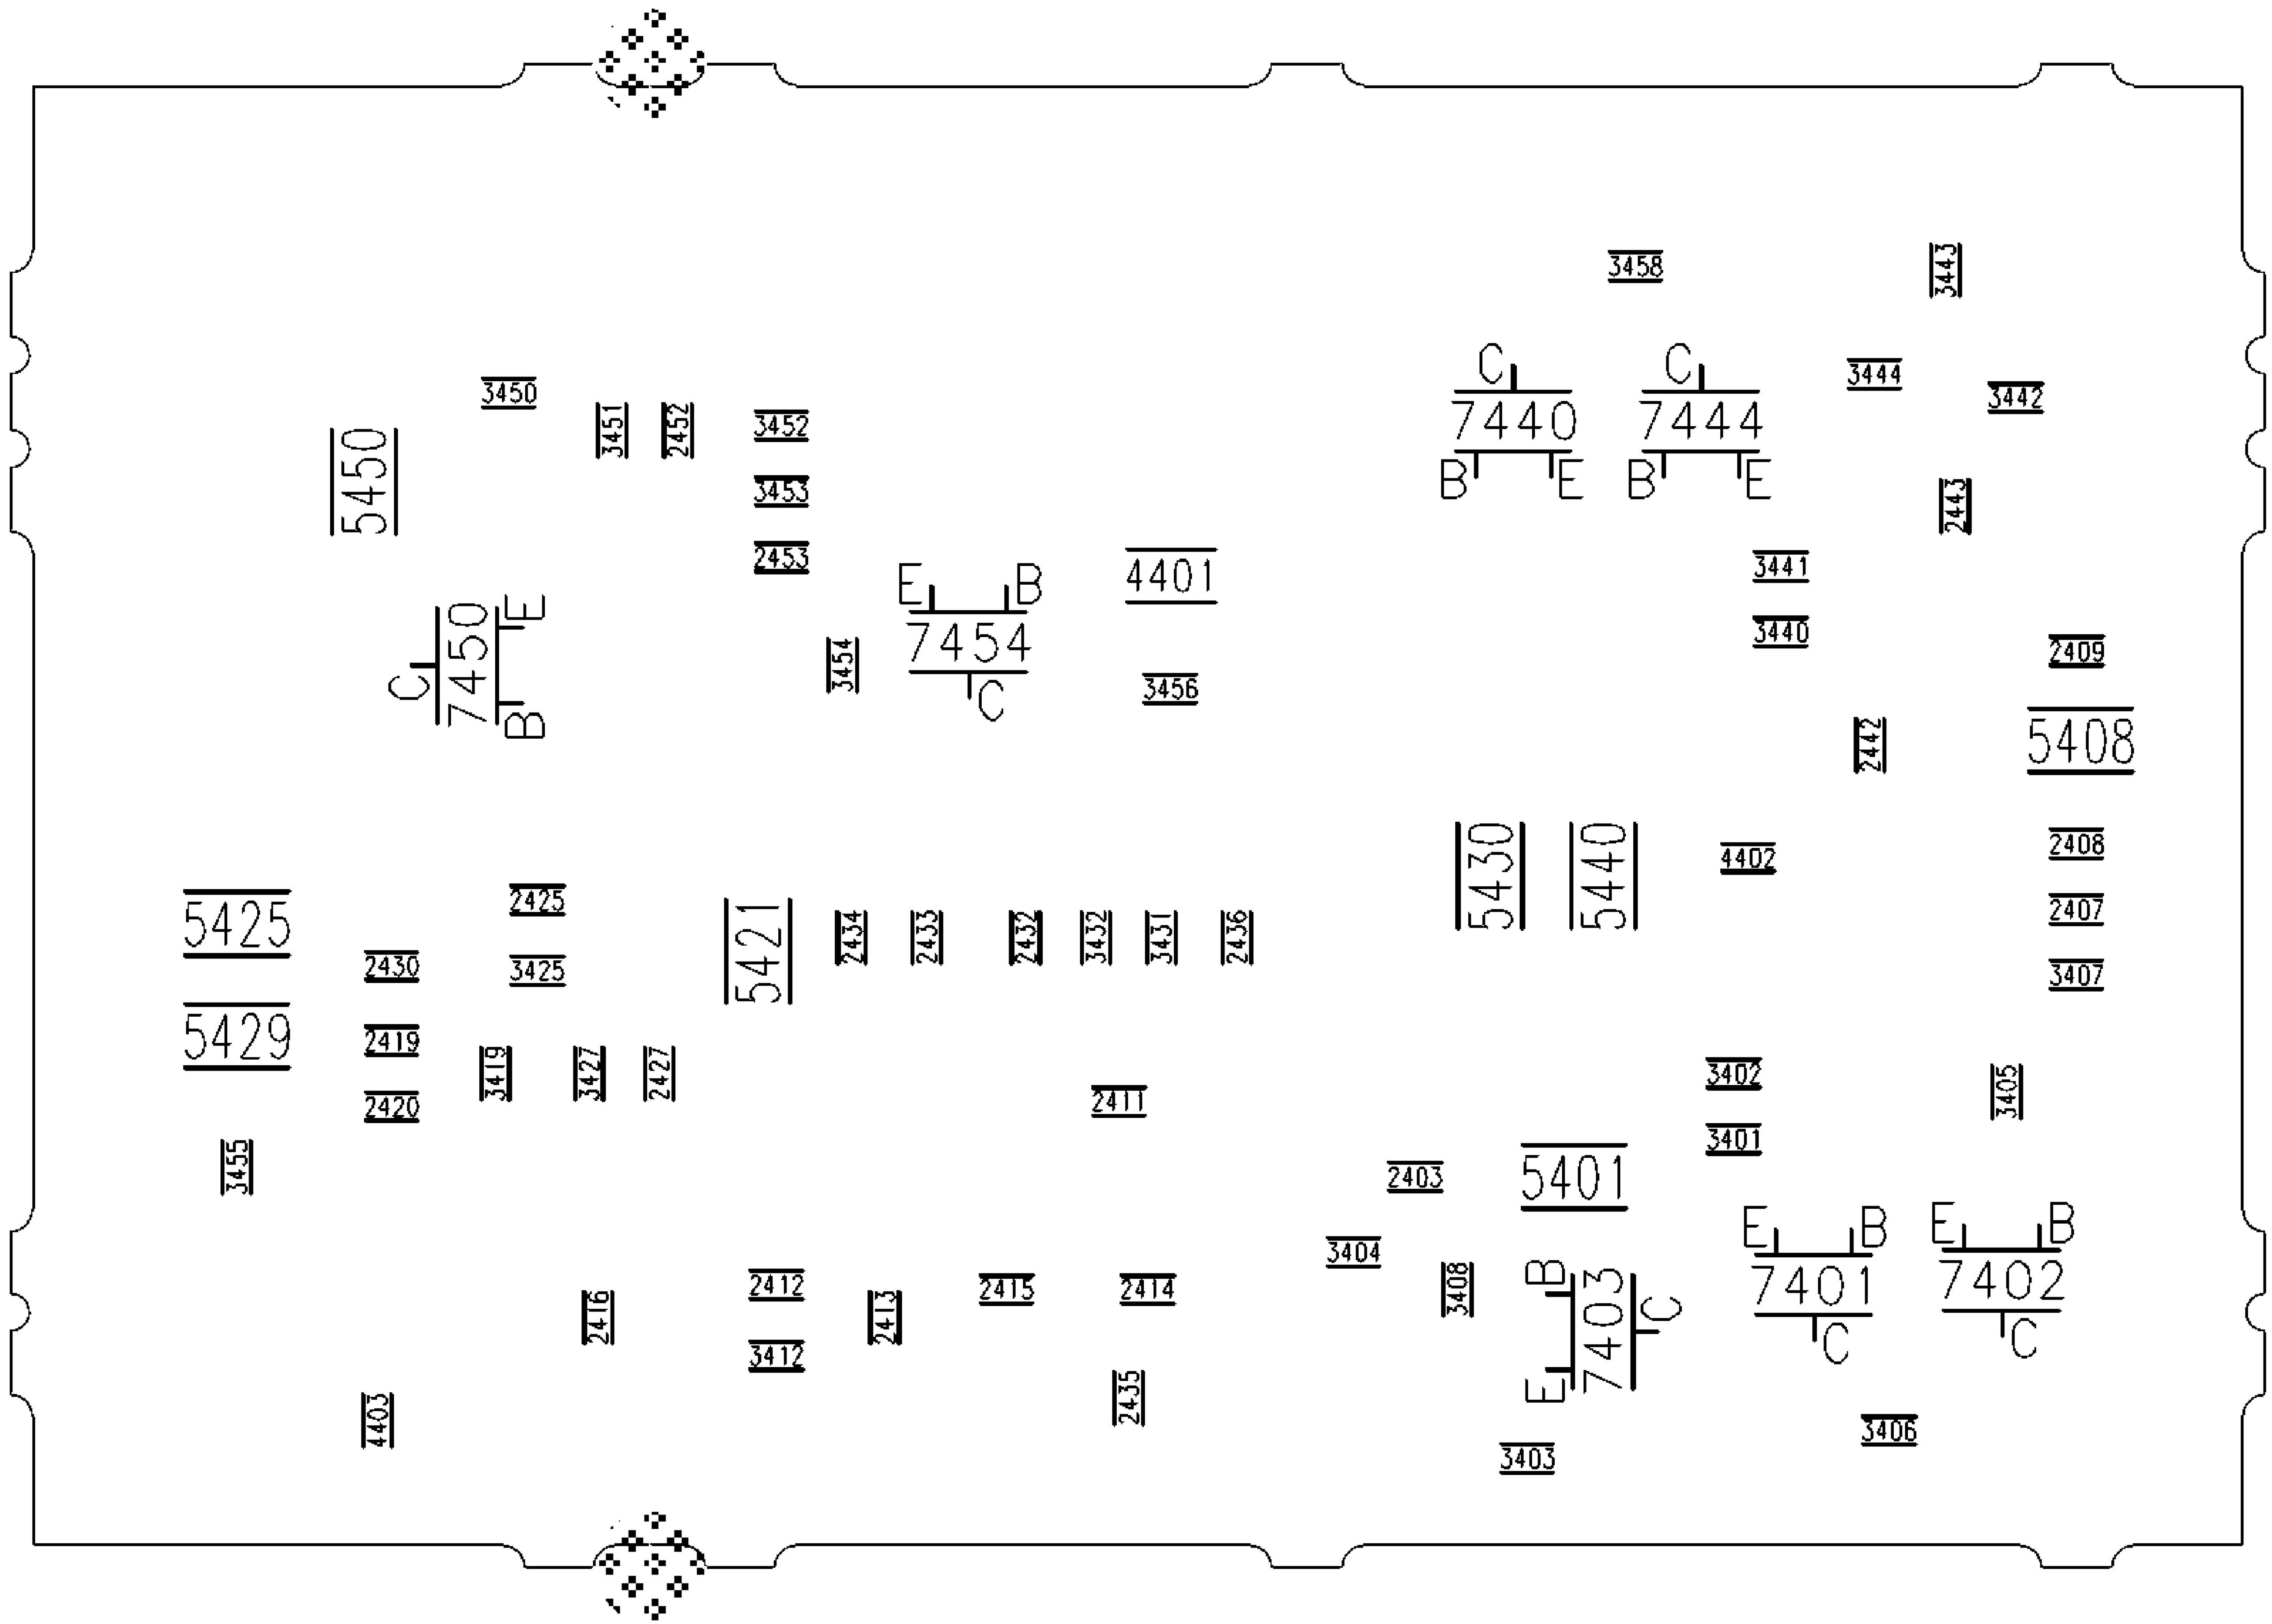


USED ONLY IN MODELS: 27PT633R37C, 27PT643R37A, 27PT663R37A, 27PT663R37C, 29PT633R85A, 29PT633R85C, 29PT663R85A, 29PT663R85C, 32PT633R37D, 32PT663R37A (7638) - Front Interface Panel
20PT653R/37, 20DV6932/37R, 20DV693R02, 27DV693R37A, 27LT621L/17, 27PT643F35A, 29PT643R85A, 30DV693R37A, , 30PW633F35A, 30PW633R37A, 30PW633R37C, 32LT621L/17, 20DV693R01, 27PT643R/37C, 27PT643R/97A,

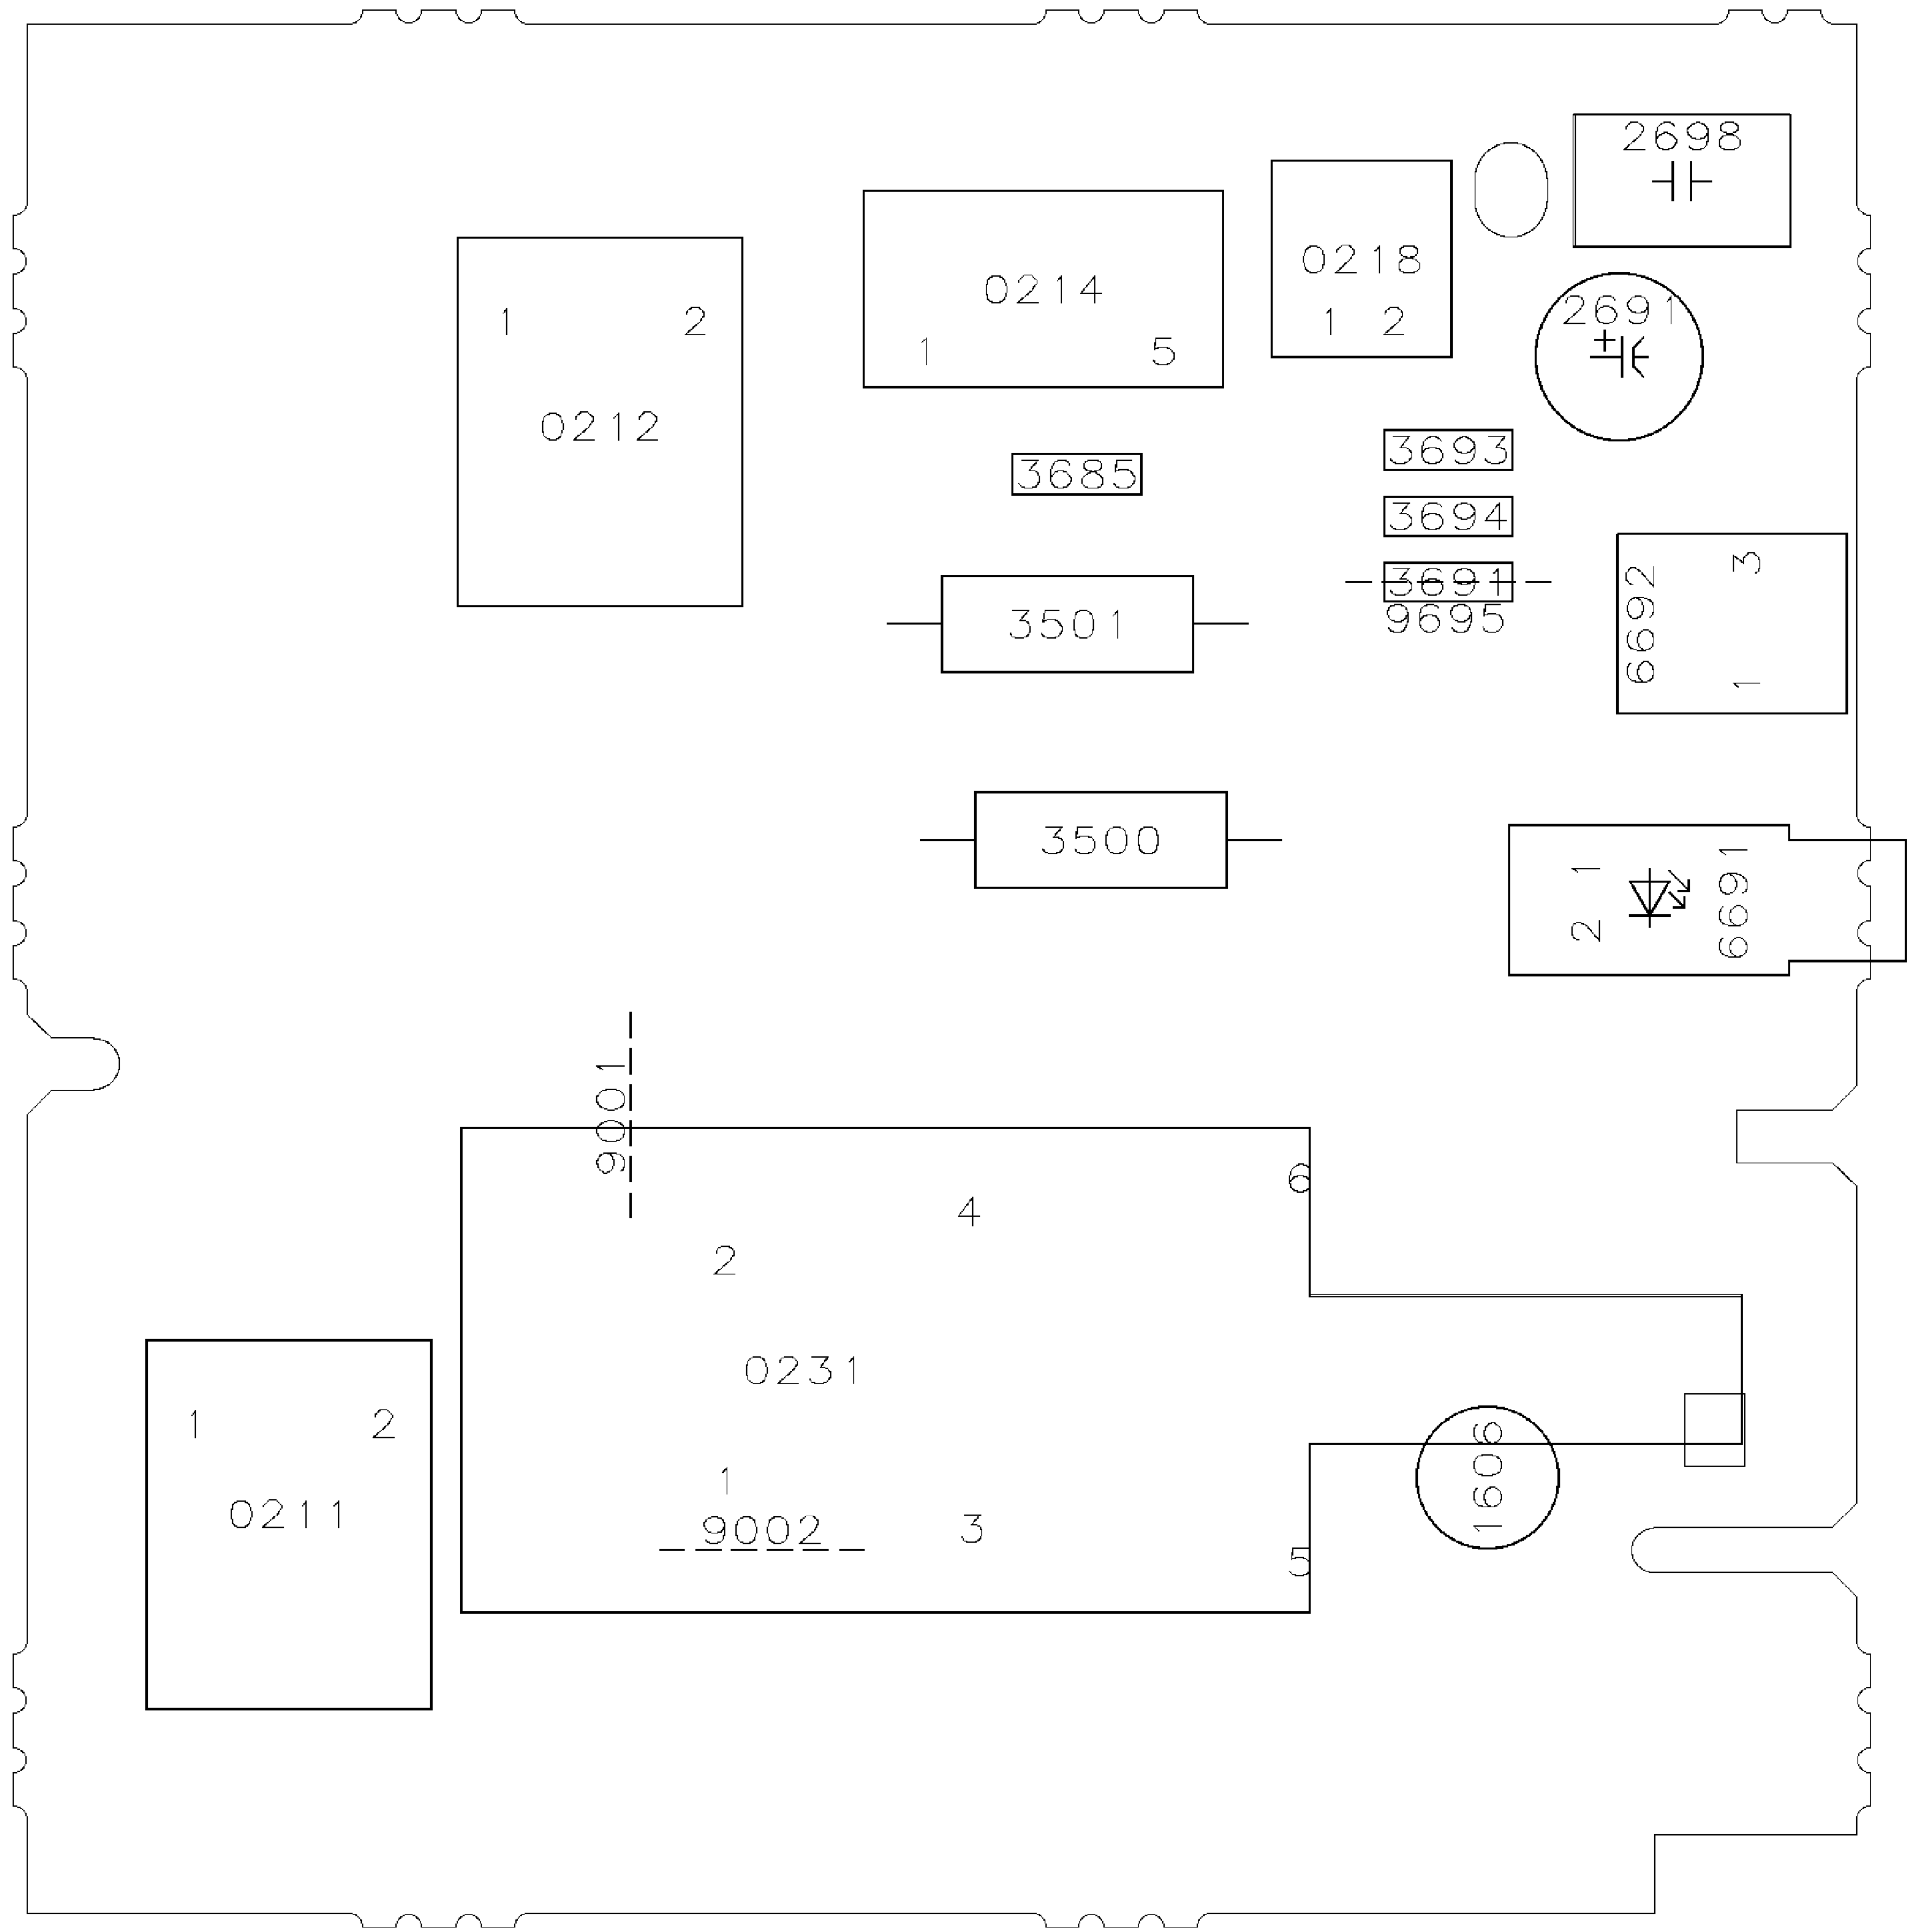


USED ONLY IN MODELS: 28PW6532/85R (7638) - Subwoofer Panel (Component Side)

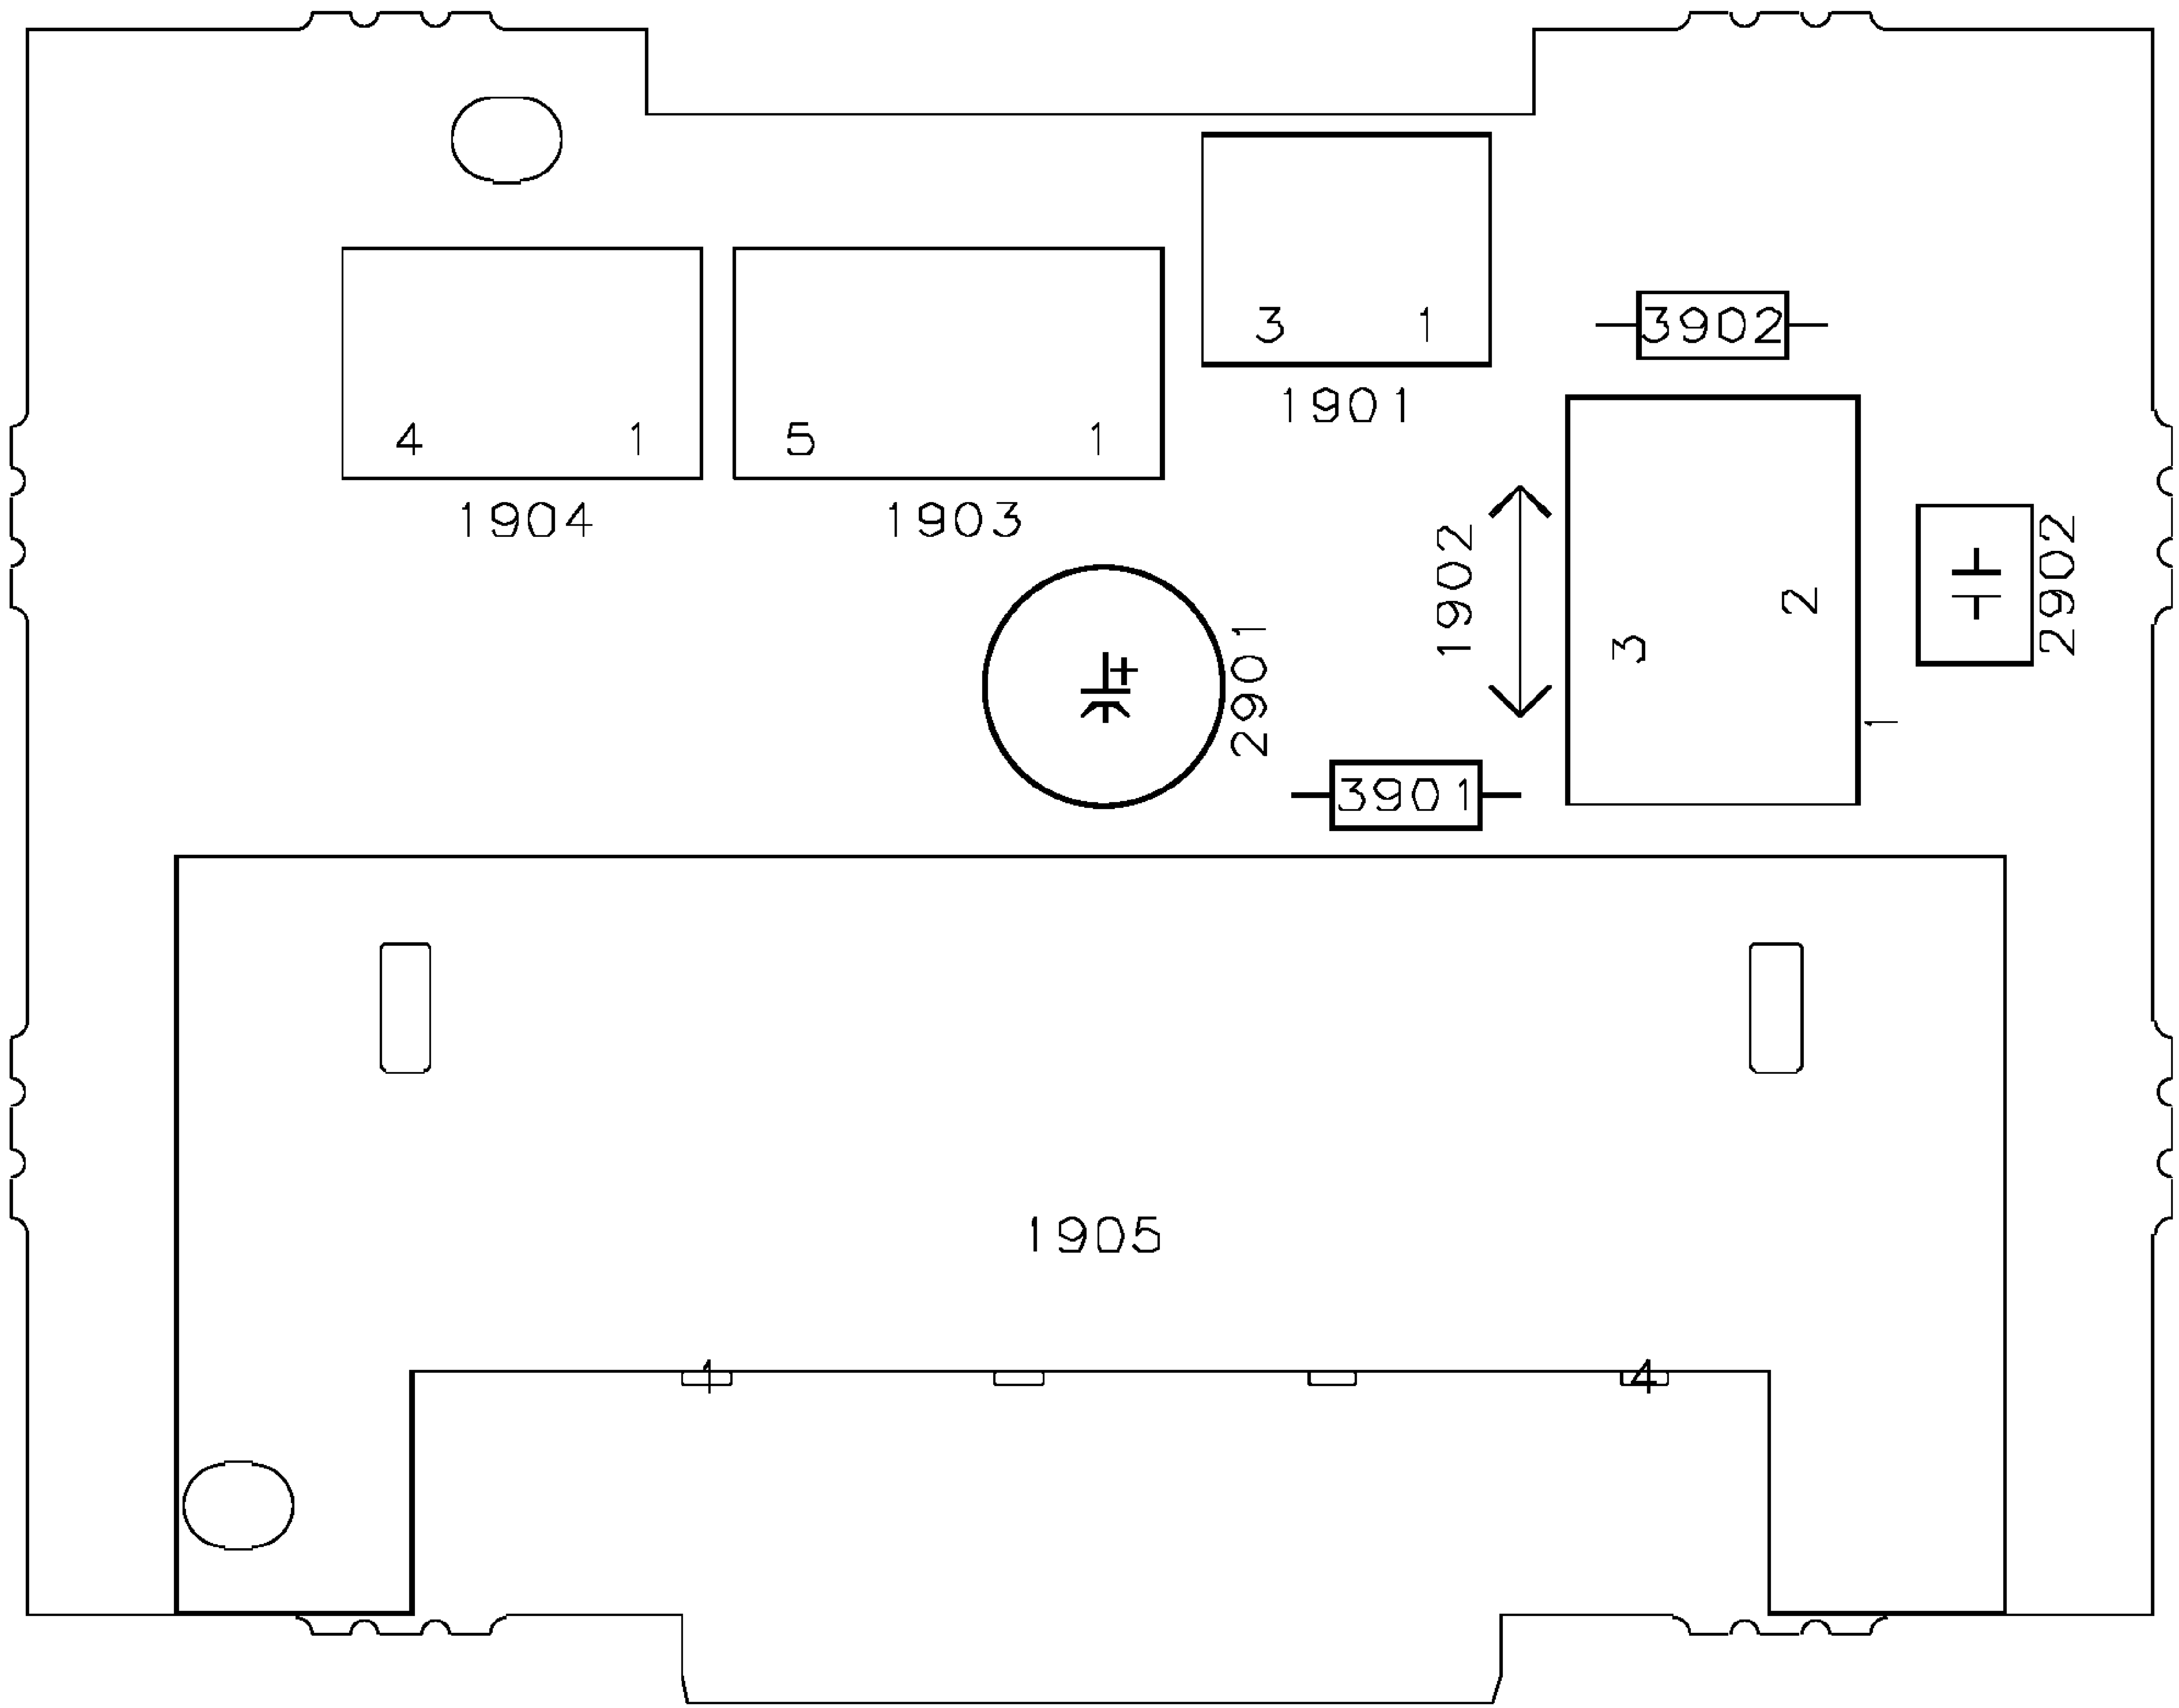


USED ONLY IN MODELS: 27PT643R37A, 27PT663R37A, 27PT663R37C, 29PT663R85A, 29PT663R85C, 32PT633R37D, 32PT663R37A, 20PT653R/37, 20DV6932/37R, 20DV693R02 (7638) - Top Control Panel (Component Side)
27DV693R37A, 27PT643F35A, 29PT643R85A, 30DV693R37A, , 30PW633F35A, 30PW633R37A, 30PW633R37C, 20DV693R01, 27PT643R/37C, 27PT643R/97A, 28PW6532/85R, 32PW633R85C, 29PT663S85A, 29DV6931/85R, 29DV693R85A

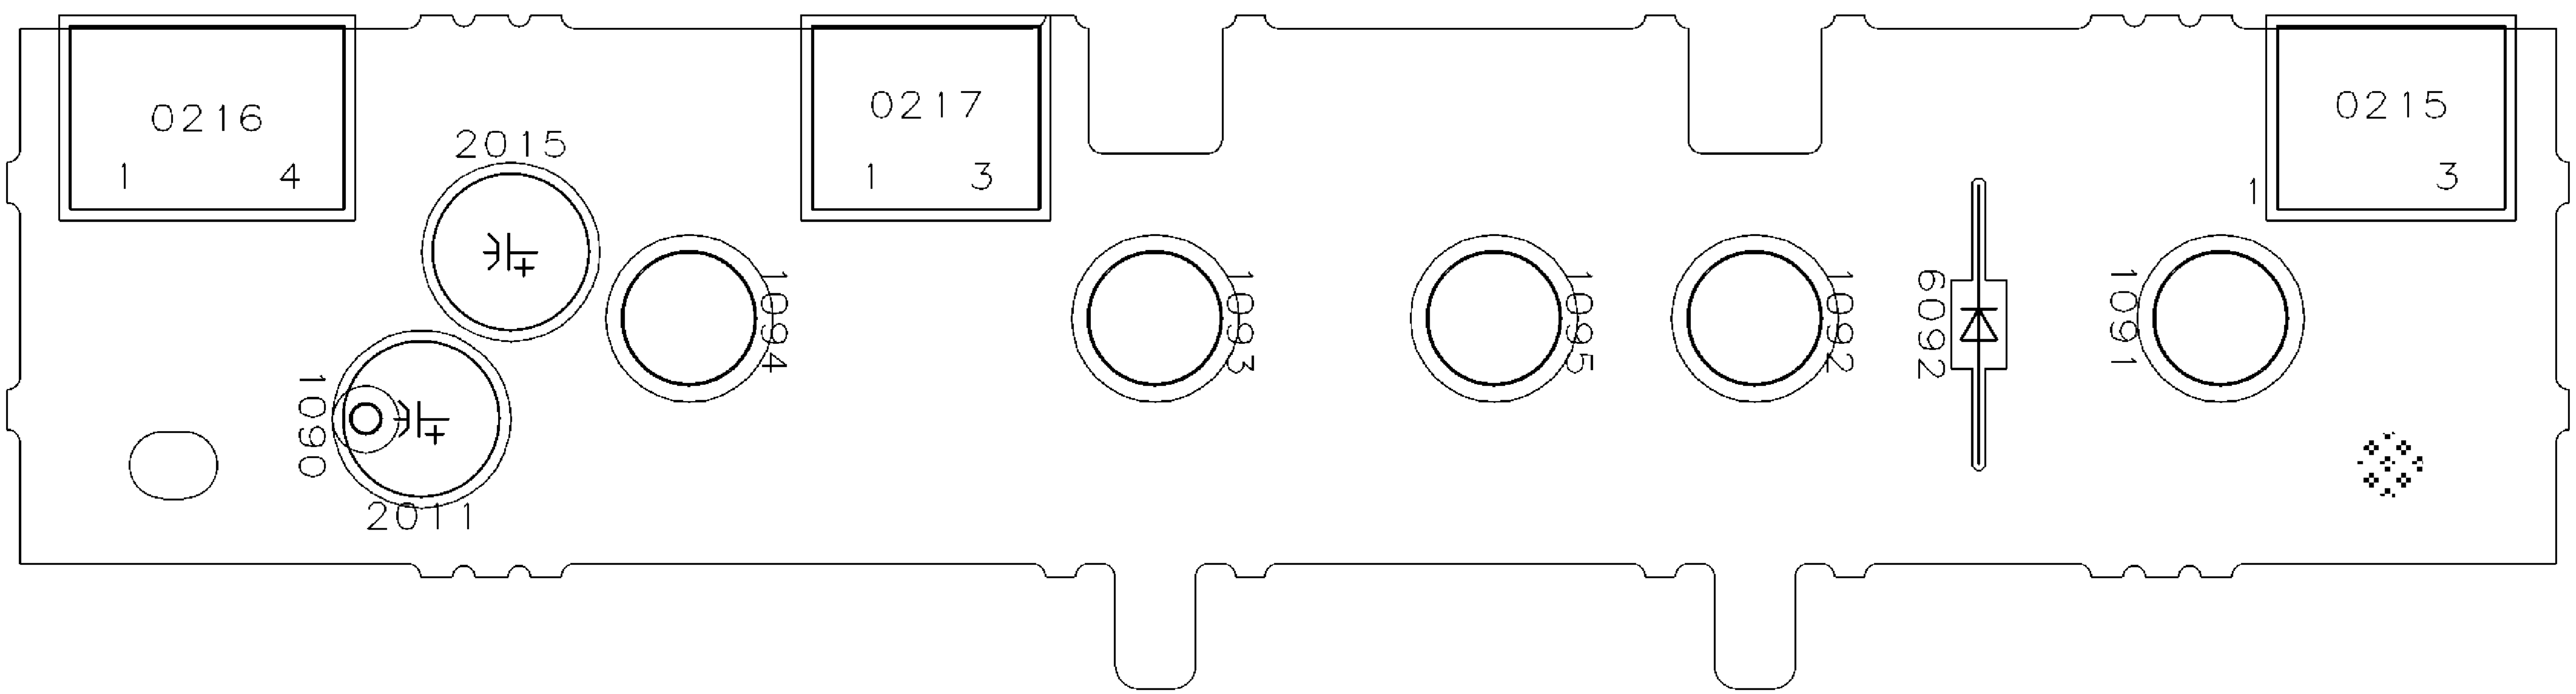


USED ONLY IN MODELS: 27PT643R37A, 27PT663R37A, 27PT663R37C, 29PT663R85A, 29PT663R85C, 32PT633R37D, 32PT663R37A, 20PT653R/37, 20DV6932/37R, 20DV693R02 (7638) - Top Control Panel (Copper Side)
27DV693R37A, 27PT643F35A, 29PT643R85A, 30DV693R37A, , 30PW633F35A, 30PW633R37A, 30PW633R37C, 20DV693R01, 27PT643R/37C, 27PT643R/97A, 28PW6532/85R, 32PW633R85C, 29PT663S85A, 29DV6931/85R, 29DV693R85A

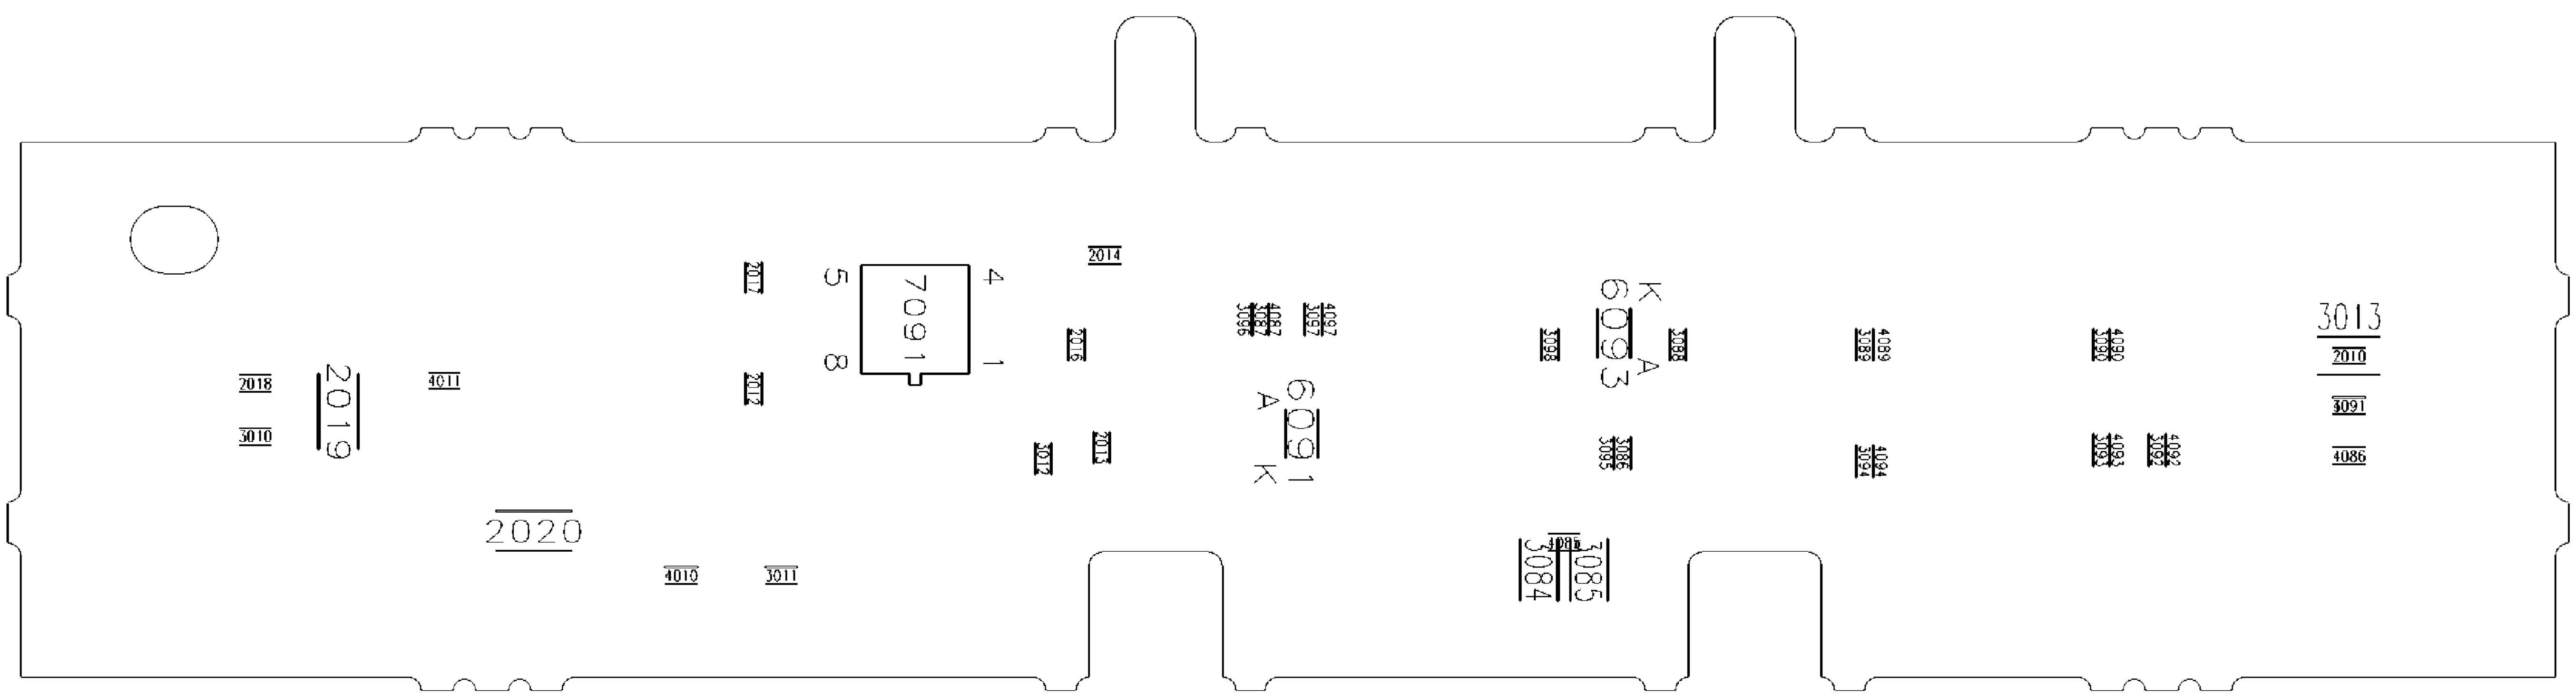

USED ONLY IN MODELS: 32PT633R37D, 32PT663R37A, 32LT621L/17 (7638) - DAF Panel + Inner Pin Cushion Correction

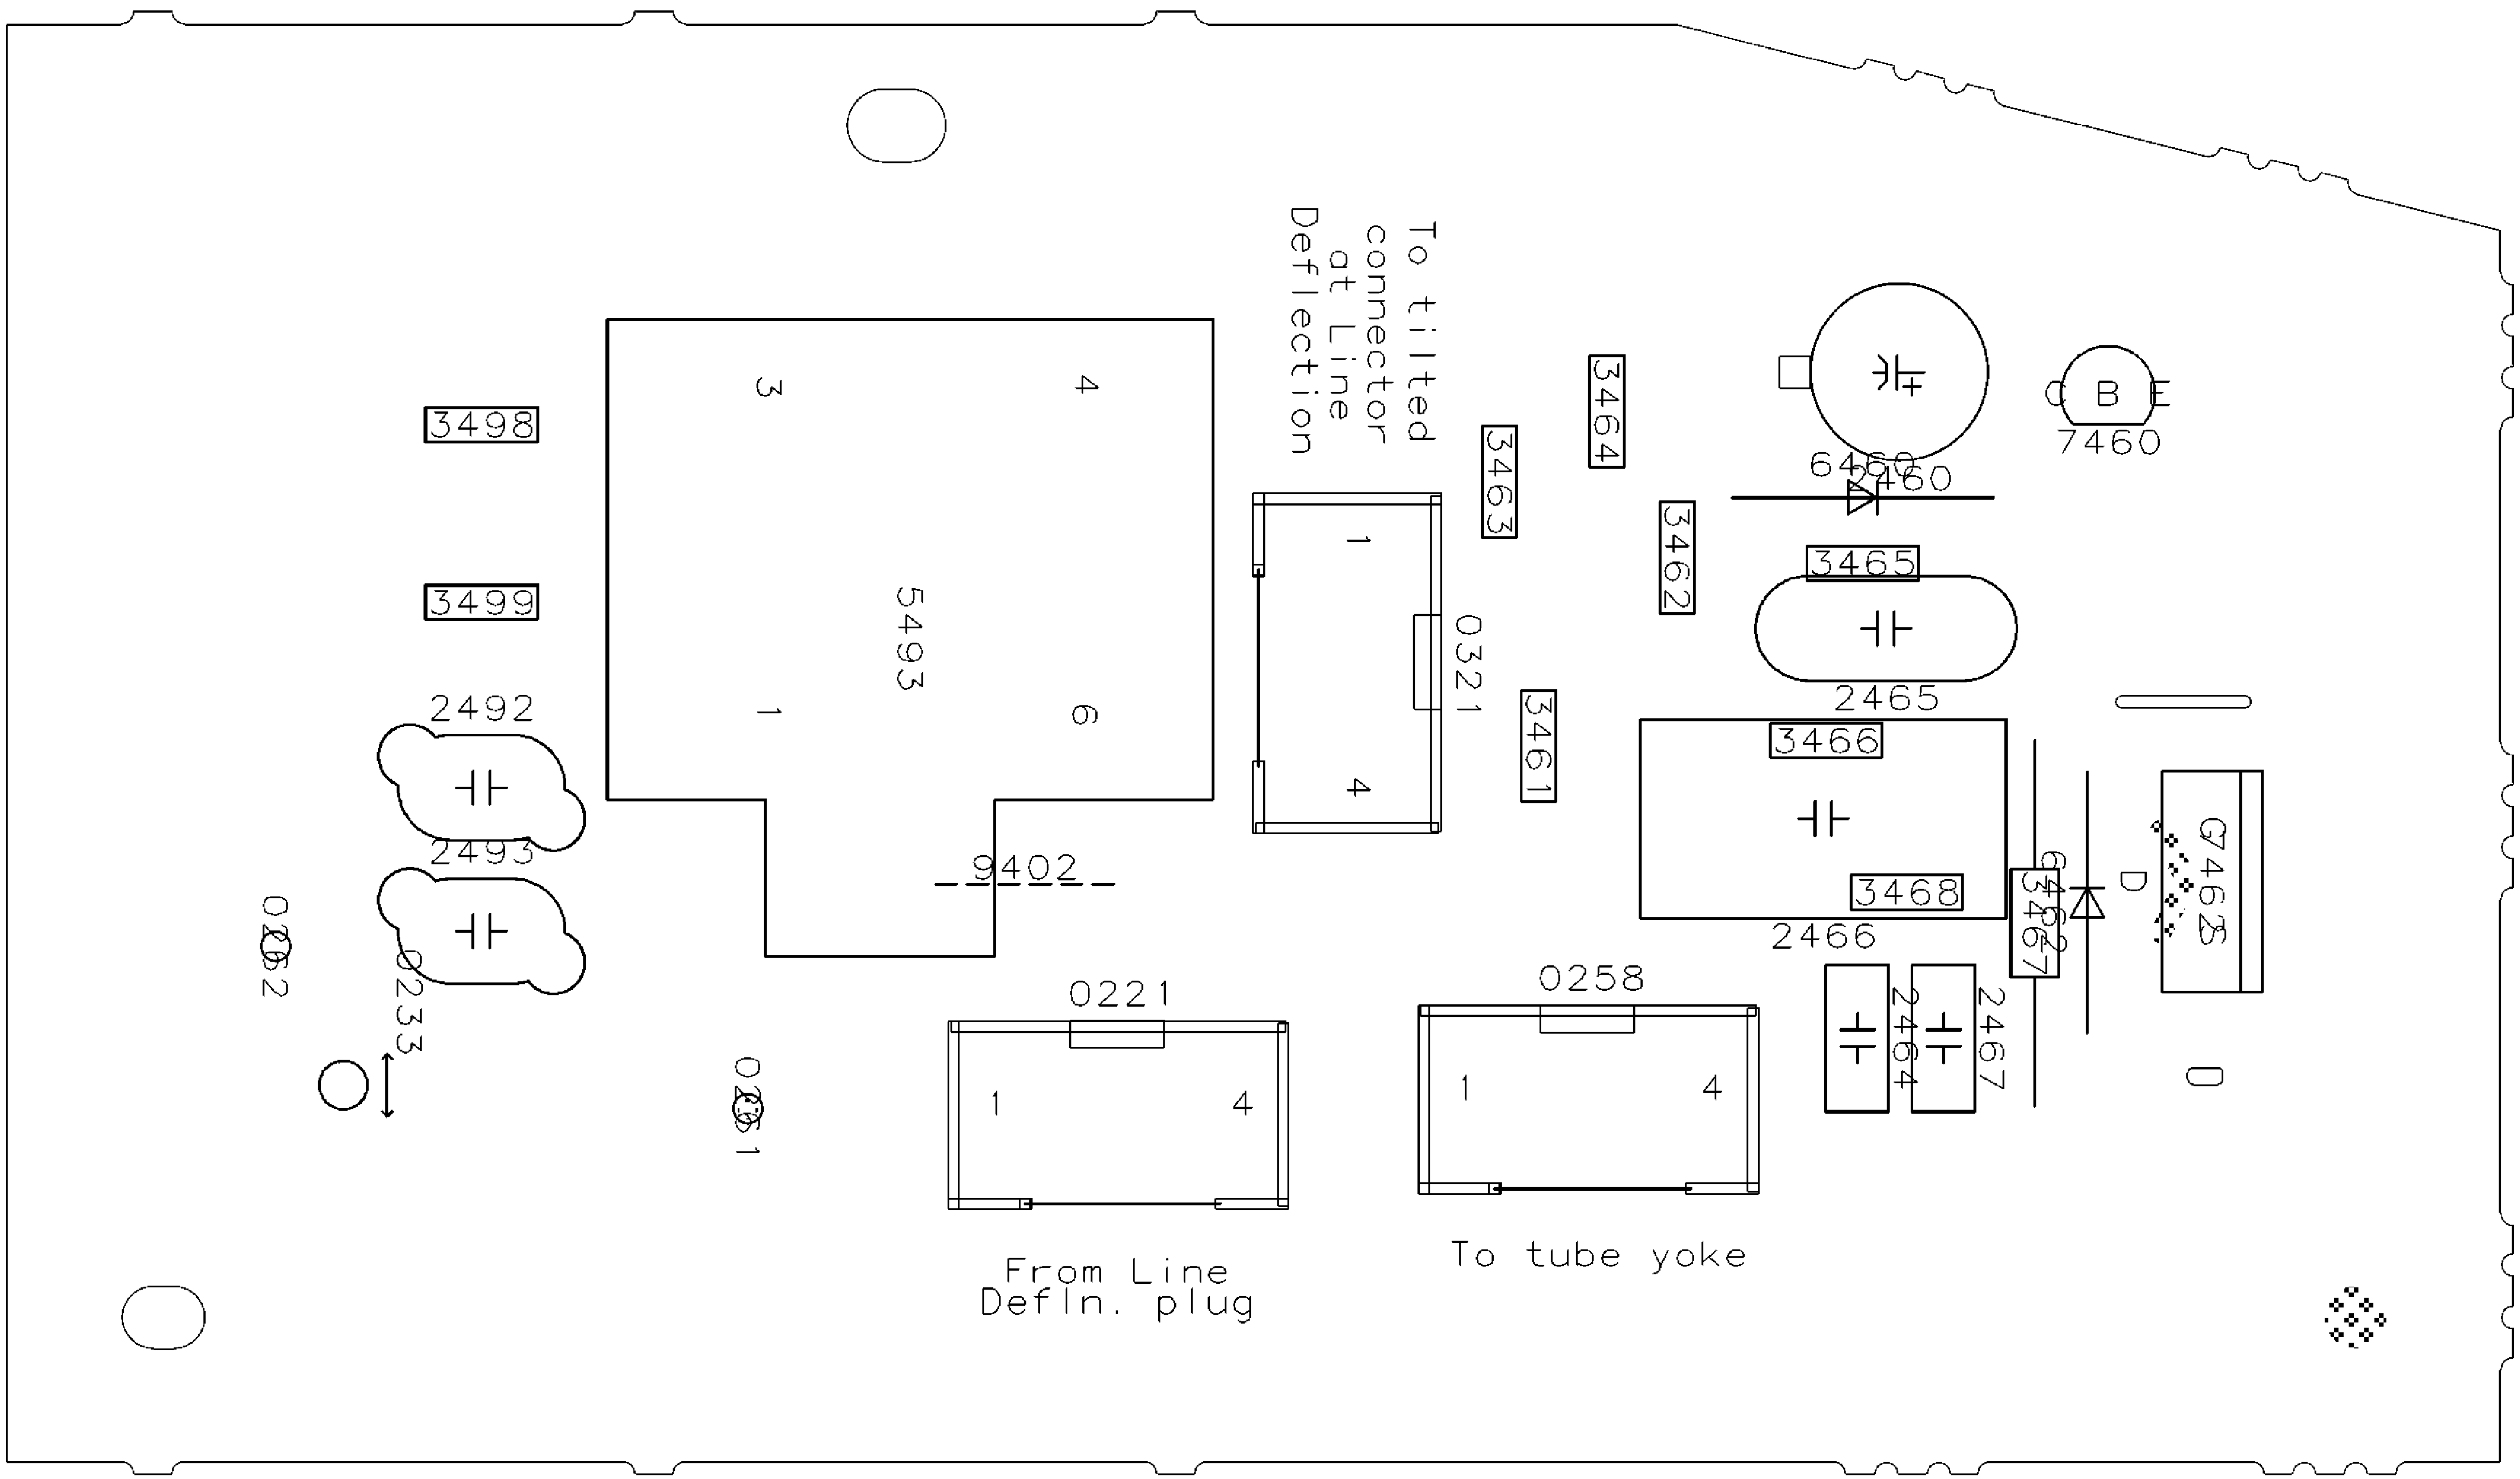


USED ONLY IN MODELS: 20DV6932/37R, 20DV693R02 (7638) - DVD Interface Panel, SD3.1 DVD Module (Component Side)

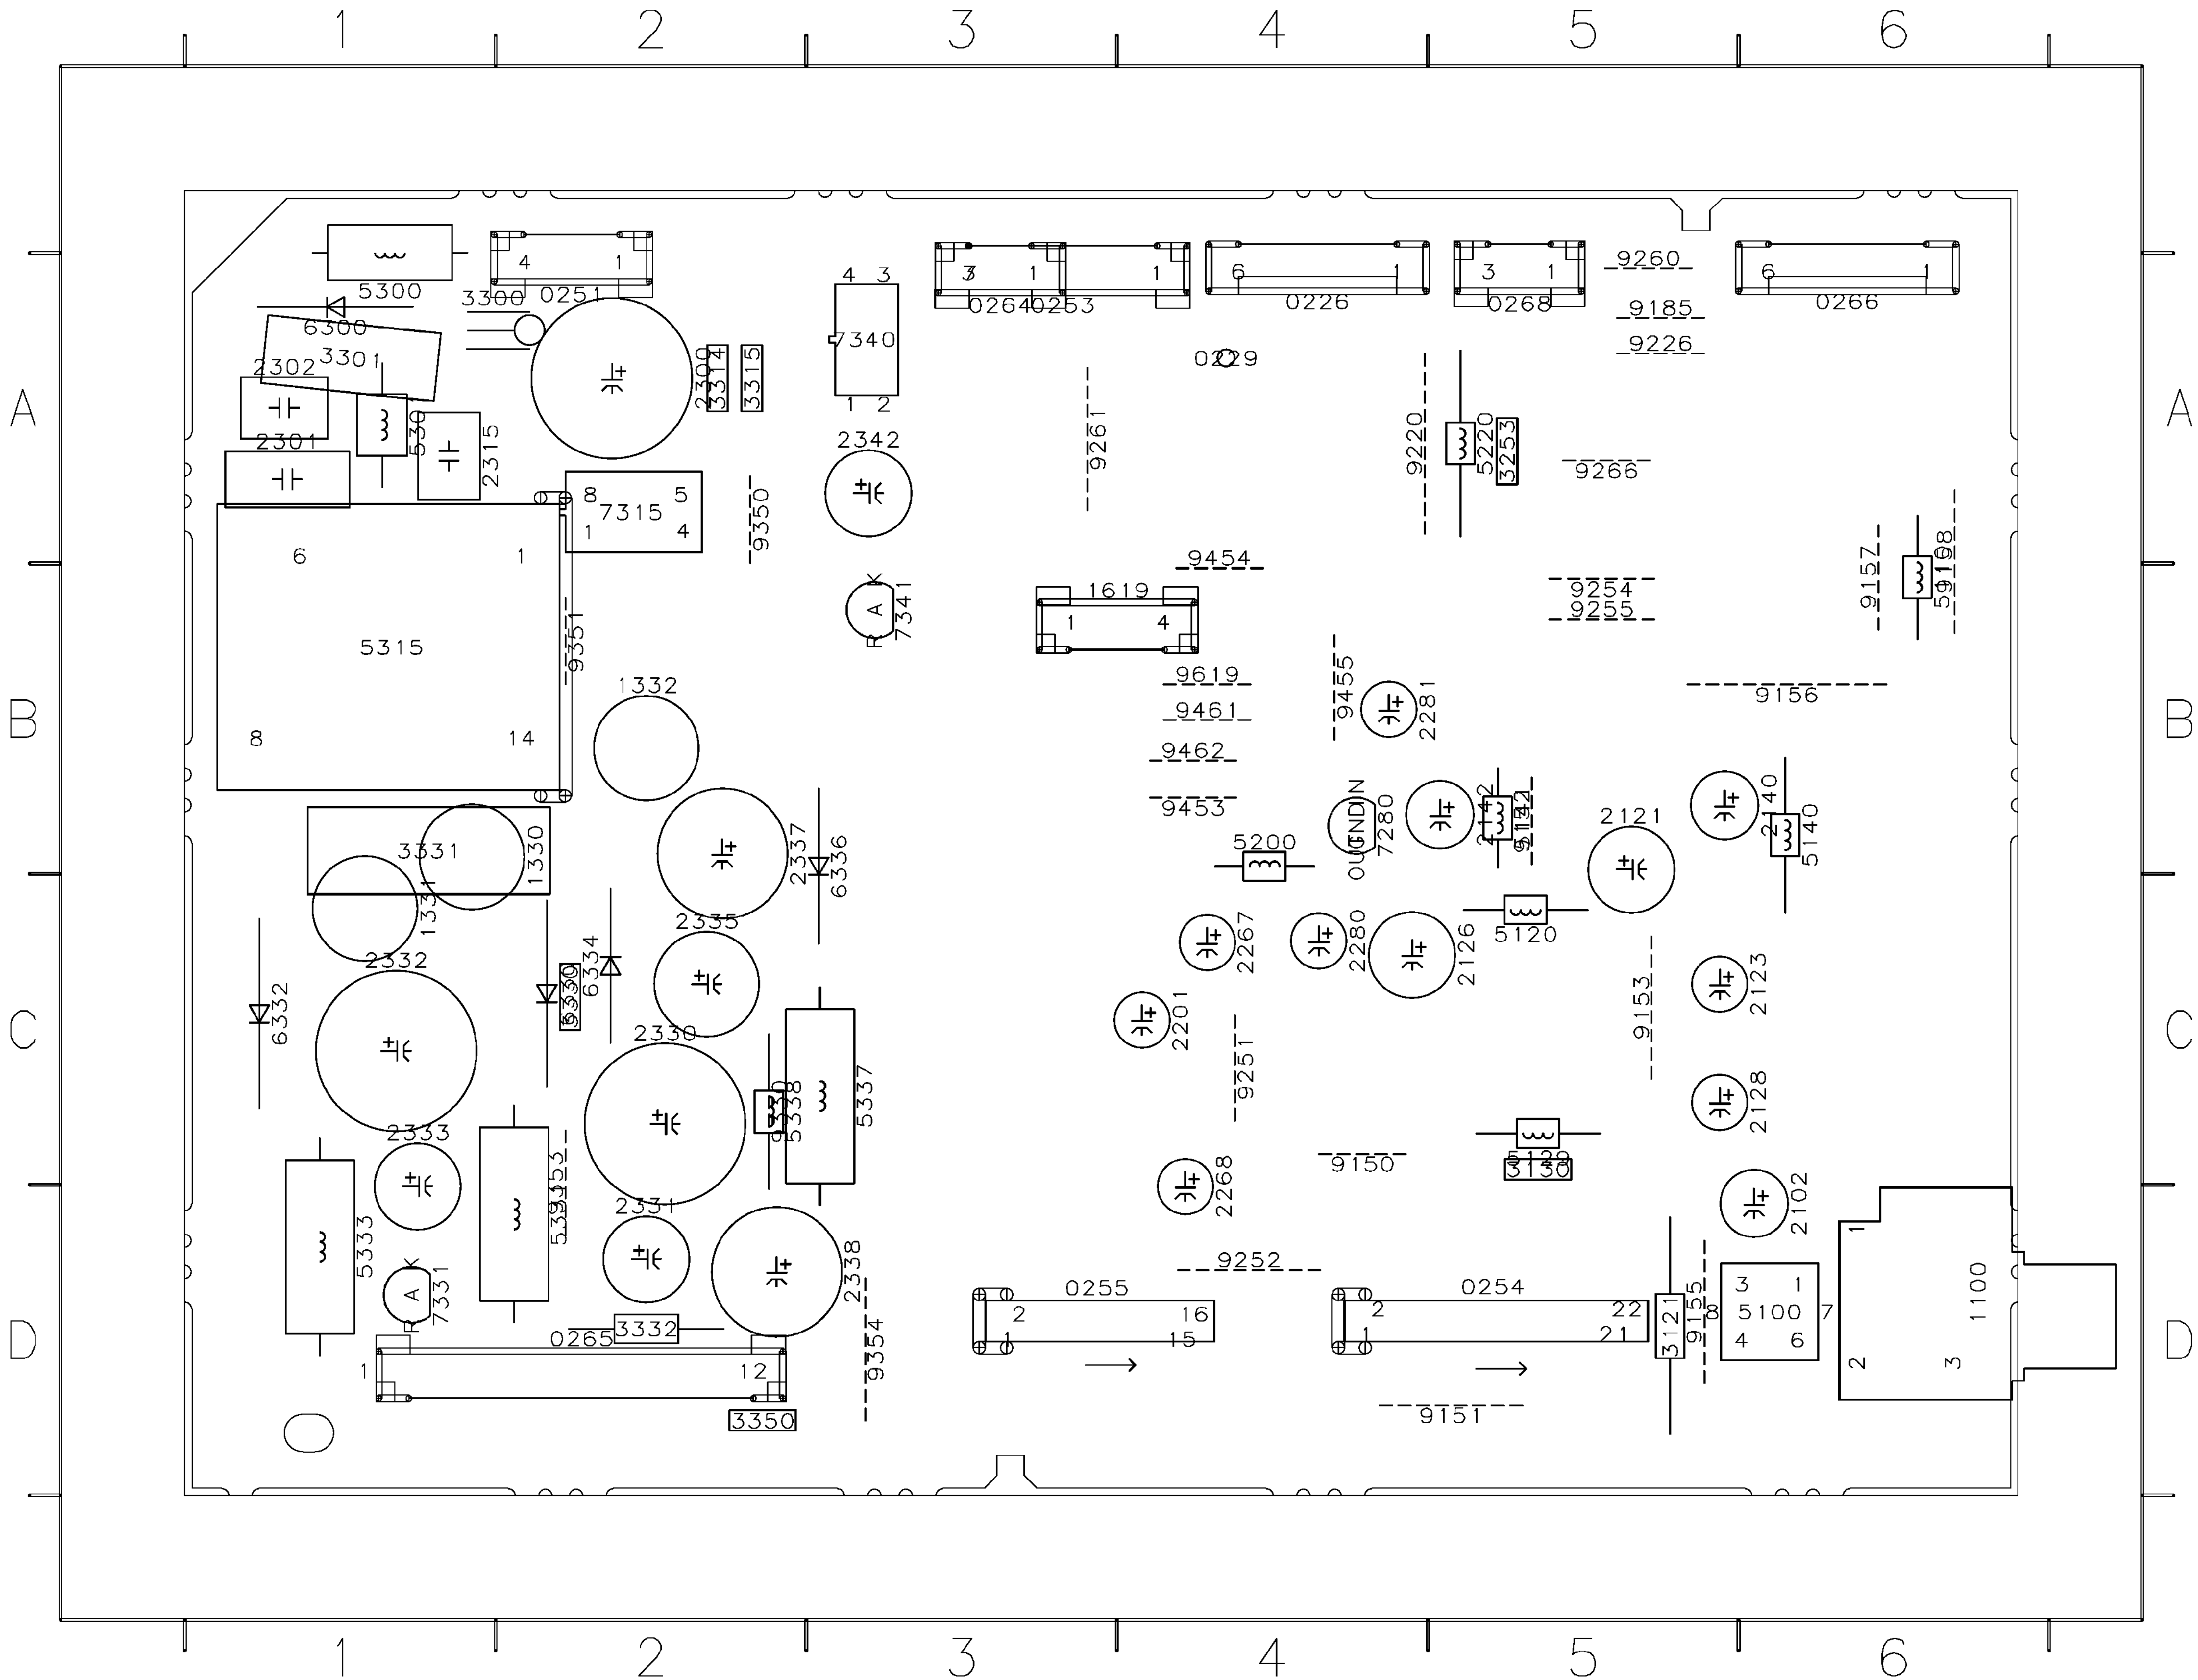

Item	Loc
0226	A4
0229	A4
0251	A2
0253	A3
0254	D5
0255	D3
0264	A3
0265	D2
0266	A6
0268	A5
1100	D6
1330	B2
1331	C1
1332	B2
1619	B3
2102	D6
2121	B5
2123	C6
2126	C5
2128	C6
2140	B6
2142	B5
2201	C4
2267	C4
2268	D4
2280	C4
2281	B4
2300	A2
2301	A1
2302	A1
2315	A1
2330	C2
2331	D2
2332	C1
2333	C1
2335	C2
2337	B2
2338	D3
2342	A3
3121	D5
3130	C5
3253	A5
3300	A1
3301	A1
3314	A2
3315	A2
3330	C2
3331	B1
3332	D2
3350	D2
5100	D6
5110	B6
5120	C5
5129	C5
5140	B6
5141	B5
5200	B4
5220	A5
5300	A1
5301	A1
5315	B1
5331	D2
5333	D1
5337	C3
5338	C2
6300	A1
6330	C2
6332	C1
6334	C2
6336	B3
7280	B4
7315	A2
7331	D1
7340	A3
7341	B3
9150	C4
9151	D5
9152	B5
9153	C5
9155	D5
9156	B6
9157	B6
9158	A6
9185	A5
9220	A4
9226	A5
9251	C4
9252	D4
9254	B5
9255	B5
9260	A5
9261	A3
9266	A5
9330	C2
9350	A2
9351	B2
9353	C2
9354	D3
9453	B4
9454	A4
9455	B4
9461	B4
9462	B4
9619	B4


USED ONLY IN MODELS: 20DV6932/37R, 20DV693R02 (7638) - DVD Interface Panel, SD3.1 DVD Module (Copper Side)

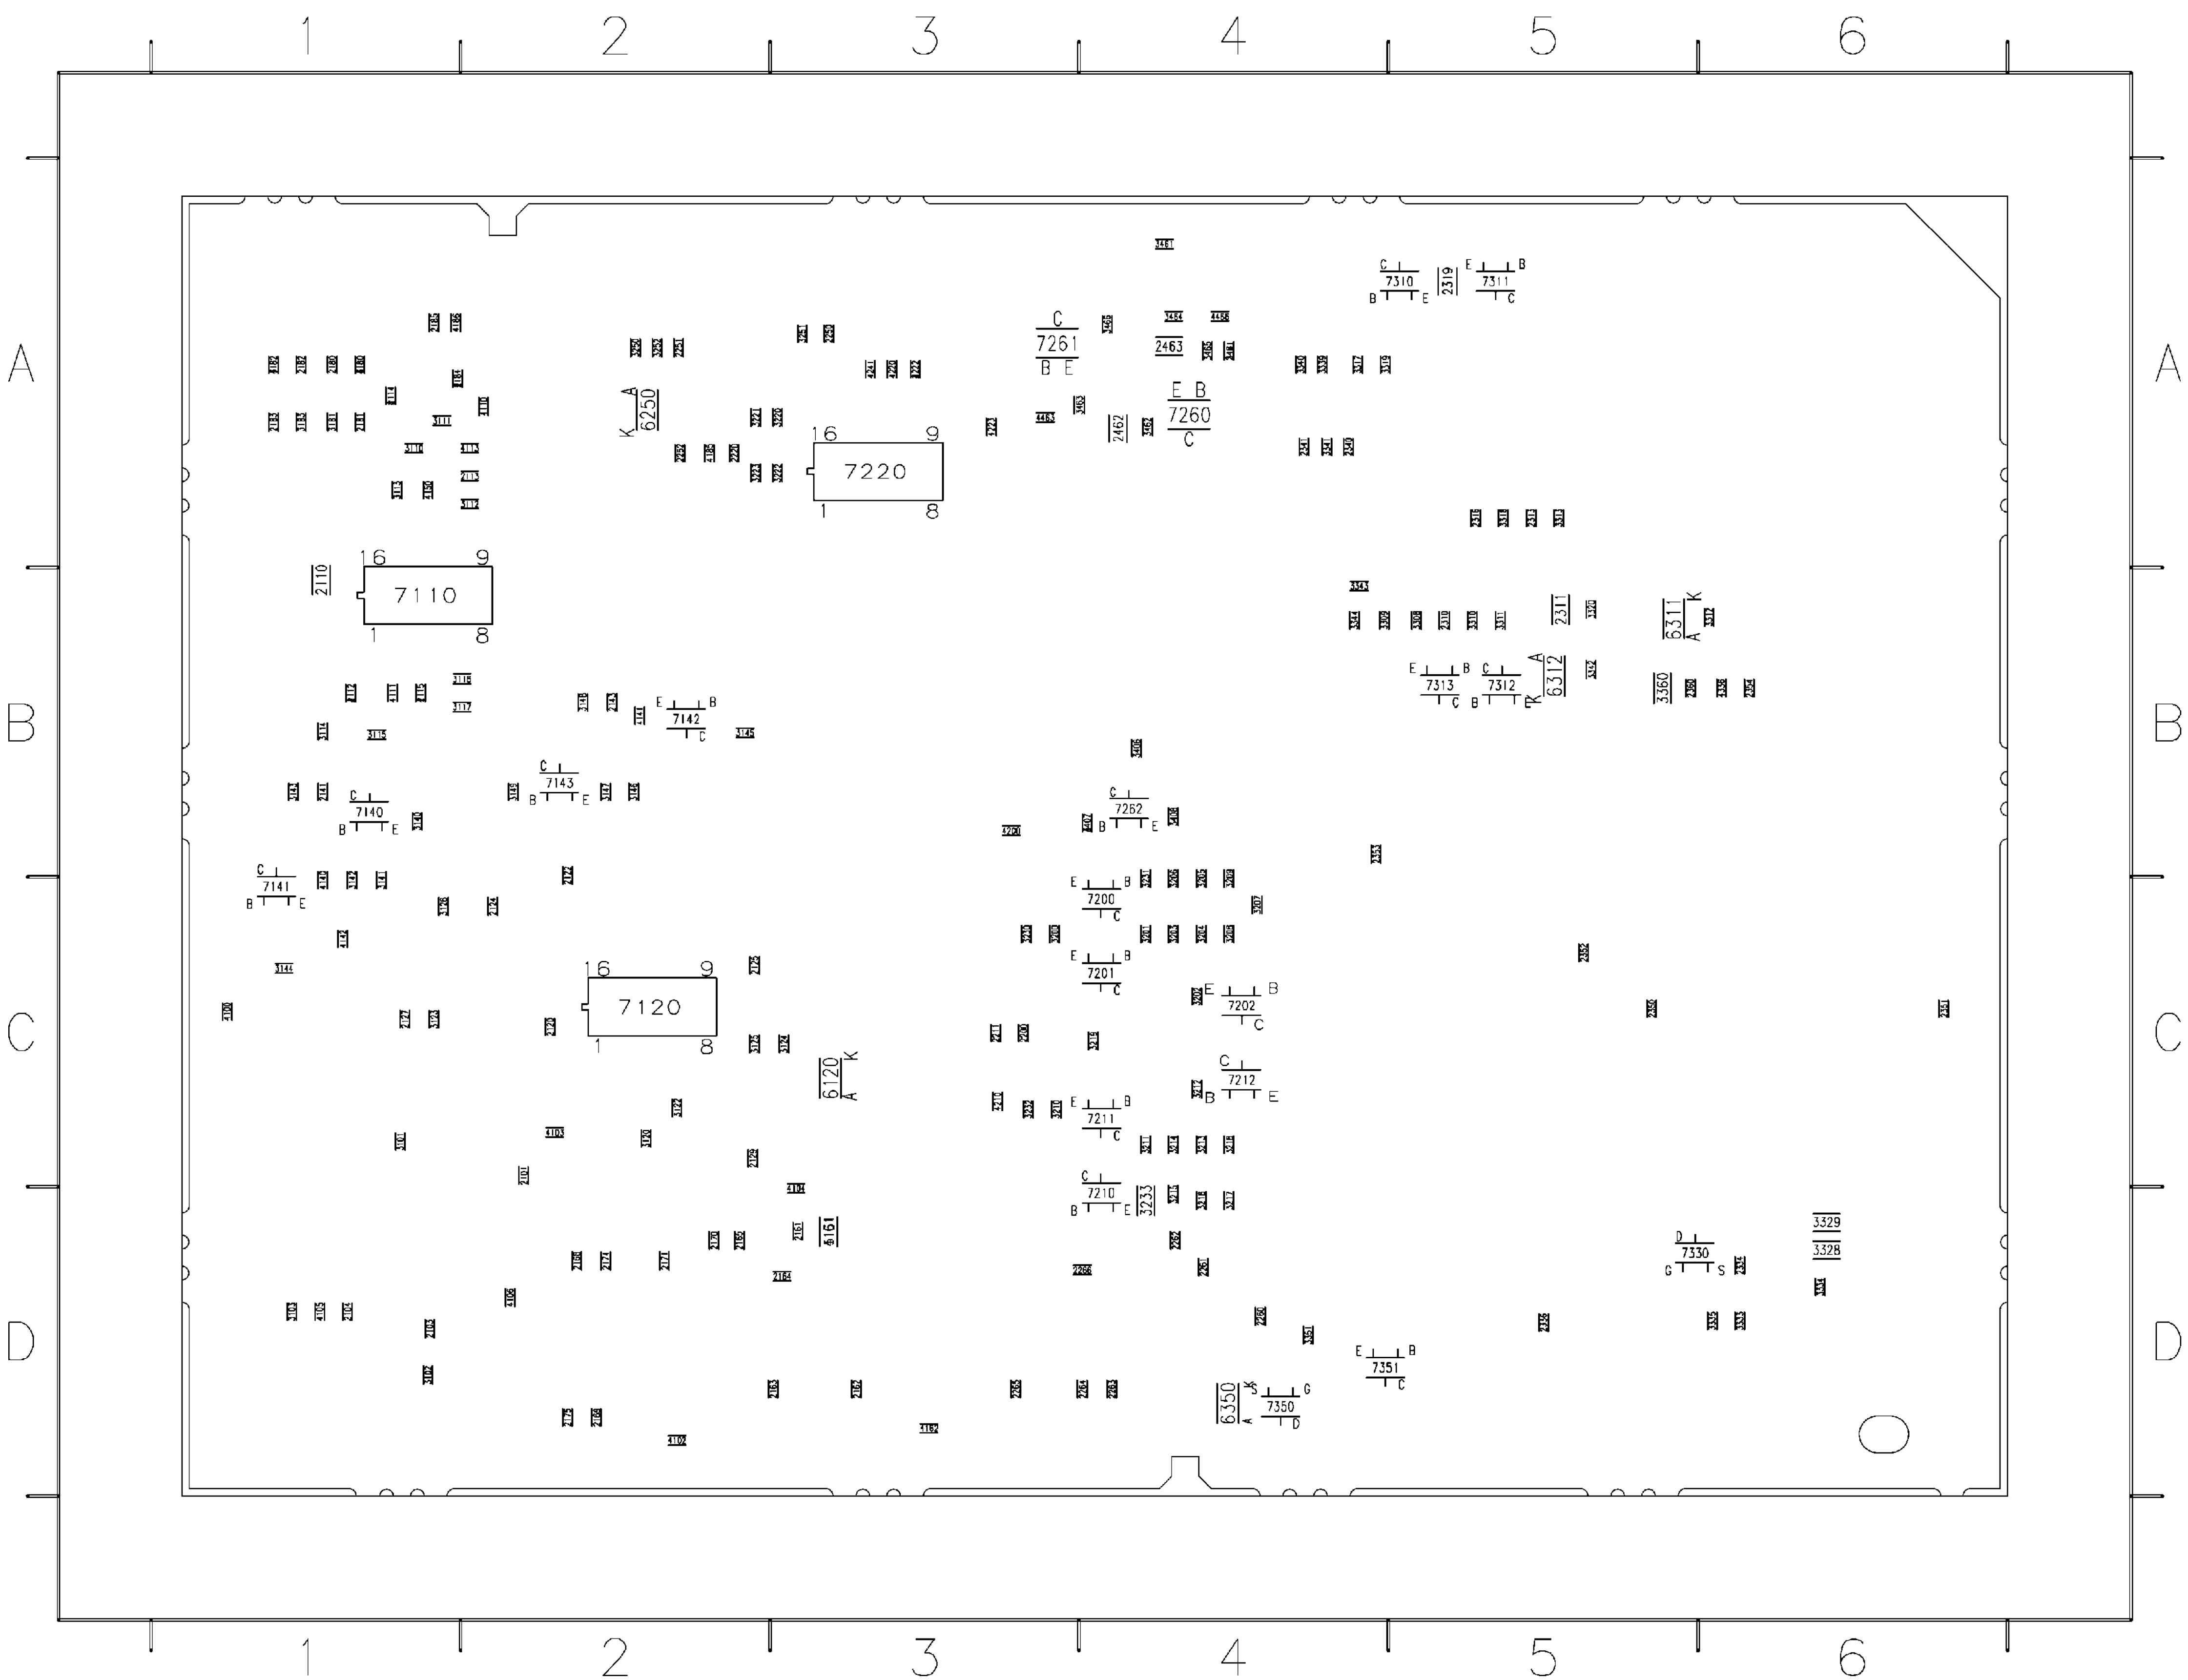

Part	Location
2101	C2
2103	D1
2104	D1
2110	B1
2111	A1
2112	B1
2113	A2
2115	B1
2120	C2
2122	B2
2124	C2
2125	C2
2127	C1
2129	C2
2141	B1
2143	B2
2161	D3
2162	D3
2163	D3
2164	D3
2165	D2
2168	D2
2169	D2
2170	D2
2171	D2
2174	D2
2175	D2
2180	A1
2181	A1
2182	A1
2183	A1
2184	A1
2185	A1
2200	C3
2211	C3
2220	A2
2222	A3
2250	A3
2251	A2
2252	A2
2260	D4
2261	D4
2262	D4
2263	D4
2264	D4
2265	D3
2266	D4
2310	B5
2311	B5
2313	A5
2316	A5
2319	A5
2334	D6
2336	D5
2340	A4
2341	A4
2350	C5
2351	C6
2352	C5
2353	B4
2354	B6
2360	B5
2461	A4
2462	A4
2463	A4
3101	C1
3102	D1
3103	D1
3110	A1
3111	A1
3112	A2
3113	A1
3114	B1
3115	B1
3116	B2
3117	B2
3120	C2
3122	C2
3123	C1
3124	C3
3125	C2
3126	C1
3140	B1
3141	C1
3142	C1
3143	B1
3144	C1
3145	B2
3146	B2
3147	B2
3148	B2
3149	B2
3180	A1
3181	A1
3182	A1
3183	A1
3200	C3
3201	C4
3202	C4
3203	C4
3204	C4
3205	C4
3206	C4
3207	C4
3208	C4
3209	C4
3210	C3
3211	C4
3212	C4
3213	C4
3214	C4
3215	D4
3216	D4
3217	D4
3218	C4
3219	C4
3220	A3
3221	A2
3222	A3
3223	A2
3230	C3
3231	C4
3232	C3
3233	D4
3250	A2
3251	A3
3252	A2
3308	B5
3309	B4
3310	B5
3311	B5
3312	B6
3313	A5
3317	A4
3318	A5
3319	A4
3320	B5
3328	D6
3329	D6
3333	D6
3334	D6
3335	D6
3339	A4
3340	A4
3341	A4
3342	B5
3343	B4
3344	B4
3351	D4
3360	B5
3406	B4
3407	B4
3408	B4
3461	A4
3462	A4
3463	A3
3464	A4
3465	A4
3466	A4
3471	A4
4100	C1
4102	D2
4103	C2
4104	D3
4105	D1
4106	D2
4110	A2
4111	B1
4112	B1
4113	A2
4114	A1
4115	B1
4140	C1
4141	B2
4142	C1
4150	A1
4161	D3
4162	D3
4180	A1
4182	A1
4184	A1
4185	A2
4186	A1
4200	B3
4210	C3
4220	A3
4222	A3
4223	A3
4241	A3
4336	B6
4407	B4
4463	A3
4466	A4
5161	D3
6120	C3
6250	A2
6311	B5
6312	B5
6350	D4
7110	B1
7120	C2
7140	B1
7141	C1
7142	B2
7143	B2
7200	C4
7201	C4
7202	C4
7210	D4
7211	C4
7212	C4
7220	A3
7260	A4
7261	A3
7262	B4
7310	A5
7311	A5
7312	B5
7313	B5
7330	D5
7350	D4
7351	D4


USED ONLY IN MODELS: 27DV693R37A, 30DV693R37A, , 20DV693R01, 29DV6931/85R, 29DV693R85A, 29DV693R85C (7638) - DVD Interface Panel, SD5.12 DVD Module (Component Side)

0226	C4	0269	D3	2301	B1	2338	D3	5100	D4	5337	C3	7341	B3	9315	B2
0228	D3	1100	D4	2302	A1	2339	D3	5110	C4	5339	C2	9103	D4	9330	C2
0229	A4	1101	D1	2315	A2	2342	A3	5220	A4	6300	A1	9110	C3	9333	D1
0251	A2	1330	B1	2330	B1	3300	A2	5300	A2	6330	B1	9111	D4	9350	B3
0253	B4	1331	C2	2331	D2	3301	A1	5301	A2	6332	D2	9183	C4	9351	B2
0254	C4	1332	B3	2332	C1	3314	A2	5315	B2	6336	C2	9220	C4	9352	C1
0255	B4	2102	D3	2333	D1	3315	A3	5331	D2	7315	B2	9250	A4	9355	D2
0266	B4	2300	A3	2337	C2	3361	D3	5333	D2	7340	A3	9266	C4	9357	C1

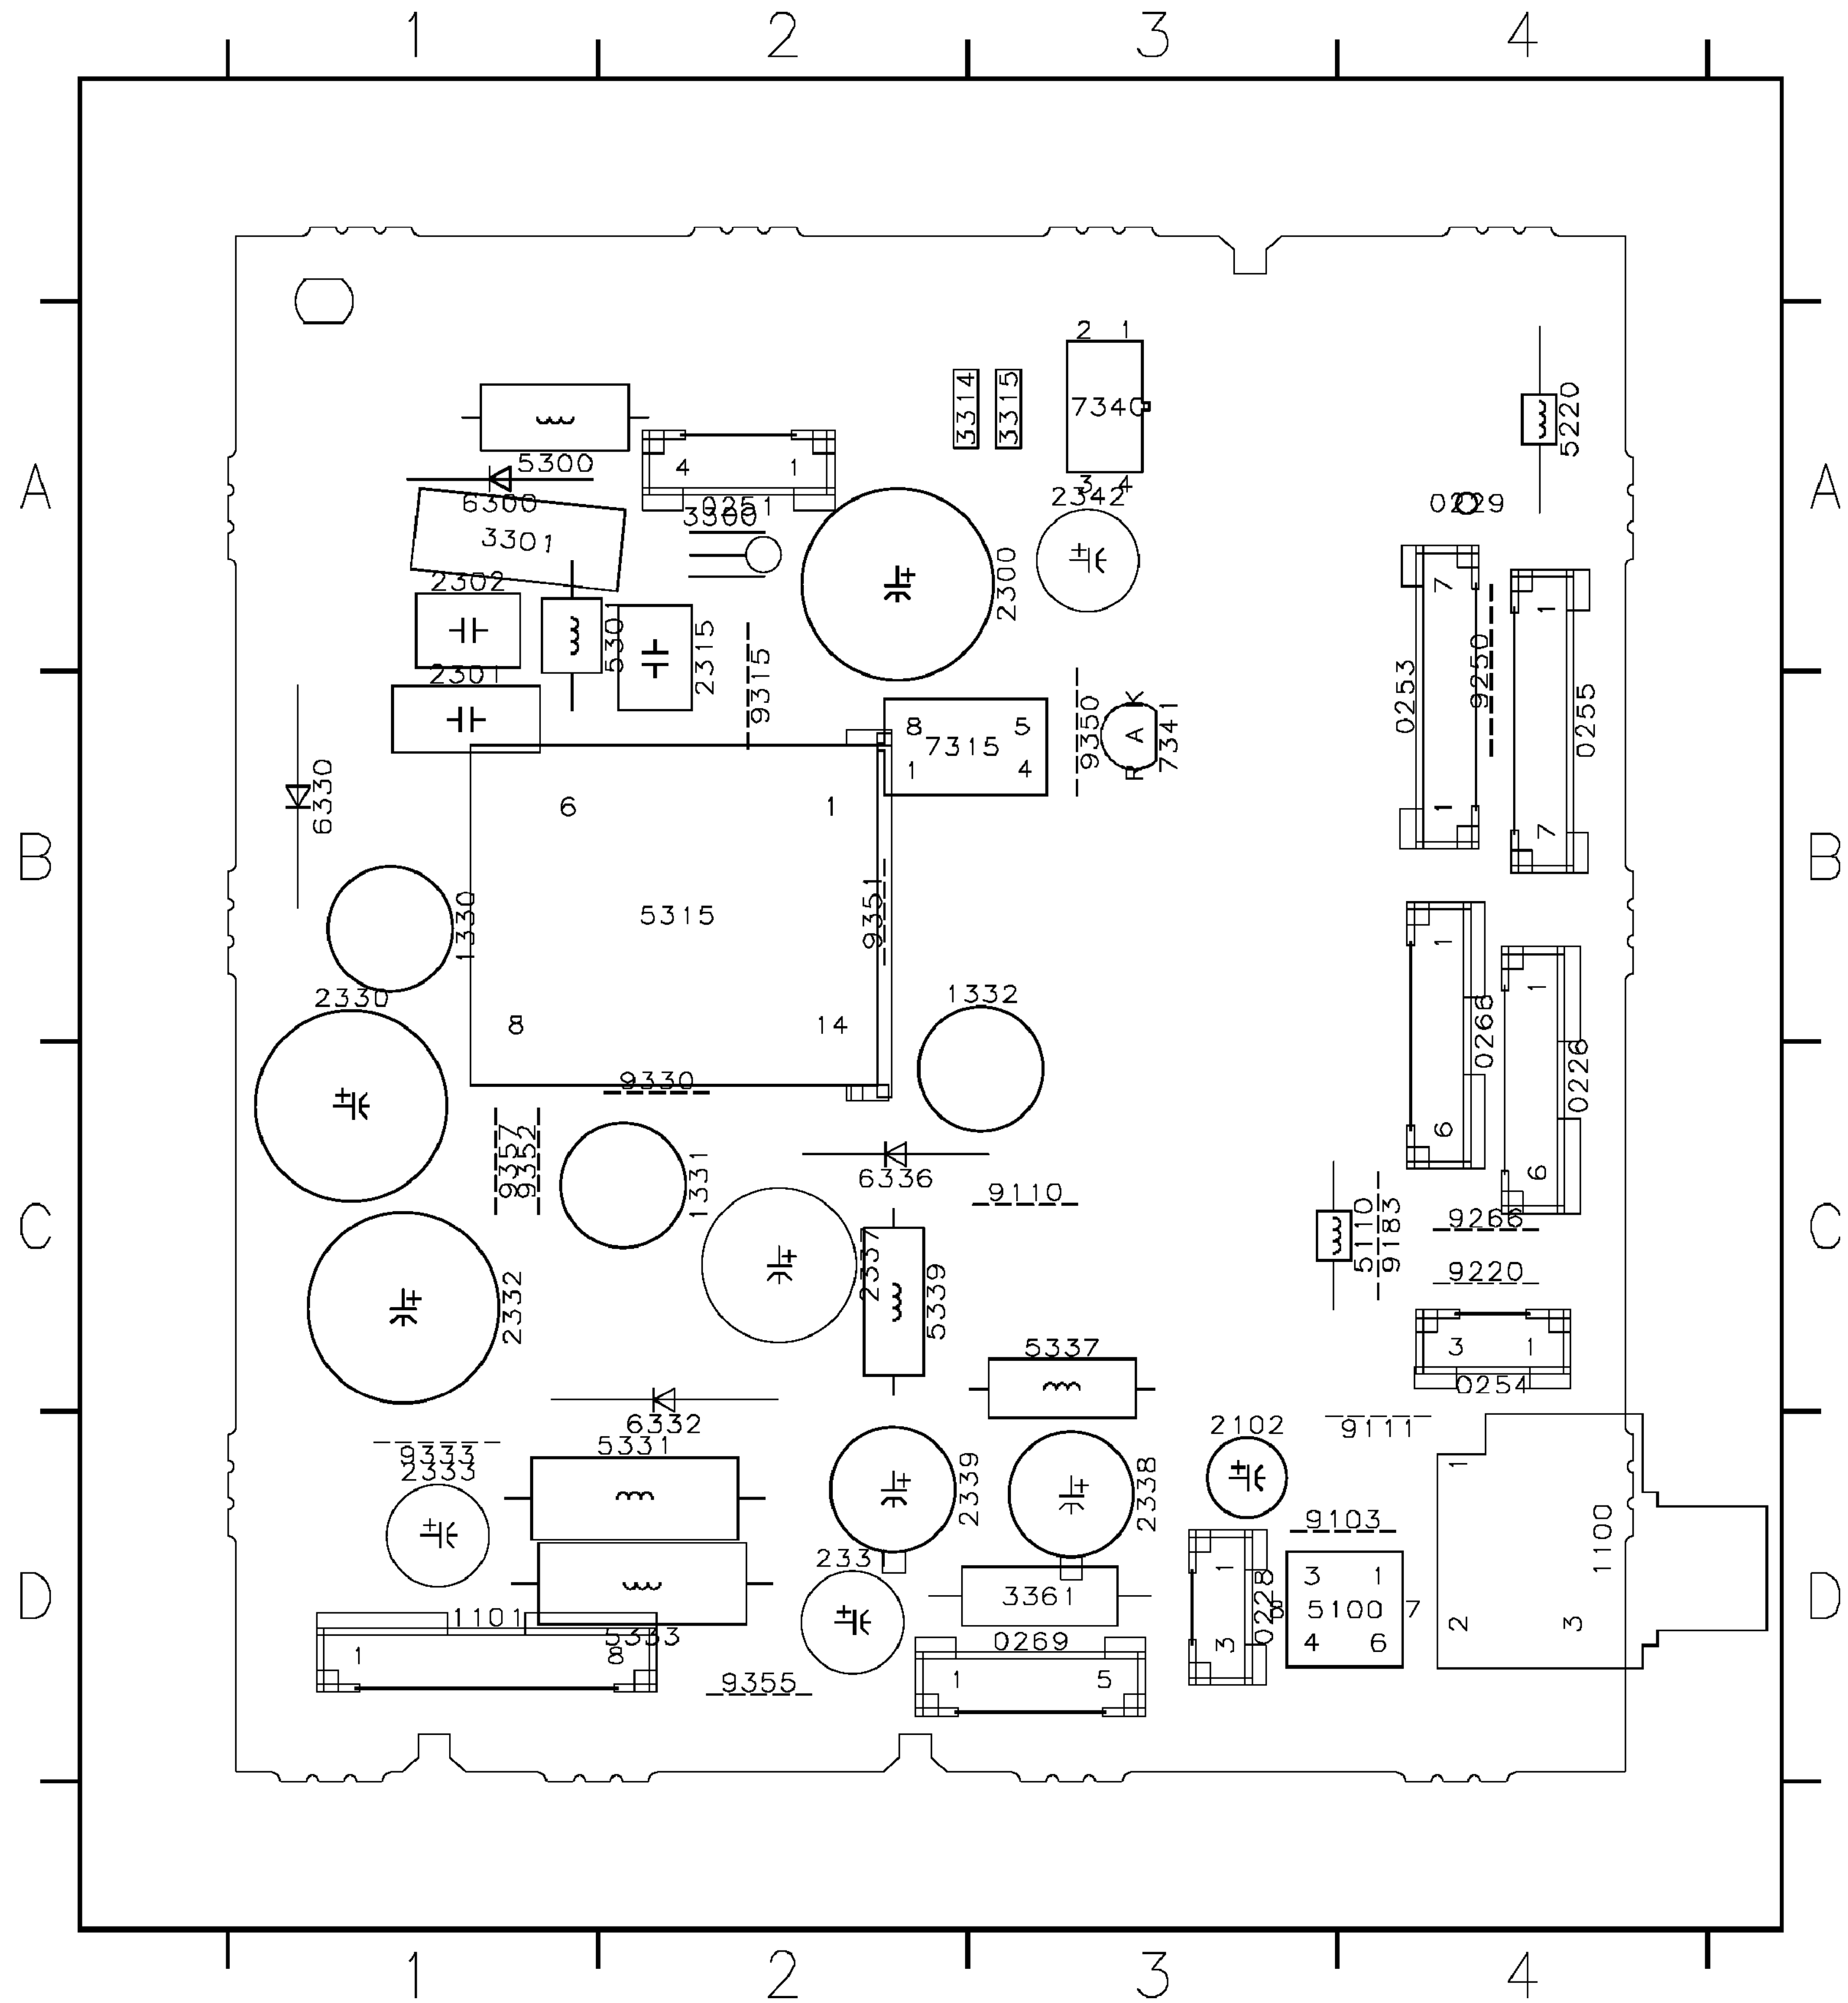


USED ONLY IN MODELS: 27DV693R37A, 30DV693R37A, , 20DV693R01, 29DV6931/85R, 29DV693R85A, 29DV693R85C (7638) - DVD Interface Panel, SD5.12 DVD Module (Copper Side)


2101	D2	2222	A2	2351	C3	3183	C1	3309	B2	4105	D1	4224	A1	5310	A2
2103	D1	2223	A1	2353	C3	3220	A2	3310	B2	4106	C1	4226	C1	6100	D2
2104	D1	2224	A1	3101	D2	3221	A2	3311	B2	4110	C2	4251	A1	6101	D1
2105	D1	2250	A2	3102	D1	3222	A1	3312	B3	4111	B2	4253	A1	6311	B3
2110	C2	2253	A1	3103	D1	3223	A1	3313	B3	4112	C2	4254	A2	6312	B2
2111	B2	2260	B2	3110	C2	3250	A2	3317	A2	4113	C1	4256	A1	7110	C2
2112	C2	2261	A2	3111	C1	3251	A2	3318	B3	4114	C2	4261	B2	7220	A2
2113	C1	2262	B2	3112	C2	3260	B2	3319	A2	4115	C2	4265	B1	7260	A2
2114	C2	2263	B1	3113	C2	3261	A2	3320	B3	4180	B2	4266	A1	7261	B2
2180	B2	2310	B2	3114	C2	3262	A2	3339	A2	4182	B1	4310	A2	7262	B2
2181	C2	2311	B3	3115	C2	3263	B2	3340	A2	4183	C2	4316	B2	7310	A3
2182	B1	2313	B3	3116	C2	3264	B1	3341	A2	4184	C2	4342	B2	7311	A3
2183	B1	2316	B2	3117	C2	3265	A1	3342	B2	4185	C2	4343	B2	7312	B2
2184	C2	2319	A3	3118	C2	3266	B1	3343	B2	4220	A1	4360	B3	7313	B2
2185	C2	2340	A2	3180	B2	3271	A2	3344	B2	4221	A2	4361	A1		
2220	A1	2341	A2	3181	C2	3272	A2	3360	B3	4222	A2	4363	B2		
2221	A2	2350	B4	3182	B1	3308	B2	4100	D1	4223	A1	4364	B2		

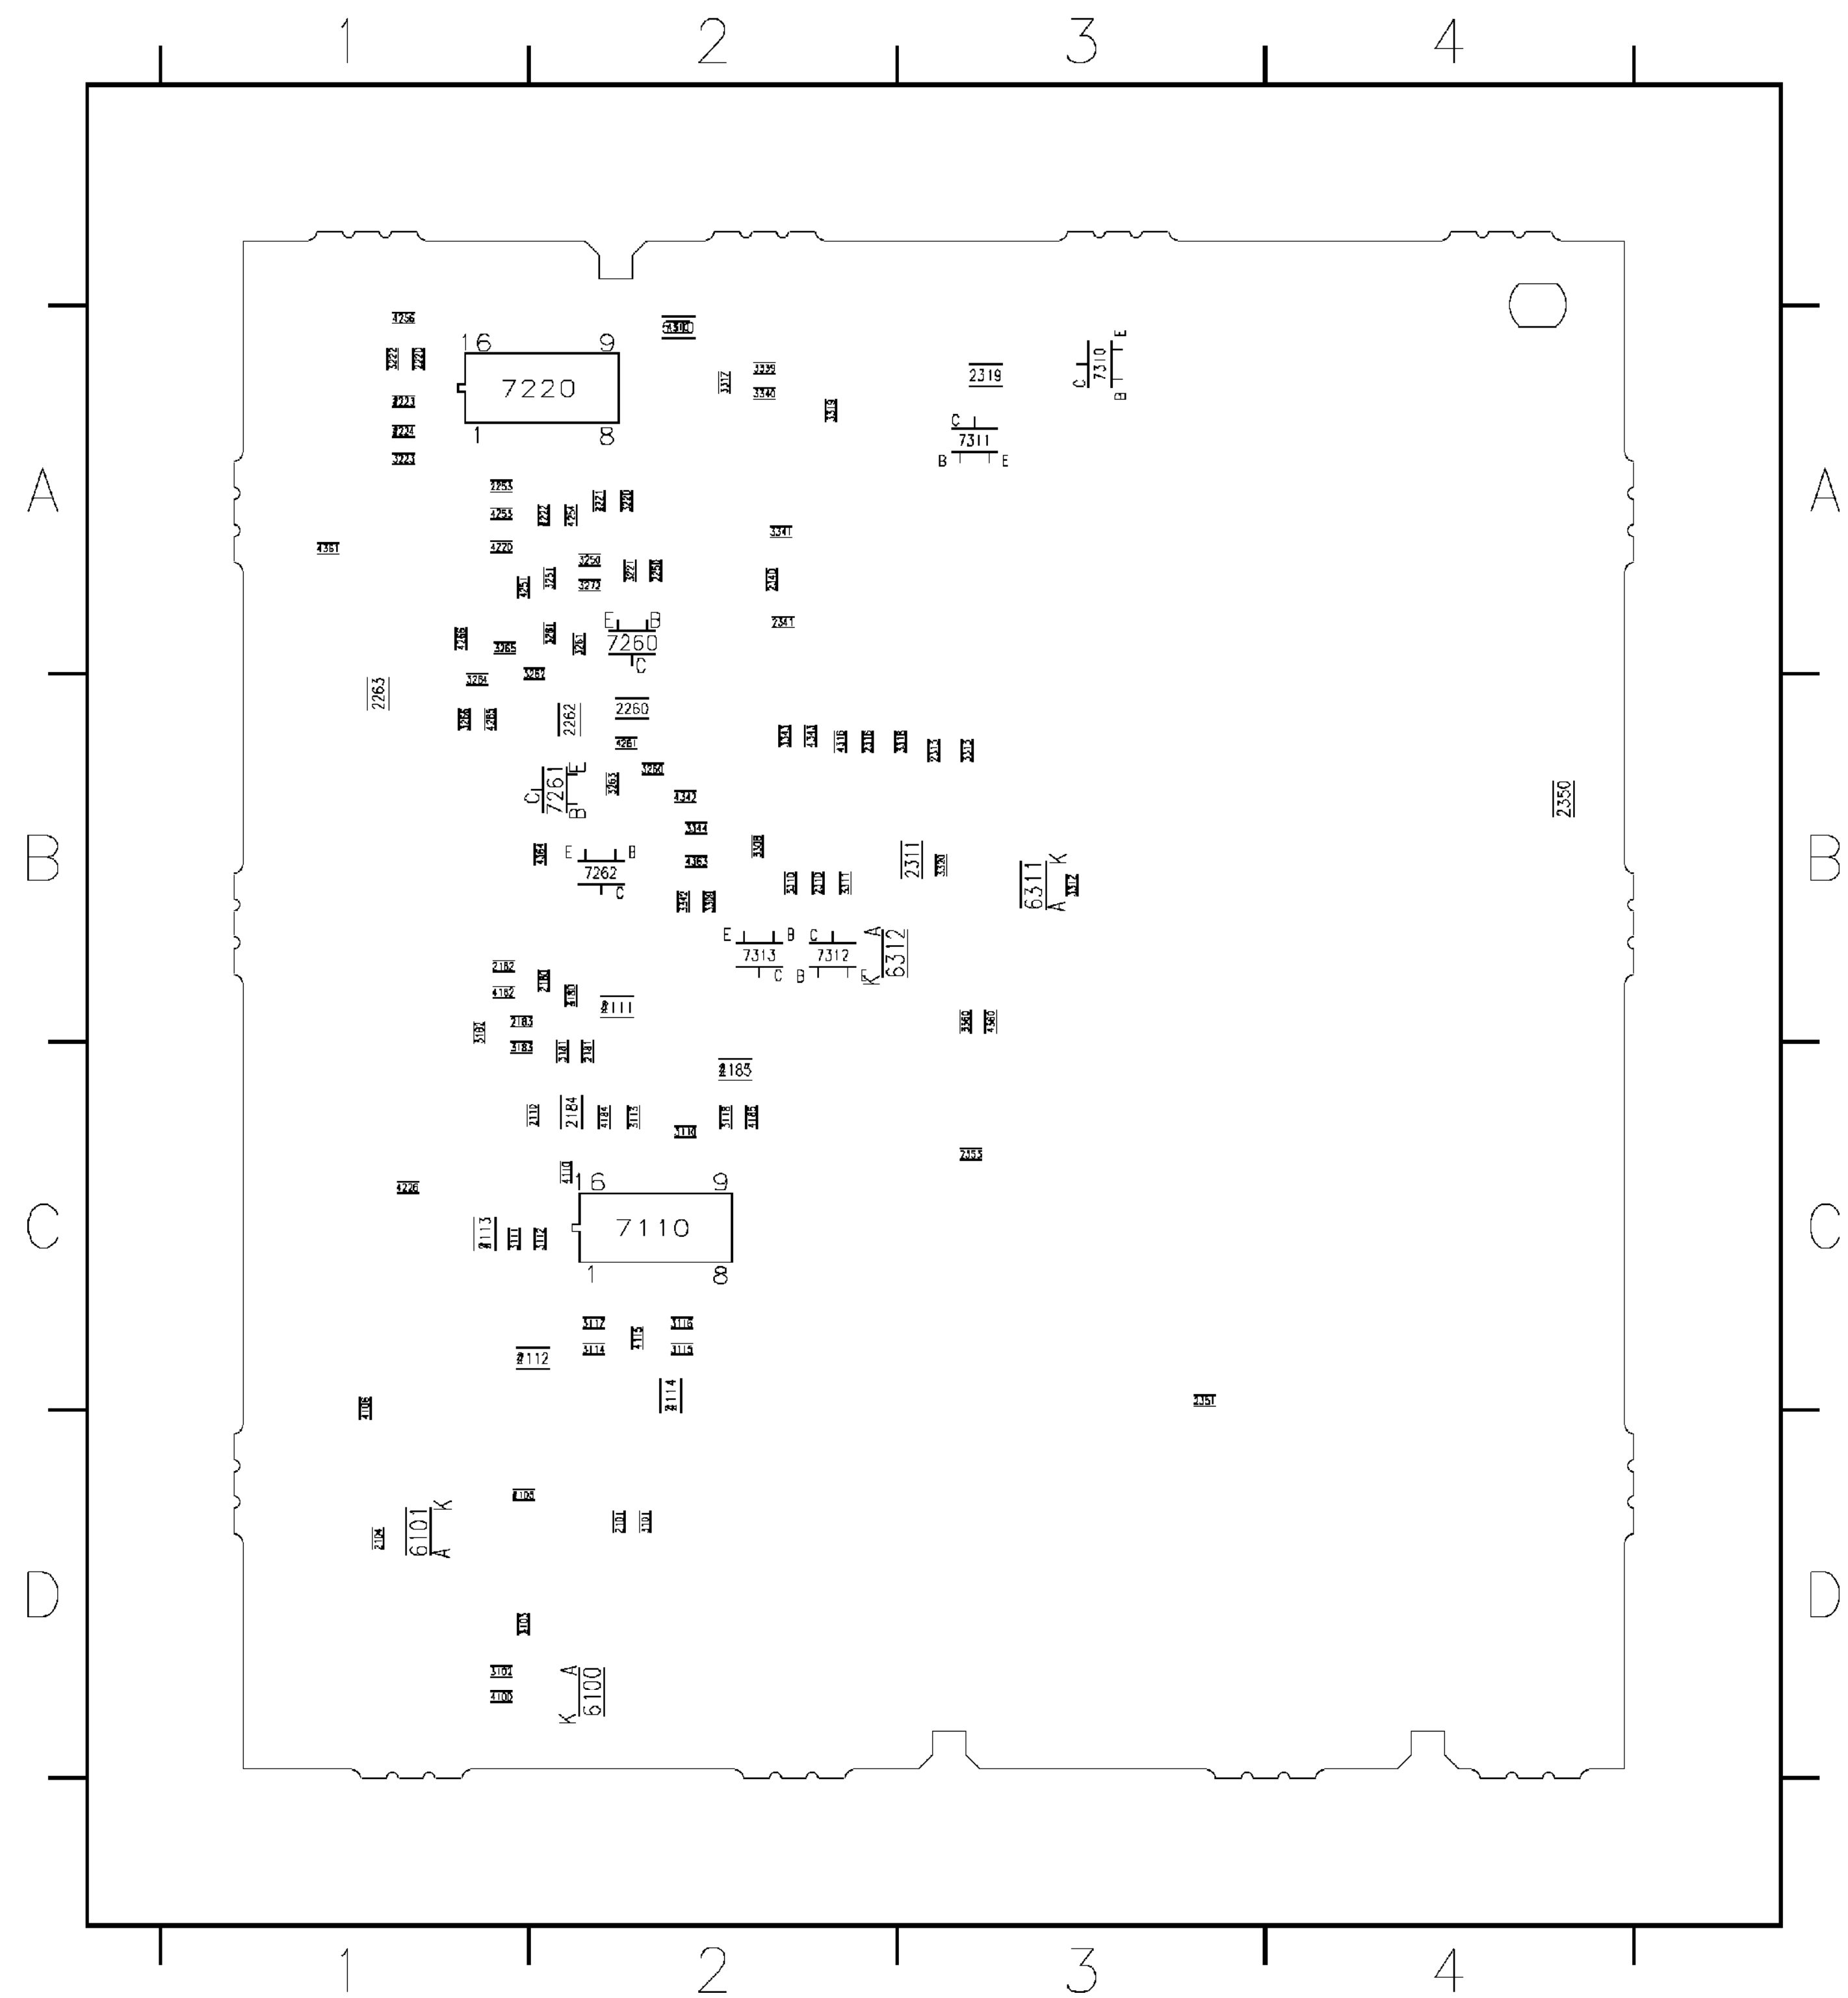


USED ONLY IN MODELS: 27ST110P/35 (7638) - Channel One Card (Component Side)

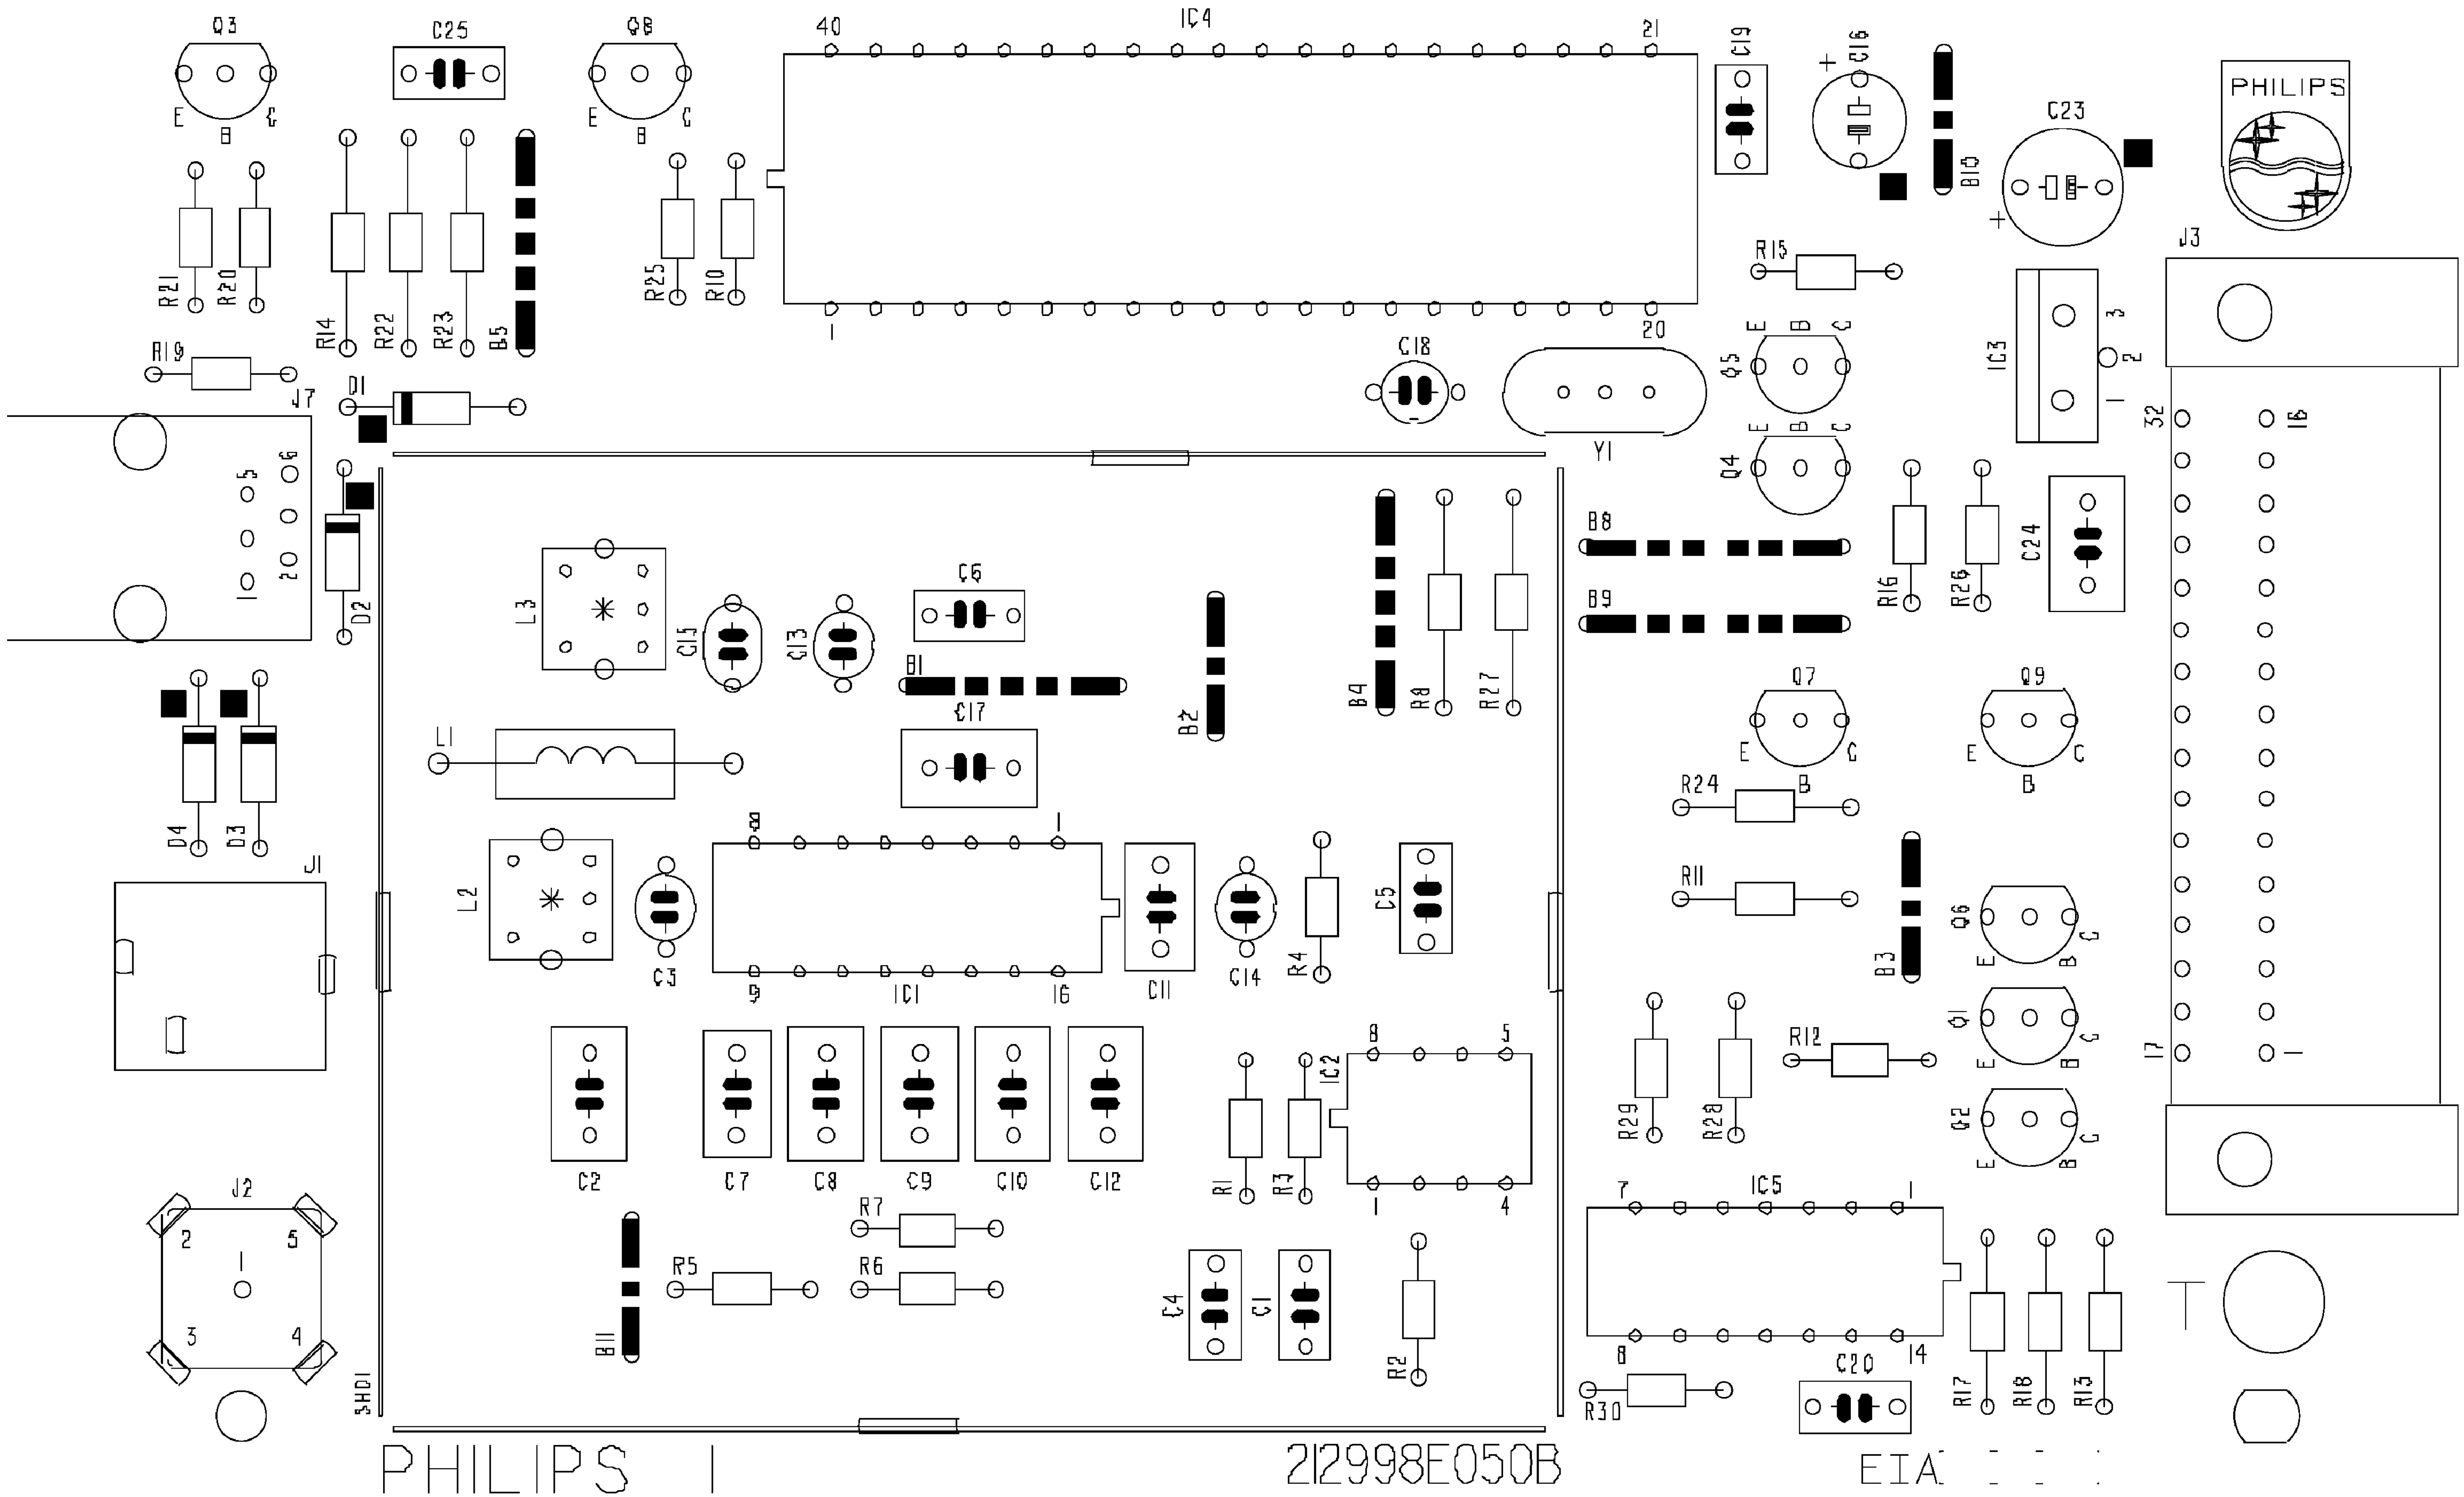


USED ONLY IN MODELS: 27ST230P/35, 32ST230P/35 (7638) - Scan 4 Card (Component Side)

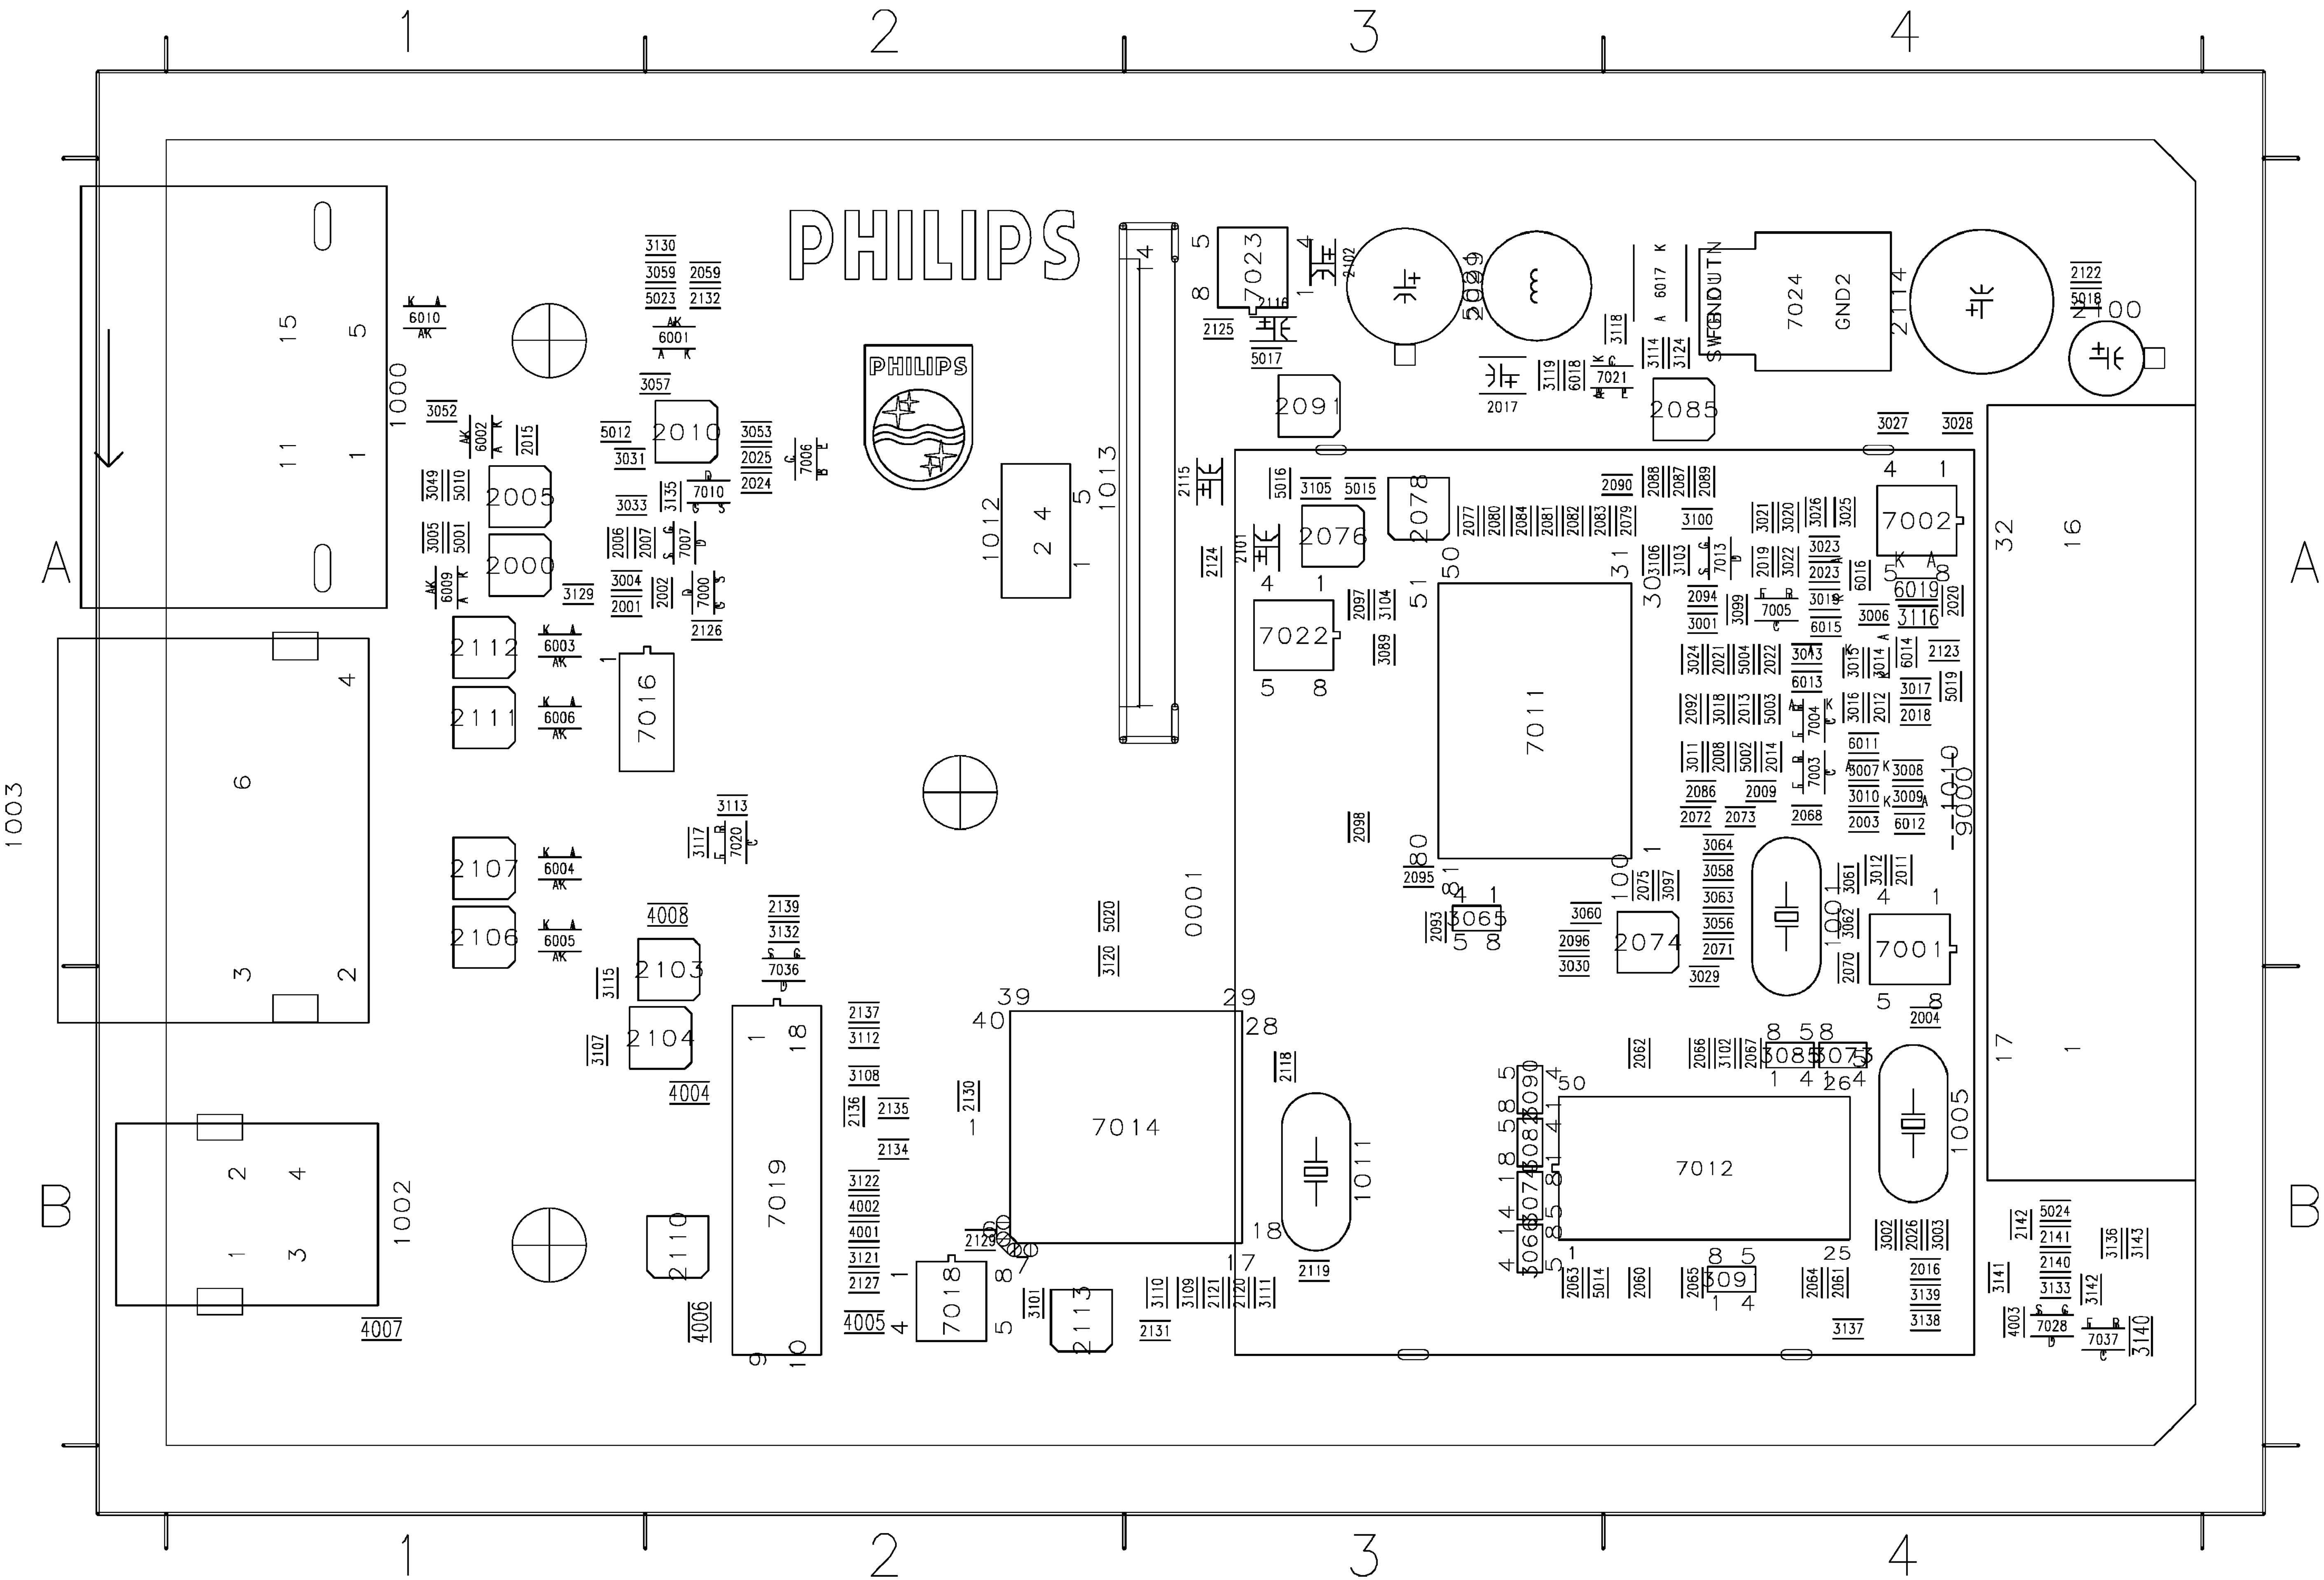


USED ONLY IN MODELS: 27ST230P/35, 32ST230P/35 (7638) - Net 1 Panel (Component Side)

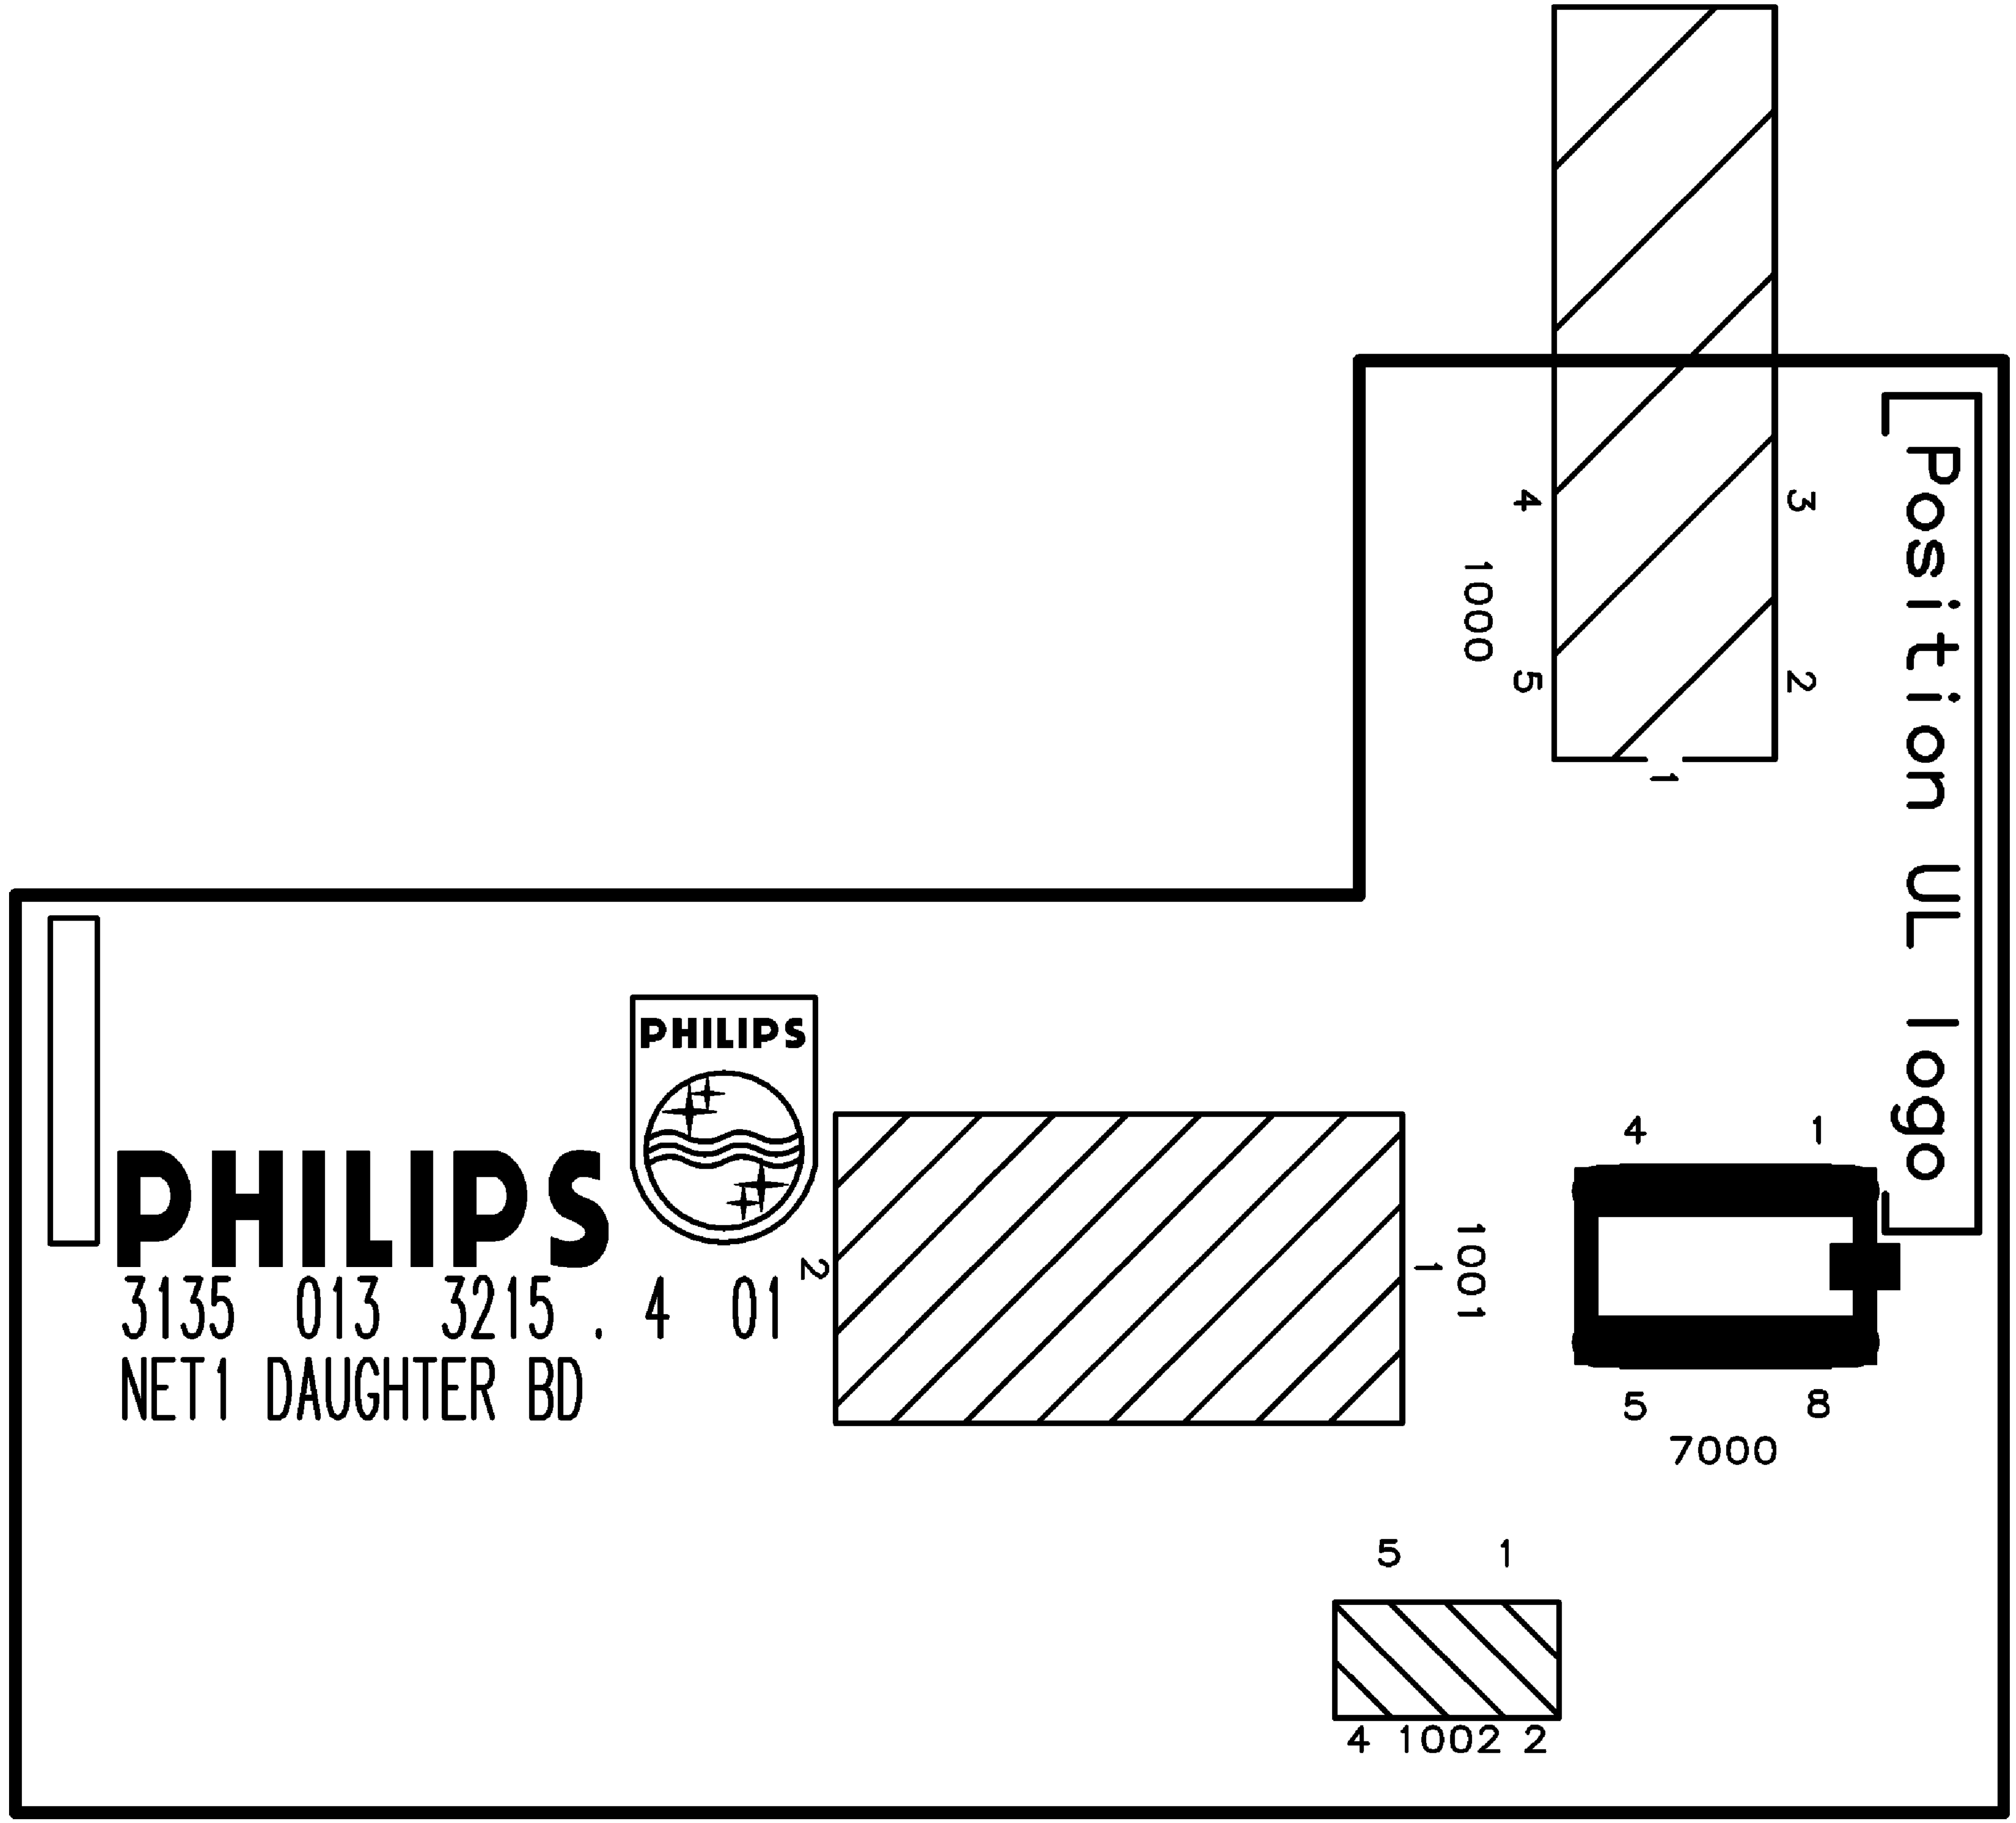

USED ONLY IN MODELS: 27ST230P/35, 32ST230P/35 (7638) - Net 1 Panel (Copper Side)

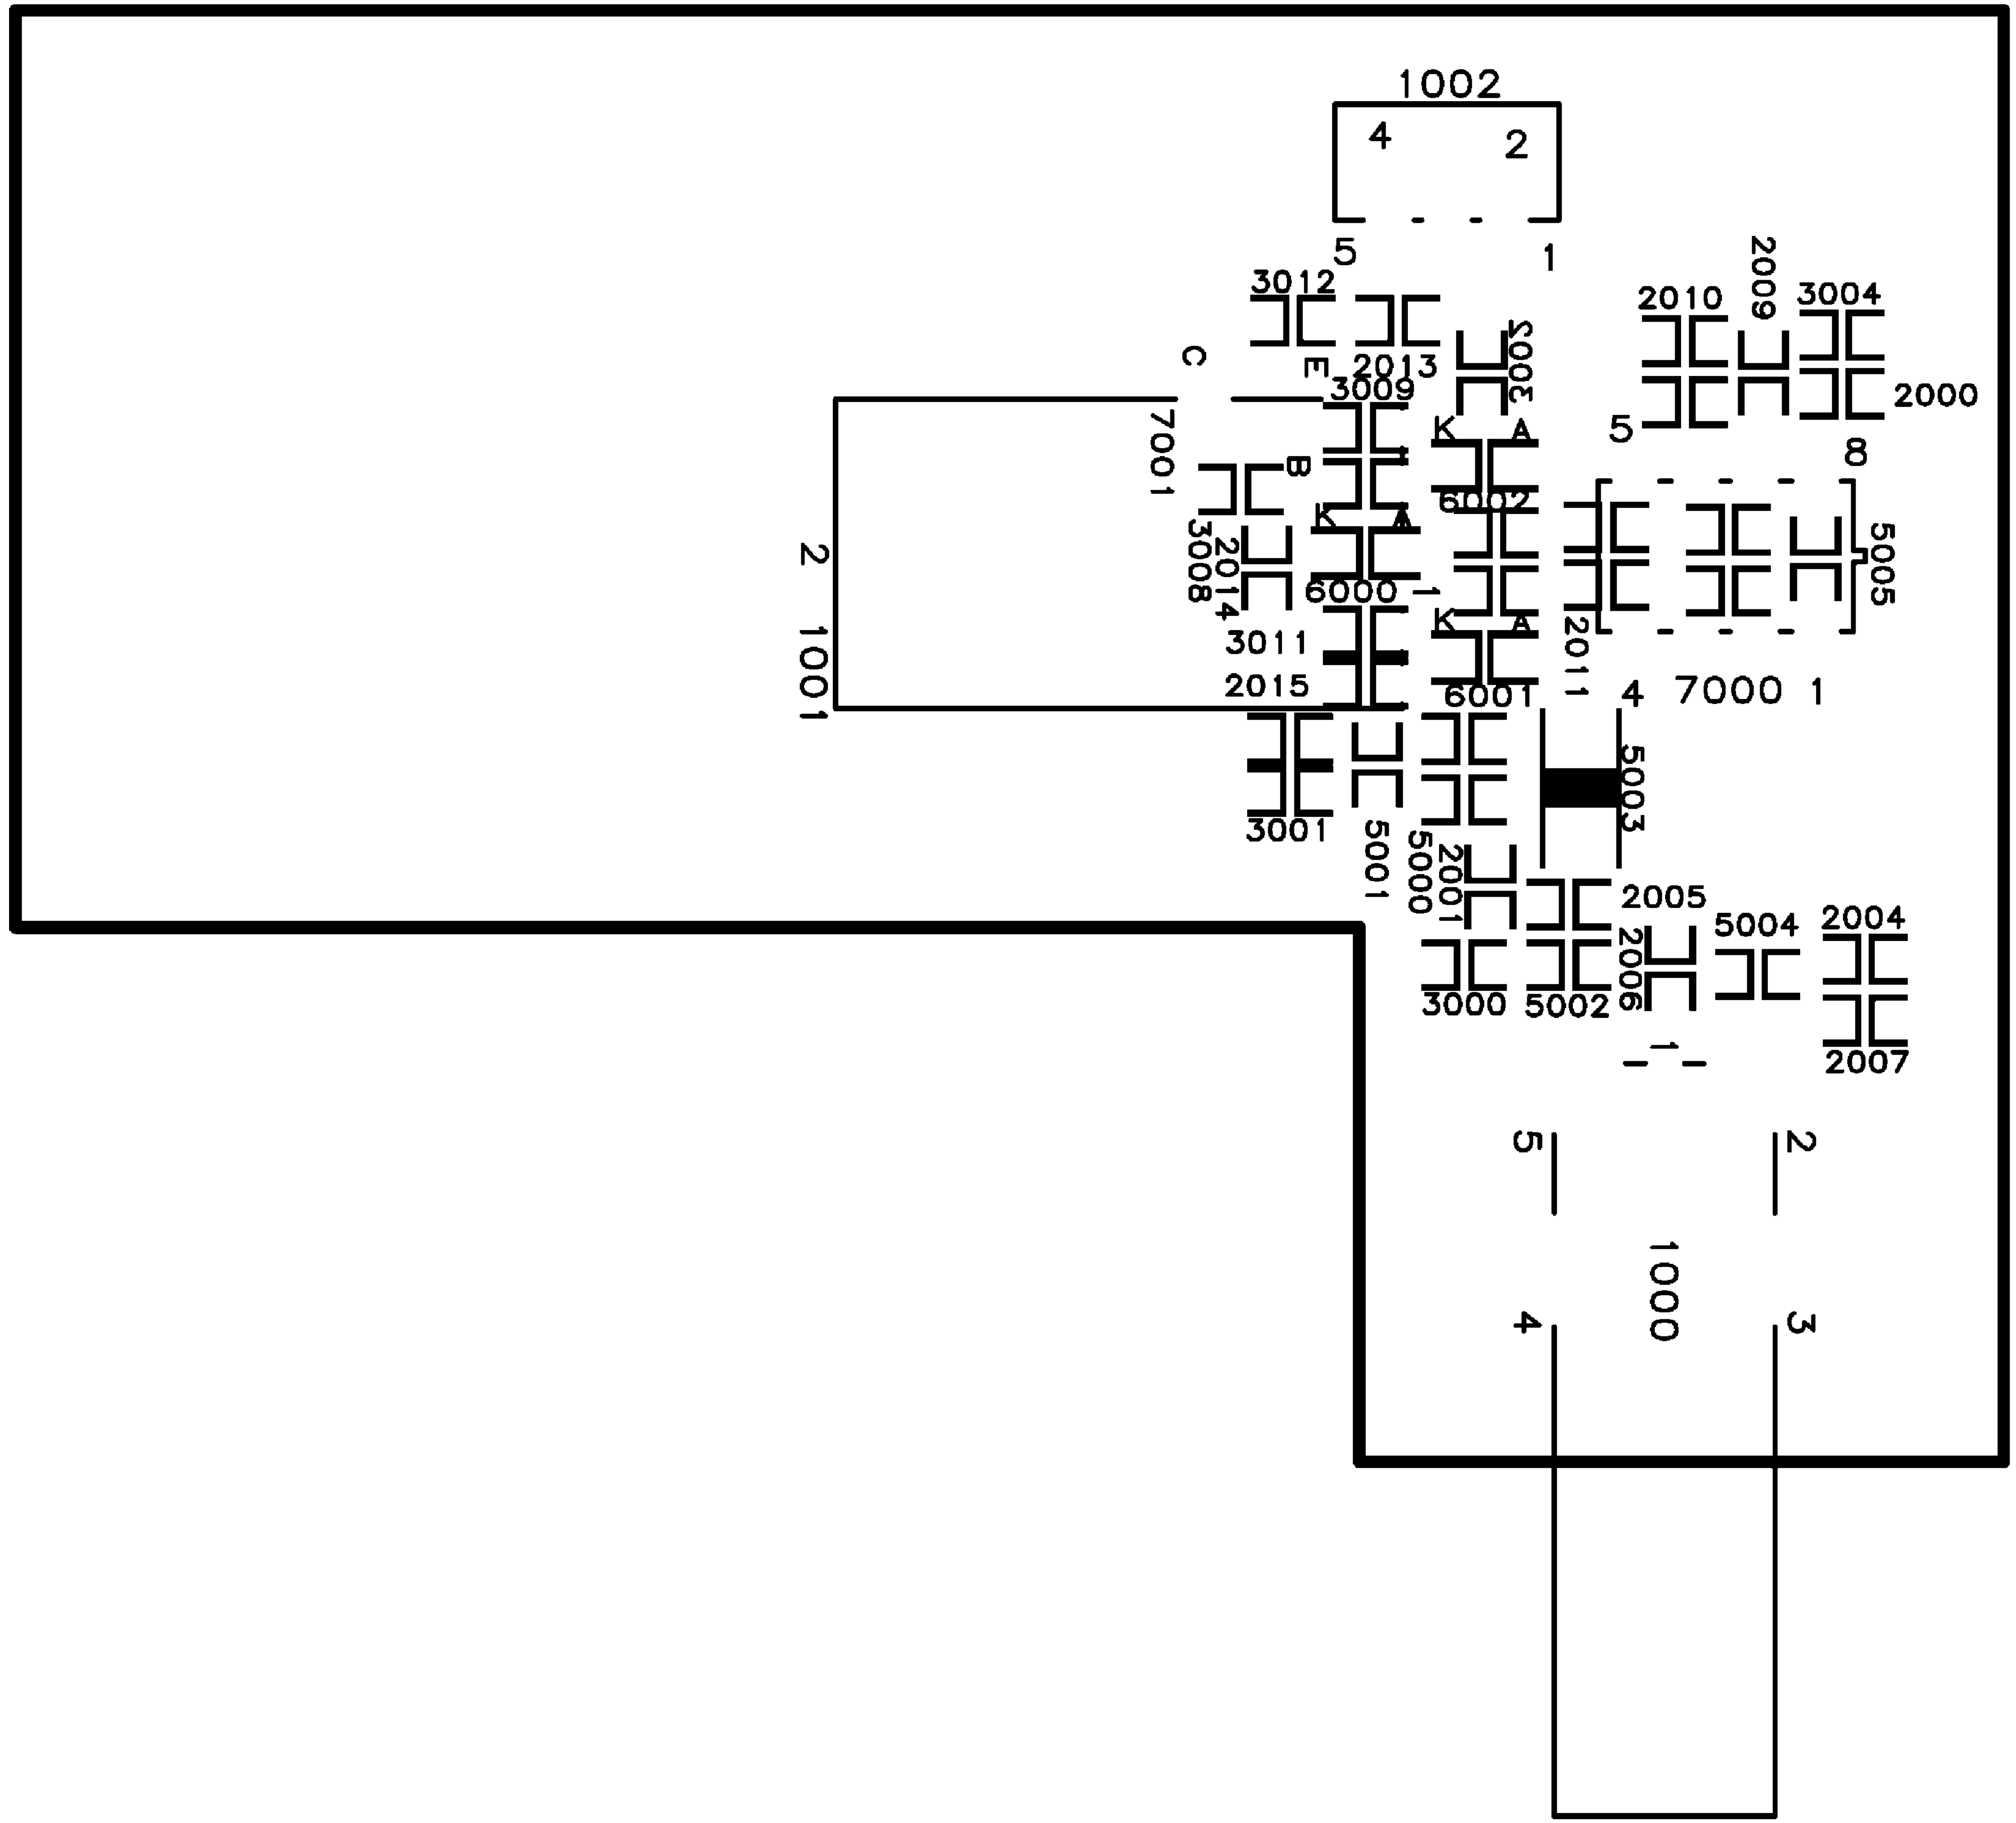


USED ONLY IN MODELS: 27ST420L/17, 27ST421L/17 (7638) - ITV Front Jack Panel (Component Side)

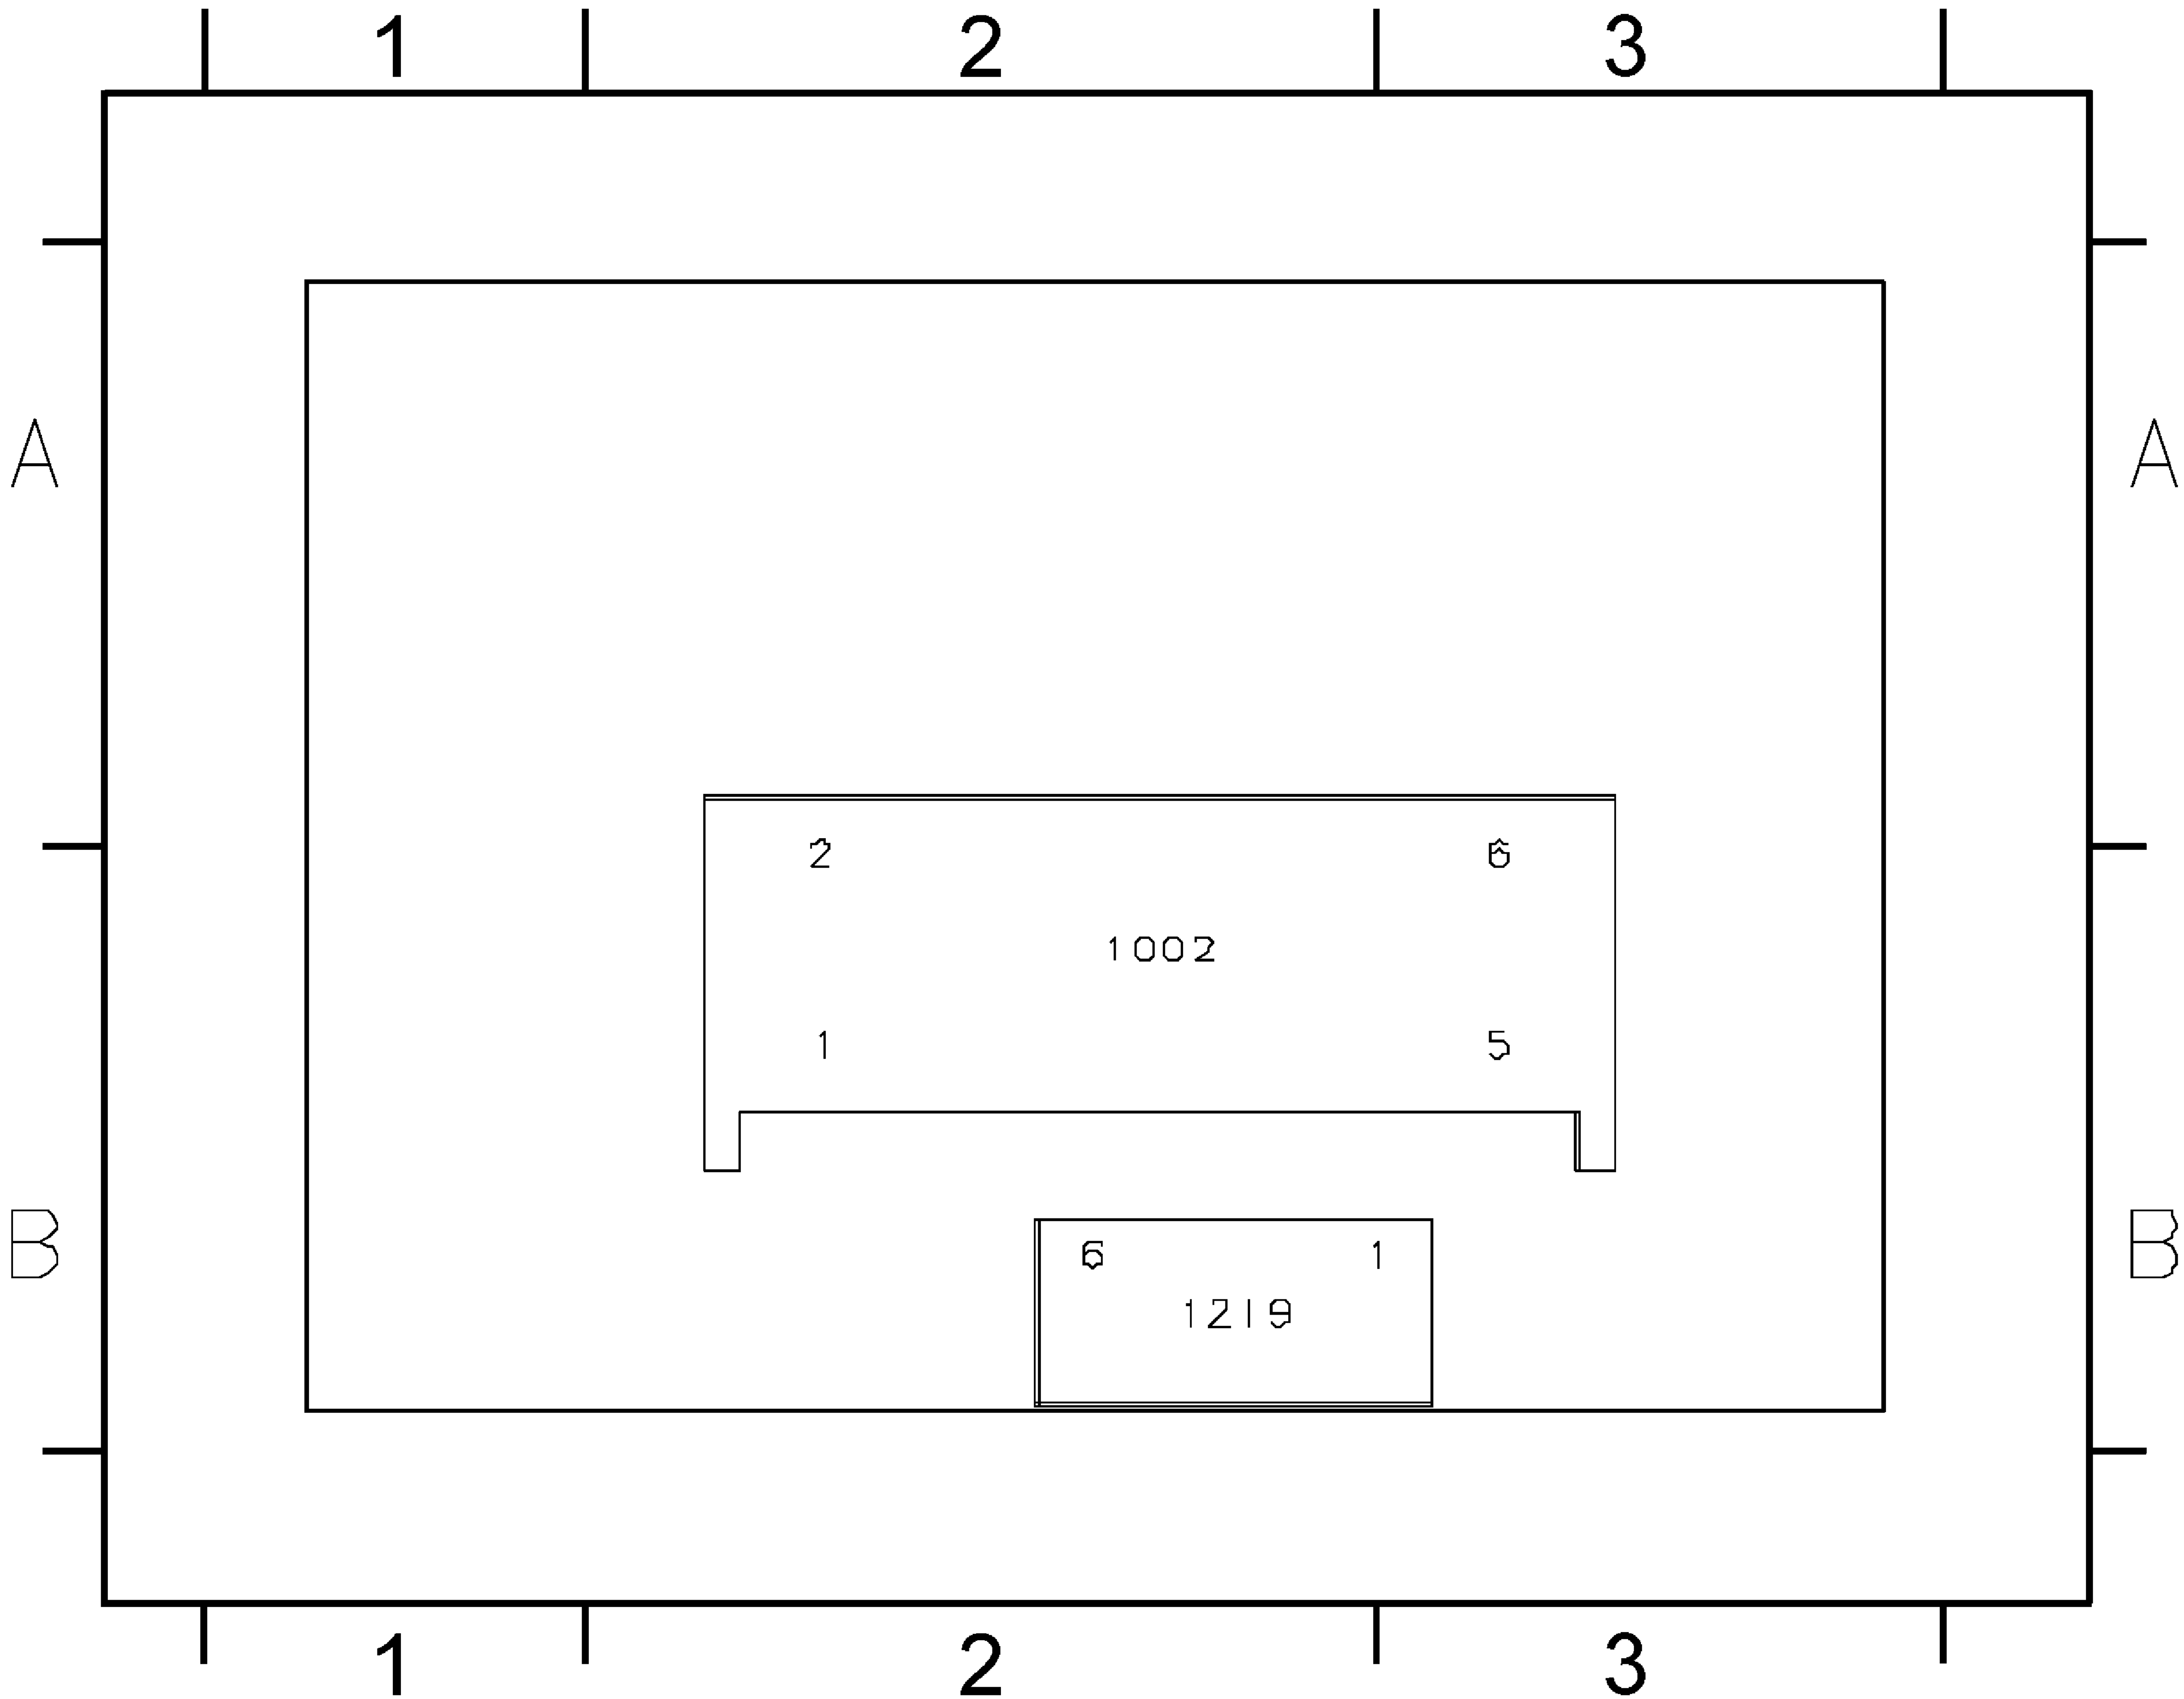


1002 A2
1219 B2

USED ONLY IN MODELS: 27ST420L/17, 27ST421L/17 (7638) - ITV Front Jack Panel (Copper Side)

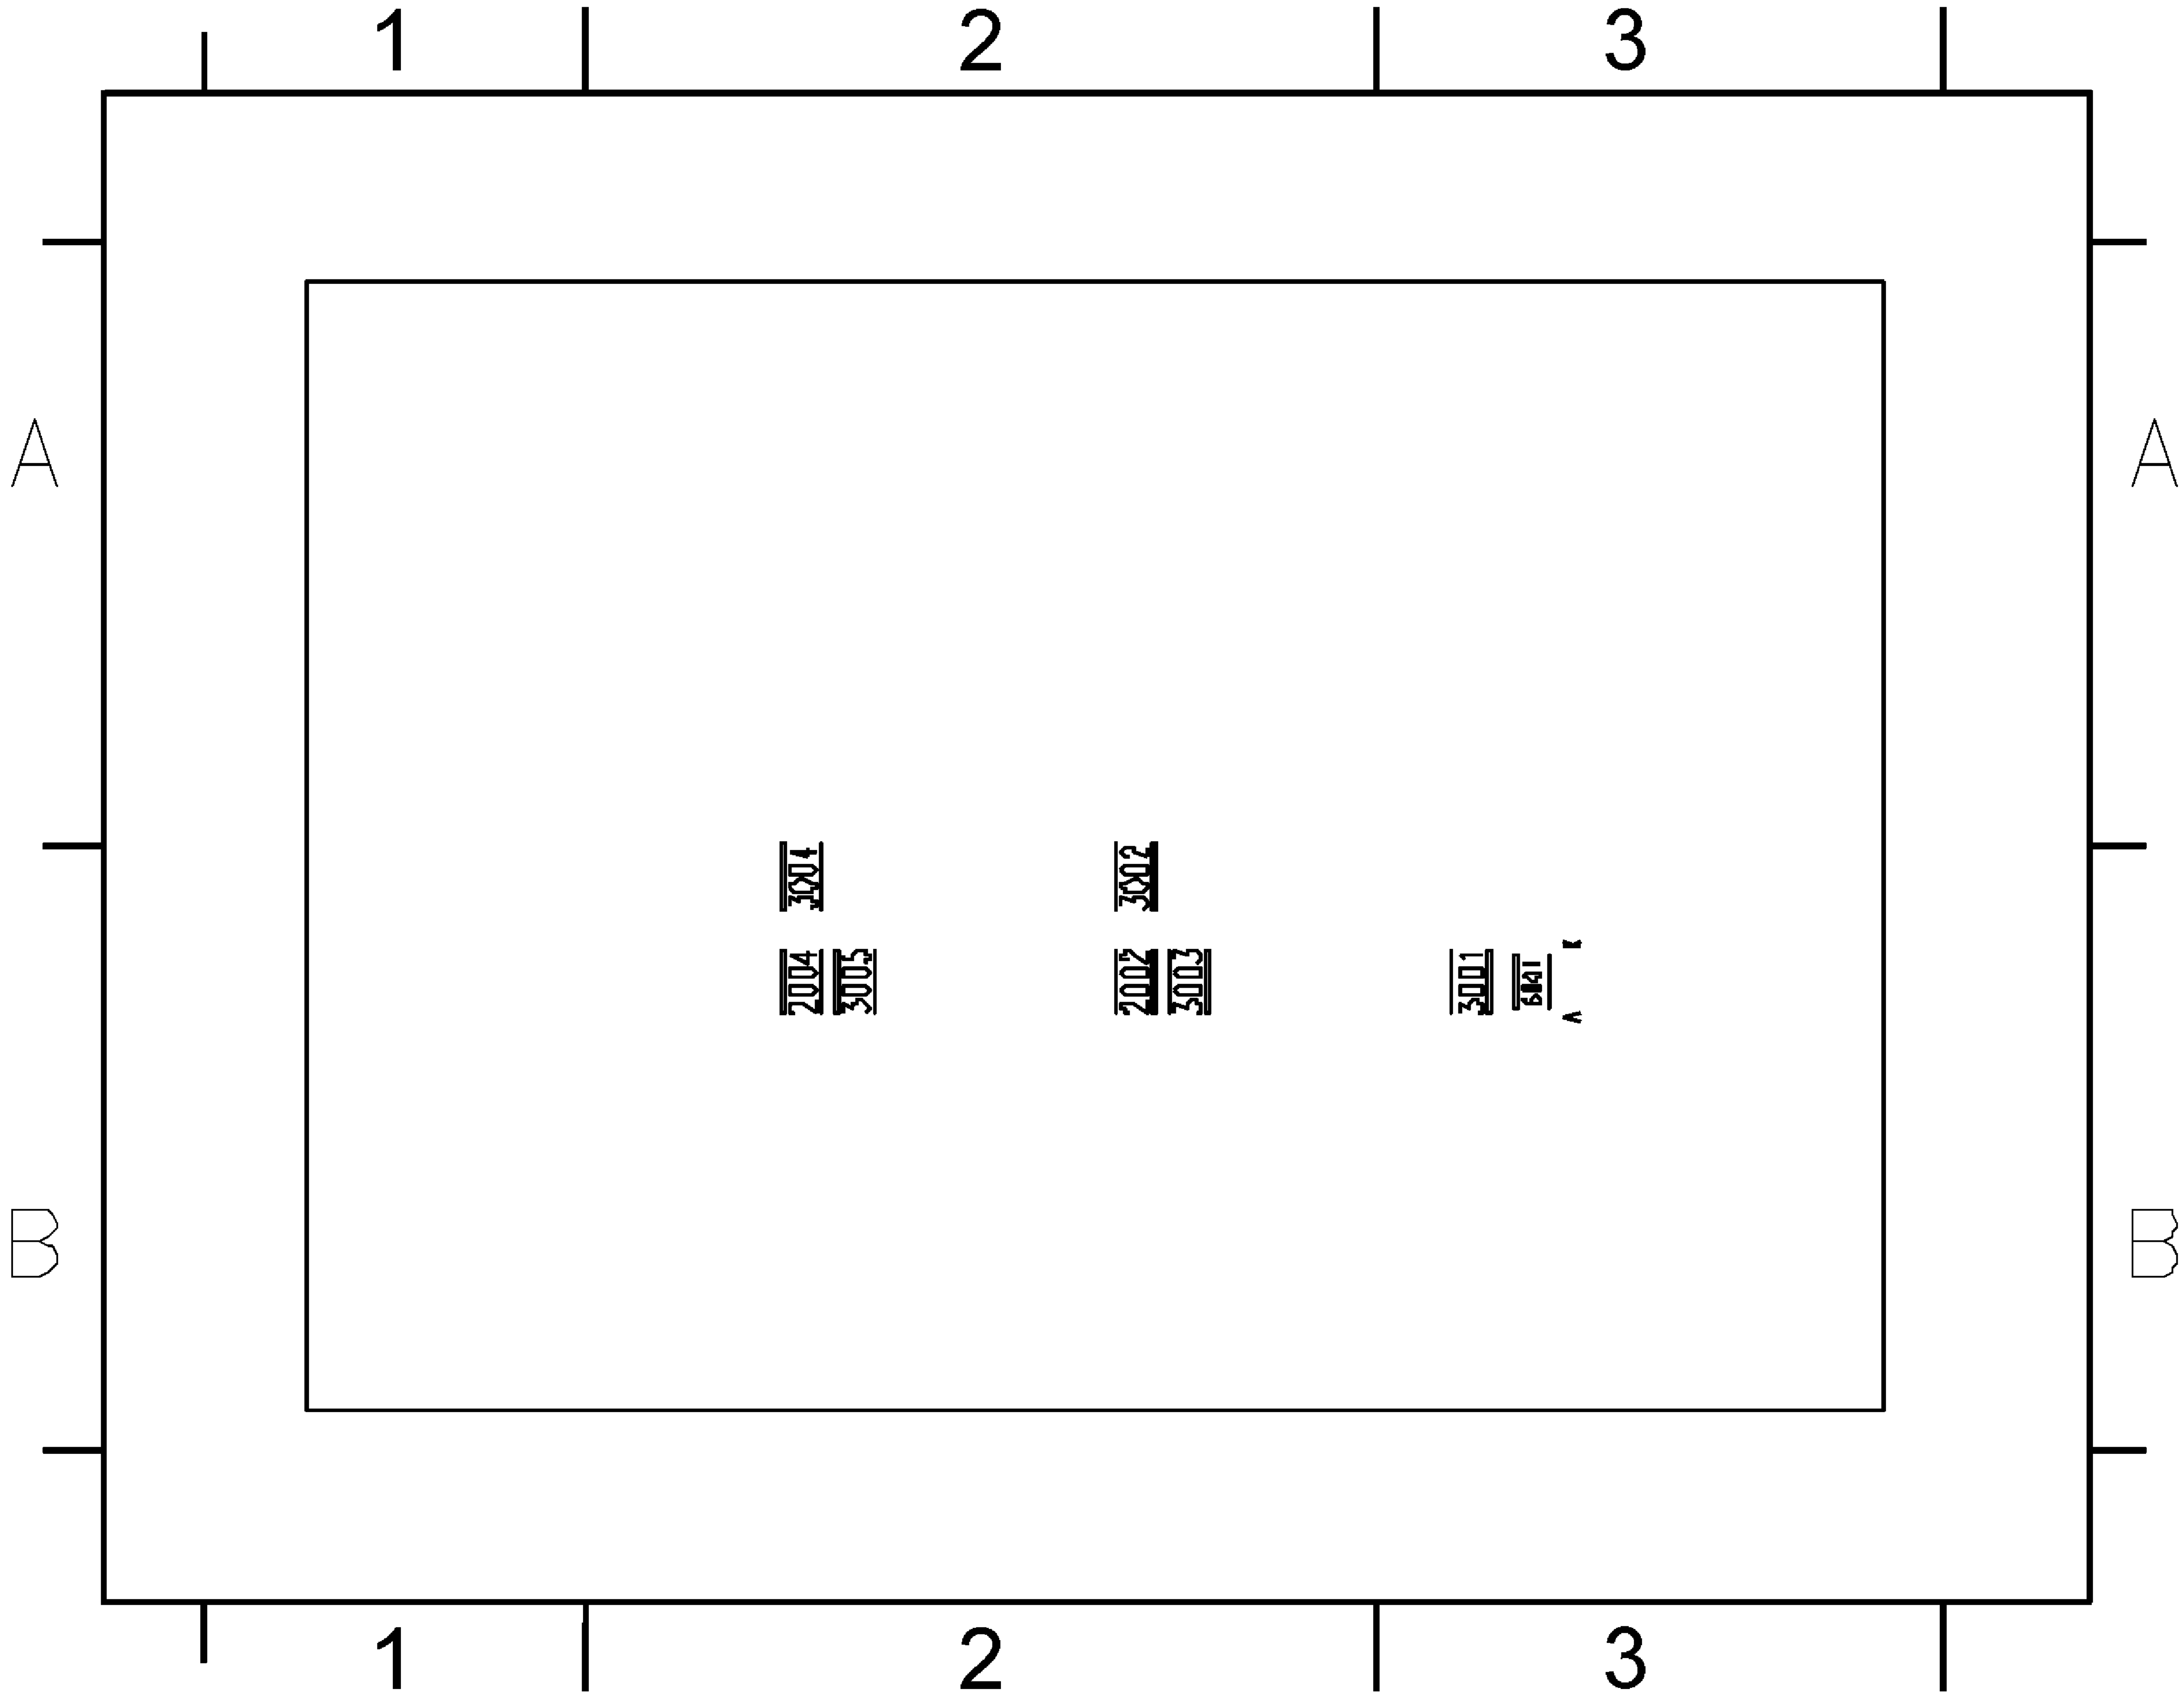


2002	B2
2004	B1
3001	B2
3002	B2
3003	B2
3004	B1
3005	B2
6001	B2

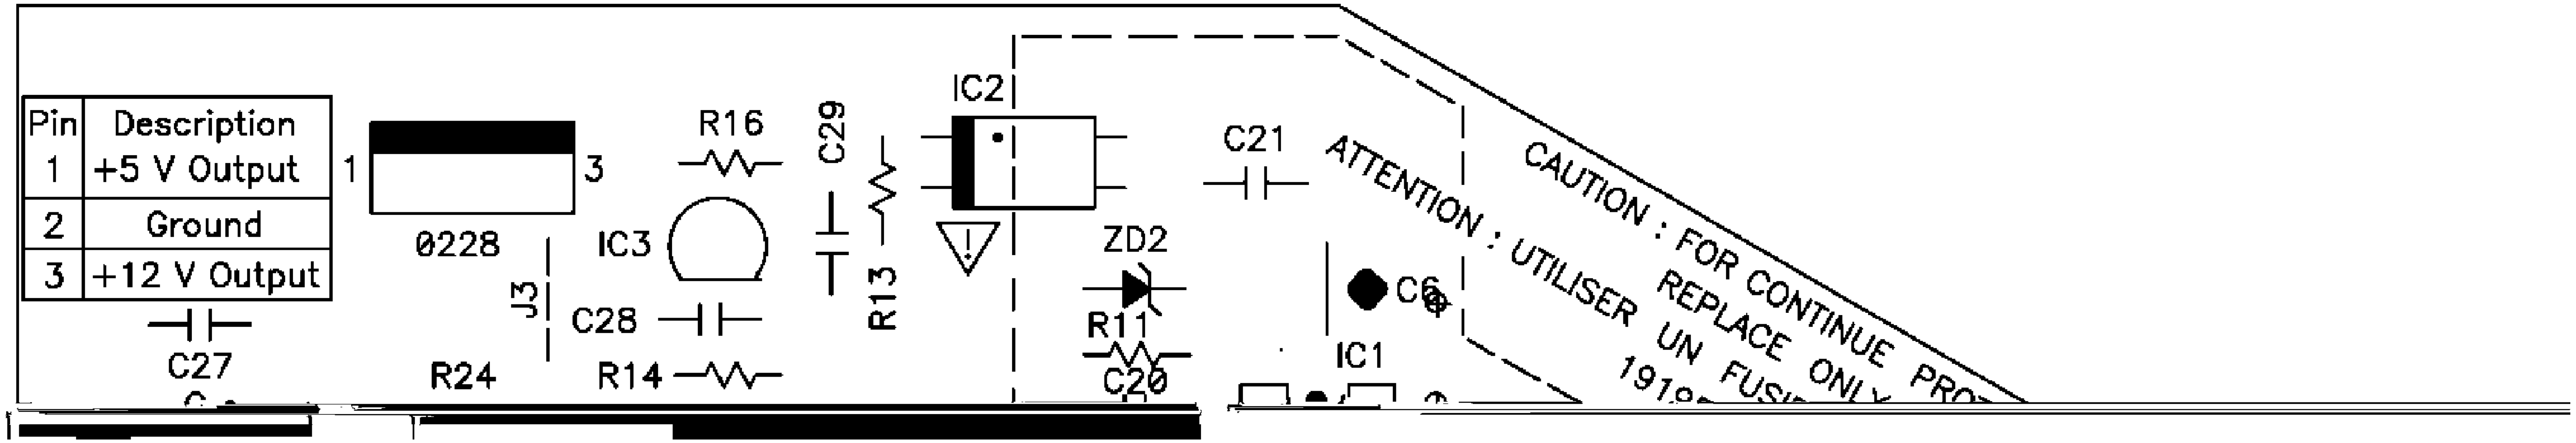



Pin	Description
1	+5 V Output
2	Ground
3	+12 V Output

1
3
0228
R16
C29
IC2
C21
IC3
R13
ZD2
J3
C28
C6
R11
C27
R24
R14
IC1
C20
ATTENTION : UTILISER UN FUSI
CAUTION : FOR CONTINUE PRO
REPLACE ONLY

USED ONLY IN MODELS: 25LT220L/17, 25LT421L/17, 25ST220L/17, 27LT220L/17, 27LT621L/17, 27ST110P/35, 27ST220L/17, 27ST220L17, 27ST240P/35, 27ST230P/35 (7638) - SP/LS Module, Vertical (Copper Side)
27ST420L/17, 27ST421L/17, 32LT621L/17, 32ST230P/35, 36ST220P/35, 36ST230P/35, 32ST220P/17

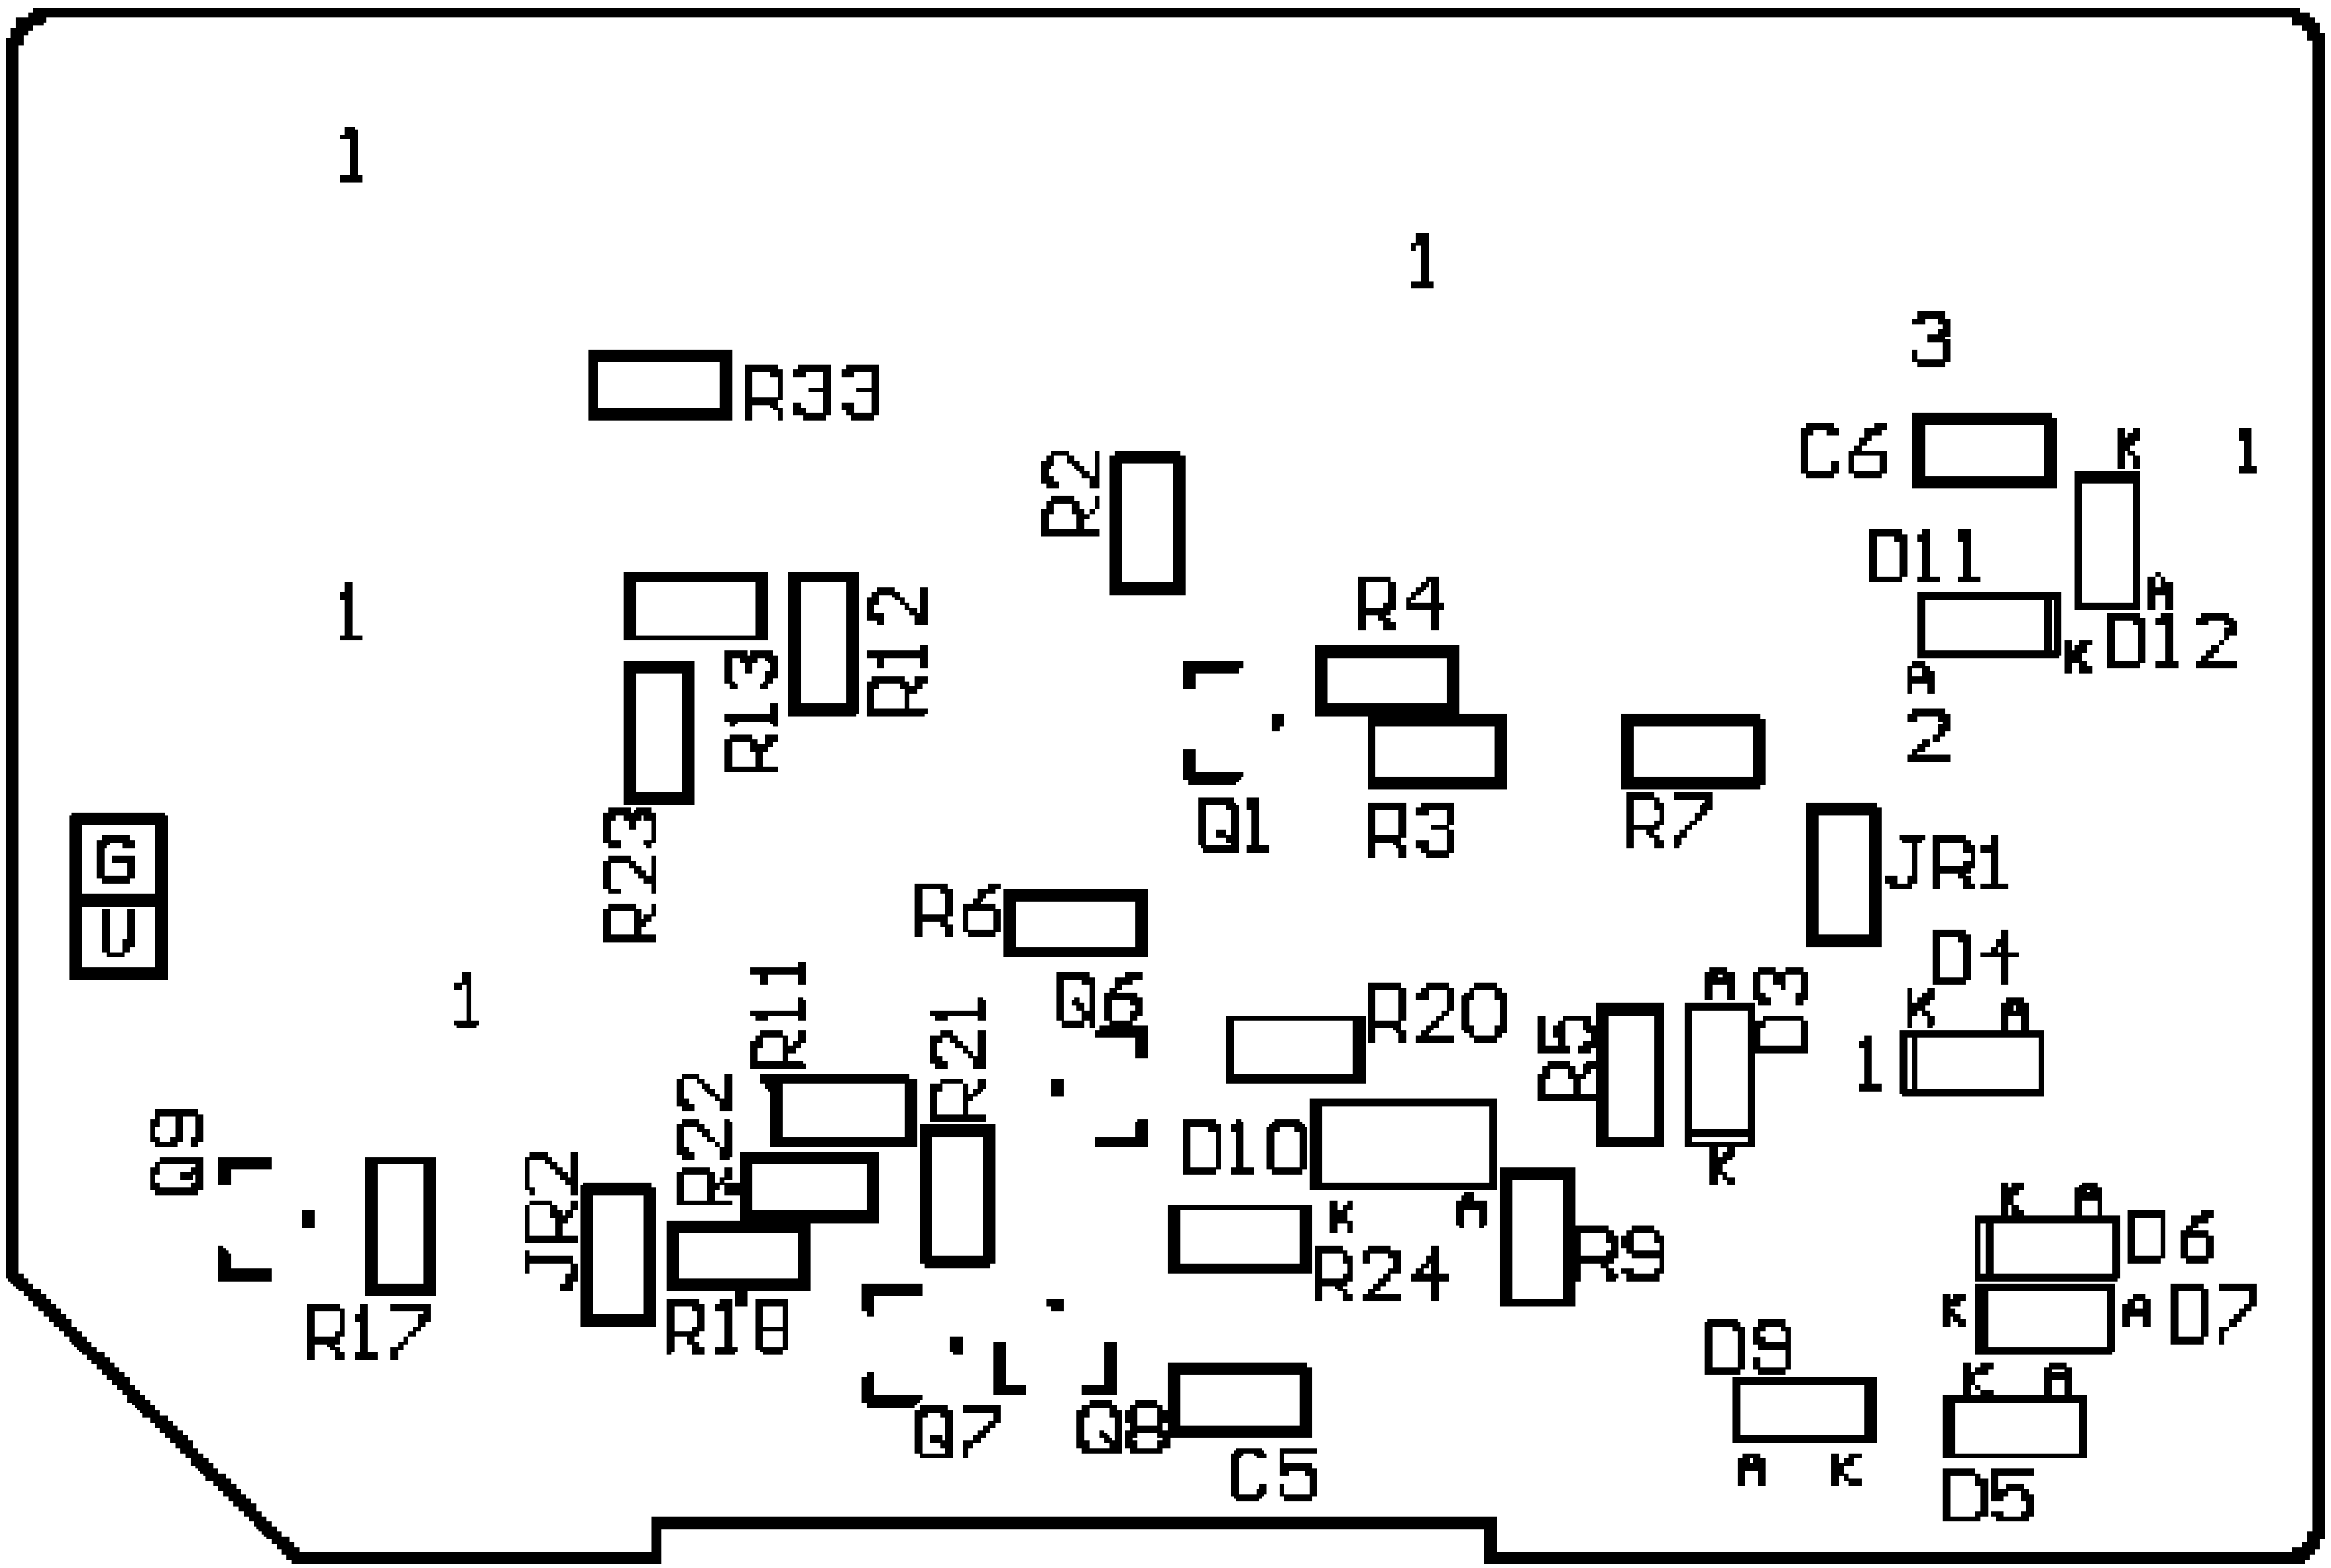


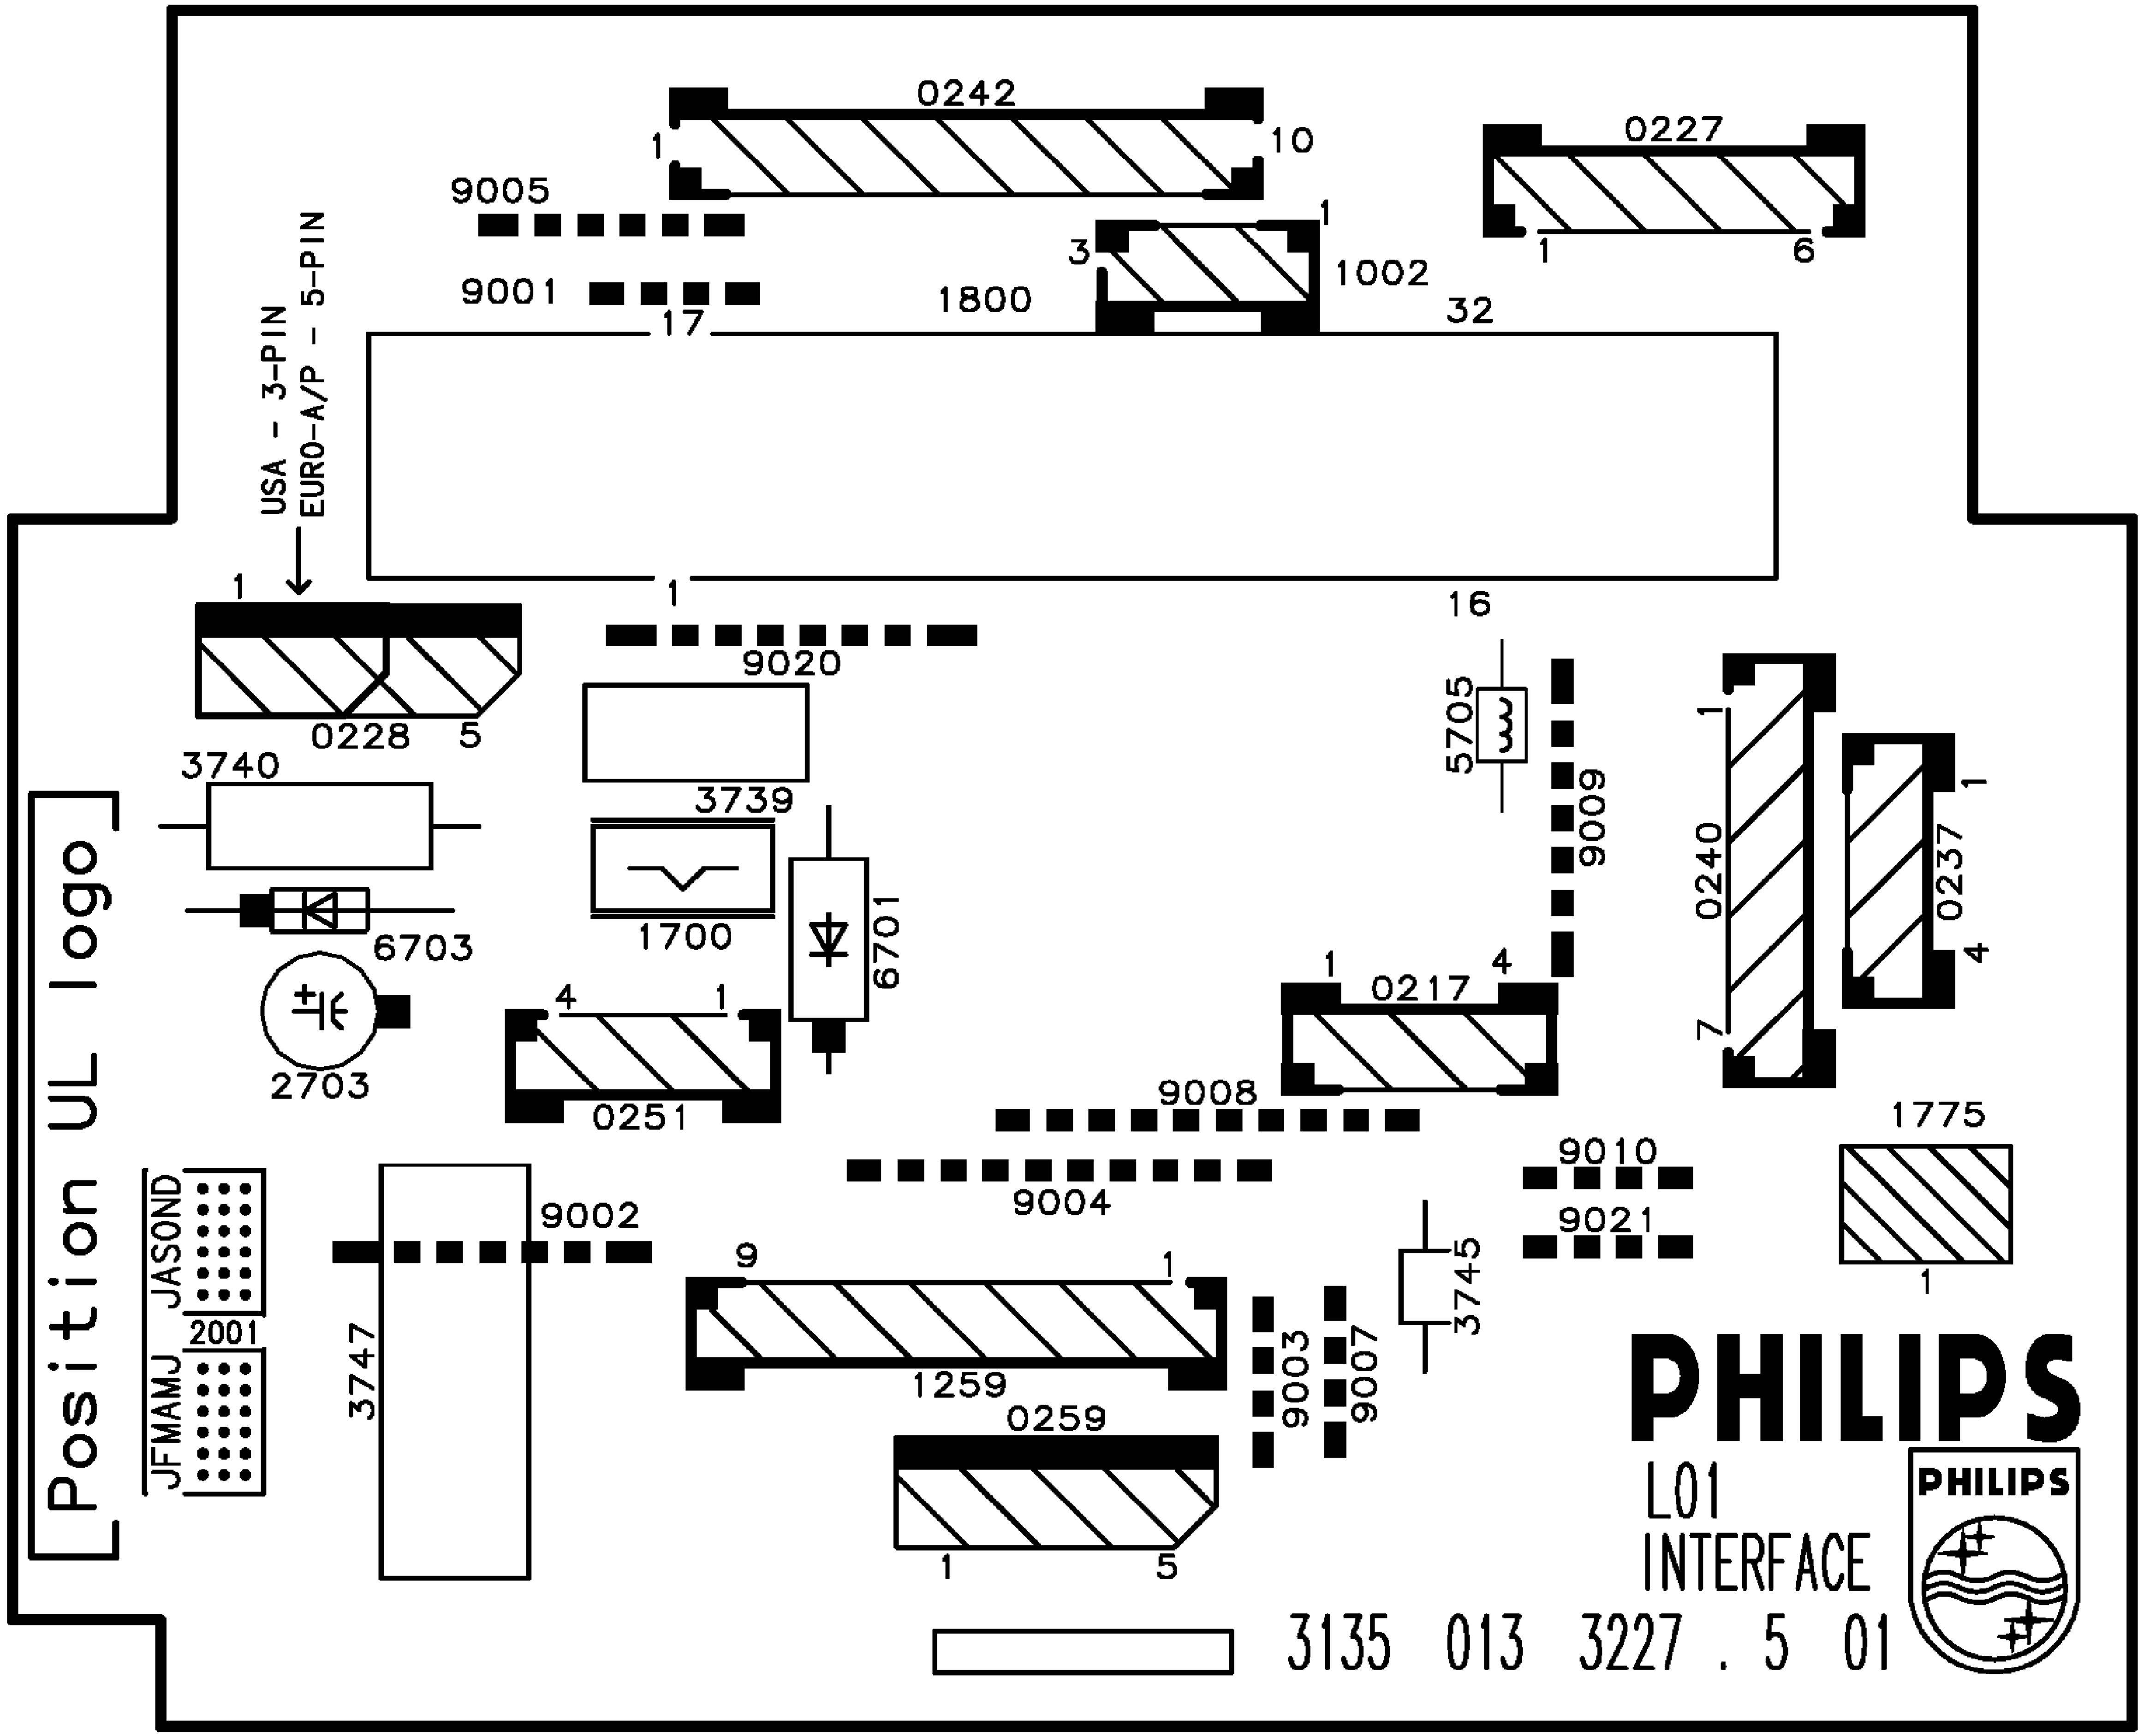

0242
0227
9005
1002
9001
1800
USA - 3-PIN
EURO-A/P - 5-PIN
0228
9020
3740
3739
1700
6701
6703
2703
0251
5705
9009
0240
0237
0217
9008
9004
9010
9021
1775
9002
3747
1259
0259
9003
9007
3745
Position UL logo
JASOND
2001
JFMAMJ
PHILIPS
L01
INTERFACE
3135 013 3227 . 5 01

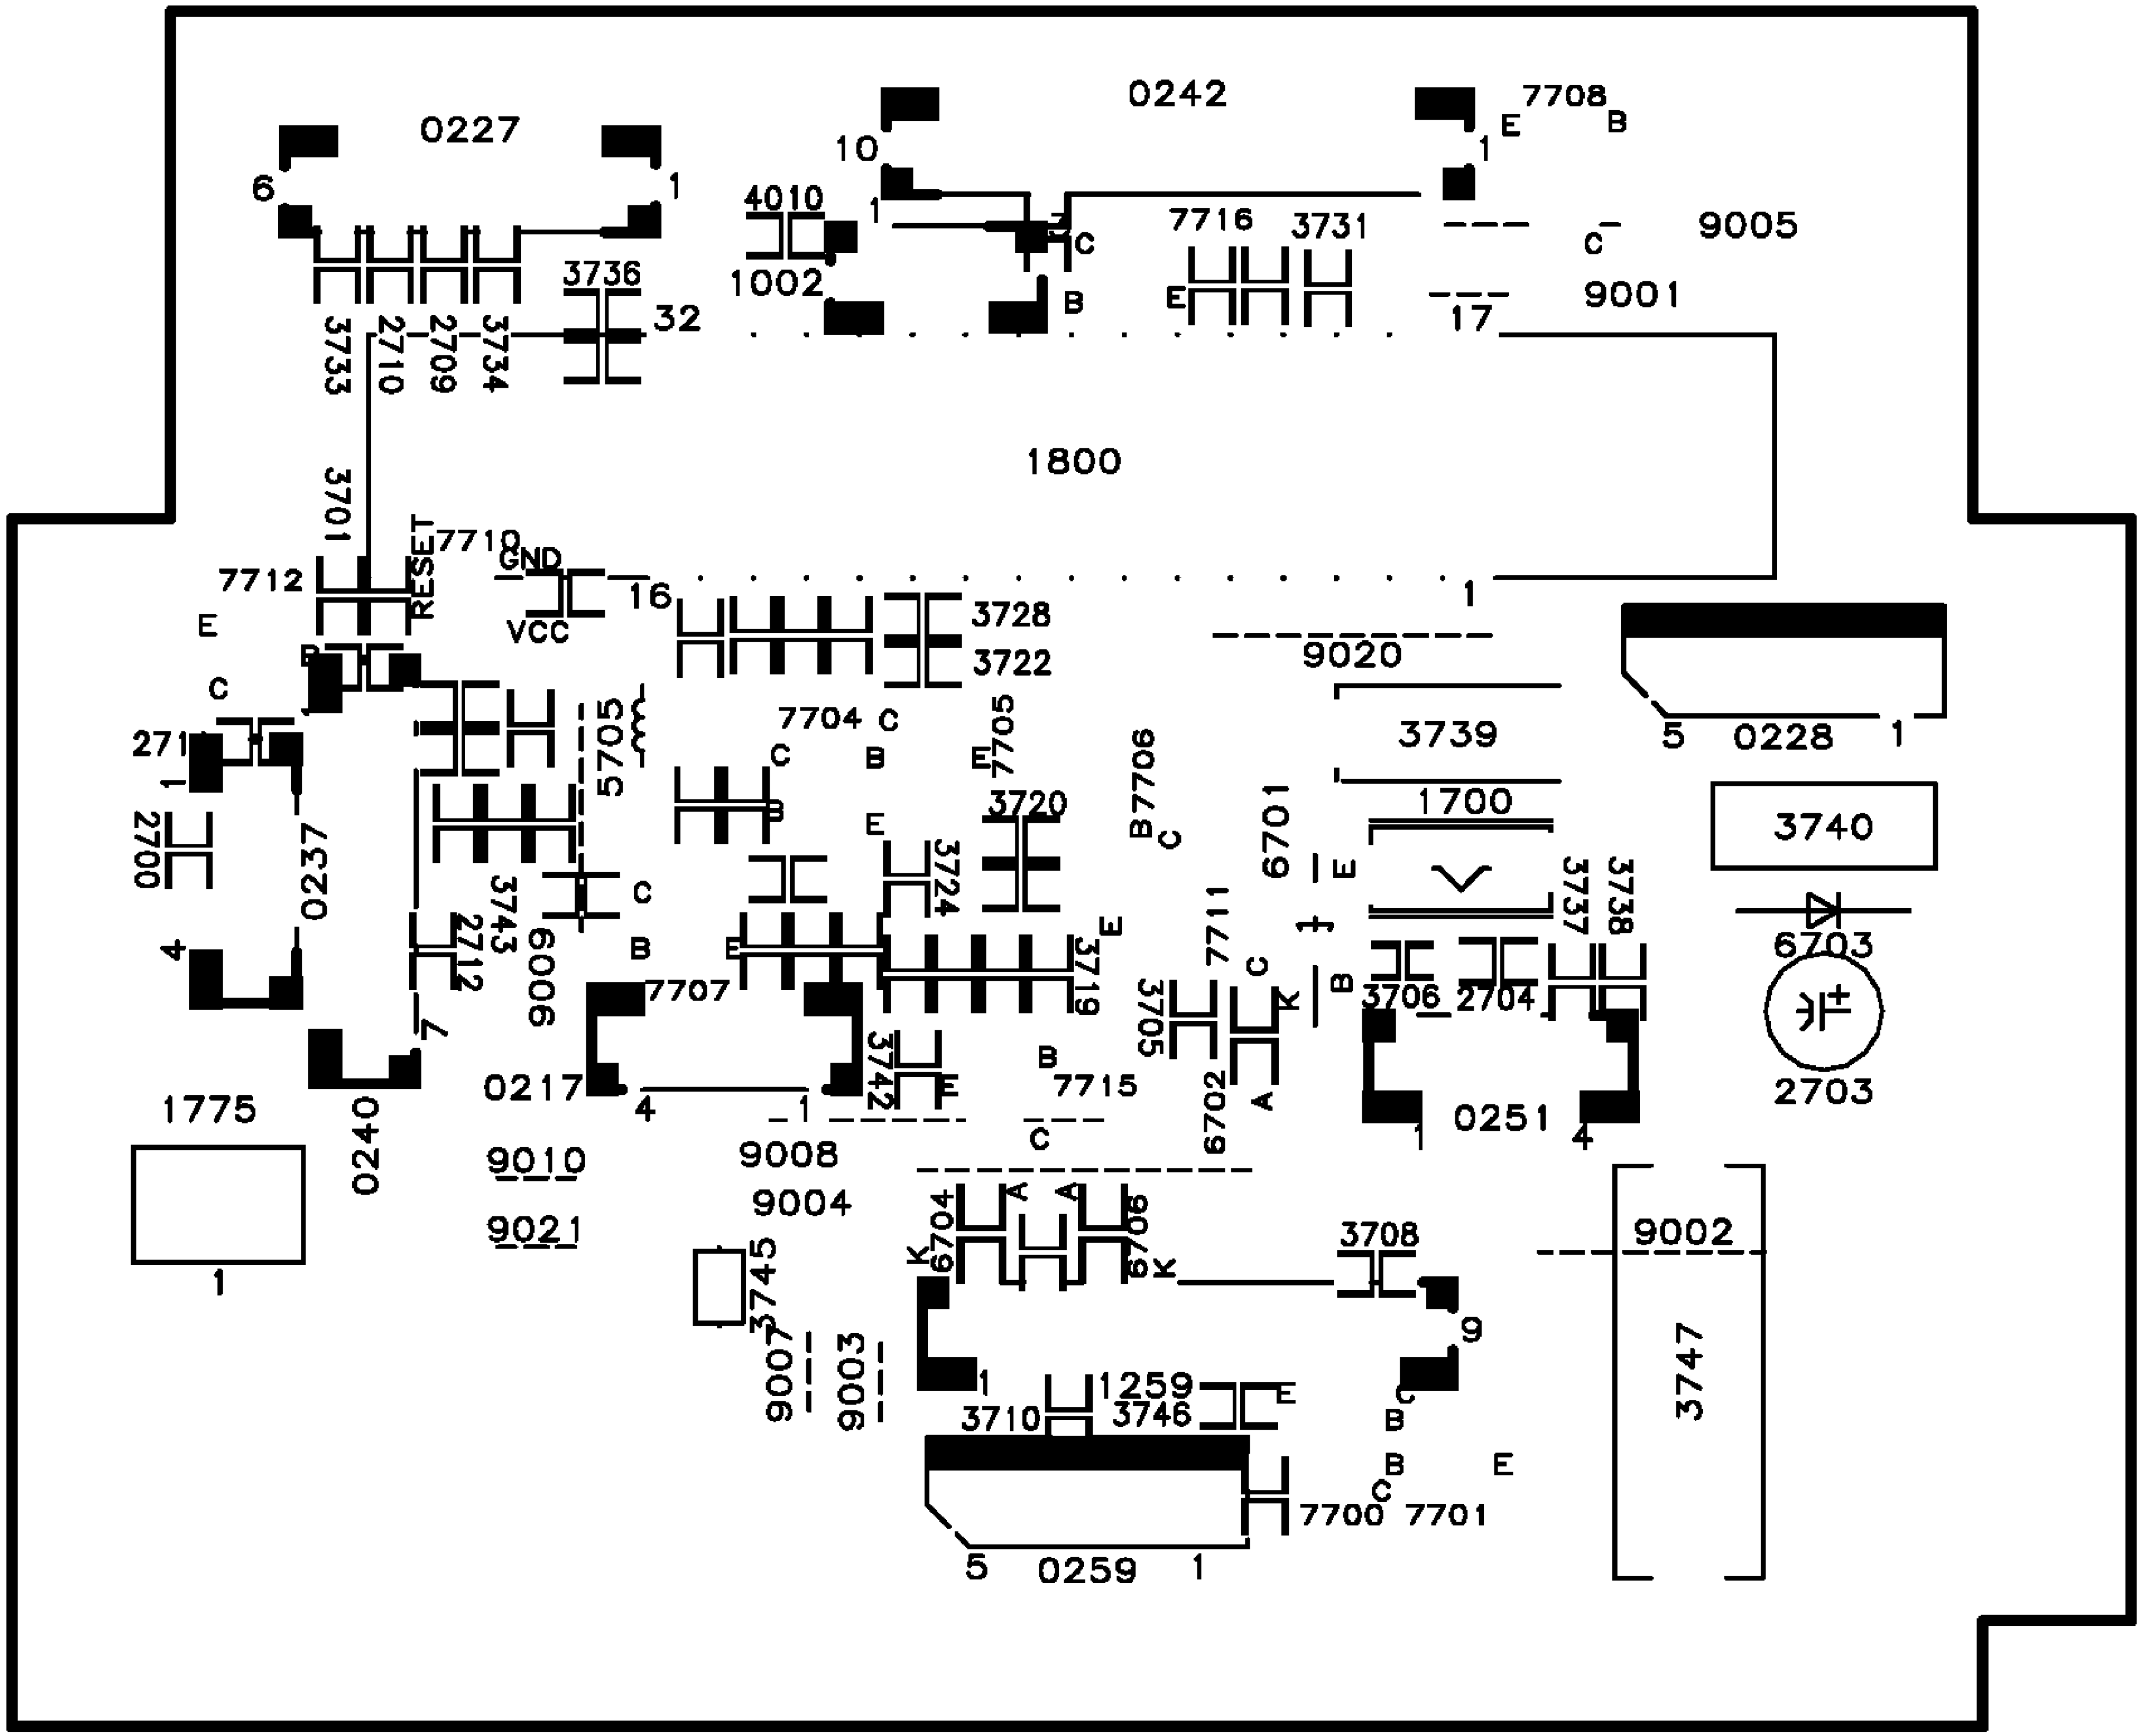

0227
0242
7708
9005
9001
1800
1002
4010
3736
7716
3731
3733
2710
2709
3734
3701
7712
7710
RESET
GND
VCC
3728
3722
9020
3739
0228
1700
3740
6703
2703
7704
7705
5705
B7706
6701
3720
3724
3719
3743
2712
6009
0237
2700
7707
0217
3742
7715
3705
6702
7711
3706
2704
3737
3738
0251
1775
0240
9010
9021
9008
9004
6704
6708
3708
9002
3745
9007
9003
1259
3710
3746
3747
0259
7700
7701


TYPICAL TABLE MODEL EXPLODED VIEW


Ref	Description
AC01	AC Cord
AC02	AC Cord Strain Relief (Not Shown)
AC03	Anode Lead Spacer (Not Shown)
AC04	Batteries for Remote Control Transmitter (Not Shown)
AC05	Cabinet Back
AC06	Cabinet Back Screw Cover (Not Shown)
AC07	Canceller Coil (Not Shown)
AC08	Chassis Tray
AC09	CRT
AC10	Customer Control Buttons
AC11	DAF Panel Bracket (Not Shown)
AC12	Degaussing Coil
AC13	Front Interface Panel Bracket (Not Shown)
AC14	Front Main PCB Bracket (Not Shown)
AC15	Holder, Degaussing Coil (4 Used)
AC16	Jack Panel Bracket
AC17	Owner's Manual
AC18	Quick Use Guide (Not Shown)
AC19	Side Jack Panel Bracket
AC20	Cabinet Front Assembly (Shown Exploded)
AC20A	Cabinet Front
AC20B	Chassis Guide
AC20C	Light Guide
AC20D	Nameplate
AC20E	Power Button
AC20F	Power Button Cover (Not Shown)
AC20G	Power Button Shaft (Not Shown)
AC20H	Speaker (2 Used)
AC20J	Top Control Assembly (Shown Exploded)
AC20J1	Top Control Bracket
AC20J2	Top Control Buttons
AC20J3	Top Control Cover
AC20J4	Top Control Rubber (Not Shown)
AC20J5	Top Control Button Assembly (Shown Exploded)
AC21	Card Door (Not Shown)
AC22	Cinch Cover (Not Shown)
AC23	DVD Door (Not Shown)
AC24	DVD Interface Panel Bracket (Not Shown)
AC25	DVD PIP Bracket (Not Shown)
AC26	EPS Bracket (Not Shown)
AC27	ITV Card Bracket (Not Shown)
AC28	ITV Card Slot Cover (Not Shown)
AC29	Plastic Facade (Not Shown)
AC30	Scan 3 VGA Adapter (Not Shown)
AC31	Scan 4 Card Cover (Not Shown)
AC32	Yoke Wedge (Not Shown)
REMOTE	Remote Control Transmitter

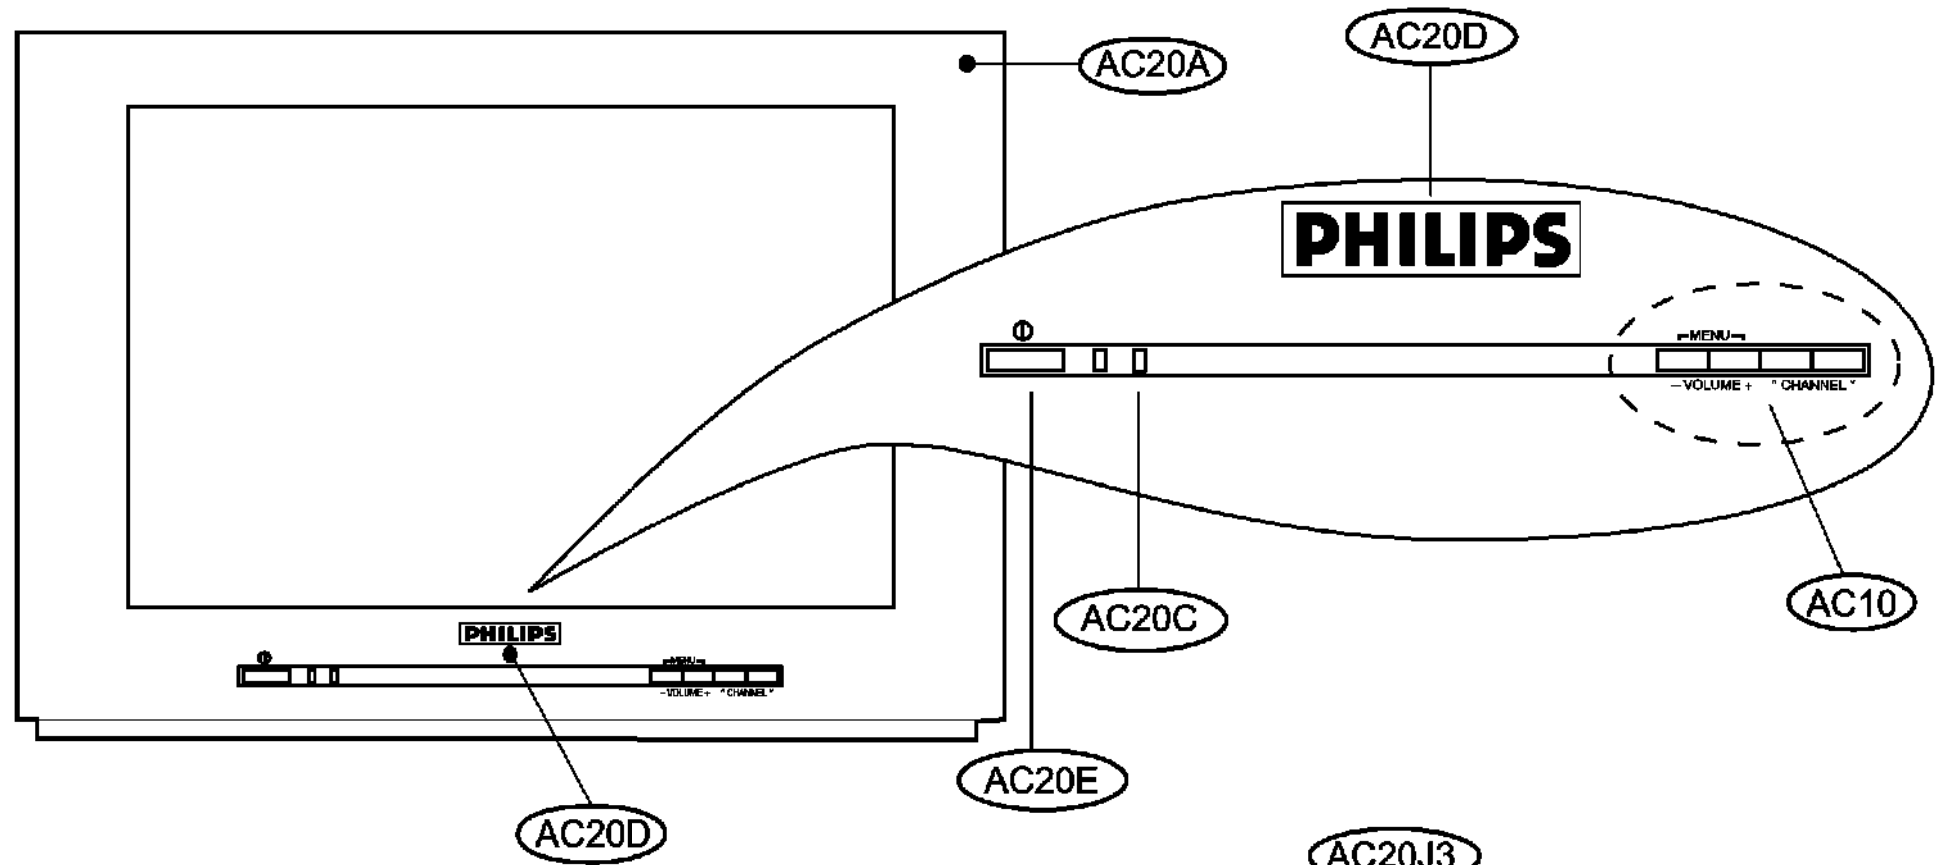

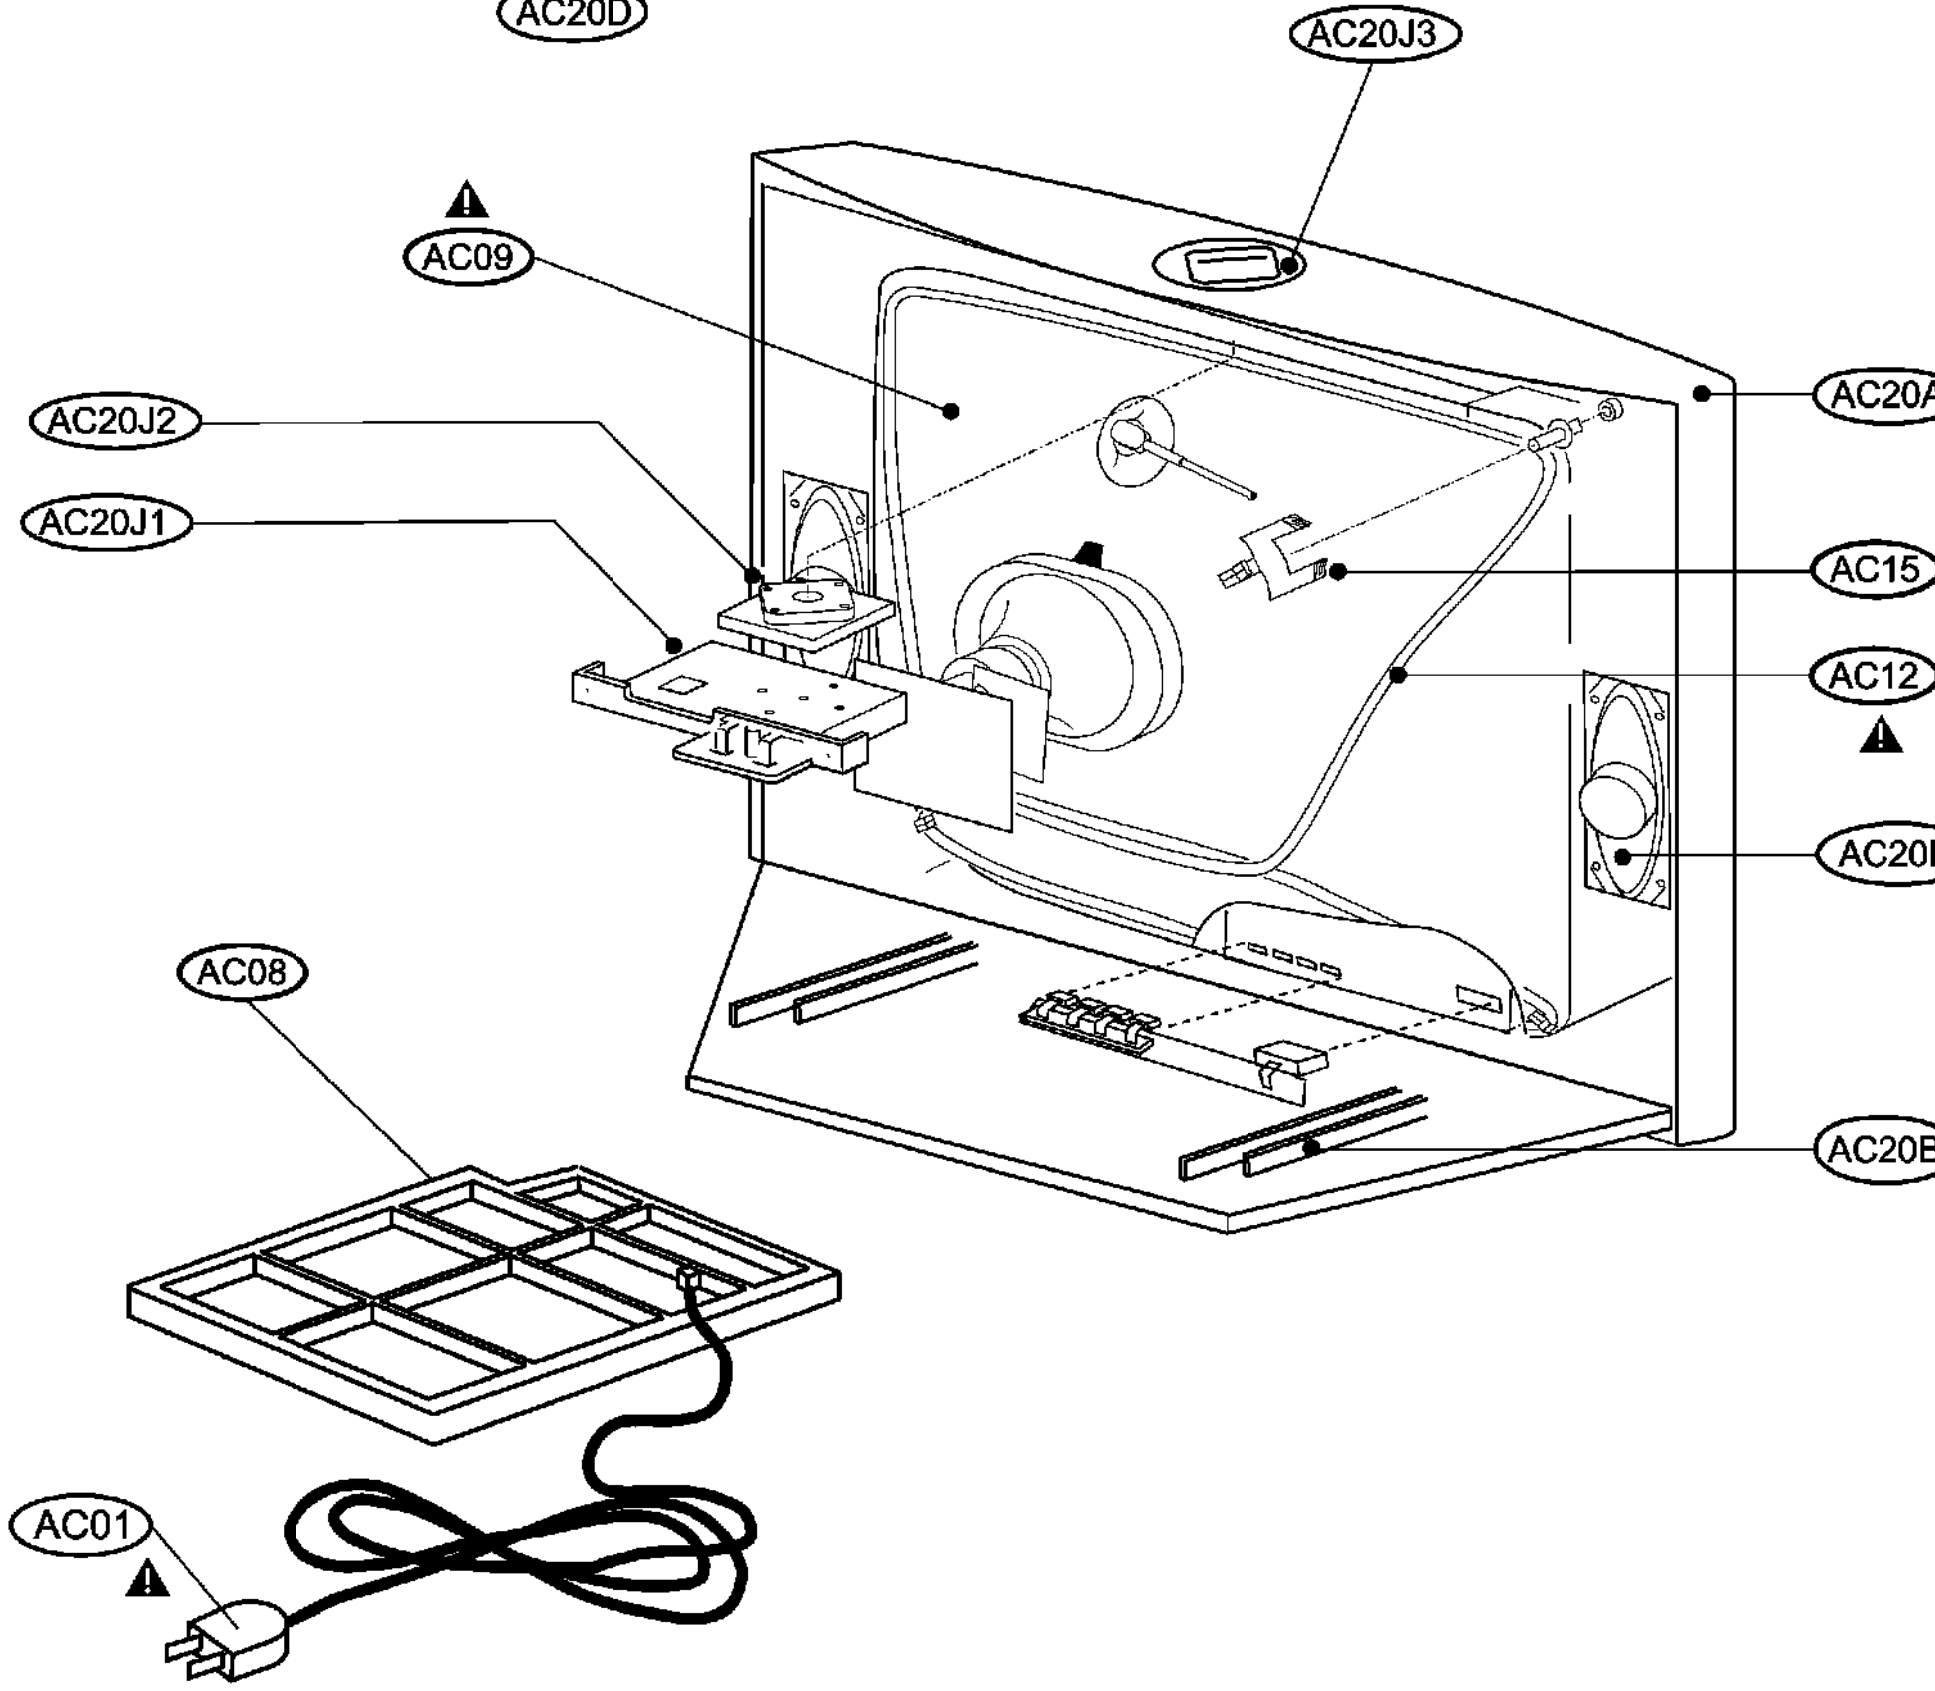





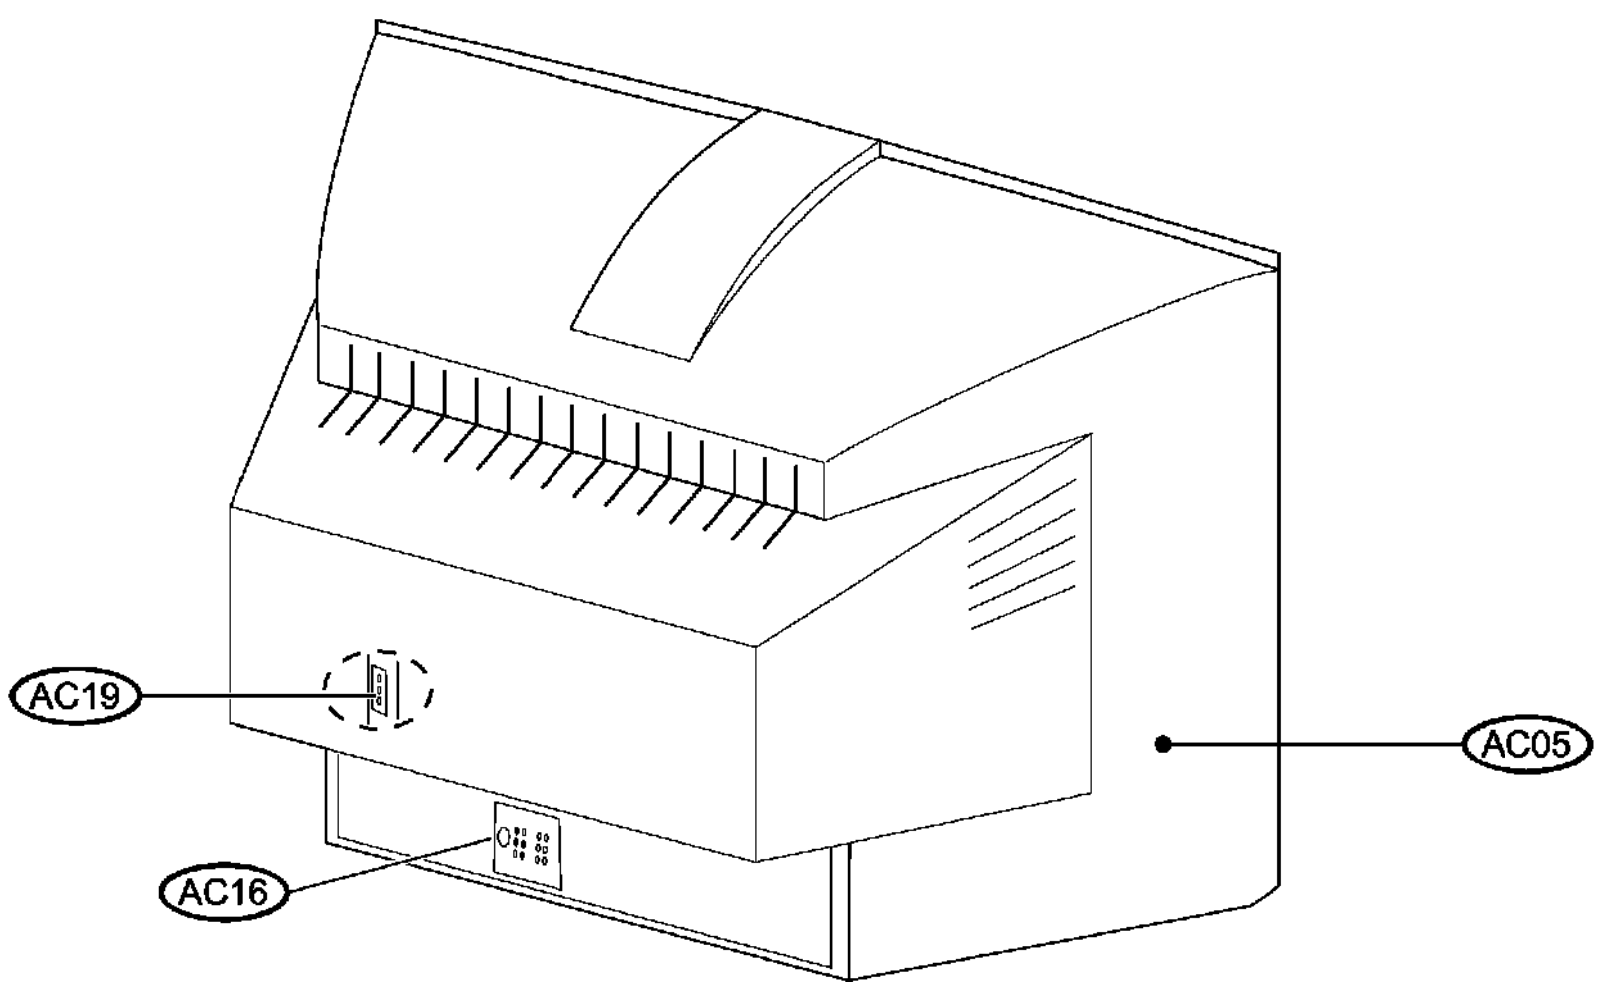

20DV6932/37R - Manual no. 7638

Main Chassis Parts

Main Chassis Parts

S	Ref	Description	Part No.
	0211	2 Pin Connector.	2422 025 16374
	0212	2 Pin Connector.	2422 025 16375
	0214	5 Pin Connector.	2422 025 12481
	0217	3 Pin Connector.	2412 020 00725
	0219	6 Pin Connector.	2422 025 12482
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0222	2 Pin Connector.	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0227	3 Pin Connector.	2422 025 16382
	0229	7 Pin Connector.	2422 025 11244
	0239	3 Pin Connector.	2422 025 16382
	0240	4 Pin Connector.	2422 025 12479
	0243	6 Pin Connector.	2422 025 04854
	0244	5 Pin Connector.	2422 025 04853
	0245	6 Pin Connector.	2422 025 04854
	0246	5 Pin Connector.	2422 025 12481
	0251	4 Pin Connector.	2422 025 15847
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector.	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U, PLL	2422 542 90108
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07467
	1660	Crystal, 12MHz000	2422 543 01203
	1810	6 Pin Connector.	2422 025 15849
	1831	Crystal, Resonator, 18MHz432, 12 Pin, HC49/U A.	2422 543 00842
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic.	2022 031 00103
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 270n, 5%, 250v, Metalized Polypropylene.	2222 479 90016
	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2022 031 00138
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
	2463	Cap, 680p, 10%, 2000v, Ceramic	2020 558 90485
	2465	Cap, 9n1, 5%, 1600v, Polypropylene	2222 375 90153
	2467	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2468	Cap, 33n, 10%, 400v, Polyester	2222 347 90227
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2038 035 13301
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2022 031 00137
	2486	Cap, 470u, 20%, 16v, Electrolytic.	2022 031 00139
	2487	Cap, 47u, 20%, 50v, Electrolytic	2038 035 13508
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2022 031 00144
	2489	Cap, 470u, 20%, 16v, Electrolytic.	2022 031 00139
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2222 336 29148
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90626
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90128
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
	2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
	2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
	2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
	2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
	2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2837	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2840	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2841	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090

S = Safety Part   Be sure to use exact replacement part.

20DV6932/37R (continued)

	2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2843	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2844	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2846	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
	2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
	2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
	2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610
	2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910
	2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
	2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
	2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2910	Cap, 3n3, 10%, 63v, Ceramic.	3198 017 03320
	2911	Cap, 3n3, 10%, 63v, Ceramic.	3198 017 03320
	2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
	3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
	3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
	3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202
	3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
	3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
	3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
	3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3247	Res, 270K, 5%, 1/16W, Metalized Glass.	2322 702 60274
	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3443	Res, 1M, 5%, 1/10W, Metalized Glass. .	3198 021 51050
	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
	3452	Res, 3K6, 1%, 3/5W, Metal Film	2312 915 13602
	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3454	Res, 1K5, 1%, 3/5W, Metal Film	2312 915 11502
S	3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
	3456	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3457	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S	3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
	3470	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
	3472	Res, 6R8, 1%, 3/5W, Metal Film	2312 915 16808
	3473	Res, 6R8, 1%, 3/5W, Metal Film	2312 915 16808
	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
	3481	Res, 18K, 1%, 3/5W, Metal Film	2312 915 11803
	3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3491	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3495	Res, 22K, 5%, 1/10W, Metalized Glass .	3198 021 52230
	3496	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
	3497	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
	3498	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
S	3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620

S = Safety Part   Be sure to use exact replacement part.

20DV6932/37R (continued)

S	Ref	Description	Part No.
S	3565	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3831	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3832	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3843	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
	3901	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4837	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4838	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5242	Coil, 10u, 5%.	3198 018 11090
	5342	Coil, 22u.	2422 535 97333
S	5445	Transformer, LOT	2422 531 02519
	5452	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5453	Coil, 22u, 5%.	3198 018 12290
	5457	Coil, Linear Correction, 82u	2422 536 00425
	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
	5471	Coil, 6u8, 20%	3198 018 76880
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 22u.	2422 535 97333
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04.	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5831	Coil, 6u8, 5%.	3198 018 16880
	5832	Coil, 6u8, 5%.	3198 018 16880
	5833	Coil, 6u8, 5%.	3198 018 16880
	5835	Coil, 12u, 10%	3198 018 31290
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316.	3198 010 10630
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630
	6206	Zener Diode, 6.8 volt.	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316.	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148.	3198 010 10010
	6448	Zener Diode, 6.2 volt.	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6453	Zener Diode, 5.6 volt.	3198 020 55680
	6460	Diode, Rect, BY228/24.	9340 559 50112
	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
	6463	Zener Diode, 8.2 volt.	3198 020 58280
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316.	3198 010 10630
	6468	Diode, Signal, BAS316.	3198 010 10630
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt.	3198 010 25680
	6482	Zener Diode, 9.1 volt.	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYV95C.	9335 001 80133
	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6487	Diode, Rect, BYV95A.	9335 000 90133
	6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667
	6520	Diode, Rect, BYV95A.	9335 000 90133
	6523	Diode, Signal, 1N4148.	3198 010 10010
	6524	Diode, Rect, 1N5062.	3198 010 10120
	6525	Diode, Rect, 1N5062.	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt.	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500.	9340 555 59127
	6562	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6563	Diode, Signal, BAS316.	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215

S = Safety Part   Be sure to use exact replacement part.

20DV6932/37R (continued)

	Ref	Description	Part No.
	6566	Diode, Signal, 1N4148.	3198 010 10010
	6569	Diode, Signal, BAS316.	3198 010 10630
	6570	Zener Diode, 6.8 volt.	3198 020 56880
	6580	Diode, Signal, BAS316.	3198 010 10630
	6831	Diode, Signal, 1N4148.	3198 010 10010
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7102	Transistor, PNP, BC857B(COL)	3198 010 42150
	7103	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9569H/N1/4I/1161.	9352 733 51557
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7450	Transistor, PNP, PDTA114ET	3198 010 44010
	7460	Transistor, NPN, BU4508DX.	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2.	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1.	9352 673 56112
	7521	Power FET, FQPF9N50.	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, L78L33ACZ.	9322 134 92676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C08-WBN6.	9322 154 38682
	7802	IC, HEF4053BT.	9333 729 60653
	7803	IC, HEF4053BT.	9333 729 60653
	7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682
	7901	IC, AN7522N PH	9322 181 41682
	9611	Coil, 27u, 10%	3198 018 22790
	9672	Coil, 22u, 10%	3198 018 22290
	9678	Coil, 22u, 10%	3198 018 22290
	CBA	Main Chassis Assembly.	3139 188 04071
	CBA	DVD Module SD3.1	3139 248 71141

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

	Ref	Description	Part No.
	0267	3 Pin Board Connector.	2422 025 09191
	0361	Eject Button	3139 138 11271
	1110	Tact Switch.	2422 128 02742
	CBA	DVD Eject Panel Assembly	3139 188 03391

DVD Interface Panel Parts

DVD Interface Panel Parts

	Ref	Description	Part No.
	0226	Connector, 6 Pin	2422 025 12482
	0251	Connector, 4 Pin	2422 025 15847
	0253	Connector, 7 Pin	2422 025 11244
	0254	Connector, 22 Pin.	2422 025 16526
	0255	Connector, 16 Pin.	2422 025 16525
	0265	Connector, 12 Pin.	2422 025 08333
	0266	Connector, 6 Pin	2422 025 15849
	1100	Socket, Cinch, 1 Pin	2422 026 04425
S	1330	Fuse, 2.5A, 250V	2422 086 10784
S	1331	Fuse, 2.5A, 250V	2422 086 10784
S	1332	Fuse, 2A, 250V IEC	2422 086 10783
	1619	Connector, 4 Pin	2422 025 15847
	2101	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
	2102	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
	2103	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
	2104	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2110	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2111	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
	2112	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
	2113	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
	2115	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
	2120	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2121	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2122	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2123	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2124	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
	2125	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2126	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2127	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
	2128	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2140	Cap, 100u, 20%, 16V, Electrolytic.	3198 029 21010
	2141	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
	2142	Cap, 100u, 20%, 16V, Electrolytic.	3198 029 21010
	2143	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
	2165	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
	2169	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
	2184	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
	2185	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
	2200	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2201	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
	2211	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2261	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
	2262	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
	2263	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2264	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2265	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2266	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2267	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2268	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2280	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
	2281	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
	2300	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
	2301	Cap, 22n, 10%, 400v, Metalized Polyeste	2222 365 55223
	2302	Cap, 330p, 10%, 1KV, Ceramic	3198 019 53310
	2310	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
	2311	Cap, 470n, 10%, 25v, Ceramic	2020 552 96465
	2313	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
	2315	Cap, 220p, 10%, 1KV, Ceramic	3198 019 62210
	2316	Cap, 33n, 10%, 16v, Ceramic.	3198 017 33330
	2330	Cap, 2u2, 20%, 25v, Electrolytic	3198 026 32220
	2331	Cap, 470u, 20%, 10v, Electrolytic.	3198 025 14710
	2332	Cap, 2u2, 20%, 25v, Electrolytic	3198 026 32220
	2333	Cap, 470u, 20%, 10v, Electrolytic.	3198 025 14710
	2335	Cap, 220u, 20%, 25V, Electrolytic.	3198 025 32210
	2337	Cap, 1000u, 20%, 25v, Electrolytic	3198 026 31020
	2338	Cap, 1000u, 20%, 25v, Electrolytic	3198 026 31020
	2341	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2350	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2351	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2353	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	3101	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3102	Res, 68 ohm, 5%, 1/16W, Metalized Glas	3198 021 36890
	3110	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3111	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3112	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3113	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3114	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3115	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3116	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3117	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3120	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3121	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3122	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3123	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3124	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
	3125	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
	3126	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3130	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
	3140	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3141	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3142	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3143	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
	3145	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3146	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3147	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3148	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
	3180	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3182	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3200	Res, 270 ohm, 5%, 1/16W, Metalized Glas	3198 021 32710
	3201	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3202	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3203	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
	3204	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
	3205	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3206	Res, 680 ohm, 5%, 1/16W, Metalized Glas	3198 021 36810
	3207	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
	3208	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3209	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3210	Res, 270 ohm, 5%, 1/16W, Metalized Glas	3198 021 32710
	3211	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3212	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3213	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
	3214	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
	3215	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3216	Res, 680 ohm, 5%, 1/16W, Metalized Glas	3198 021 36810
	3217	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
	3218	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3219	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3230	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
	3231	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403

S = Safety Part   Be sure to use exact replacement part.

20DV6932/37R (continued)

S	Ref	Description	Part No.
	3232	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
	3233	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
S	3300	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
S	3301	Power Resistor, 68K, 5%, 2W.	3198 012 26830
	3308	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3309	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3310	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3311	Res, 180 ohm, 5%, 1/16W, Metalized Glas	3198 021 31810
	3312	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
	3313	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3314	Res, 1 ohm, 5%, 1/6W, Carbon Film.	3198 011 01080
	3315	Res, 1 ohm, 5%, 1/6W, Carbon Film.	3198 011 01080
	3317	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3318	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3319	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3320	Res, 75K, 1%, 1/16W, Metalized Glass	2322 704 67503
	3330	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
S	3331	Res, 10 ohm, 5%, 2 1/2W, Metal Film.	3198 012 31090
	3339	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3340	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3342	Res, 1K5, 1%, 1/16W, Metalized Glass	2322 704 61502
	3344	Res, 4K7, 1%, 1/16W, Metalized Glass	2322 704 64702
	3350	Res, 18K, 5%, 1/6W, Carbon Film.	3198 011 01830
	3351	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3360	Res, 4R7, 5%, 1/16W, Metalized Glass	3198 021 34780
	3406	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3466	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	4100	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4102	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4142	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4150	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4162	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4185	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4336	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4463	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4466	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	5100	Inductor, Variable, 100uH, 10%	2422 549 41663
	5110	Coil, 220n	3198 018 12270
	5120	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5140	Coil, 220n	3198 018 12270
	5141	Coil, 220n	3198 018 12270
	5200	Coil, 6u8.	3198 018 16880
	5300	Coil, 56u.	3198 018 25690
	5301	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
S	5315	Transformer, SS25105-02.	2422 531 02521
	5331	Coil, 10u, 5%.	2422 535 95363
	5333	Coil, 10u, 5%.	2422 535 95363
	5337	Coil, 10u.	2422 535 95363
	6120	Diode, Signal, BAS316.	3198 010 10630
	6300	Diode, Rect, BYD33J	9337 234 20133
	6311	Diode, Signal, BAS316.	3198 010 10630
	6312	Zener Diode, 22 volt	3198 020 52290
	6330	Diode, Rect, EGP20DL-5100	9322 164 42682
	6332	Diode, Rect, SB340L-7024.	9322 161 76682
	6334	Diode, Rect, BYD33D	9337 234 00133
	6336	Diode, Rect, BYV27-200.	9335 526 80133
	6350	Zener Diode, 12 volt	3198 020 51290
	7110	IC, HEF4053BT.	9333 729 60653
	7120	IC, UDA1334BT/N2	9352 703 94118
	7140	Transistor, NPN, BC847B.	3198 010 42030
	7142	Transistor, NPN, BC847B.	3198 010 42030
	7200	Transistor, NPN, BC847B.	3198 010 42030
	7201	Transistor, PNP, BC857B.	3198 010 42150
	7202	Transistor, NPN, BC847B.	3198 010 42030
	7210	Transistor, NPN, BC847B.	3198 010 42030
	7211	Transistor, PNP, BC857B.	3198 010 42150
	7212	Transistor, NPN, BC847B.	3198 010 42030
	7262	Transistor, NPN, PDTC124ET	9340 310 20215
	7280	IC, L78L08ACZ.	9322 130 67676
	7310	Transistor, NPN, PDTC114ET	3198 010 44110
	7311	Transistor, PNP, PDTA114ET	3198 010 44010
	7312	Transistor, PNP, BC857B.	3198 010 42150
	7313	Transistor, NPN, BC847B.	3198 010 42030
	7315	IC, TEA1523P/N2.	9352 699 68112
S	7340	Optical Coupler, TCET1103(G)	9322 140 14667
	7341	IC, TL431CLP	9337 711 00676
	7350	Transistor, FET, SI2306DS.	9322 163 75685
	7351	Transistor, NPN, PDTC144ET	3198 010 44130
	CBA	DVD Interface Panel Assembly	3139 188 03291

Front Interface Panel Parts

Front Interface Panel Parts

S	Ref	Description	Part No.
S	0211	2 Pin Connector.	2422 025 16268
S	0212	2 Pin Connector.	2422 025 16559
	0214	5 Pin Connector.	2422 025 06353
	1606	Tact Switch.	2422 128 02742
	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2692	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
	2693	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
	2694	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
	2695	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
	2698	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
S	3500	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322 242 13335
S	3501	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322 242 13335
	3685	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
	3691	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
	3693	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
	6691	LED, LTL-10234WHCR	9322 185 69682
	6692	IR Receiver, TSOP1836UH3V.	9322 127 54667
	9001	Wire Jumper.	3198 036 90010
	9002	Wire Jumper.	3198 036 90010
	CBA	Front Interface Panel Assembly	3139 177 26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

S	Ref	Description	Part No.
	0232	Headphone Jack	2422 026 04747
	0250	A/V Jack	2422 026 04815
	0251	6 Pin Connector.	2422 025 15849
	0254	5 Pin Connector.	2422 025 12481
	0255	4 Pin Connector.	2422 025 12479
	2171	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
	2172	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
	2173	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
	2174	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
	2176	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
	2177	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2178	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
	2179	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	3150	Res, 47k, 5%, 1/6W, Carbon	3198 011 04730
	3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
	3152	Res, 47k, 5%, 1/6W, Carbon	3198 011 04730
	3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
	3156	Res, 120 ohm, 5%, 1/6W, Carbon Film.	3198 011 01210
	3157	Res, 120 ohm, 5%, 1/6W, Carbon Film.	3198 011 01210
	6161	Zener Diode, 6.8 volt.	3198 010 26880
	9153	Wire Jumper.	3198 036 90010
	9170	Wire Jumper.	3198 036 90010
	9171	Wire Jumper.	3198 036 90010
	CBA	Side Jack Panel Assembly	3139 188 03541

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

S	Ref	Description	Part No.
	0215	3 Pin Connector.	2422 025 16601
	1091	Tact Switch.	2422 128 02742
	1092	Tact Switch.	2422 128 02742
	1093	Tact Switch.	2422 128 02742
	1094	Tact Switch.	2422 128 02742
	3091	Res, 560 ohm, 5%, Metalized Glass.	3198 021 35610
	3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
	3093	Res, 560 ohm, 5%, Metalized Glass.	3198 021 35610
	3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
	3095	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3096	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
	4085	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4089	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4090	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	6091	Diode, Signal.	9340 453 90115
	CBA	Top Control Panel Assembly	3139 187 15841

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S	Ref	Description	Part No.
S	AC01	AC Cord.	3135 010 03831
	AC04	Batteries for Remote Control Transmitte	9299 000 65263
	AC05	Cabinet Back	3139 124 45831
	AC06	Cabinet Back Screw Cover (2 Used).	3139 124 42891
S	AC09	CRT, A51ERF135X82.	9301 903 81343
S	AC12	Degaussing Coil.	3141 058 20131
	AC13	Front Interface Panel Bracket.	3139 124 32891
	AC14	Front Main PCB Bracket	3139 124 45641
	AC17	Owner's Manual	3139 125 31451
	AC18	Quick Use Guide.	3141 055 52361
	AC19	Side Jack Panel Bracket.	3139 124 37061
	AC20A	Cabinet Front.	3139 177 53981
	AC20B	Chassis Guide.	3139 124 25893
	AC20B	Chassis Guide.	3139 124 45661
	AC20C	Light Guide.	3139 124 41421
	AC20D	Nameplate.	3139 120 01371
	AC20E	Power Button	3139 177 58491

20DV6932/37R (continued)

```
AC20H  Speaker, 16 ohm, 5W (2 Used) . . . . .  2422 264 00411
AC20J  Top Control Assembly . . . . . . . . .  3139 138 11451
AC23   DVD Door . . . . . . . . . . . . . . .  3139 138 11281
AC25   DVD PIP Bracket. . . . . . . . . . . .  3139 124 35571
REMOTE Remote Control Transmitter, RC19042007/
       01. . . . . . . . . . . . . . . . . . . 3128 147 14521
```

20DV693R01 - Manual no. 7638

Main Chassis Parts

S	Ref	Description	Part No.
		Main Chassis Parts	
	0127	Socket Fuse.	2422 088 00271
	0129	NTC Holder	3139 120 10151
	0130	Bead, Ferrite, 100MHz	2422 549 45808
	0136	IC-Spring.	3104 301 22081
	0137	Spring	3139 121 24583
	0138	IC-Spring.	3104 301 22081
	0139	Spring for Bracket	3122 121 24786
	0141	IC-Spring.	3104 301 22081
	0152	Cable, DIPMate, 6 Pin.	3139 121 08841
	0153	Cable, DIPMate, 5 Pin, 480mm	3139 121 07951
	0211	2 Pin Connector.	2422 025 16374
	0212	2 Pin Connector.	2422 025 16375
	0214	5 Pin Connector.	2422 025 12481
	0217	3 Pin Connector.	2412 020 00725
	0219	6 Pin Connector.	2422 025 12482
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0222	2 Pin Connector.	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0229	7 Pin Connector.	2422 025 11244
	0239	3 Pin Connector.	2422 025 16382
	0240	4 Pin Connector.	2422 025 12479
	0243	6 Pin Connector.	2422 025 04854
	0244	5 Pin Connector.	2422 025 04853
	0245	6 Pin Connector.	2422 025 04854
	0246	5 Pin Connector.	2422 025 12481
	0251	4 Pin Connector.	2422 025 15847
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector.	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U, PLL	2422 542 90108
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07467
	1660	Crystal, 12MHz000	2422 543 01203
	1810	6 Pin Connector.	2422 025 15849
	1831	Crystal, Resonator, 18MHz432, 12 Pin, HC49/U A.	2422 543 00842
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic.	2022 031 00103
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 270n, 5%, 250v, Metalized Polypropylene.	2222 479 90016
	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2022 031 00138
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
	2463	Cap, 680p, 10%, 2000v, Ceramic	2020 558 90485
	2465	Cap, 9n1, 5%, 1600v, Polypropylene	2222 375 90153
	2467	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2468	Cap, 33n, 10%, 400v, Polyester	2222 347 90227
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2038 035 13301
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2022 031 00137
	2486	Cap, 470u, 20%, 16v, Electrolytic.	2022 031 00139
	2487	Cap, 47u, 20%, 50v, Electrolytic	2038 035 13508
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2022 031 00144
	2489	Cap, 470u, 20%, 16v, Electrolytic.	2022 031 00139
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2222 336 29148
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90626
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90128
S	2516	Cap, 470p, 20%, 50v, Ceramic	2020 554 90148
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250

S = Safety Part   Be sure to use exact replacement part.

20DV693R01 (continued)

Ref	Description	Part No.
2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
2837	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
2840	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
2841	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2842	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
2843	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2844	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2845	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
2846	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2902	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2904	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
2906	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
2908	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2910	Cap, 3n3, 10%, 63v, Ceramic.	3198 017 03320
2911	Cap, 3n3, 10%, 63v, Ceramic.	3198 017 03320
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3124	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3126	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3134	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
3154	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620
3156	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3157	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3158	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3159	Res, 1K2, 1%, 1/8W, Metalized Glass.	2322 734 61202
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
3205	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3206	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
3218	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3241	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3242	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
3245	Res, 39K, 1%, 1/16W, Metalized Glass	2322 704 63903
3246	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3247	Res, 270K, 5%, 1/16W, Metalized Glass.	2322 702 60274
3248	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3257	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020
3340	Res, 10 ohm, 5%, 1/2W, Metal Film.	2306 207 03109
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
3343	Res, 1K5, 20%, 1/2W, Carbon Film	3198 013 01520
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3442	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3443	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3445	Res, 15K, 5%, 1/6W, Carbon Film.	3198 011 01530
3446	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620
3447	Res, 180 ohm, 5%, 1/6W, Carbon Film.	3198 011 01810
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
3449	Res, 68 ohm, 5%, 1/6W, Carbon Film	3198 011 06890
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film.	2306 204 03109
3452	Res, 3K6, 1%, 3/5W, Metal Film	2312 915 13602
3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3454	Res, 1K5, 1%, 3/5W, Metal Film	2312 915 11502
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film	3198 012 26880
3456	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3457	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S 3459	Res, 15K, 5%, 1 1/3W, Metal Film	3198 012 21530
3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320
3470	Res, 270K, 5%, 1/8W, Metalized Glass	2322 730 61274
3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
3472	Res, 6R8, 1%, 3/5W, Metal Film	2312 915 16808
3473	Res, 6R8, 1%, 3/5W, Metal Film	2312 915 16808
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3479	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2122 101 02083
3481	Res, 18K, 1%, 3/5W, Metal Film	2312 915 11803
3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3491	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3492	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3497	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3498	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3506	Res, 1M5, 5%, 1/2W, Metalized Glass.	2322 242 13155
3507	Surge Protector.	2422 549 43073
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film	3198 013 02210
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3520	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3521	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3523	Res, 100 ohm, 5%, 1/3W, Metal Film	2306 204 03101
3524	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3525	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S 3527	Res, 0R33, 5%, 3/5W, Metal Film.	3198 012 13370
3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3529	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3530	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710

S = Safety Part   Be sure to use exact replacement part.

20DV693R01 (continued)

	Ref	Description	Part No.
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass.	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3831	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3832	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3843	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
	3901	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4837	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4838	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4842	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5242	Coil, 10u, 5%.	3198 018 11090
	5342	Coil, 22u.	2422 535 97333
S	5445	Transformer, LOT	2422 531 02519
	5452	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5453	Coil, 22u, 5%.	3198 018 12290
	5457	Coil, Linear Correction, 82u	2422 536 00425
	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
	5471	Coil, 6u8, 20%	3198 018 76880
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 22u.	2422 535 97333
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04.	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5831	Coil, 6u8, 5%.	3198 018 16880
	5832	Coil, 6u8, 5%.	3198 018 16880
	5833	Coil, 6u8, 5%.	3198 018 16880
	5835	Coil, 12u, 10%	3198 018 31290
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316.	3198 010 10630
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630
	6206	Zener Diode, 6.8 volt.	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316.	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148.	3198 010 10010
	6448	Zener Diode, 6.2 volt.	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6453	Zener Diode, 5.6 volt.	3198 020 55680
	6460	Diode, Rect, BY228/24.	9340 559 50112
	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
	6463	Zener Diode, 8.2 volt.	3198 020 58280
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316.	3198 010 10630
	6468	Diode, Signal, BAS316.	3198 010 10630
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt.	3198 010 25680
	6482	Zener Diode, 9.1 volt.	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYV95C.	9335 001 80133
	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6487	Diode, Rect, BYV95A.	9335 000 90133
	6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667

S = Safety Part   Be sure to use exact replacement part.

20DV693R01 (continued)

S	Ref	Description	Part No.
	6520	Diode, Rect, BYV95A.	9335 000 90133
	6523	Diode, Signal, 1N4148.	3198 010 10010
	6524	Diode, Rect, 1N5062.	3198 010 10120
	6525	Diode, Rect, 1N5062.	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt.	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500.	9340 555 59127
	6562	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6563	Diode, Signal, BAS316.	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148.	3198 010 10010
	6569	Diode, Signal, BAS316.	3198 010 10630
	6570	Zener Diode, 6.8 volt.	3198 020 56880
	6580	Diode, Signal, BAS316.	3198 010 10630
	6831	Diode, Signal, 1N4148.	3198 010 10010
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7102	Transistor, PNP, BC857B(COL)	3198 010 42150
	7103	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9569H/N1/4I/1313.	9352 743 94557
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7450	Transistor, PNP, PDTA114ET	3198 010 44010
	7460	Transistor, NPN, BU4508DX.	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2.	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1.	9352 673 56112
	7521	Power FET, FQPF9N50.	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, L78L33ACZ.	9322 134 92676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C08-WBN6.	9322 154 38682
	7802	IC, HEF4053BT.	9333 729 60653
	7803	IC, HEF4053BT.	9333 729 60653
	7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682
	7901	IC, AN7522N PH	9322 181 41682
	9611	Coil, 27u, 10%	3198 018 22790
	9672	Coil, 22u, 10%	3198 018 22290
	9678	Coil, 22u, 10%	3198 018 22290
	CBA	Main Chassis Assembly.	3139 187 21771
	CBA	DVD Loader SD5.12.	3139 188 55471
	CBA	DVD MPEG Assembly SD5.12	3139 188 55481
	CBA	DVD Module SD5.12 (contains Loader and MPEG Assembly)	4835 310 57599

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

S	Ref	Description	Part No.
	0267	3 Pin Board Connector.	2422 025 09191
	0361	Eject Button	3139 177 63451
	1110	Tact Switch.	2422 128 02742
	CBA	DVD Eject Panel Assembly	3139 187 23311

DVD Interface Panel Parts

DVD Interface Panel Parts

S	Ref	Description	Part No.
	0226	Connector, 6 Pin	2422 025 12482
	0228	Connector, 3 Pin	2412 020 00725
	0251	Connector, 4 Pin	2422 025 15847
	0253	Connector, 7 Pin	2422 025 11244
	0254	Connector, 3 Pin	2422 025 16382
	0266	Connector, 6 Pin	2422 025 15849
	0269	Connector, 5 Pin	2422 025 15848
	1100	Socket, Cinch, 1 Pin	2422 026 04425
	1101	Connector, 8 Pin	2422 025 12483
S	1330	Fuse, 2A, 250V	2422 086 10422
S	1331	Fuse, 2A, 250V	2422 086 10422
S	1332	Fuse, 2A, 250V	2422 086 10421
	2101	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
	2102	Cap, 10u, 20%, 16v, Electrolytic . . .	3198 028 21090
	2103	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
	2104	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2110	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2111	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2112	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2113	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2114	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2185	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2263	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41095
	2300	Cap, 10u, 20%, 250v, Electrolytic. . .	2020 012 93495
	2301	Cap, 22n, 10%, 400v, Metalized Polyeste	2222 365 55223
	2302	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
	2310	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
	2311	Cap, 470n, 10%, 25v, Ceramic	2020 552 96465
	2313	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
	2315	Cap, 220p, 10%, 1KV, Ceramic	3198 019 62210
	2316	Cap, 33n, 10%, 16v, Ceramic.	3198 017 33330
	2319	Cap, 220n, +80/-20%, 25v, Ceramic. . .	3198 023 22240
	2330	Cap, 2u2, 20%, 25v, Electrolytic . . .	3198 026 32220
	2331	Cap, 470u, 20%, 10v, Electrolytic. . .	3198 025 14710
	2332	Cap, 2u2, 20%, 25v, Electrolytic . . .	3198 026 32220
	2333	Cap, 1000u, 20%, 10v, Electrolytic . .	2020 021 91631
	2337	Cap, 1000u, 20%, 25v, Electrolytic . .	3198 026 31020
	2338	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
	2339	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
	2341	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2342	Cap, 47u, 20%, 16v, Electrolytic . . .	3198 028 24790
	2350	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2351	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2353	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	3101	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3102	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
	3110	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3111	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3112	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3113	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3114	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3115	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3116	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3117	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3118	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3180	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3182	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3262	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3266	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
S	3300	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S	3301	Power Resistor, 68K, 5%, 2W.	3198 012 26830
	3308	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3309	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3310	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3311	Res, 180 ohm, 5%, 1/16W, Metalized Glas	3198 021 31810
	3312	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
	3313	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3314	Res, 1 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01080
	3315	Res, 1 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01080
	3317	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3318	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3319	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3320	Res, 100K, 1%, 1/16W, Metalized Glass.	2322 704 61004
	3339	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3340	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3342	Res, 4K7, 1%, 1/16W, Metalized Glass .	2322 704 64702
	3344	Res, 4K7, 1%, 1/16W, Metalized Glass .	2322 704 64702
	3360	Res, 4R7, 5%, 1/16W, Metalized Glass .	3198 021 34780
	3361	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	4105	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4106	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4185	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4226	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4261	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4265	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	4266	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4316	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4342	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4343	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4361	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4363	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4364	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	5100	Inductor, Variable, 100uH, 10%	2422 549 41663
	5110	Coil, 220n	3198 018 12270
	5300	Coil, 27u.	3198 018 22790
	5301	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
S	5315	Transformer, SS25113-00.	2422 531 02596
	5331	Coil, 10u, 5%.	2422 535 95363
	5333	Coil, 10u, 5%.	2422 535 95363
	5337	Coil, 10u, 10%	2422 535 97328
	5339	Coil, 10u, 10%	2422 535 97328
	6100	Diode, Signal, BAS316.	3198 010 10630
	6101	Diode, Signal, BAS316.	3198 010 10630
	6300	Diode, Rect, BYD33J	9337 234 20133
	6311	Diode, Signal, BAS316.	3198 010 10630

S = Safety Part   Be sure to use exact replacement part.

20DV693R01 (continued)

```
  6312   Zener Diode, 22 volt . . . . . . . . .  3198 020 52290
  6330   Diode, Rect,  EGP20DL-5100 . . . . . .  9322 164 42682
  6332   Diode, Rect,  SB340L-7024. . . . . . .  9322 161 76682
  6336   Diode, Rect,  BYV27-200. . . . . . . .  9335 526 80133
  7110   IC, HEF4053BT. . . . . . . . . . . . .  9333 729 60653
  7262   Transistor, NPN, PDTC124ET . . . . . .  9340 310 20215
  7310   Transistor, NPN, PDTC114ET . . . . . .  3198 010 44110
  7311   Transistor, PNP, PDTA114ET . . . . . .  3198 010 44010
  7312   Transistor, PNP, BC857B. . . . . . . .  3198 010 42150
  7313   Transistor, NPN, BC847B. . . . . . . .  3198 010 42030
  7315   IC, TEA1523P/N2. . . . . . . . . . . .  9352 699 68112
S 7340   Optical Coupler, TCET1103(G) . . . . .  9322 140 14667
  7341   IC, TL431CLP . . . . . . . . . . . . .  9337 711 00676
  9110   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9111   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9183   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9266   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9315   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9350   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9351   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9352   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9355   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9357   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  CBA    DVD Interface Panel Assembly . . . . .  3139 187 20761
```

Front Interface Panel Parts

```
         Front Interface Panel Parts
S 0211   2 Pin Connector. . . . . . . . . . . .  2422 025 16268
S 0212   2 Pin Connector. . . . . . . . . . . .  2422 025 16559
  0214   5 Pin Connector. . . . . . . . . . . .  2422 025 06353
  1606   Tact Switch. . . . . . . . . . . . . .  2422 128 02742
  2691   Cap, 220u, 20%, 25v, Electrolytic. . .  3198 025 32210
  2692   Cap, 47n, 10%, 25v, Ceramic. . . . . .  3198 023 04730
  2693   Cap, 47n, 10%, 25v, Ceramic. . . . . .  3198 023 04730
  2694   Cap, 47n, 10%, 25v, Ceramic. . . . . .  3198 023 04730
  2695   Cap, 47n, 10%, 25v, Ceramic. . . . . .  3198 023 04730
  2698   Cap, 100n, 10%, 50v, Polyester . . . .  3198 014 01040
S 3500   Res, 3M3, 5%, 1/2W, Metalized Glass. .  2322 242 13335
S 3501   Res, 3M3, 5%, 1/2W, Metalized Glass. .  2322 242 13335
  3685   Res, 560 ohm, 5%, 1/6W, Carbon Film. .  3198 011 05610
  3691   Res, 330 ohm, 5%, 1/6W, Carbon Film. .  3198 011 03310
  3693   Res, 220 ohm, 5%, 1/6W, Carbon Film. .  3198 011 02210
  6691   LED, LTL-10234WHCR . . . . . . . . . .  9322 185 69682
  6692   IR Receiver, TSOP1836UH3V. . . . . . .  9322 127 54667
  9001   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9002   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  CBA    Front Interface Panel Assembly . . . .  3139 177 26211
```

ITV Front Jack Panel Parts

```
         ITV Front Jack Panel Parts
```

Net 1 Panel (part of Scan 4 Card Assembly)

```
         Net 1 Panel (part of Scan 4 Card Assemb
         ly)
```

Scan 4 Card (part of Scan 4 Card Assembly)

```
         Scan 4 Card (part of Scan 4 Card Assemb
         ly)
```

Side Jack Panel Parts

```
         Side Jack Panel Parts
  0232   Headphone Jack . . . . . . . . . . . .  2422 026 04747
  0250   A/V Jack . . . . . . . . . . . . . . .  2422 026 04815
  0251   6 Pin Connector. . . . . . . . . . . .  2422 025 15849
  0254   5 Pin Connector. . . . . . . . . . . .  2422 025 12481
  0255   4 Pin Connector. . . . . . . . . . . .  2422 025 12479
  2171   Cap, 470p, 5%, 50v, Ceramic. . . . . .  3198 019 14710
  2172   Cap, 470p, 5%, 50v, Ceramic. . . . . .  3198 019 14710
  2173   Cap, 470p, 5%, 50v, Ceramic. . . . . .  3198 019 14710
  2174   Cap, 470p, 5%, 50v, Ceramic. . . . . .  3198 019 14710
  2176   Cap, 470p, 5%, 50v, Ceramic. . . . . .  3198 019 14710
  2177   Cap, 10u, 20%, 50v, Electrolytic . . .  3198 025 51090
  2178   Cap, 470p, 5%, 50v, Ceramic. . . . . .  3198 019 14710
  2179   Cap, 10u, 20%, 50v, Electrolytic . . .  3198 025 51090
  3150   Res, 47k, 5%, 1/6W, Carbon . . . . . .  3198 011 04730
  3151   Res, 150 ohm, 5%, 1/6W, Carbon . . . .  3198 011 01510
  3152   Res, 47k, 5%, 1/6W, Carbon . . . . . .  3198 011 04730
  3153   Res, 150 ohm, 5%, 1/6W, Carbon . . . .  3198 011 01510
  3156   Res, 120 ohm, 5%, 1/6W, Carbon Film. .  3198 011 01210
  3157   Res, 120 ohm, 5%, 1/6W, Carbon Film. .  3198 011 01210
  6161   Zener Diode, 6.8 volt. . . . . . . . .  3198 010 26880
  9153   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9170   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9171   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  CBA    Side Jack Panel Assembly . . . . . . .  3139 188 03541
```

Subwoofer Panel Parts

```
         Subwoofer Panel Parts
```

Top Control Panel Parts

```
         Top Control Panel Parts
  0215   3 Pin Connector. . . . . . . . . . . .  2422 025 16601
  1091   Tact Switch. . . . . . . . . . . . . .  2422 128 02742
  1092   Tact Switch. . . . . . . . . . . . . .  2422 128 02742
  1093   Tact Switch. . . . . . . . . . . . . .  2422 128 02742
  1094   Tact Switch. . . . . . . . . . . . . .  2422 128 02742
  3091   Res, 560 ohm, 5%, Metalized Glass. . .  3198 021 35610
  3092   Res, 390 ohm, 5%, 1/16W, Metalized Glas 3198 021 33910
  3093   Res, 560 ohm, 5%, Metalized Glass. . .  3198 021 35610
  3094   Res, 390 ohm, 5%, 1/16W, Metalized Glas 3198 021 33910
  3095   Res, 3K3, 5%, 1/16W, Metalized Glass .  3198 021 33320
  3096   Res, 1K5, 5%, 1/16W, Metalized Glass .  3198 021 31520
  4085   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90020
  4089   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90030
  4090   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90030
  6091   Diode, Signal. . . . . . . . . . . . .  9340 453 90115
  CBA    Top Control Panel Assembly . . . . . .  3139 187 15841
```

Cabinet & Accessory Parts

```
         Cabinet & Accessory Parts
S AC01   AC Cord. . . . . . . . . . . . . . . .  3139 177 25821
  AC04   Batteries for Remote Control Transmitte 9299 000 65263
  AC05   Cabinet Back . . . . . . . . . . . . .  3139 124 45831
  AC06   Cabinet Back Screw Cover (2 Used). . .  3139 124 42891
S AC09   CRT, A51ERF135X82. . . . . . . . . . .  9301 903 81343
S AC12   Degaussing Coil. . . . . . . . . . . .  3141 058 20131
  AC13   Front Interface Panel Bracket. . . . .  3139 124 32891
  AC14   Front Main PCB Bracket . . . . . . . .  3139 124 45641
  AC17   Owner's Manual . . . . . . . . . . . .  3141 055 22221
  AC17   Owner's Manual, French . . . . . . . .  3141 055 22251
  AC19   Side Jack Panel Bracket. . . . . . . .  3139 124 37061
  AC20A  Cabinet Front. . . . . . . . . . . . .  3139 177 53981
  AC20B  Chassis Guide. . . . . . . . . . . . .  3139 124 25893
  AC20B  Chassis Guide. . . . . . . . . . . . .  3139 124 45661
  AC20C  Light Guide. . . . . . . . . . . . . .  3139 124 41421
  AC20D  Nameplate. . . . . . . . . . . . . . .  3139 120 01371
  AC20E  Power Button . . . . . . . . . . . . .  3139 177 58491
  AC20H  Speaker, 16 ohm, 5W (2 Used) . . . . .  2422 264 00411
  AC20J  Top Control Assembly . . . . . . . . .  3139 177 56381
  AC20J1 Top Control Bracket. . . . . . . . . .  3139 124 39172
  AC20J2 Top Control Buttons. . . . . . . . . .  3139 124 39182
  AC23   DVD Door . . . . . . . . . . . . . . .  3139 177 63441
  AC24   DVD Interface Panel Bracket. . . . . .  3139 124 43291
  REMOTE Remote Control Transmitter, RC19042007/
         01. . . . . . . . . . . . . . . . . . . 3128 147 14521
```

S = Safety Part   Be sure to use exact replacement part.

20DV693R02 - Manual no. 7638

Main Chassis Parts

Main Chassis Parts

S	Ref	Description	Part No.
	0211	2 Pin Connector.	2422 025 16374
	0212	2 Pin Connector.	2422 025 16375
	0214	5 Pin Connector.	2422 025 12481
	0217	3 Pin Connector.	2412 020 00725
	0219	6 Pin Connector.	2422 025 12482
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0222	2 Pin Connector.	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0227	3 Pin Connector.	2422 025 16382
	0229	7 Pin Connector.	2422 025 11244
	0239	3 Pin Connector.	2422 025 16382
	0240	4 Pin Connector.	2422 025 12479
	0243	6 Pin Connector.	2422 025 04854
	0244	5 Pin Connector.	2422 025 04853
	0245	6 Pin Connector.	2422 025 04854
	0246	5 Pin Connector.	2422 025 12481
	0251	4 Pin Connector.	2422 025 15847
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector.	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U, PLL	2422 542 90108
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07467
	1660	Crystal, 12MHz000	2422 543 01203
	1810	6 Pin Connector.	2422 025 15849
	1831	Crystal, Resonator, 18MHz432, 12 Pin, HC49/U A.	2422 543 00842
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic.	2022 031 00103
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 270n, 5%, 250v, Metalized Polypropylene.	2222 479 90016
	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2022 031 00138
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
	2463	Cap, 680p, 10%, 2000v, Ceramic	2020 558 90485
	2465	Cap, 9n1, 5%, 1600v, Polypropylene	2222 375 90153
	2467	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2468	Cap, 33n, 10%, 400v, Polyester	2222 347 90227
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2038 035 13301
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2022 031 00137
	2486	Cap, 470u, 20%, 16v, Electrolytic.	2022 031 00139
	2487	Cap, 47u, 20%, 50v, Electrolytic	2038 035 13508
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2022 031 00144
	2489	Cap, 470u, 20%, 16v, Electrolytic.	2022 031 00139
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2222 336 29148
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90626
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90128
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
	2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
	2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
	2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
	2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
	2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2837	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2840	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2841	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090

S = Safety Part Be sure to use exact replacement part.

20DV693R02 (continued)

	Ref	Description	Part No.
	2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2843	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2844	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2846	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
	2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
	2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
	2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610
	2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910
	2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
	2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
	2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2910	Cap, 3n3, 10%, 63v, Ceramic.	3198 017 03320
	2911	Cap, 3n3, 10%, 63v, Ceramic.	3198 017 03320
	2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
	3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
	3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
	3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202
	3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
	3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
	3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
	3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3247	Res, 270K, 5%, 1/16W, Metalized Glass.	2322 702 60274
	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3443	Res, 1M, 5%, 1/10W, Metalized Glass. .	3198 021 51050
	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
	3452	Res, 3K6, 1%, 3/5W, Metal Film	2312 915 13602
	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3454	Res, 1K5, 1%, 3/5W, Metal Film	2312 915 11502
S	3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
	3456	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3457	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S	3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
	3470	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
	3472	Res, 6R8, 1%, 3/5W, Metal Film	2312 915 16808
	3473	Res, 6R8, 1%, 3/5W, Metal Film	2312 915 16808
	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
	3481	Res, 18K, 1%, 3/5W, Metal Film	2312 915 11803
	3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3491	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3495	Res, 22K, 5%, 1/10W, Metalized Glass .	3198 021 52230
	3496	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
	3497	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
	3498	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
S	3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620

S = Safety Part   Be sure to use exact replacement part.

20DV693R02 (continued)

	Ref	Description	Part No.
S	3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3831	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3843	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4837	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4838	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5242	Coil, 10u, 5%.	3198 018 11090
	5342	Coil, 22u.	2422 535 97333
S	5445	Transformer, LOT	2422 531 02519
	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5453	Coil, 22u, 5%.	3198 018 12290
	5457	Coil, Linear Correction, 82u	2422 536 00425
	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
	5471	Coil, 6u8, 20%	3198 018 76880
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 22u.	2422 535 97333
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04.	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5831	Coil, 6u8, 5%.	3198 018 16880
	5832	Coil, 6u8, 5%.	3198 018 16880
	5833	Coil, 6u8, 5%.	3198 018 16880
	5835	Coil, 12u, 10%	3198 018 31290
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316.	3198 010 10630
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630
	6206	Zener Diode, 6.8 volt.	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316.	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148.	3198 010 10010
	6448	Zener Diode, 6.2 volt.	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6453	Zener Diode, 5.6 volt.	3198 020 55680
	6460	Diode, Rect, BY228/24.	9340 559 50112
	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
	6463	Zener Diode, 8.2 volt.	3198 020 58280
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316.	3198 010 10630
	6468	Diode, Signal, BAS316.	3198 010 10630
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt.	3198 010 25680
	6482	Zener Diode, 9.1 volt.	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYV95C.	9335 001 80133
	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6487	Diode, Rect, BYV95A.	9335 000 90133
	6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6500	Diode, Bridge Rect, GBU6JL-7002. . . .	9322 138 08667
	6520	Diode, Rect, BYV95A.	9335 000 90133
	6523	Diode, Signal, 1N4148.	3198 010 10010
	6524	Diode, Rect, 1N5062.	3198 010 10120
	6525	Diode, Rect, 1N5062.	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt.	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500.	9340 555 59127
	6562	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6563	Diode, Signal, BAS316.	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215

S = Safety Part   Be sure to use exact replacement part.

20DV693R02 (continued)

	Ref	Description	Part No.
	6566	Diode, Signal, 1N4148.	3198 010 10010
	6569	Diode, Signal, BAS316.	3198 010 10630
	6570	Zener Diode, 6.8 volt.	3198 020 56880
	6580	Diode, Signal, BAS316.	3198 010 10630
	6831	Diode, Signal, 1N4148.	3198 010 10010
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7102	Transistor, PNP, BC857B(COL)	3198 010 42150
	7103	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9569H/N1/4I/1161.	9352 733 51557
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7450	Transistor, PNP, PDTA114ET	3198 010 44010
	7460	Transistor, NPN, BU4508DX.	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2.	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1.	9352 673 56112
	7521	Power FET, FQPF9N50.	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, L78L33ACZ.	9322 134 92676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C08-WBN6.	9322 154 38682
	7802	IC, HEF4053BT.	9333 729 60653
	7803	IC, HEF4053BT.	9333 729 60653
	7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682
	7901	IC, AN7522N PH	9322 181 41682
	9611	Coil, 27u, 10%	3198 018 22790
	9672	Coil, 22u, 10%	3198 018 22290
	9678	Coil, 22u, 10%	3198 018 22290
	CBA	Main Chassis Assembly.	3139 188 04071
	CBA	DVD Module SD3.1	3139 248 71141

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

	Ref	Description	Part No.
	0267	3 Pin Board Connector.	2422 025 09191
	0361	Eject Button	3139 138 11271
	1110	Tact Switch.	2422 128 02742
	CBA	DVD Eject Panel Assembly	3139 188 03391

DVD Interface Panel Parts

DVD Interface Panel Parts

	Ref	Description	Part No.
	0226	Connector, 6 Pin	2422 025 12482
	0251	Connector, 4 Pin	2422 025 15847
	0253	Connector, 7 Pin	2422 025 11244
	0254	Connector, 22 Pin.	2422 025 16526
	0255	Connector, 16 Pin.	2422 025 16525
	0265	Connector, 12 Pin.	2422 025 08333
	0266	Connector, 6 Pin	2422 025 15849
	1100	Socket, Cinch, 1 Pin	2422 026 04425
S	1330	Fuse, 2.5A, 250V	2422 086 10784
S	1331	Fuse, 2.5A, 250V	2422 086 10784
S	1332	Fuse, 2A, 250V IEC	2422 086 10783
	1619	Connector, 4 Pin	2422 025 15847
	2101	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
	2102	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
	2103	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
	2104	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2110	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2111	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
	2112	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
	2113	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
	2115	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
	2120	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2121	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2122	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2123	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2124	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
	2125	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2126	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
	2127	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
	2128	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2140	Cap, 100u, 20%, 16V, Electrolytic.	3198 029 21010
	2141	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
	2142	Cap, 100u, 20%, 16V, Electrolytic.	3198 029 21010
	2143	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
	2165	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
	2169	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
	2184	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
	2185	Cap, 1u, +80/-20%, 10V, Ceramic.	3198 017 41050
	2200	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2201	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
	2211	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2261	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
	2262	Cap, 10n, 10%, 50V, Ceramic.	3198 017 31030
	2263	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2264	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2265	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2266	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2267	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2268	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
	2280	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
	2281	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
	2300	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
	2301	Cap, 22n, 10%, 400v, Metalized Polyeste	2222 365 55223
	2302	Cap, 330p, 10%, 1KV, Ceramic	3198 019 53310
	2310	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
	2311	Cap, 470n, 10%, 25v, Ceramic	2020 552 96465
	2313	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
	2315	Cap, 220p, 10%, 1KV, Ceramic	3198 019 62210
	2316	Cap, 33n, 10%, 16v, Ceramic.	3198 017 33330
	2330	Cap, 2u2, 20%, 25v, Electrolytic	3198 026 32220
	2331	Cap, 470u, 20%, 10v, Electrolytic.	3198 025 14710
	2332	Cap, 2u2, 20%, 25v, Electrolytic	3198 026 32220
	2333	Cap, 470u, 20%, 10v, Electrolytic.	3198 025 14710
	2335	Cap, 220u, 20%, 25V, Electrolytic.	3198 025 32210
	2337	Cap, 1000u, 20%, 25v, Electrolytic	3198 026 31020
	2338	Cap, 1000u, 20%, 25v, Electrolytic	3198 026 31020
	2341	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2350	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2351	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2353	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	3101	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3102	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
	3110	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3111	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3112	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3113	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3114	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3115	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3116	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3117	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3120	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3121	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3122	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3123	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3124	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3125	Res, 5K6, 5%, 1/16W, Metalized Glass .	3198 021 35620
	3126	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3130	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
	3140	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3141	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3142	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3143	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
	3145	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3146	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3147	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3148	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
	3180	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3182	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3200	Res, 270 ohm, 5%, 1/16W, Metalized Glas	3198 021 32710
	3201	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3202	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3203	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198 021 36820
	3204	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
	3205	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3206	Res, 680 ohm, 5%, 1/16W, Metalized Glas	3198 021 36810
	3207	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3208	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3209	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3210	Res, 270 ohm, 5%, 1/16W, Metalized Glas	3198 021 32710
	3211	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3212	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3213	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198 021 36820
	3214	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
	3215	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3216	Res, 680 ohm, 5%, 1/16W, Metalized Glas	3198 021 36810
	3217	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3218	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3219	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3230	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3231	Res, 24K, 1%, 1/16W, Metalized Glass .	2322 704 62403

S = Safety Part   Be sure to use exact replacement part.

20DV693R02 (continued)

S	Ref	Description	Part No.
	3232	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
	3233	Res, 24K, 1%, 1/16W, Metalized Glass	2322 704 62403
S	3300	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
S	3301	Power Resistor, 68K, 5%, 2W.	3198 012 26830
	3308	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3309	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3310	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3311	Res, 180 ohm, 5%, 1/16W, Metalized Glas	3198 021 31810
	3312	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
	3313	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3314	Res, 1 ohm, 5%, 1/6W, Carbon Film.	3198 011 01080
	3315	Res, 1 ohm, 5%, 1/6W, Carbon Film.	3198 011 01080
	3317	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3318	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3319	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3320	Res, 75K, 1%, 1/16W, Metalized Glass	2322 704 67503
	3330	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
S	3331	Res, 10 ohm, 5%, 2 1/2W, Metal Film.	3198 012 31090
	3339	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3340	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3342	Res, 1K5, 1%, 1/16W, Metalized Glass	2322 704 61502
	3344	Res, 4K7, 1%, 1/16W, Metalized Glass	2322 704 64702
	3350	Res, 18K, 5%, 1/6W, Carbon Film.	3198 011 01830
	3351	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3360	Res, 4R7, 5%, 1/16W, Metalized Glass	3198 021 34780
	3406	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3466	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	4100	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4102	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4142	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4150	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4162	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4185	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4336	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4463	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4466	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	5100	Inductor, Variable, 100uH, 10%	2422 549 41663
	5110	Coil, 220n	3198 018 12270
	5120	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5140	Coil, 220n	3198 018 12270
	5141	Coil, 220n	3198 018 12270
	5200	Coil, 6u8.	3198 018 16880
	5300	Coil, 56u.	3198 018 25690
	5301	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
S	5315	Transformer, SS25105-02.	2422 531 02521
	5331	Coil, 10u, 5%.	2422 535 95363
	5333	Coil, 10u, 5%.	2422 535 95363
	5337	Coil, 10u.	2422 535 95363
	6120	Diode, Signal, BAS316.	3198 010 10630
	6300	Diode, Rect, BYD33J	9337 234 20133
	6311	Diode, Signal, BAS316.	3198 010 10630
	6312	Zener Diode, 22 volt	3198 020 52290
	6330	Diode, Rect, EGP20DL-5100	9322 164 42682
	6332	Diode, Rect, SB340L-7024.	9322 161 76682
	6334	Diode, Rect, BYD33D	9337 234 00133
	6336	Diode, Rect, BYV27-200.	9335 526 80133
	6350	Zener Diode, 12 volt	3198 020 51290
	7110	IC, HEF4053BT.	9333 729 60653
	7120	IC, UDA1334BT/N2	9352 703 94118
	7140	Transistor, NPN, BC847B.	3198 010 42030
	7142	Transistor, NPN, BC847B.	3198 010 42030
	7200	Transistor, NPN, BC847B.	3198 010 42030
	7201	Transistor, PNP, BC857B.	3198 010 42150
	7202	Transistor, NPN, BC847B.	3198 010 42030
	7210	Transistor, NPN, BC847B.	3198 010 42030
	7211	Transistor, PNP, BC857B.	3198 010 42150
	7212	Transistor, NPN, BC847B.	3198 010 42030
	7262	Transistor, NPN, PDTC124ET	9340 310 20215
	7280	IC, L78L08ACZ.	9322 130 67676
	7310	Transistor, NPN, PDTC114ET	3198 010 44110
	7311	Transistor, PNP, PDTA114ET	3198 010 44010
	7312	Transistor, PNP, BC857B.	3198 010 42150
	7313	Transistor, NPN, BC847B.	3198 010 42030
	7315	IC, TEA1523P/N2.	9352 699 68112
S	7340	Optical Coupler, TCET1103(G)	9322 140 14667
	7341	IC, TL431CLP	9337 711 00676
	7350	Transistor, FET, SI2306DS.	9322 163 75685
	7351	Transistor, NPN, PDTC144ET	3198 010 44130
	CBA	DVD Interface Panel Assembly	3139 188 03291

Front Interface Panel Parts

Front Interface Panel Parts

S	Ref	Description	Part No.
S	0211	2 Pin Connector.	2422 025 16268
S	0212	2 Pin Connector.	2422 025 16559
	0214	5 Pin Connector.	2422 025 06353
	1606	Tact Switch.	2422 128 02742
	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2692	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
	2693	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
	2694	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
	2695	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
	2698	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
S	3500	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322 242 13335
S	3501	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322 242 13335
	3685	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
	3691	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
	3693	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
	6691	LED, LTL-10234WHCR	9322 185 69682
	6692	IR Receiver, TSOP1836UH3V.	9322 127 54667
	9001	Wire Jumper.	3198 036 90010
	9002	Wire Jumper.	3198 036 90010
	CBA	Front Interface Panel Assembly	3139 177 26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts

Side Jack Panel Parts

S	Ref	Description	Part No.
	0232	Headphone Jack	2422 026 04747
	0250	A/V Jack	2422 026 04815
	0251	6 Pin Connector.	2422 025 15849
	0254	5 Pin Connector.	2422 025 12481
	0255	4 Pin Connector.	2422 025 12479
	2171	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
	2172	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
	2173	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
	2174	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
	2176	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
	2177	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2178	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
	2179	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	3150	Res, 47k, 5%, 1/6W, Carbon	3198 011 04730
	3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
	3152	Res, 47k, 5%, 1/6W, Carbon	3198 011 04730
	3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
	3156	Res, 120 ohm, 5%, 1/6W, Carbon Film.	3198 011 01210
	3157	Res, 120 ohm, 5%, 1/6W, Carbon Film.	3198 011 01210
	6161	Zener Diode, 6.8 volt.	3198 010 26880
	9153	Wire Jumper.	3198 036 90010
	9170	Wire Jumper.	3198 036 90010
	9171	Wire Jumper.	3198 036 90010
	CBA	Side Jack Panel Assembly	3139 188 03541

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

S	Ref	Description	Part No.
	0215	3 Pin Connector.	2422 025 16601
	1091	Tact Switch.	2422 128 02742
	1092	Tact Switch.	2422 128 02742
	1093	Tact Switch.	2422 128 02742
	1094	Tact Switch.	2422 128 02742
	3091	Res, 560 ohm, 5%, Metalized Glass.	3198 021 35610
	3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
	3093	Res, 560 ohm, 5%, Metalized Glass.	3198 021 35610
	3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
	3095	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3096	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
	4085	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4089	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4090	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	6091	Diode, Signal.	9340 453 90115
	CBA	Top Control Panel Assembly	3139 187 15841

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S	Ref	Description	Part No.
S	AC01	AC Cord.	3135 010 03831
	AC04	Batteries for Remote Control Transmitte	9299 000 65263
	AC05	Cabinet Back	3139 124 45831
	AC06	Cabinet Back Screw Cover (2 Used).	3139 124 42891
S	AC09	CRT, A51ERF135X82.	9301 903 81343
S	AC12	Degaussing Coil.	3141 058 20131
	AC13	Front Interface Panel Bracket.	3139 124 32891
	AC14	Front Main PCB Bracket	3139 124 45641
	AC17	Owner's Manual	3139 125 31451
	AC18	Quick Use Guide.	3141 055 52361
	AC19	Side Jack Panel Bracket.	3139 124 37061
	AC20A	Cabinet Front.	3139 177 53981
	AC20B	Chassis Guide.	3139 124 25893
	AC20B	Chassis Guide.	3139 124 45661
	AC20C	Light Guide.	3139 124 41421
	AC20D	Nameplate.	3139 120 01371
	AC20E	Power Button	3139 177 58491

S = Safety Part   Be sure to use exact replacement part.

20DV693R02 (continued)

AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00411
AC20J	Top Control Assembly	3139 138 11451
AC23	DVD Door	3139 138 11281
AC25	DVD PIP Bracket.	3139 124 35571
REMOTE	Remote Control Transmitter, RC19042007/ 01.	3128 147 14521

20MS334R/37 - Manual no. 7638

Main Chassis Parts

S	Ref	Description	Part No.
		Main Chassis Parts	
	0211	2 Pin Connector	2422 025 16269
	0212	2 Pin Connector	2422 025 16375
	0218	A/V Jack	2422 026 04742
	0220	5 Pin Connector	2422 025 04853
	0221	2 Pin Connector	2422 025 15503
	0222	2 Pin Connector	2422 025 10646
	0232	Headphone Jack	2422 026 04747
	0243	6 Pin Connector	2422 025 04854
	0244	5 Pin Connector	2422 025 04853
	0245	6 Pin Connector	2422 025 04854
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector	2412 020 00725
	0280	4 Pin Connector	2422 025 12479
S	1000	Tuner, V+U, PLL	2422 542 90108
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07467
	1600	Tact Switch	2422 128 02742
	1601	Tact Switch	2422 128 02742
	1602	Tact Switch	2422 128 02742
	1603	Tact Switch	2422 128 02742
	1606	Tact Switch	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2181	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2182	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2183	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic.	2022 031 00103
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 270n, 5%, 250v, Metalized Polypropylene.	2222 479 90016
	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2022 031 00138
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
	2463	Cap, 680p, 10%, 2000v, Ceramic	2020 558 90485
	2465	Cap, 9n1, 5%, 1600v, Polypropylene	2222 375 90153
	2467	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2468	Cap, 33n, 10%, 400v, Polyester	2222 347 90227
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2038 035 13301
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2022 031 00137
	2486	Cap, 470u, 20%, 16v, Electrolytic.	2022 031 00139
	2487	Cap, 47u, 20%, 50v, Electrolytic	2038 035 13508
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2022 031 00144
	2489	Cap, 470u, 20%, 16v, Electrolytic.	2022 031 00139
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2222 336 29148
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90626
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90128
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2803	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2862	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2864	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2865	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2866	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
	2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
	2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
	2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
	2873	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2874	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
	2875	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
	2876	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2877	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2878	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2883	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710
	2884	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240
	2886	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2902	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
	2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 580 15624
	2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
	2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 580 15624
	2908	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
	2981	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2982	Cap, 470p, 10%, 50v, Ceramic	3198 017 34710
	2983	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2984	Cap, 470p, 10%, 50v, Ceramic	3198 017 34710

S = Safety Part   Be sure to use exact replacement part.

20MS334R/37 (continued)

S	Ref	Description	Part No.
	3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3184	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3185	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3186	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3187	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
	3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
	3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
	3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
	3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3247	Res, 270K, 5%, 1/16W, Metalized Glass.	2322 702 60274
	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3443	Res, 1M, 5%, 1/10W, Metalized Glass. .	3198 021 51050
	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
	3452	Res, 3K6, 1%, 3/5W, Metal Film	2312 915 13602
	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3454	Res, 1K5, 1%, 3/5W, Metal Film	2312 915 11502
S	3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
	3456	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3457	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S	3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
	3470	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
	3472	Res, 6R8, 1%, 3/5W, Metal Film	2312 915 16808
	3473	Res, 6R8, 1%, 3/5W, Metal Film	2312 915 16808
	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
	3481	Res, 18K, 1%, 3/5W, Metal Film	2312 915 11803
	3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3491	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3495	Res, 22K, 5%, 1/10W, Metalized Glass .	3198 021 52230
	3496	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
	3497	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
	3498	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S	3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3637	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198 021 53320
	3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198 021 31530
	3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198 021 31220
	3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	3981	Res, 120 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01210

S = Safety Part   Be sure to use exact replacement part.

20MS334R/37 (continued)

S	Ref	Description	Part No.
	3982	Res, 120 ohm, 5%, 1/6W, Carbon Film.	3198 011 01210
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4808	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4817	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4819	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5242	Coil, 10u, 5%.	3198 018 11090
	5342	Coil, 22u.	2422 535 97333
S	5445	Transformer, LOT	2422 531 02519
	5452	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5453	Coil, 22u, 5%.	3198 018 12290
	5457	Coil, Linear Correction, 82u	2422 536 00425
	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
	5471	Coil, 6u8, 20%	3198 018 76880
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 22u.	2422 535 97333
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04.	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5861	Coil, 10u, 5%.	3198 018 11090
	6001	Zener Diode, 33 volt	3198 010 23390
	6181	Zener Diode, 6.8 volt.	3198 020 56880
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630
	6206	Zener Diode, 6.8 volt.	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316.	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148.	3198 010 10010
	6448	Zener Diode, 6.2 volt.	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6453	Zener Diode, 5.6 volt.	3198 020 55680
	6460	Diode, Rect, BY228/24.	9340 559 50112
	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
	6463	Zener Diode, 8.2 volt.	3198 020 58280
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316.	3198 010 10630
	6468	Diode, Signal, BAS316.	3198 010 10630
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt.	3198 010 25680
	6482	Zener Diode, 9.1 volt.	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYV95C.	9335 001 80133
	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6487	Diode, Rect, BYV95A.	9335 000 90133
	6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667
	6520	Diode, Rect, BYV95A.	9335 000 90133
	6523	Diode, Signal, 1N4148.	3198 010 10010
	6524	Diode, Rect, 1N5062.	3198 010 10120
	6525	Diode, Rect, 1N5062.	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt.	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500.	9340 555 59127
	6562	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6563	Diode, Signal, BAS316.	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148.	3198 010 10010
	6569	Diode, Signal, BAS316.	3198 010 10630
	6570	Zener Diode, 6.8 volt.	3198 020 56880
	6580	Diode, Signal, BAS316.	3198 010 10630
	6681	Diode, Signal, BAT85	9336 247 60133
	6691	LED, LTL-10234WHCR	9322 185 69682
	6692	IR Receiver.	9322 127 54667
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7200	IC, TDA9587H/N1/3I/1136.	9352 731 64557
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7450	Transistor, PNP, PDTA114ET	3198 010 44010
	7460	Transistor, NPN, BU4508DX.	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2.	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1.	9352 673 56112
	7521	Power FET, FQPF9N50.	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, L78L33ACZ.	9322 134 92676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C08-WBN6.	9322 154 38682
	7861	IC, TDA9853H/V1.	9352 671 19557
	7901	IC, AN7522N PH	9322 181 41682
	9611	Coil, 27u, 10%	3198 018 22790
	9672	Coil, 22u, 10%	3198 018 22290
	9678	Coil, 22u, 10%	3198 018 22290
	CBA	Main Chassis Assembly.	3141 058 59121

Channel One Card Parts
Channel One Card Parts

2D 3 Line Comb Filter Parts
2D 3 Line Comb Filter Parts

DAF Panel Parts
DAF Panel Parts

DVD Eject Panel Parts
DVD Eject Panel Parts

DVD Interface Panel Parts
DVD Interface Panel Parts

Front Interface Panel Parts
Front Interface Panel Parts

ITV Front Jack Panel Parts
ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)
Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)
Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts
Side Jack Panel Parts

Subwoofer Panel Parts
Subwoofer Panel Parts

S = Safety Part   Be sure to use exact replacement part.

20MS334R/37 (continued)

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

	Ref	Description	Part No.
S	AC01	AC Cord.	3139 128 76161
	AC04	Batteries for Remote Control Transmitte	9082 100 90002
	AC05	Cabinet Back	3139 124 46481
S	AC09	CRT, A51ERF135X82.	9301 903 81343
	AC10	Customer Control Buttons	3139 137 94241
S	AC12	Degaussing Coil.	3141 058 20131
	AC17	Owner's Manual	3141 055 21471
	AC20A	Cabinet Front.	3139 177 67451
	AC20B	Chassis Guide.	3139 124 30812
	AC20C	Light Guide.	3139 124 32221
	AC20D	Nameplate.	3141 050 00331
	AC20E	Power Button	3139 137 94231
	AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00411
	AC22	Cinch Cover.	3139 124 25551
	REMOTE	Remote Control Transmitter, RC1112917/1 7A.	3139 238 04701

S = Safety Part   Be sure to use exact replacement part.

20MS334R01 - Manual no. 7638

Main Chassis Parts

S	Ref	Description	Part No.
		Main Chassis Parts	
	0211	2 Pin Connector.	2422 025 16269
	0212	2 Pin Connector.	2422 025 16375
	0218	A/V Jack	2422 026 04742
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0222	2 Pin Connector.	2422 025 10646
	0232	Headphone Jack	2422 026 04747
	0243	6 Pin Connector.	2422 025 04854
	0244	5 Pin Connector.	2422 025 04853
	0245	6 Pin Connector.	2422 025 04854
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector.	2412 020 00725
	0280	4 Pin Connector.	2422 025 12479
S	1000	Tuner, V+U, PLL	2422 542 90108
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07467
	1600	Tact Switch.	2422 128 02742
	1601	Tact Switch.	2422 128 02742
	1602	Tact Switch.	2422 128 02742
	1603	Tact Switch.	2422 128 02742
	1606	Tact Switch.	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2181	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2182	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2183	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2202	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
	2216	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyest er.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic. . .	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic. . .	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic . .	2020 558 90445
	2405	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
	2441	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic . . .	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic. . .	2022 031 00103
	2455	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
	2457	Cap, 270n, 5%, 250v, Metalized Polyprop ylene.	2222 479 90016
	2458	Cap, 2u2, 20%, 100v, Electrolytic. . .	2022 031 00138
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
	2463	Cap, 680p, 10%, 2000v, Ceramic	2020 558 90485
	2465	Cap, 9n1, 5%, 1600v, Polypropylene . .	2222 375 90153
	2467	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2468	Cap, 33n, 10%, 400v, Polyester	2222 347 90227
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic . . .	2038 035 13301
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic. . .	2022 031 00137
	2486	Cap, 470u, 20%, 16v, Electrolytic. . .	2022 031 00139
	2487	Cap, 47u, 20%, 50v, Electrolytic . . .	2038 035 13508
	2488	Cap, 1000u, 20%, 16v, Electrolytic . .	2022 031 00144
	2489	Cap, 470u, 20%, 16v, Electrolytic. . .	2022 031 00139
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
	2500	Cap, 470n, 20%, 275v, Metalized Polypro pylene	2222 336 29148
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic . .	2020 024 90626
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90128
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic . . .	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic . .	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic . . .	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic . . .	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic . . .	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic. . .	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic. . .	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050
	2691	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
	2803	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2862	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
	2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
	2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
	2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
	2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
	2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
	2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240
	2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
	2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 580 15624
	2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
	2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 580 15624
	2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
	2981	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2982	Cap, 470p, 10%, 50v, Ceramic	3198 017 34710
	2983	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2984	Cap, 470p, 10%, 50v, Ceramic	3198 017 34710

S = Safety Part   Be sure to use exact replacement part.

20MS334R01 (continued)

	Ref	Description	Part Number
	3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3184	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3185	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3186	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3187	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
	3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
	3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
	3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
	3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3247	Res, 270K, 5%, 1/16W, Metalized Glass.	2322 702 60274
	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3443	Res, 1M, 5%, 1/10W, Metalized Glass. .	3198 021 51050
	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
	3452	Res, 3K6, 1%, 3/5W, Metal Film	2312 915 13602
	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3454	Res, 1K5, 1%, 3/5W, Metal Film	2312 915 11502
S	3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
	3456	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3457	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S	3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
	3470	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
	3472	Res, 6R8, 1%, 3/5W, Metal Film	2312 915 16808
	3473	Res, 6R8, 1%, 3/5W, Metal Film	2312 915 16808
	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
	3481	Res, 18K, 1%, 3/5W, Metal Film	2312 915 11803
	3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3491	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3495	Res, 22K, 5%, 1/10W, Metalized Glass .	3198 021 52230
	3496	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
	3497	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
	3498	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S	3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3637	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198 021 53320
	3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198 021 31530
	3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198 021 31220
	3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	3981	Res, 120 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01210

S = Safety Part   Be sure to use exact replacement part.

20MS334R01 (continued)

	3982	Res, 120 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01210
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4808	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4817	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4819	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5242	Coil, 10u, 5%.	3198 018 11090
	5342	Coil, 22u.	2422 535 97333
S	5445	Transformer, LOT	2422 531 02519
	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5453	Coil, 22u, 5%.	3198 018 12290
	5457	Coil, Linear Correction, 82u	2422 536 00425
	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
	5471	Coil, 6u8, 20%	3198 018 76880
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 22u.	2422 535 97333
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04.	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5861	Coil, 10u, 5%.	3198 018 11090
	6001	Zener Diode, 33 volt	3198 010 23390
	6181	Zener Diode, 6.8 volt.	3198 020 56880
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630
	6206	Zener Diode, 6.8 volt.	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316.	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148.	3198 010 10010
	6448	Zener Diode, 6.2 volt.	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6453	Zener Diode, 5.6 volt.	3198 020 55680
	6460	Diode, Rect, BY228/24.	9340 559 50112
	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
	6463	Zener Diode, 8.2 volt.	3198 020 58280
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316.	3198 010 10630
	6468	Diode, Signal, BAS316.	3198 010 10630
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt.	3198 010 25680
	6482	Zener Diode, 9.1 volt.	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYV95C.	9335 001 80133
	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6487	Diode, Rect, BYV95A.	9335 000 90133
	6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6500	Diode, Bridge Rect, GBU6JL-7002. . . .	9322 138 08667
	6520	Diode, Rect, BYV95A.	9335 000 90133
	6523	Diode, Signal, 1N4148.	3198 010 10010
	6524	Diode, Rect, 1N5062.	3198 010 10120
	6525	Diode, Rect, 1N5062.	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt.	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500.	9340 555 59127
	6562	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6563	Diode, Signal, BAS316.	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148.	3198 010 10010
	6569	Diode, Signal, BAS316.	3198 010 10630
	6570	Zener Diode, 6.8 volt.	3198 020 56880
	6580	Diode, Signal, BAS316.	3198 010 10630
	6681	Diode, Signal, BAT85	9336 247 60133
	6691	LED, LTL-10234WHCR	9322 185 69682
	6692	IR Receiver.	9322 127 54667
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7200	IC, TDA9587H/N1/3I/1136.	9352 731 64557
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7450	Transistor, PNP, PDTA114ET	3198 010 44010
	7460	Transistor, NPN, BU4508DX.	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2.	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1.	9352 673 56112
	7521	Power FET, FQPF9N50.	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, L78L33ACZ.	9322 134 92676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C08-WBN6.	9322 154 38682
	7861	IC, TDA9853H/V1.	9352 671 19557
	7901	IC, AN7522N PH	9322 181 41682
	9611	Coil, 27u, 10%	3198 018 22790
	9672	Coil, 22u, 10%	3198 018 22290
	9678	Coil, 22u, 10%	3198 018 22290
	CBA	Main Chassis Assembly.	3141 058 59121

Channel One Card Parts
Channel One Card Parts

2D 3 Line Comb Filter Parts
2D 3 Line Comb Filter Parts

DAF Panel Parts
DAF Panel Parts

DVD Eject Panel Parts
DVD Eject Panel Parts

DVD Interface Panel Parts
DVD Interface Panel Parts

Front Interface Panel Parts
Front Interface Panel Parts

ITV Front Jack Panel Parts
ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)
Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)
Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts
Side Jack Panel Parts

Subwoofer Panel Parts
Subwoofer Panel Parts

20MS334R01 (continued)

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

	Ref	Description	Part No.
S	AC01	AC Cord.	3139 128 76161
	AC04	Batteries for Remote Control Transmitte	9082 100 90002
	AC05	Cabinet Back	3139 124 46481
S	AC09	CRT, A51ERF135X82.	9301 903 81343
	AC10	Customer Control Buttons	3139 137 94241
S	AC12	Degaussing Coil.	3141 058 20131
	AC17	Owner's Manual	3141 055 21471
	AC20A	Cabinet Front.	3139 177 67451
	AC20B	Chassis Guide.	3139 124 30812
	AC20C	Light Guide.	3139 124 32221
	AC20D	Nameplate.	3141 050 00331
	AC20E	Power Button	3139 137 94231
	AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00411
	AC22	Cinch Cover.	3139 124 25551
	REMOTE	Remote Control Transmitter, RC1112917/17A.	3139 238 04701

S = Safety Part   Be sure to use exact replacement part.

Main Chassis Parts

S	Ref	Description	Part No.
		Main Chassis Parts	
	0211	2 Pin Connector	2422 025 16269
	0212	2 Pin Connector	2422 025 16375
	0218	A/V Jack	2422 026 04742
	0220	5 Pin Connector	2422 025 04853
	0221	2 Pin Connector	2422 025 15503
	0222	2 Pin Connector	2422 025 10646
	0232	Headphone Jack	2422 026 04747
	0243	6 Pin Connector	2422 025 04854
	0244	5 Pin Connector	2422 025 04853
	0245	6 Pin Connector	2422 025 04854
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector	2412 020 00725
	0280	4 Pin Connector	2422 025 12479
S	1000	Tuner, V+U, PLL	2422 542 90108
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC	2422 086 10914
S	1515	Relay, 5 Amp, 12V	2422 132 07467
	1600	Tact Switch	2422 128 02742
	1601	Tact Switch	2422 128 02742
	1602	Tact Switch	2422 128 02742
	1603	Tact Switch	2422 128 02742
	1606	Tact Switch	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344
	2004	Cap, 47n, 10%, 50v, Ceramic	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2181	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2182	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2183	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2226	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2241	Cap, 1n5, 10%, 50v, Ceramic	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2405	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2441	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic	2020 021 91139
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 270n, 5%, 250v, Metalized Polypropylene	2222 479 90016
	2458	Cap, 2u2, 20%, 100v, Electrolytic	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
	2463	Cap, 680p, 10%, 2000v, Ceramic	2020 558 90485
	2465	Cap, 9n1, 5%, 1600v, Polypropylene	2222 375 90153
	2467	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2468	Cap, 33n, 10%, 400v, Polyester	2222 347 90227
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic	3198 019 41020
	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2222 336 29148
	2501	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90626
	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic	2020 554 90128
	2520	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2606	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic	3198 017 21050
	2691	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2803	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2862	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2864	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2865	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2866	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2867	Cap, 1n8, 10%, 50v, Ceramic	2238 586 15626
	2868	Cap, 150p, 5%, 50v, Ceramic	3198 016 31510
	2869	Cap, 68n, 10%, 50v, Polyester	3198 014 06830
	2870	Cap, 68n, 10%, 50v, Polyester	3198 014 06830
	2871	Cap, 150p, 5%, 50v, Ceramic	3198 016 31510
	2872	Cap, 1n8, 10%, 50v, Ceramic	2238 586 15626
	2873	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2874	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
	2875	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
	2876	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2877	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2878	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2879	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
	2880	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2883	Cap, 470u, 20%, 16v, Electrolytic	3198 025 24710
	2884	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240
	2886	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2902	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2903	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2904	Cap, 27n, 10%, 50v, Ceramic	2238 580 15642
	2905	Cap, 1n2, 10%, 50v, Ceramic	2238 580 15624
	2906	Cap, 27n, 10%, 50v, Ceramic	2238 580 15642
	2907	Cap, 1n2, 10%, 50v, Ceramic	2238 580 15624
	2908	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2910	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2911	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2950	Cap, 330p, 5%, 50v, Ceramic	3198 016 33310
	2981	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2982	Cap, 470p, 10%, 50v, Ceramic	3198 017 34710
	2983	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2984	Cap, 470p, 10%, 50v, Ceramic	3198 017 34710

S = Safety Part   Be sure to use exact replacement part.

20PT633R/37 (continued)

	Ref	Description	Part No.
	3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3184	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3185	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3186	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3187	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
	3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
	3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
	3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
	3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3247	Res, 270K, 5%, 1/16W, Metalized Glass.	2322 702 60274
	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
	3341	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
	3342	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3443	Res, 1M, 5%, 1/10W, Metalized Glass. .	3198 021 51050
	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
	3452	Res, 3K6, 1%, 3/5W, Metal Film	2312 915 13602
	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3454	Res, 1K5, 1%, 3/5W, Metal Film	2312 915 11502
S	3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
	3456	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3457	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S	3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
	3470	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
	3472	Res, 6R8, 1%, 3/5W, Metal Film	2312 915 16808
	3473	Res, 6R8, 1%, 3/5W, Metal Film	2312 915 16808
	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
	3481	Res, 18K, 1%, 3/5W, Metal Film	2312 915 11803
	3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3491	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3495	Res, 22K, 5%, 1/10W, Metalized Glass .	3198 021 52230
	3496	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
	3497	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
	3498	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S	3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3630	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3637	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3681	Res, 180 ohm, 1%, 1/8W, Metalized Glass	2322 734 61801
	3682	Res, 270 ohm, 1%, 1/8W, Metalized Glass	2322 734 62701
	3683	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322 734 63901
	3684	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322 734 63901
	3686	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3687	Res, 75 ohm, 1%, 1/8W, Metalized Glass	2322 734 67509
	3688	Res, 68 ohm, 1%, 1/8W, Metalized Glass	2322 734 66809
	3689	Res, 2K7, 1%, 1/8W, Metalized Glass. .	2322 734 62702
	3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198 021 31530
	3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198 021 31220
	3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030

S = Safety Part   Be sure to use exact replacement part.

20PT633R/37 (continued)

S	Ref	Description	Part No.
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
	3981	Res, 120 ohm, 5%, 1/6W, Carbon Film.	3198 011 01210
	3982	Res, 120 ohm, 5%, 1/6W, Carbon Film.	3198 011 01210
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4808	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4817	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4819	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5242	Coil, 10u, 5%.	3198 018 11090
	5342	Coil, 22u.	2422 535 97333
S	5445	Transformer, LOT	2422 531 02519
	5452	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5453	Coil, 22u, 5%.	3198 018 12290
	5457	Coil, Linear Correction, 82u	2422 536 00425
	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
	5471	Coil, 6u8, 20%	3198 018 76880
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 22u.	2422 535 97333
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04.	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5861	Coil, 10u, 5%.	3198 018 11090
	6001	Zener Diode, 33 volt	3198 010 23390
	6181	Zener Diode, 6.8 volt.	3198 020 56880
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630
	6206	Zener Diode, 6.8 volt.	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316.	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148.	3198 010 10010
	6448	Zener Diode, 6.2 volt.	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6453	Zener Diode, 5.6 volt.	3198 020 55680
	6460	Diode, Rect, BY228/24.	9340 559 50112
	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
	6463	Zener Diode, 8.2 volt.	3198 020 58280
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316.	3198 010 10630
	6468	Diode, Signal, BAS316.	3198 010 10630
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt.	3198 010 25680
	6482	Zener Diode, 9.1 volt.	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYD33J.	9337 234 20133
	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6487	Diode, Rect, BYD33D.	9337 234 00133
	6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667
	6520	Diode, Rect, BYD33D.	9337 234 00133
	6523	Diode, Signal, 1N4148.	3198 010 10010
	6524	Diode, Rect, 1N5062.	3198 010 10120
	6525	Diode, Rect, 1N5062.	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt.	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500.	9340 555 59127
	6562	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6563	Diode, Signal, BAS316.	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148.	3198 010 10010
	6569	Diode, Signal, BAS316.	3198 010 10630
	6570	Zener Diode, 6.8 volt.	3198 020 56880
	6580	Diode, Signal, BAS316.	3198 010 10630
	6692	IR Receiver.	9322 127 54667
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7200	IC, TDA9577H/N1/AI/1130.	9352 731 51557
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7450	Transistor, PNP, PDTA114ET	3198 010 44010
	7460	Transistor, NPN, BU4508DX.	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2.	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1.	9352 673 56112
	7521	Power FET, FQPF9N50.	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, L78L33ACZ.	9322 134 92676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C08-WBN6.	9322 154 38682
	7861	IC, TDA9853H/V1.	9352 671 19557
	7901	IC, AN7522N PH	9322 181 41682
	9611	Coil, 27u, 10%	3198 018 22790
	9672	Coil, 22u, 10%	3198 018 22290
	9678	Coil, 22u, 10%	3198 018 22290
	CBA	Main Chassis Assembly.	3139 187 23221

Channel One Card Parts
Channel One Card Parts

2D 3 Line Comb Filter Parts
2D 3 Line Comb Filter Parts

DAF Panel Parts
DAF Panel Parts

DVD Eject Panel Parts
DVD Eject Panel Parts

DVD Interface Panel Parts
DVD Interface Panel Parts

Front Interface Panel Parts
Front Interface Panel Parts

ITV Front Jack Panel Parts
ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)
Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)
Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts
Side Jack Panel Parts

Subwoofer Panel Parts
Subwoofer Panel Parts

S = Safety Part   Be sure to use exact replacement part.

20PT633R/37 (continued)

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

	Ref	Description	Part No.
S	AC01	AC Cord.	3139 128 76161
	AC04	Batteries for Remote Control Transmitte	9299 000 65263
	AC05	Cabinet Back	3139 124 46001
S	AC09	CRT, A51ERF135X82.	9301 903 81301
	AC10	Customer Control Buttons	3139 177 65681
S	AC12	Degaussing Coil.	3141 058 20131
	AC17	Owner's Manual	3121 235 20611
	AC20A	Cabinet Front.	3139 177 59721
	AC20B	Chassis Guide.	3139 124 30811
	AC20C	Light Guide.	3139 124 32221
	AC20D	Nameplate.	3139 120 01371
	AC20E	Power Button	3139 177 65691
	AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00411
	REMOTE	Remote Control Transmitter, RC19335004/ 01.	3139 228 86463

S = Safety Part   Be sure to use exact replacement part.

20PT643F/35R - Manual no. 7638

Main Chassis Parts

Main Chassis Parts

S	Ref	Description	Part No.
	0127	Holder, Fuse, 2 Pin.	4822 265 11253
	0129	NTC Holder	3139 120 10151
	0136	Spring, IC	4822 492 70788
	0137	SPRING	4822 492 70289
	0138	Spring, IC	4822 492 70788
	0139	Spring, Transistor	4822 492 62076
	0141	Spring, IC	4822 492 70788
	0152	Cable, DIPMate, 6 Pin.	3139 121 08841
	0153	Cable, DIPMate, 5 Pin, 480mm	3139 121 07951
	0211	Connector, Printed Circuit, B2P3-VH.	4822 265 20723
	0212	Connector, Printed Circuit, 2 Pin, Male , (RED).	4822 267 10774
	0220	Connector, Printed Circuit, 5 Pin.	4822 265 30735
	0221	Connector, Printed Circuit, 2 Pin.	4822 267 10966
	0222	2 Pin Connector.	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0229	Connector, Printed Circuit	4822 267 10735
	0239	3 Pin Connector.	2422 025 16382
	0243	6 Pin Connector.	2422 025 04854
	0244	Connector, Printed Circuit, 5 Pin.	4822 265 30735
	0245	6 Pin Connector.	2422 025 04854
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	Connector, Printed Circuit	4822 267 10735
	0269	Jack	2422 026 05182
	0280	Connector, Printed Circuit, 4 Pin.	4822 267 10565
S	1000	Tuner, V+U, PLL	2422 542 90108
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic.	4822 242 81978
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07467
	1606	Switch, Push Button.	4822 276 13775
	1660	Crystal, 12MHz000	2422 543 01203
	1811	Connector, Printed Circuit	4822 267 10735
	1861	Filter, Ceramic, CSB503F58	4822 242 10359
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 63V	4822 124 40248
	2006	Cap, 470u, 20%, 16v, Electrolytic.	4822 124 80791
	2007	Cap, 100n, +80/-20%, 50v, Ceramic.	2238 586 59812
	2008	Cap, 100u, 20%, 25v, Electrolytic.	4822 124 40207
	2009	Cap, 22n, 10%, 25v, Ceramic.	2238 916 15641
	2101	Cap, 470n, +80/-20%, 16v, Ceramic.	4822 126 13482
	2102	Cap, 22p, 5%, 50v, Ceramic	4822 122 33761
	2103	Cap, 330p, 50V, Ceramic.	4822 126 14241
	2104	Cap, 330p, 50V, Ceramic.	4822 126 14241
	2105	Cap, 10u, 20%, 63V	4822 124 40248
	2106	Cap, 10u, 20%, 63V	4822 124 40248
	2111	Cap, 22p, 5%, 50v, Ceramic	4822 122 33761
	2112	Cap, 22p, 5%, 50v, Ceramic	4822 122 33761
	2113	Cap, 22p, 5%, 50v, Ceramic	4822 122 33761
	2121	Cap, 22p, 5%, 50v, Ceramic	4822 122 33761
	2122	Cap, 330p, 50V, Ceramic.	4822 126 14241
	2123	Cap, 2u2, 10V, Ceramic	4822 126 14491
	2124	Cap, 330p, 50V, Ceramic.	4822 126 14241
	2125	Cap, 2u2, 10V, Ceramic	4822 126 14491
	2131	Cap, 330p, 50V, Ceramic.	4822 126 14241
	2132	Cap, 2u2, 10V, Ceramic	4822 126 14491
	2133	Cap, 330p, 50V, Ceramic.	4822 126 14241
	2134	Cap, 2u2, 10V, Ceramic	4822 126 14491
	2135	Cap, 22p, 5%, 50v, Ceramic	4822 122 33761
	2136	Cap, 22p, 5%, 50v, Ceramic	4822 122 33761
	2141	Cap, 330p, 50V, Ceramic.	4822 126 14241
	2143	Cap, 100n, +80/-20%, 50v, Ceramic.	2238 586 59812
	2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852
	2201	Cap, 100n, +80/-20%, 50v, Ceramic.	2238 586 59812
	2202	Cap, 100n, +80/-20%, 50v, Ceramic.	2238 586 59812
	2203	Cap, 100n, +80/-20%, 50v, Ceramic.	2238 586 59812
	2204	Cap, 100n, +80/-20%, 50v, Ceramic.	2238 586 59812
	2205	Cap, 220n, +80/-20%, 16v, Ceramic.	4822 126 13879
	2208	Cap, 100n, +80/-20%, 50v, Ceramic.	2238 586 59812
	2209	Cap, 4u7, 20%, 100V, Electrolytic.	4822 124 40769
	2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	2238 916 15641
	2214	Cap, 22n, 10%, 25v, Ceramic.	2238 916 15641
	2215	Cap, 22n, 10%, 25v, Ceramic.	2238 916 15641
	2216	Cap, 1000u, 20%, 16v, Electrolytic	4822 124 81144
	2217	Cap, 22n, 10%, 25v, Ceramic.	2238 916 15641
	2219	Cap, 220n, +80/-20%, 16v, Ceramic.	4822 126 13879
	2220	Cap, 470n, 5%, 63v, Metalized Polyester	4822 121 51252
	2221	Cap, 22n, 10%, 25v, Ceramic.	2238 916 15641
	2226	Cap, 100p, 5%, 50v, Ceramic.	2020 552 94427
	2227	Cap, 4,7nF, 10%, 63V, Ceramic.	4822 126 13193
	2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210
	2229	Cap, 10u, 20%, 63V	4822 124 40248
	2241	Cap, 1n5, 10%, 50v, Ceramic.	4822 126 14247
	2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	4822 126 14238
	2244	Cap, 100nF, 5%, 63V.	5322 121 42386
	2245	Cap, 220n, +80/-20%, 16v, Ceramic.	4822 126 13879
	2247	Cap, 1000u, 20%, 16v, Electrolytic	4822 124 81144
	2248	Cap, 22n, 10%, 25v, Ceramic.	2238 916 15641
	2249	Cap, 22n, 10%, 25v, Ceramic.	2238 916 15641
	2250	Cap, 2u2, 20%, 50v, Electrolytic	4822 124 22652
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	4822 051 20008
	2330	Cap, 470nF, 20%, 63V, Film	4822 121 51473
	2340	Cap, 10u, 20%, 250v, Electrolytic.	4822 124 11565
	2341	Cap, 3n3, 10%, 500v, Ceramic	4822 126 13599
	2342	Cap, 560pF, 5%, 63V, Ceramic	5322 116 80853
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	4822 126 13451
	2344	Cap, 100n, 10%, 50v, Ceramic	4822 126 14585
	2345	Cap, 1nF, 10%, 500V, Ceramic	4822 122 31175
	2405	Cap, 220u, 25V, Electrolytic	4822 124 12379
	2441	Cap, 1uF, 20%, 63V, Electrolytic	4822 124 21913
	2443	Cap, 47n, 10%, 50v, Ceramic.	4822 126 13751
	2444	Cap, 1uF, 20%, 63V, Electrolytic	4822 124 21913
	2450	Cap, 47u, 20%, 160v, Electrolytic.	4822 124 11575
	2455	Cap, 47uF, 20%, 25V, Electrolytic.	4822 124 40433
	2457	Cap, 270n, 5%, 250v, Metalized Polypropylene.	2222 479 90016
	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2022 031 00138
	2459	Cap, 680p, 10%, 500v, Ceramic.	4822 126 13185
	2460	Cap, 100p, 5%, 50v, Ceramic.	5322 122 32531
	2463	Cap, 680p, 10%, 2000v, Ceramic	4822 126 14138
	2465	Cap, 9n1, 5%, 1600v, Polypropylene	4822 121 70649
	2467	Cap, 68n, 10%, 250v, Polyester	4822 121 40482
	2468	Cap, 33n, 10%, 400v, Polyester	5322 121 44151
	2471	Cap, 100nF, 5%, 63V.	5322 121 42386
	2472	Cap, 150n, 5%, 63V	4822 121 41854
	2473	Cap, 100nF, 5%, 63V.	5322 121 42386
	2474	Cap, 2,2nF, 10%, 63V, Ceramic.	4822 122 33127
	2475	Cap, 2,2nF, 10%, 63V, Ceramic.	4822 122 33127
	2476	Cap, 4n7, 10%, 63v, Ceramic.	5322 126 10223
	2480	Cap, 47u, 20%, 25V, Electrolytic	4822 124 11965
	2481	Cap, 470p, 10%, 500V, Ceramic.	4822 122 31177
	2482	Cap, 68n, 10%, 250v, Polyester	4822 121 40482
	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2022 031 00137
	2486	Cap, 470u, 20%, 16v, Electrolytic.	2022 031 00139
	2487	Cap, 47u, 20%, 50v, Electrolytic	2038 035 13508
	2488	Cap, 1000u, 20%, 16v, Electrolytic	4822 124 81145
	2489	Cap, 470u, 20%, 16v, Electrolytic.	2022 031 00139
	2491	Cap, 1nF, 10%, 500V, Ceramic	4822 122 31175
	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	4822 126 13589
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	4822 126 14153
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	4822 126 14153
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90626
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	4822 126 14153
	2507	Cap, 470pF, 10%, 50V, Ceramic.	9965 000 09661
	2508	Cap, 470p, 10%, 1000v, Ceramic	4822 122 50116
S	2515	Cap, 1n5, 20%, v, Ceramic.	4822 126 14049
	2520	Cap, 10nF, 20%, 50V, Ceramic	4822 122 33177
	2521	Cap, 22u, 50v, Electrolytic Aluminum	4822 124 81151
	2522	Cap, 100n, 10%, 50v, Ceramic	4822 126 14585
	2523	Cap, 1n5, 10%, 2000v, Ceramic.	4822 126 13862
	2525	Cap, 470pF, 10%, 50V, Ceramic.	9965 000 09661
	2527	Cap, 2,2nF, 10%, 63V, Ceramic.	4822 122 33127
	2528	Cap, 1nF, 10%, 63V, Ceramic.	5322 122 31647
	2540	Cap, 10nF, 20%, 50V, Ceramic	4822 122 33177
	2541	Cap, 10nF, 20%, 50V, Ceramic	4822 122 33177
	2560	Cap, 680p, 10%, 1000v, Ceramic	4822 126 14152
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91496
	2562	Cap, 1nF, 10%, 100V, Ceramic	5322 122 32331
	2563	Cap, 100nF, 5%, 63V.	5322 121 42386
	2564	Cap, 2200u, 20%, 25V, Electrolytic	4822 124 12417
	2567	Cap, 47uF, 20%, 25V, Electrolytic.	4822 124 40433
	2568	Cap, 1uF, 20%, 63V, Electrolytic	4822 124 21913
	2580	Cap, 47u, 20%, 16v, Electrolytic	4822 124 81286
	2581	Cap, 22u, 50v, Electrolytic Aluminum	4822 124 81151
	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
	2601	Cap, 220n, +/-80/20, 25v, Ceramic.	4822 126 14076
	2602	Cap, 100p, 5%, 50v, Ceramic.	2020 552 94427
	2606	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2607	Cap, 33p, 5%, 50v, Ceramic	2222 867 15339
	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	2222 867 15339
	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2612	Cap, 6p8, 7%, 50v, Ceramic	4822 126 13956
	2613	Cap, 6p8, 7%, 50v, Ceramic	4822 126 13956
	2615	Cap, 1n, 10%, 50v, Ceramic	5322 126 11578
	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	4822 126 14043
	2691	Cap, 220u, 25V, Electrolytic	4822 124 12379
	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	4822 126 13879
	2803	Cap, 220n, +80/-20%, 16v, Ceramic.	4822 126 13879
	2810	Cap, 2u2, 10V, Ceramic	4822 126 14491
	2813	Cap, 2u2, 10V, Ceramic	4822 126 14491
	2816	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2862	Cap, 2u2, 10V, Ceramic	4822 126 14491
	2864	Cap, 2u2, 20%, 50v, Electrolytic	4822 124 22652

S = Safety Part   Be sure to use exact replacement part.

20PT643F/35R (continued)

S	Ref	Description	Part No.
	2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	4822 124 22652
	2866	Cap, 2u2, 10V, Ceramic	4822 126 14491
	2867	Cap, 1n8, 10%, 50V, Ceramic.	4822 126 13617
	2868	Cap, 150p, 5%, 50v, Ceramic.	4822 122 33753
	2869	Cap, 68nF, 5%, 63V	5322 121 42465
	2870	Cap, 68nF, 5%, 63V	5322 121 42465
	2871	Cap, 150p, 5%, 50v, Ceramic.	4822 122 33753
	2872	Cap, 1n8, 10%, 50V, Ceramic.	4822 126 13617
	2873	Cap, 2u2, 10V, Ceramic	4822 126 14491
	2874	Cap, 100u, 20%, 25v, Electrolytic. . .	4822 124 40207
	2875	Cap, 100u, 20%, 25v, Electrolytic. . .	4822 124 40207
	2876	Cap, 4u7, 20%, 100V, Electrolytic. . .	4822 124 40769
	2877	Cap, 10u, 20%, 63V	4822 124 40248
	2878	Cap, 1uF, 20%, 63V, Electrolytic . . .	4822 124 21913
	2879	Cap, 4,7nF, 10%, 63V, Ceramic.	4822 126 13193
	2880	Cap, 22n, 10%, 25v, Ceramic.	2238 916 15641
	2883	Cap, 470u, 20%, 16v, Electrolytic. . .	4822 124 80791
	2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	4822 124 22652
	2885	Cap, 220n, 5%, 63v, Metalized Polyester	4822 121 42408
	2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	4822 126 13879
	2892	Cap, 100n, +80/-20%, 50v, Ceramic. . .	2238 586 59812
	2893	Cap, 100n, +80/-20%, 50v, Ceramic. . .	2238 586 59812
	2902	Cap, 1000u, 20%, 16v, Electrolytic . .	4822 124 81144
	2903	Cap, 1uF, 20%, 63V, Electrolytic . . .	4822 124 21913
	2904	Cap, 27nF, 10%, 63V, Ceramic	4822 122 33735
	2905	Cap, 1n2, 10%, 63v, Ceramic.	4822 122 32614
	2906	Cap, 27nF, 10%, 63V, Ceramic	4822 122 33735
	2907	Cap, 1n2, 10%, 63v, Ceramic.	4822 122 32614
	2908	Cap, 10u, 20%, 63V	4822 124 40248
	2910	Cap, 10nF, 20%, 50V, Ceramic	4822 122 33177
	2911	Cap, 10nF, 20%, 50V, Ceramic	4822 122 33177
	2950	Cap, 330p, 50V, Ceramic.	4822 126 14241
	3000	Res, 100 ohm, 5%, 1/2W	4822 116 52175
	3001	Res, 100 ohm, 5%, 1/2W	4822 116 52175
	3002	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	3003	Res, 1k5, 5%, 1/16W.	4822 051 30152
	3004	Res, 8K2, 1%, 1/16W.	4822 117 12902
	3005	Res, 100 ohm, 5%, 1/2W	4822 116 52175
	3101	Res, 68R, 5%, 0,5W	4822 116 52199
	3102	Res, 1k, 5%, 1/16W	4822 051 30102
	3103	Res, 150R, 5%, 0,5W.	4822 116 83868
	3104	Res, 220K, 1%, 1/16W, Metalized Glass.	4822 117 12891
	3105	Res, 150R, 5%, 0,5W.	4822 116 83868
	3106	Res, 220K, 1%, 1/16W, Metalized Glass.	4822 117 12891
	3111	Res, 75R, 5%, 0,5W	4822 116 52201
	3112	Res, 100 ohm, 5%, 1/2W	4822 116 52175
	3113	Res, 75R, 5%, 0,5W	4822 116 52201
	3114	Res, 100 ohm, 5%, 1/2W	4822 116 52175
	3115	Res, 75R, 5%, 0,5W	4822 116 52201
	3116	Res, 100 ohm, 5%, 1/2W	4822 116 52175
	3123	Res, 150R, 5%, 0,5W.	4822 116 83868
	3124	Res, 47k, 1%, 1/16W.	4822 117 12925
	3125	Res, 150R, 5%, 0,5W.	4822 116 83868
	3126	Res, 47k, 1%, 1/16W.	4822 117 12925
	3131	Res, 150R, 5%, 0,5W.	4822 116 83868
	3132	Res, 47k, 1%, 1/16W.	4822 117 12925
	3133	Res, 150R, 5%, 0,5W.	4822 116 83868
	3134	Res, 47k, 1%, 1/16W.	4822 117 12925
	3135	Res, 75R, 5%, 0,5W	4822 116 52201
	3136	Res, 100 ohm, 5%, 1/2W	4822 116 52175
	3141	Res, 1K0, 1%, 0,4W	4822 050 11002
	3149	Res, 100k, 1%, 1/16W	4822 117 13632
	3150	Res, 150k, 5%, 1/16W	4822 051 30154
	3154	Res, 5K6, 5%, 0,5W	4822 116 52289
	3156	Res, 10k, 1%, 1/16W	4822 050 21003
	3157	Res, 1k5, 5%, 1/16W.	4822 051 30152
	3158	Res, 10k, 5%, 1/16W.	4822 051 30103
	3159	Res, 1K2, 5%, 1/8W, Metalized Glass. .	4822 051 20122
	3200	Res, 390R, 5%, 0,5W.	4822 116 83881
	3201	Res, 100 ohm, 5%, 1/2W	4822 116 52175
	3202	Res, 100 ohm, 5%, 1/2W	4822 116 52175
	3203	Res, 100 ohm, 5%, 1/2W	4822 116 52175
	3204	Res, 22k, 5%, 1/2W	4822 116 52257
	3205	Res, 1k, 5%, 1/16W	4822 051 30102
	3206	Res, 33k, 5%, 1/16W.	4822 051 30333
	3207	Res, 1K0, 1%, 0,4W	4822 050 11002
	3208	Res, 220 ohm, 5%, 1/16W.	4822 051 30221
	3209	Res, 68R, 5%, 0,063W	4822 051 30689
	3212	Res, 470R, 5%, 0,062W.	4822 051 30471
	3213	Res, 560R, 5%, 0,5W.	4822 116 52226
	3217	Res, 330k, 5%, 1/16W	4822 051 30334
	3218	Res, 82K, 5%, 1/16W, Metalized Glass .	4822 117 12864
	3219	Res, 2k2, 5%, 1/16W.	4822 051 30222
	3220	Res, 100 ohm, 5%, 1/2W	4822 116 52175
	3221	Res, 560R, 5%, 0,5W.	4822 116 52226
	3222	Res, 100 ohm, 5%, 1/2W	4822 116 52175
	3226	Res, 560 ohm, 5%, 1/16W.	4822 051 30561
	3232	Res, 2k2, 5%, 1/16W.	4822 051 30222
	3235	Res, 100 ohm, 5%, 1/2W	4822 116 52175
	3241	Res, 22k, 5%, 1/16W.	4822 051 30223
	3242	Res, 27K, 5%, 0,062W	4822 051 30273
	3244	Res, 820R, 5%, 0,5W.	4822 116 52231
	3245	Res, 39K, 1%, 0W063.	5322 117 13064
	3246	Res, 10k, 5%, 1/16W.	4822 051 30103
	3247	Res, 270K, 1%, 0W063	4822 117 12889
	3248	Res, 33k, 5%, 1/16W.	4822 051 30333
	3249	Res, 820R, 5%, 0,5W.	4822 116 52231
	3251	Res, 100 ohm, 5%, 1/2W	4822 116 52175
	3256	Res, 1k, 5%, 1/16W	4822 051 30102
	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
	3258	Res, 100k, 1%, 1/16W	4822 117 13632
	3259	Res, 47k, 5%, 1/16W.	4822 051 30474
	3331	Res, 100 ohm, 5%, 1/2W	4822 116 52175
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3333	Res, 100 ohm, 5%, 1/2W	4822 116 52175
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3335	Res, 100 ohm, 5%, 1/2W	4822 116 52175
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	4822 052 11109
	3341	Res, 1R, 5%, 0,33W	4822 052 10108
	3342	Res, 1R, 5%, 0,33W	4822 052 10108
	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
	3344	Res, 33R, 5%, 0,5W	4822 116 52191
S	3345	Varactor, 1MA/50V, Max 115V.	4822 117 13016
	3346	Res, 33R, 5%, 0,5W	4822 116 52191
	3441	Res, 100 ohm, 1%, 1/8W, Metalized Glass	4822 117 11373
	3442	Res, Zero ohm, "Chip" Jumper	4822 051 20008
	3443	Res, 1M, 5%, 1/8W, Metalized Glass . .	4822 051 20105
	3445	Res, 15K, 5%, 1/2W, Metal Film	4822 116 52244
	3446	Res, 5K6, 5%, 0,5W	4822 116 52289
	3447	Res, 180R, 5%, 0,5W.	4822 116 52213
	3448	Res, 820R, 5%, 0,5W.	4822 116 52231
	3449	Res, 68R, 5%, 0,5W	4822 116 52199
	3450	Res, 33R, 5%, 0,5W	4822 116 52191
	3451	Res, 10R, 5%, 0.33W.	4822 052 10109
	3452	Res, 3K6, 1%, 0,6W	4822 050 23602
	3453	Res, 1K0, 1%, 0,4W	4822 050 11002
	3454	Res, 1K5, 1%, 0,6W	4822 050 21502
S	3455	Res, 6R8, 5%, 2W	4822 053 11688
	3456	Res, Zero ohm, "Chip" Jumper	4822 051 20008
	3457	Res, Zero ohm, "Chip" Jumper	4822 051 20008
	3458	Res, 1K0, 1%, 0,4W	4822 050 11002
S	3459	Res, 15K, 5%, 2W	4822 053 11153
	3460	Res, 3K9, 5%, 0,5W	4822 116 52276
	3463	Res, 33R, 5%, 0,5W	4822 116 52191
	3465	Res, 27K, 1%, 0,6W	4822 050 22703
	3469	Res, 3K3, 5%, 0,5W	4822 116 52269
	3470	Res, 270K, 5%, 1/8W, Metalized Glass .	4822 051 20274
	3471	Res, 3R9, 1%, 0,6W	4822 050 23908
	3472	Res, 6R8, 1%, 0,6W	4822 050 26808
	3473	Res, 6R8, 1%, 0,6W	4822 050 26808
	3474	Res, 2K2, 1%, 0,6W	4822 050 22202
	3475	Res, 2K2, 1%, 0,6W	4822 050 22202
	3477	Res, 150R, 5%, 0,5W.	4822 116 83868
	3478	Res, 150R, 5%, 0,5W.	4822 116 83868
	3479	Res, 2K7, 1%, 1/8W, Metalized Glass. .	4822 117 12955
	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
	3481	Res, 18K, 1%, 0,6W	4822 050 21803
	3482	Res, 12k, 1%, 0,6W	4822 050 21203
	3484	Res, 3K9, 5%, 0,5W	4822 116 52276
	3488	Res, 4R7, 5%, 1/2W, Metal Film	4822 052 11478
	3490	Res, 8K2, 5%, 0,5W	4822 116 52303
	3491	Res, 10K, 1%, 1/8W, Metalized Glass. .	4822 117 10833
	3492	Res, 1K, 2%, 0,25W	4822 051 10102
	3493	Res, 6R8, 5%, 0,33W.	4822 052 10688
	3494	Res, 4R7, 5%, 1/2W, Metal Film	4822 052 11478
	3495	Res, 22K, 5%, 1/8W, Metalized Glass. .	4822 051 20223
	3496	Res, 100K, 1%, 0.1W.	4822 117 10837
	3497	Res, 100K, 1%, 0.1W.	4822 117 10837
	3498	Res, 12K, 1%, 0,1W	4822 117 11383
	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	4822 053 21335
	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	4822 053 21335
S	3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	4822 053 21155
	3507	Surge Protector.	4822 252 11215
	3508	Res, 220R, 5%, 0,5W.	4822 116 83872
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00055
	3519	Res, 270 ohm, 5%, 1/2W	4822 116 83876
	3520	Res, 1K2, 5%, 1/8W, Metalized Glass. .	4822 051 20122
	3521	Res, 4R7, 1%, 0,6W	4822 050 24708
	3522	Res, 330K, 5%, 1/8W, Metalized Glass .	4822 051 20334
	3523	Res, 100R, 5%, 0,33W	4822 052 10101
	3524	Res, 56K, 1%, 1/8W, Metalized Glass. .	4822 117 11148
	3525	Res, 1K, 2%, 0,25W	4822 051 10102
S	3526	Res, 0R10, 2W.	4822 116 83303
S	3527	Res, 0R33, 5%, 2W.	4822 117 11342
	3528	Res, Zero ohm, "Chip" Jumper	4822 051 20008
	3529	Res, 47K, 1%, 1/8W, Metalized Glass. .	4822 117 10834
	3530	Res, 10K, 1%, 1/8W, Metalized Glass. .	4822 117 10833
	3531	Res, 4K7, 5%, 1/8W, Metalized Glass. .	4822 051 20472
	3532	Res, 2K2, 5%, 0,33W.	4822 052 10222
	3541	Res, 470R, 5% 0,1W.	4822 051 20471
	3542	Res, 1K5, 1%, 1/8W, Metalized Glass. .	4822 117 11139
	3543	Res, 82K, 1%, 0,6W	4822 050 28203

S = Safety Part   Be sure to use exact replacement part.

20PT643F/35R (continued)

S	Ref.	Description	Part No.
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass.	4822 117 11145
	3545	Res, 270K, 5%, 1/8W, Metalized Glass	4822 051 20274
	3548	Res, 15K, 1%, 1/8W, Metalized Glass.	4822 116 83933
	3552	Res, 10K, 1%, 1/8W, Metalized Glass.	4822 117 10833
	3557	Res, 1K, 2%, 0,25W	4822 051 10102
	3561	Res, 100 ohm, 5%, 1/2W	4822 116 52175
	3562	Res, 12K, 1%, 0,1W	4822 117 11383
	3563	Res, 5K6, 5%, 1/8W, Metalized Glass.	4822 051 20562
S	3565	Res, 330 ohm, 5%, 1W, Metal Film	4822 053 10331
	3566	Res, 2K2, 1%, 1/8W, Metalized Glass.	4822 117 11449
	3569	Res, 5K6, 5%, 1/8W, Metalized Glass.	4822 051 20562
	3580	Res, 47K, 1%, 1/8W, Metalized Glass.	4822 117 10834
	3594	Res, 330R, 1%, 1.25W.	4822 117 13577
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3601	Res, 8K2, 5%, 0,5W	4822 116 52303
	3603	Res, 100 ohm, 5%, 1/2W	4822 116 52175
	3604	Res, 100 ohm, 5%, 1/2W	4822 116 52175
	3605	Res, 4k7, 5%, 1/16W.	4822 051 30472
	3606	Res, 2k2, 5%, 1/2W	4822 116 52256
	3607	Res, 2k2, 5%, 1/2W	4822 116 52256
	3608	Res, 470 ohm, 5%, 1/2W	4822 116 83883
	3609	Res, 1K0, 1%, 0,4W	4822 050 11002
	3610	Res, 8K2, 5%, 0,5W	4822 116 52303
	3611	Res, 100 ohm, 5%, 1/16W.	4822 051 30101
	3618	Res, 6K8, 5%	4822 116 83961
	3622	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	3623	Res, 4k7, 5%, 1/16W.	4822 051 30472
	3624	Res, 100 ohm, 5%, 1/2W	4822 116 52175
	3625	Res, 100 ohm, 5%, 1/2W	4822 116 52175
	3626	Res, 4k7, 5%, 1/16W.	4822 051 30472
	3627	Res, 4k7, 5%, 1/16W.	4822 051 30472
	3628	Res, 10k, 5%, 1/16W.	4822 051 30103
	3630	Res, 470R, 5%, 0,062W.	4822 051 30471
	3632	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	3634	Res, 100 ohm, 5%, 1/2W	4822 116 52175
	3635	Res, 100 ohm, 5%, 1/2W	4822 116 52175
	3636	Res, 1K, 2%, 0,25W	4822 051 10102
	3637	Res, 75 ohm, 5%, 1/16W	4822 051 30759
	3638	Res, 75 ohm, 5%, 1/16W	4822 051 30759
	3639	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	3640	Res, 8K2, 5%, 0,5W	4822 116 52303
	3685	Res, 1K5, 1%, 1/8W, Metalized Glass.	4822 117 11139
	3691	Res, 330 ohm, 5%, 1/16W.	4822 051 30331
	3693	Res, 220 ohm, 5%, 1/16W.	4822 051 30221
	3694	Res, 4k7, 5%, 1/16W.	4822 051 30472
	3801	Res, 220 ohm, 5%, 1/16W.	4822 051 30221
	3802	Res, 1k, 5%, 1/16W	4822 051 30102
	3814	Res, 100k, 1%, 1/16W	4822 117 13632
	3815	Res, 100k, 1%, 1/16W	4822 117 13632
	3816	Res, 100k, 1%, 1/16W	4822 117 13632
	3817	Res, 100k, 1%, 1/16W	4822 117 13632
	3818	Res, 100k, 1%, 1/16W	4822 117 13632
	3819	Res, 100k, 1%, 1/16W	4822 117 13632
	3820	Res, 100k, 1%, 1/16W	4822 117 13632
	3821	Res, 100k, 1%, 1/16W	4822 117 13632
	3861	Res, 100k, 1%, 1/16W	4822 117 13632
	3862	Res, 15k, 5%, 1/16W	4822 051 30153
	3863	Res, 1K2, 5%, 1/16W, Metalized Glass	4822 117 11817
	3864	Res, 100 ohm, 5%, 1/16W.	4822 051 30101
	3865	Res, 100 ohm, 5%, 1/2W	4822 116 52175
	3866	Res, 100 ohm, 5%, 1/2W	4822 116 52175
	3867	Res, 3k3, 5%, 1/16W.	4822 051 30332
	3891	Res, 100 ohm, 5%, 1/16W.	4822 051 30101
	3893	Res, 330 ohm, 5%, 1/16W.	4822 051 30331
	3894	Res, 100 ohm, 5%, 1/16W.	4822 051 30101
	3896	Res, 330 ohm, 5%, 1/16W.	4822 051 30331
	3901	Res, 1k, 5%, 1/16W	4822 051 30102
	3902	Res, 3k3, 5%, 1/16W.	4822 051 30332
	3903	Res, 3k3, 5%, 1/16W.	4822 051 30332
	3904	Res, 10k, 5%, 1/16W.	4822 051 30103
	3905	Res, 3k3, 5%, 1/16W.	4822 051 30332
	3906	Res, 10k, 5%, 1/16W.	4822 051 30103
	3907	Res, 8K2, 1%, 1/16W.	4822 117 12902
	4001	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4002	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4122	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4123	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4127	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4214	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4216	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4341	Res, Zero ohm, "Chip" Jumper	4822 051 20008
	4388	Res, Zero ohm, "Chip" Jumper	4822 051 20008
	4401	Res, Zero ohm, "Chip" Jumper	4822 051 20008
	4431	Res, Zero ohm, "Chip" Jumper	4822 051 20008
	4601	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4608	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4609	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4613	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4614	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4615	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4616	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4617	Res, Zero ohm, "Chip" Jumper	4822 051 20008
	4619	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4622	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4623	Res, Zero ohm, "Chip" Jumper	4822 051 20008
	4691	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4692	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4693	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4807	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4812	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4814	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4820	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4825	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4827	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4829	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4830	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4831	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4861	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4863	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4865	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4866	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4867	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4869	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4870	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4871	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4873	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4876	Res, Zero ohm, "Chip" Jumper	4822 051 20008
	4879	Res, Zero ohm, "Chip" Jumper	4822 051 20008
	4880	Res, Zero ohm, "Chip" Jumper	4822 051 20008
	4881	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4883	Res, Zero ohm, "Chip" Jumper	4822 051 20008
	4885	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4892	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4901	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4903	Res, Zero ohm, "Chip" Jumper	4822 051 30008
	4906	Res, Zero ohm, "Chip" Jumper	4822 051 20008
	4924	Res, Zero ohm, "Chip" Jumper	4822 051 20008
	4925	Res, Zero ohm, "Chip" Jumper	4822 051 20008
	5001	Coil, 27u.	4822 157 52392
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8.	4822 157 11139
	5204	Bead, Ferrite, 100MHz	4822 157 11411
	5205	Bead, Ferrite, 100MHz	4822 157 11411
	5206	Bead, Ferrite, 100MHz	4822 157 11411
	5242	Coil, 10u, 5%.	4822 157 11706
	5342	Coil, 22u.	4822 157 50961
S	5445	Transformer, LOT	2422 531 02519
	5452	Bead, Ferrite, 100MHz	4822 157 11411
	5453	Coil, 22u.	4822 157 11235
	5457	Coil, Linear Correction, 82u	2422 536 00425
	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
	5471	Coil, 6u8.	2422 535 94638
	5472	Coil, 3u3.	4822 157 51157
	5480	Coil, 22u.	4822 157 50961
S	5501	Filter, Line Choke, 5mH, 2A.	4822 157 11523
S	5520	Transformer, SS39009-04.	2422 531 02459
	5521	Bead, Ferrite, 100MHz.	4822 526 10704
	5560	Bead, Ferrite, 100MHz.	4822 526 10704
	5561	Coil, 27u.	4822 157 71401
	5562	Bead, Ferrite, 100MHz.	4822 526 10704
	5564	Bead, Ferrite, 100MHz.	4822 526 10704
	5602	Coil, 5.6uH, 5%.	4822 157 11867
	5603	Coil, 5.6uH, 5%.	4822 157 11867
	5604	Coil, 5.6uH, 5%.	4822 157 11867
	5861	Coil, 10u, 5%.	4822 157 11706
	6001	Zener Diode, 33 volt	4822 130 34142
	6150	Diode, BAS316.	4822 130 11397
	6201	Diode, BAS316.	4822 130 11397
	6202	Diode, BAS316.	4822 130 11397
	6206	Diode, Reference, PDZ6.8B.	4822 130 11416
	6331	Diode, BAV21	4822 130 30842
	6332	Diode, BAS316.	4822 130 11397
	6333	Diode, BAV21	4822 130 30842
	6335	Diode, BAV21	4822 130 30842
	6445	Diode, Reference, UDZS10B.	4822 130 11551
	6447	Diode, 1N4148.	4822 130 30621
	6448	Zener Diode, 6.2 volt.	4822 130 34167
	6449	Diode, BAV99	5322 130 34337
	6453	Zener Diode, 5.6 volt.	3198 020 55680
	6460	Diode, Rect, BY228/24.	9340 559 50112
	6461	Diode, Rect, RGP30J-L7004	4822 130 80572
	6463	Zener Diode, 8.2 volt.	4822 130 10837
	6465	Diode, BAV21	4822 130 30842
	6466	Diode, BAV21	4822 130 30842
	6467	Diode, BAS316.	4822 130 11397
	6468	Diode, BAS316.	4822 130 11397
	6470	Diode, BAV99	5322 130 34337
	6476	Zener Diode, 15 volt	4822 130 34281
	6481	Zener Diode, 5.6 volt.	4822 130 34173
	6482	Zener Diode, 9.1 volt.	4822 130 30862
	6483	Zener Diode, 33 volt	4822 130 34142
	6485	Diode, Rect, BYV95C.	4822 130 41487
	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682

S = Safety Part   Be sure to use exact replacement part.

```
  6487   Diode, Rect, BYV95A. . . . . . . . . .  4822 130 41601
  6488   Diode, Rect, EGP20DL-5100. . . . . . .  9322 164 42682
  6500   Diode, Bridge Rect . . . . . . . . . .  4822 130 10741
  6520   Diode, Rect, BYV95A. . . . . . . . . .  4822 130 41601
  6523   Diode, 1N4148. . . . . . . . . . . . .  4822 130 30621
  6524   Diode, Rect,  1N5062 . . . . . . . . .  4822 130 31083
  6525   Diode, Rect,  1N5062 . . . . . . . . .  4822 130 31083
  6526   Zener Diode, 22 volt . . . . . . . . .  9340 548 67115
  6540   Zener Diode, 6.2 volt. . . . . . . . .  4822 130 34167
  6541   Diode, Reference, UDZS10B. . . . . . .  4822 130 11551
  6560   Diode, Rect,  BYV29X-500 . . . . . . .  3139 120 52021
  6562   Diode, Rect, EGP20DL-5100. . . . . . .  9322 164 42682
  6563   Diode, BAS316. . . . . . . . . . . . .  4822 130 11397
  6565   Diode, BAV70 . . . . . . . . . . . . .  5322 130 34331
  6566   Diode, 1N4148. . . . . . . . . . . . .  4822 130 30621
  6569   Diode, BAS316. . . . . . . . . . . . .  4822 130 11397
  6570   Diode, Reference, PDZ6.8B. . . . . . .  4822 130 11416
  6580   Diode, BAS316. . . . . . . . . . . . .  4822 130 11397
  6691   LED, LTL-10234WHCR . . . . . . . . . .  9322 185 69682
  6692   IR Receiver. . . . . . . . . . . . . .  9322 127 54667
  6901   Res, Zero ohm, "Chip" Jumper . . . . .  4822 051 20008
  6904   Res, Zero ohm, "Chip" Jumper . . . . .  4822 051 20008
  7101   Transistor, NPN, BC846B. . . . . . . .  5322 130 60159
  7102   Transistor, PNP, BC856B. . . . . . . .  4822 130 60373
  7103   Transistor, NPN, BC846B. . . . . . . .  5322 130 60159
  7200   IC, TDA9577H/N1/AI/1130. . . . . . . .  9352 731 51557
  7201   Transistor, NPN, BC846B. . . . . . . .  5322 130 60159
  7204   Transistor, PNP, BC856B. . . . . . . .  4822 130 60373
  7205   Transistor, PNP, BC856B. . . . . . . .  4822 130 60373
  7330   IC, TDA6107JF/N3 . . . . . . . . . . .  9352 713 37112
  7441   Transistor, PNP, BC856B. . . . . . . .  4822 130 60373
  7443   Transistor, BC557B . . . . . . . . . .  4822 130 44568
  7450   Transistor, PNP, PDTA114ET . . . . . .  3198 010 44010
  7460   Transistor, NPN, BU4508DX. . . . . . .  9340 550 92127
  7461   Transistor, BC337-25 . . . . . . . . .  4822 130 40981
  7462   Transistor, NPN, PDTC143ZT . . . . . .  9340 547 00215
  7463   Transistor, BC327-25 . . . . . . . . .  4822 130 41246
  7471   IC, TDA8359J/N2. . . . . . . . . . . .  9352 701 64112
  7480   Transistor, NPN, BD135 . . . . . . . .  4822 130 40823
  7482   Transistor, NPN, BD135 . . . . . . . .  4822 130 40823
  7515   Coupler, Optic, TCET1103G. . . . . . .  8238 274 02070
  7520   IC, TEA1507P/N1. . . . . . . . . . . .  9352 673 56112
  7521   Power FET, FQPF9N50. . . . . . . . . .  9322 187 16687
  7522   Transistor, NPN, BC846B. . . . . . . .  5322 130 60159
  7540   Transistor, BC547B . . . . . . . . . .  4822 130 40959
  7541   Transistor, NPN, PDTC114ET . . . . . .  4822 130 11155
  7542   Transistor, PNP, BC856B. . . . . . . .  4822 130 60373
  7560   IC, LF33CV . . . . . . . . . . . . . .  4822 209 16978
  7561   Transistor, NPN, PDTC143ZT . . . . . .  9340 547 00215
  7580   Transistor, PNP, BC856B. . . . . . . .  4822 130 60373
  7602   IC, M24C08-WBN6. . . . . . . . . . . .  9322 154 38682
  7802   IC, Digital, MOS, HEF4053BT. . . . . .  5322 209 14481
  7861   IC, TDA9853H/V1. . . . . . . . . . . .  9352 671 19557
  7891   Transistor, NPN, BC846B. . . . . . . .  5322 130 60159
  7892   Transistor, NPN, BC846B. . . . . . . .  5322 130 60159
  7901   IC, AN7522N PH . . . . . . . . . . . .  9322 181 41682
  9611   Coil, 27u. . . . . . . . . . . . . . .  4822 157 52392
  9672   Coil, 22u. . . . . . . . . . . . . . .  4822 157 50961
  9678   Coil, 22u. . . . . . . . . . . . . . .  4822 157 50961
  CBA    Main Chassis Assembly. . . . . . . . .  3141 058 59191
```

Channel One Card Parts
Channel One Card Parts

2D 3 Line Comb Filter Parts
2D 3 Line Comb Filter Parts

DAF Panel Parts
DAF Panel Parts

DVD Eject Panel Parts
DVD Eject Panel Parts

DVD Interface Panel Parts
DVD Interface Panel Parts

Front Interface Panel Parts
Front Interface Panel Parts

ITV Front Jack Panel Parts
ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)
Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)
Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts
Side Jack Panel Parts

S = Safety Part   Be sure to use exact replacement part.

Subwoofer Panel Parts
Subwoofer Panel Parts

Top Control Panel Parts

```
         Top Control Panel Parts
  0215   3 Pin Connector. . . . . . . . . . . .  2422 025 09191
  1091   Tact Switch. . . . . . . . . . . . . .  2422 128 02742
  1092   Tact Switch. . . . . . . . . . . . . .  2422 128 02742
  1093   Tact Switch. . . . . . . . . . . . . .  2422 128 02742
  1094   Tact Switch. . . . . . . . . . . . . .  2422 128 02742
  3088   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90030
  3089   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90030
  3093   Res, 390 ohm, 1%, 1/8W, Metalized Glass 2322 734 63901
  3094   Res, 180 ohm, 1%, 1/8W, Metalized Glass 2322 734 61801
  3095   Res, 270 ohm, 1%, 1/8W, Metalized Glass 2322 734 62701
  3096   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90030
  3097   Res, 2K7, 1%, 1/8W, Metalized Glass. .  2322 734 62702
  3098   Res, 75 ohm, 1%, 1/8W, Metalized Glass  2322 734 67509
  3099   Res, 68 ohm, 1%, 1/8W, Metalized Glass  2322 734 66809
  4091   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90020
  CBA    Top Control Panel Assembly . . . . . .  3139 177 26241
```

Cabinet & Accessory Parts

```
         Cabinet & Accessory Parts
S AC01   AC Cord. . . . . . . . . . . . . . . .  3139 128 76161
  AC04   Batteries for Remote Control Transmitte 9299 000 65263
  AC05   Cabinet Back . . . . . . . . . . . . .  3139 124 45991
S AC09   CRT, A51ERF135X82. . . . . . . . . . .  9301 903 81343
S AC12   Degaussing Coil. . . . . . . . . . . .  3141 058 20131
  AC17   Owner's Manual . . . . . . . . . . . .  3121 235 20621
  AC17   Owner's Manual, French . . . . . . . .  3139 125 31601
  AC20A  Cabinet Front. . . . . . . . . . . . .  3139 177 65671
  AC20B  Chassis Guide. . . . . . . . . . . . .  3139 124 30812
  AC20C  Light Guide. . . . . . . . . . . . . .  3139 124 32221
  AC20D  Nameplate. . . . . . . . . . . . . . .  3139 120 01371
  AC20E  Power Button . . . . . . . . . . . . .  3139 177 65691
  AC20H  Speaker, 16 ohm, 5W (2 Used) . . . . .  2422 264 00411
  AC20J1 Top Control Bracket. . . . . . . . . .  3139 124 30381
  AC20J3 Top Control Cover. . . . . . . . . . .  3139 124 31131
  AC20J4 Top Control Rubber . . . . . . . . . .  3139 124 30391
  AC20J5 Top Control Button Assembly. . . . . .  3139 137 66921
  REMOTE Remote Control Transmitter, RC19335004/
         01. . . . . . . . . . . . . . . . . . . 3139 228 86464
```

20PT643R01 - Manual no. 7638

Main Chassis Parts

Main Chassis Parts

S	Ref	Description	Part No.
	0211	2 Pin Connector	2422 025 16269
	0212	2 Pin Connector	2422 025 16375
	0220	5 Pin Connector	2422 025 04853
	0221	2 Pin Connector	2422 025 15503
	0222	2 Pin Connector	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack	2422 026 04926
	0229	3 Pin Connector	2412 020 00725
	0239	3 Pin Connector	2422 025 16382
	0243	6 Pin Connector	2422 025 04854
	0244	5 Pin Connector	2422 025 04853
	0245	6 Pin Connector	2422 025 04854
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector	2412 020 00725
	0269	Jack	2422 026 05182
	0280	4 Pin Connector	2422 025 12479
S	1000	Tuner, V+U, PLL	2422 542 90108
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC	2422 086 10914
S	1515	Relay, 5 Amp, 12V	2422 132 07467
	1606	Tact Switch	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1811	3 Pin Connector	2412 020 00725
	1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344
	2004	Cap, 47n, 10%, 50v, Ceramic	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic	2238 786 19852
	2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2226	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2241	Cap, 1n5, 10%, 50v, Ceramic	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2405	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2441	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic	2020 021 91139
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 270n, 5%, 250v, Metalized Polypropylene	2222 479 90016
	2458	Cap, 2u2, 20%, 100v, Electrolytic	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
	2463	Cap, 680p, 10%, 2000v, Ceramic	2020 558 90485
	2465	Cap, 9n1, 5%, 1600v, Polypropylene	2222 375 90153
	2467	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2468	Cap, 33n, 10%, 400v, Polyester	2222 347 90227
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic	3198 019 41020
	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2222 336 29148
	2501	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90626
	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic	2020 554 90128
	2520	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2606	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic	3198 017 21050
	2691	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2802	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2803	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2816	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2862	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2864	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2865	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2866	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2867	Cap, 1n8, 10%, 50v, Ceramic	2238 586 15626
	2868	Cap, 150p, 5%, 50v, Ceramic	3198 016 31510
	2869	Cap, 68n, 10%, 50v, Polyester	3198 014 06830
	2870	Cap, 68n, 10%, 50v, Polyester	3198 014 06830
	2871	Cap, 150p, 5%, 50v, Ceramic	3198 016 31510
	2872	Cap, 1n8, 10%, 50v, Ceramic	2238 586 15626

S = Safety Part   Be sure to use exact replacement part.

20PT643R01 (continued)

S	Ref	Description	Part No.
	2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
	2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
	2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240
	2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
	2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 580 15624
	2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
	2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 580 15624
	2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
	3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
	3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
	3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202
	3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
	3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
	3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
	3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
	3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3247	Res, 270K, 5%, 1/16W, Metalized Glass.	2322 702 60274
	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
	3341	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
	3342	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3443	Res, 1M, 5%, 1/10W, Metalized Glass. .	3198 021 51050
	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
	3452	Res, 3K6, 1%, 3/5W, Metal Film	2312 915 13602
	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3454	Res, 1K5, 1%, 3/5W, Metal Film	2312 915 11502
S	3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
	3456	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3457	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S	3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
	3470	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
	3472	Res, 6R8, 1%, 3/5W, Metal Film	2312 915 16808
	3473	Res, 6R8, 1%, 3/5W, Metal Film	2312 915 16808
	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
	3481	Res, 18K, 1%, 3/5W, Metal Film	2312 915 11803
	3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3491	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3495	Res, 22K, 5%, 1/10W, Metalized Glass .	3198 021 52230
	3496	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
	3497	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
	3498	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S	3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620

S = Safety Part   Be sure to use exact replacement part.

20PT643R01 (continued)

S 3565 Res, 330 ohm, 5%, 1W, Metal Film . . . 3198 012 13310
3566 Res, 2K2, 5%, 1/10W, Metalized Glass . 3198 021 52220
3569 Res, 5K6, 5%, 1/10W, Metalized Glass . 3198 021 55620
3580 Res, 47K, 5%, 1/10W, Metalized Glass . 3198 021 54730
3594 Res, 330 ohm, 5%, 1/10W, Metalized Glas 3198 021 53310
3595 Res, 220K, 5%, 1/10W, Metalized Glass. 3198 021 52240
3596 Res, 220K, 5%, 1/10W, Metalized Glass. 3198 021 52240
3601 Res, 8K2, 5%, 1/6W, Carbon Film. . . . 3198 011 08220
3603 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3604 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3605 Res, 4K7, 5%, 1/16W, Metalized Glass . 3198 021 34720
3606 Res, 2K2, 5%, 1/6W, Carbon Film. . . . 3198 011 02220
3607 Res, 2K2, 5%, 1/6W, Carbon Film. . . . 3198 011 02220
3608 Res, 470 ohm, 5%, 1/6W, Carbon Film. . 3198 011 04710
3609 Res, 1K, 5%, 1/6W, Carbon Film 3198 011 01020
3610 Res, 8K2, 5%, 1/6W, Carbon Film. . . . 3198 011 08220
3611 Res, 100 ohm, 5%, 1/16W, Metalized Glas 3198 021 31010
3618 Res, 6K8, 5%, 1/6W, Carbon Film. . . . 3198 011 06820
3622 Res, Zero ohm, "Chip" Jumper 3198 021 90030
3623 Res, 4K7, 5%, 1/16W, Metalized Glass . 3198 021 34720
3624 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3625 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3626 Res, 4K7, 5%, 1/16W, Metalized Glass . 3198 021 34720
3627 Res, 4K7, 5%, 1/16W, Metalized Glass . 3198 021 34720
3628 Res, 10K, 5%, 1/16W, Metalized Glass . 3198 021 31030
3630 Res, 470 ohm, 5%, 1/16W, Metalized Glas 3198 021 34710
3632 Res, Zero ohm, "Chip" Jumper 3198 021 90030
3634 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3635 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3636 Res, 1K, 5%, 1/10W, Metalized Glass. . 3198 021 51020
3637 Res, 75 ohm, 5%, 1/16W, Metalized Glass 3198 021 37590
3638 Res, 75 ohm, 5%, 1/16W, Metalized Glass 3198 021 37590
3639 Res, Zero ohm, "Chip" Jumper 3198 021 90030
3640 Res, 8K2, 5%, 1/6W, Carbon Film. . . . 3198 011 08220
3685 Res, 1K5, 1%, 1/8W, Metalized Glass. . 2322 734 61502
3691 Res, 330 ohm, 5%, 1/16W, Metalized Glas 3198 021 33310
3693 Res, 220 ohm, 5%, 1/16W, Metalized Glas 3198 021 32210
3694 Res, 4K7, 5%, 1/16W, Metalized Glass . 3198 021 34720
3801 Res, 220 ohm, 5%, 1/16W, Metalized Glas 3198 021 32210
3802 Res, 1K, 5%, 1/16W, Metalized Glass. . 3198 021 31020
3814 Res, 100K, 5%, 1/16W, Metalized Glass. 3198 021 31040
3815 Res, 100K, 5%, 1/16W, Metalized Glass. 3198 021 31040
3816 Res, 100K, 5%, 1/16W, Metalized Glass. 3198 021 31040
3817 Res, 100K, 5%, 1/16W, Metalized Glass. 3198 021 31040
3818 Res, 100K, 5%, 1/16W, Metalized Glass. 3198 021 31040
3819 Res, 100K, 5%, 1/16W, Metalized Glass. 3198 021 31040
3820 Res, 100K, 5%, 1/16W, Metalized Glass. 3198 021 31040
3821 Res, 100K, 5%, 1/16W, Metalized Glass. 3198 021 31040
3861 Res, 100K, 5%, 1/16W, Metalized Glass. 3198 021 31040
3862 Res, 15K, 5%, 1/16W, Metalized Glass . 3198 021 31530
3863 Res, 1K2, 5%, 1/16W, Metalized Glass . 3198 021 31220
3864 Res, 100 ohm, 5%, 1/16W, Metalized Glas 3198 021 31010
3865 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3866 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3867 Res, 3K3, 5%, 1/16W, Metalized Glass . 3198 021 33320
3891 Res, 100 ohm, 5%, 1/16W, Metalized Glas 3198 021 31010
3893 Res, 330 ohm, 5%, 1/16W, Metalized Glas 3198 021 33310
3894 Res, 100 ohm, 5%, 1/16W, Metalized Glas 3198 021 31010
3896 Res, 330 ohm, 5%, 1/16W, Metalized Glas 3198 021 33310
3901 Res, 1K, 5%, 1/16W, Metalized Glass. . 3198 021 31020
3902 Res, 3K3, 5%, 1/16W, Metalized Glass . 3198 021 33320
3903 Res, 3K3, 5%, 1/16W, Metalized Glass . 3198 021 33320
3904 Res, 10K, 5%, 1/16W, Metalized Glass . 3198 021 31030
3905 Res, 3K3, 5%, 1/16W, Metalized Glass . 3198 021 33320
3906 Res, 10K, 5%, 1/16W, Metalized Glass . 3198 021 31030
3907 Res, 8K2, 5%, 1/16W, Metalized Glass . 3198 021 38220
4001 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4002 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4122 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4123 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4127 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4214 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4216 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4341 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4388 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4401 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4431 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4601 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4608 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4609 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4613 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4614 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4615 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4616 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4617 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4619 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4622 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4623 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4691 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4692 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4693 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4807 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4812 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4814 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4820 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4825 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4827 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4829 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4830 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4831 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4861 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4863 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4865 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4866 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4867 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4869 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4870 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4871 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4873 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4876 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4879 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4880 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4881 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4883 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4885 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4892 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4901 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4903 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4906 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4924 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4925 Res, Zero ohm, "Chip" Jumper 3198 021 90020
5001 Coil, 27u, 10% 3198 018 22790
5002 Coil, 820n, 10%. 3198 018 18270
5201 Coil, 6u8, 5%. 3198 018 16880
5204 Fixed, Inductor, 100MHz, 80 ohm. . . . 3198 018 90020
5205 Fixed, Inductor, 100MHz, 80 ohm. . . . 3198 018 90020
5206 Fixed, Inductor, 100MHz, 80 ohm. . . . 3198 018 90020
5242 Coil, 10u, 5%. 3198 018 11090
5342 Coil, 22u. 2422 535 97333
S 5445 Transformer, LOT 2422 531 02519
5452 Fixed, Inductor, 100MHz, 80 ohm. . . . 3198 018 90020
5453 Coil, 22u, 5%. 3198 018 12290
5457 Coil, Linear Correction, 82u 2422 536 00425
5461 Transformer, Signal Driver, SC10015-00 2422 531 02465
5471 Coil, 6u8, 20% 3198 018 76880
5472 Coil, 3u3, 10% 3198 018 23380
5480 Coil, 22u. 2422 535 97333
S 5501 Mains Filter 2422 549 43432
S 5520 Transformer, SS39009-04. . . . . 2422 531 02459
5521 Fixed, Inductor, 100MHz, 50R. 3198 018 90010
5560 Fixed, Inductor, 100MHz, 50R. 3198 018 90010
5561 Coil, 27u, 5%. 2422 535 95366
5562 Fixed, Inductor, 100MHz, 50R. 3198 018 90010
5564 Fixed, Inductor, 100MHz, 50R. 3198 018 90010
5602 Coil, 5u6, 5%. 3198 018 15680
5603 Coil, 5u6, 5%. 3198 018 15680
5604 Coil, 5u6, 5%. 3198 018 15680
5861 Coil, 10u, 5%. 3198 018 11090
6001 Zener Diode, 33 volt 3198 010 23390
6150 Diode, Signal, BAS316. . . . . 3198 010 10630
6201 Diode, Signal, BAS316. . . . . 3198 010 10630
6202 Diode, Signal, BAS316. . . . . 3198 010 10630
6206 Zener Diode, 6.8 volt. 3198 020 56880
6331 Diode, Signal, BAV21 . . . . 3198 010 10070
6332 Diode, Signal, BAS316. . . . . 3198 010 10630
6333 Diode, Signal, BAV21 . . . . 3198 010 10070
6335 Diode, Signal, BAV21 . . . . 3198 010 10070
6445 Zener Diode, 10 volt 3198 020 51090
6447 Diode, Signal, 1N4148. . . . . 3198 010 10010
6448 Zener Diode, 6.2 volt. 9331 668 30133
6449 Diode, Signal, BAV99 . . . . 3198 010 10620
6453 Zener Diode, 5.6 volt. 3198 020 55680
6460 Diode, Rect, BY228/24. . . . . 9340 559 50112
6461 Diode, Rect, RGP30J-L7004. . . . . . . 9338 617 60682
6463 Zener Diode, 8.2 volt. 3198 020 58280
6465 Diode, Signal, BAV21 . . . . 3198 010 10070
6466 Diode, Signal, BAV21 . . . . 3198 010 10070
6467 Diode, Signal, BAS316. . . . . 3198 010 10630
6468 Diode, Signal, BAS316. . . . . 3198 010 10630
6470 Diode, Signal, BAV99 . . . . 3198 010 10620
6476 Zener Diode, 15 volt 3198 010 21590
6481 Zener Diode, 5.6 volt. 3198 010 25680
6482 Zener Diode, 9.1 volt. 9331 177 80133
6483 Zener Diode, 33 volt 3198 010 23390
6485 Diode, Rect, BYD33J. 9337 234 20133
6486 Diode, Rect, EGP20DL-5100. . . . . . . 9322 164 42682
6487 Diode, Rect, BYD33D. 9337 234 00133
6488 Diode, Rect, EGP20DL-5100. . . . . . . 9322 164 42682
6500 Diode, Bridge Rect, GBU6JL-7002. . . . 9322 138 08667
6520 Diode, Rect, BYD33D. 9337 234 00133
6523 Diode, Signal, 1N4148. . . . . 3198 010 10010
6524 Diode, Rect, 1N5062. . . . . 3198 010 10120
6525 Diode, Rect, 1N5062. . . . . 3198 010 10120
6526 Zener Diode, 22 volt 3198 020 52290

S = Safety Part   Be sure to use exact replacement part.

```
  6540   Zener Diode, 6.2 volt. . . . . . . . .  9331 668 30133
  6541   Zener Diode, 10 volt . . . . . . . . .  3198 020 51090
  6560   Diode, Rect, BYV29X-500. . . . . . . .  9340 555 59127
  6562   Diode, Rect, EGP20DL-5100. . . . . . .  9322 164 42682
  6563   Diode, Signal, BAS316. . . . . . . . .  3198 010 10630
  6565   Diode, Signal, BAV70 . . . . . . . . .  9331 849 10215
  6566   Diode, Signal, 1N4148. . . . . . . . .  3198 010 10010
  6569   Diode, Signal, BAS316. . . . . . . . .  3198 010 10630
  6570   Zener Diode, 6.8 volt. . . . . . . . .  3198 020 56880
  6580   Diode, Signal, BAS316. . . . . . . . .  3198 010 10630
  6691   LED, LTL-10234WHCR . . . . . . . . . .  9322 185 69682
  6692   IR Receiver. . . . . . . . . . . . . .  9322 127 54667
  6901   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90020
  6904   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90020
  7101   Transistor, NPN, BC847B(COL) . . . . .  3198 010 42030
  7102   Transistor, PNP, BC857B(COL) . . . . .  3198 010 42150
  7103   Transistor, NPN, BC847B(COL) . . . . .  3198 010 42030
  7200   IC, TDA9577H/N1/AI/1130. . . . . . . .  9352 731 51557
  7201   Transistor, NPN, BC847B(COL) . . . . .  3198 010 42030
  7204   Transistor, PNP, BC857B(COL) . . . . .  3198 010 42150
  7205   Transistor, PNP, BC857B(COL) . . . . .  3198 010 42150
  7330   IC, TDA6107JF/N3 . . . . . . . . . . .  9352 713 37112
  7441   Transistor, PNP, BC857B(COL) . . . . .  3198 010 42150
  7443   Transistor, PNP, BC557B(COL) . . . . .  3198 020 40110
  7450   Transistor, PNP, PDTA114ET . . . . . .  3198 010 44010
  7460   Transistor, NPN, BU4508DX. . . . . . .  9340 550 92127
  7461   Transistor, NPN, BC337-25(COL) . . . .  3198 020 43530
  7462   Transistor, NPN, PDTC143ZT . . . . . .  9340 547 00215
  7463   Transistor, PNP, BC327-25(COL) . . . .  3198 020 43430
  7471   IC, TDA8359J/N2. . . . . . . . . . . .  9352 701 64112
  7480   Transistor, NPN, BD135 . . . . . . . .  3198 020 41010
  7482   Transistor, NPN, BD135 . . . . . . . .  3198 020 41010
S 7515   Optical Coupler, TCET1103(G) . . . . .  9322 140 14667
  7520   IC, TEA1507P/N1. . . . . . . . . . . .  9352 673 56112
  7521   Power FET, FQPF9N50. . . . . . . . . .  9322 187 16687
  7522   Transistor, NPN, BC847B(COL) . . . . .  3198 010 42030
  7540   Transistor, NPN, BC547B(COL) . . . . .  3198 020 40030
  7541   Transistor, NPN, PDTC114ET . . . . . .  9340 310 10215
  7542   Transistor, PNP, BC857B(COL) . . . . .  3198 010 42150
  7560   IC, L78L33ACZ. . . . . . . . . . . . .  9322 134 92676
  7561   Transistor, NPN, PDTC143ZT . . . . . .  9340 547 00215
  7580   Transistor, PNP, BC857B(COL) . . . . .  3198 010 42150
  7602   IC, M24C08-WBN6. . . . . . . . . . . .  9322 154 38682
  7802   IC, HEF4053BT. . . . . . . . . . . . .  9333 729 60653
  7861   IC, TDA9853H/V1. . . . . . . . . . . .  9352 671 19557
  7891   Transistor, NPN, BC847B(COL) . . . . .  3198 010 42030
  7892   Transistor, NPN, BC847B(COL) . . . . .  3198 010 42030
  7901   IC, AN7522N PH . . . . . . . . . . . .  9322 181 41682
  9611   Coil, 27u, 10% . . . . . . . . . . . .  3198 018 22790
  9672   Coil, 22u, 10% . . . . . . . . . . . .  3198 018 22290
  9678   Coil, 22u, 10% . . . . . . . . . . . .  3198 018 22290
  CBA    Main Chassis Assembly. . . . . . . . .  3139 187 23211
```

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

```
  0215   3 Pin Connector. . . . . . . . . . . .  2422 025 09191
  1091   Tact Switch. . . . . . . . . . . . . .  2422 128 02742
  1092   Tact Switch. . . . . . . . . . . . . .  2422 128 02742
  1093   Tact Switch. . . . . . . . . . . . . .  2422 128 02742
  1094   Tact Switch. . . . . . . . . . . . . .  2422 128 02742
  3088   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90020
  3089   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90020
  3093   Res, 390 ohm, 1%, 1/8W, Metalized Glass 2322 734 63901
  3094   Res, 180 ohm, 1%, 1/8W, Metalized Glass 2322 734 61801
  3095   Res, 270 ohm, 1%, 1/8W, Metalized Glass 2322 734 62701
  3096   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90020
  3097   Res, 2K7, 1%, 1/8W, Metalized Glass. .  2322 734 62702
  3098   Res, 75 ohm, 1%, 1/8W, Metalized Glass  2322 734 67509
  3099   Res, 68 ohm, 1%, 1/8W, Metalized Glass  2322 734 66809
  4091   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90020
  CBA    Top Control Panel Assembly . . . . . .  3139 177 26241
```

Cabinet & Accessory Parts

Cabinet & Accessory Parts

```
S AC01   AC Cord. . . . . . . . . . . . . . . .  3139 128 76161
  AC03   Anode Lead Spacer. . . . . . . . . . .  3139 124 17541
  AC04   Batteries for Remote Control Transmitte 9299 000 65263
  AC05   Cabinet Back . . . . . . . . . . . . .  3139 124 45991
S AC09   CRT, A51ERF135X82. . . . . . . . . . .  9301 903 81301
S AC12   Degaussing Coil. . . . . . . . . . . .  3141 058 20131
  AC17   Owner's Manual . . . . . . . . . . . .  3121 235 20621
  AC20A  Cabinet Front. . . . . . . . . . . . .  3139 177 65671
  AC20B  Chassis Guide. . . . . . . . . . . . .  3139 124 30812
  AC20C  Light Guide. . . . . . . . . . . . . .  3139 124 32221
  AC20D  Nameplate. . . . . . . . . . . . . . .  3139 120 01371
  AC20E  Power Button . . . . . . . . . . . . .  3139 177 65691
  AC20H  Speaker, 16 ohm, 5W (2 Used) . . . . .  2422 264 00411
  AC20J1 Top Control Bracket. . . . . . . . . .  3139 124 30381
  AC20J3 Top Control Cover. . . . . . . . . . .  3139 124 31131
  AC20J4 Top Control Rubber . . . . . . . . . .  3139 124 30391
  AC20J5 Top Control Button Assembly. . . . . .  3139 137 66921
  REMOTE Remote Control Transmitter, RC19335004/
         01. . . . . . . . . . . . . . . . . . . 3139 228 86463
```

S = Safety Part   Be sure to use exact replacement part.

20PT653R/37 - Manual no. 7638

Main Chassis Parts

S	Ref	Description	Part No.
		Main Chassis Parts	
	0211	2 Pin Connector	2422 025 16374
	0212	2 Pin Connector	2422 025 16375
	0214	5 Pin Connector	2422 025 12481
	0219	6 Pin Connector	2422 025 12482
	0220	5 Pin Connector	2422 025 04853
	0221	2 Pin Connector	2422 025 15503
	0222	2 Pin Connector	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack	2422 026 04926
	0229	3 Pin Connector	2412 020 00725
	0239	3 Pin Connector	2422 025 16382
	0243	6 Pin Connector	2422 025 04854
	0244	5 Pin Connector	2422 025 04853
	0245	6 Pin Connector	2422 025 04854
	0246	5 Pin Connector	2422 025 12481
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U, PLL	2422 542 90108
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC	2422 086 10914
S	1515	Relay, 5 Amp, 12V	2422 132 07467
	1660	Crystal, 12MHz000	2422 543 01203
	1811	3 Pin Connector	2412 020 00725
	1861	Ceramic Resonator, 514KHz5, CSB503F58	2422 540 98344
	2004	Cap, 47n, 10%, 50v, Ceramic	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2226	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2241	Cap, 1n5, 10%, 50v, Ceramic	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester	2222 368 90177
	2340	Cap, 10u, 20%, 250v, Electrolytic	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2405	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2441	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic	2020 021 91139
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 270n, 5%, 250v, Metalized Polypropylene	2222 479 90016
	2458	Cap, 2u2, 20%, 100v, Electrolytic	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
	2463	Cap, 680p, 10%, 2000v, Ceramic	2020 558 90485
	2465	Cap, 9n1, 5%, 1600v, Polypropylene	2222 375 90153
	2467	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2468	Cap, 33n, 10%, 400v, Polyester	2222 347 90227
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic	3198 019 41020
	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2222 336 29148
	2501	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90626
	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic	2020 554 90128
	2520	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2606	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic	3198 017 21050
	2802	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2803	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2816	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2862	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2864	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2865	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2866	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2867	Cap, 1n8, 10%, 50v, Ceramic	2238 586 15626
	2868	Cap, 150p, 5%, 50v, Ceramic	3198 016 31510
	2869	Cap, 68n, 10%, 50v, Polyester	3198 014 06830
	2870	Cap, 68n, 10%, 50v, Polyester	3198 014 06830
	2871	Cap, 150p, 5%, 50v, Ceramic	3198 016 31510

S = Safety Part   Be sure to use exact replacement part.

20PT653R/37 (continued)

Ref	Description	Part No.
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 580 15624
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 580 15624
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3247	Res, 270K, 5%, 1/16W, Metalized Glass.	2322 702 60274
3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
3341	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3342	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3442	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3443	Res, 1M, 5%, 1/10W, Metalized Glass. .	3198 021 51050
3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
3452	Res, 3K6, 1%, 3/5W, Metal Film	2312 915 13602
3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3454	Res, 1K5, 1%, 3/5W, Metal Film	2312 915 11502
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3456	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3457	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3470	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
3472	Res, 6R8, 1%, 3/5W, Metal Film	2312 915 16808
3473	Res, 6R8, 1%, 3/5W, Metal Film	2312 915 16808
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
3481	Res, 18K, 1%, 3/5W, Metal Film	2312 915 11803
3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3491	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3495	Res, 22K, 5%, 1/10W, Metalized Glass .	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3497	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3498	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3507	Surge Protector.	2422 549 43073
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S 3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
S 3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310

S = Safety Part   Be sure to use exact replacement part.

20PT653R/37 (continued)

Ref	Description	Part No.
3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
3622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3630	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198 021 31530
3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198 021 31220
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4122	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4123	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4127	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
5001	Coil, 27u, 10%	3198 018 22790
5002	Coil, 820n, 10%.	3198 018 18270
5201	Coil, 6u8, 5%.	3198 018 16880
5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
5242	Coil, 10u, 5%.	3198 018 11090
5342	Coil, 22u.	2422 535 97333
S 5445	Transformer, LOT	2422 531 02519
5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
5453	Coil, 22u, 5%.	3198 018 12290
5457	Coil, Linear Correction, 82u	2422 536 00425
5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
5471	Coil, 6u8, 20%	3198 018 76880
5472	Coil, 3u3, 10%	3198 018 23380
5480	Coil, 22u.	2422 535 97333
S 5501	Mains Filter	2422 549 43432
S 5520	Transformer, SS39009-04.	2422 531 02459
5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5561	Coil, 27u, 5%.	2422 535 95366
5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5602	Coil, 5u6, 5%.	3198 018 15680
5603	Coil, 5u6, 5%.	3198 018 15680
5604	Coil, 5u6, 5%.	3198 018 15680
5861	Coil, 10u, 5%.	3198 018 11090
6001	Zener Diode, 33 volt	3198 010 23390
6150	Diode, Signal, BAS316.	3198 010 10630
6201	Diode, Signal, BAS316.	3198 010 10630
6202	Diode, Signal, BAS316.	3198 010 10630
6206	Zener Diode, 6.8 volt.	3198 020 56880
6331	Diode, Signal, BAV21	3198 010 10070
6332	Diode, Signal, BAS316.	3198 010 10630
6333	Diode, Signal, BAV21	3198 010 10070
6335	Diode, Signal, BAV21	3198 010 10070
6445	Zener Diode, 10 volt	3198 020 51090
6447	Diode, Signal, 1N4148.	3198 010 10010
6448	Zener Diode, 6.2 volt.	9331 668 30133
6449	Diode, Signal, BAV99	3198 010 10620
6453	Zener Diode, 5.6 volt.	3198 020 55680
6460	Diode, Rect, BY228/24.	9340 559 50112
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
6463	Zener Diode, 8.2 volt.	3198 020 58280
6465	Diode, Signal, BAV21	3198 010 10070
6466	Diode, Signal, BAV21	3198 010 10070
6467	Diode, Signal, BAS316.	3198 010 10630
6468	Diode, Signal, BAS316.	3198 010 10630
6470	Diode, Signal, BAV99	3198 010 10620
6476	Zener Diode, 15 volt	3198 010 21590
6481	Zener Diode, 5.6 volt.	3198 010 25680
6482	Zener Diode, 9.1 volt.	9331 177 80133
6483	Zener Diode, 33 volt	3198 010 23390
6485	Diode, Rect, BYD33J.	9337 234 20133
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
6487	Diode, Rect, BYD33D.	9337 234 00133
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
6500	Diode, Bridge Rect, GBU6JL-7002. . . .	9322 138 08667
6520	Diode, Rect, BYD33D.	9337 234 00133
6523	Diode, Signal, 1N4148.	3198 010 10010
6524	Diode, Rect, 1N5062.	3198 010 10120
6525	Diode, Rect, 1N5062.	3198 010 10120
6526	Zener Diode, 22 volt	3198 020 52290
6540	Zener Diode, 6.2 volt.	9331 668 30133
6541	Zener Diode, 10 volt	3198 020 51090
6560	Diode, Rect, BYV29X-500.	9340 555 59127
6562	Diode, Rect, EGP20DL-5100.	9322 164 42682

S = Safety Part   Be sure to use exact replacement part.

20PT653R/37 (continued)

	Ref	Description	Part No.
	6563	Diode, Signal, BAS316.	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148.	3198 010 10010
	6569	Diode, Signal, BAS316.	3198 010 10630
	6570	Zener Diode, 6.8 volt.	3198 020 56880
	6580	Diode, Signal, BAS316.	3198 010 10630
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7102	Transistor, PNP, BC857B(COL)	3198 010 42150
	7103	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9577H/N1/AI/1130.	9352 731 51557
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7450	Transistor, PNP, PDTA114ET	3198 010 44010
	7460	Transistor, NPN, BU4508DX.	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2.	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1.	9352 673 56112
	7521	Power FET, FQPF9N50.	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, L78L33ACZ.	9322 134 92676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C08-WBN6.	9322 154 38682
	7802	IC, HEF4053BT.	9333 729 60653
	7861	IC, TDA9853H/V1.	9352 671 19557
	7891	Transistor, NPN, BC847B(COL)	3198 010 42030
	7892	Transistor, NPN, BC847B(COL)	3198 010 42030
	7901	IC, AN7522N PH	9322 181 41682
	9611	Coil, 27u, 10%	3198 018 22790
	9672	Coil, 22u, 10%	3198 018 22290
	9678	Coil, 22u, 10%	3198 018 22290
	CBA	Main Chassis Assembly.	3139 187 21091

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

	Ref	Description	Part No.
S	0211	2 Pin Connector.	2422 025 16268
S	0212	2 Pin Connector.	2422 025 16559
	0214	5 Pin Connector.	2422 025 06353
	1606	Tact Switch.	2422 128 02742
	2691	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
	2692	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
	2693	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
	2694	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
	2695	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
	2698	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
S	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
	3685	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3691	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
	3693	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
	6691	LED, LTL-10234WHCR	9322 185 69682
	6692	IR Receiver, TSOP1836UH3V.	9322 127 54667
	CBA	Front Interface Panel Assembly	3139 177 26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts

Side Jack Panel Parts

	Ref	Description	Part No.
	0232	Headphone Jack	2422 026 04747
	0250	A/V Jack	2422 026 04815
	0251	6 Pin Connector.	2422 025 12482
	0254	5 Pin Connector.	2422 025 12481
	0255	4 Pin Connector.	2422 025 12479
	1810	3 Pin Connector.	2412 020 00725
	1811	3 Pin Connector.	2412 020 00725
	2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2176	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
	2177	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2178	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
	2179	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2180	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2181	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	3150	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
	3152	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
	3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
	3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	6161	Zener Diode, 6.8 volt.	3198 010 26880
	7802	IC, HEF4053BT.	9333 729 60653
	CBA	Side Jack Panel Assembly	3139 177 26231

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

	Ref	Description	Part No.
	0215	3 Pin Connector.	2422 025 16601
	1091	Tact Switch.	2422 128 02742
	1092	Tact Switch.	2422 128 02742
	1093	Tact Switch.	2422 128 02742
	1094	Tact Switch.	2422 128 02742
	3013	Res, 2K7, 1%, 1/8W, Metalized Glass. .	2322 734 62702
	3084	Res, 75 ohm, 1%, 1/8W, Metalized Glass	2322 734 67509
	3085	Res, 68 ohm, 1%, 1/8W, Metalized Glass	2322 734 66809
	3093	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322 734 63901
	3094	Res, 180 ohm, 1%, 1/8W, Metalized Glass	2322 734 61801
	3095	Res, 270 ohm, 1%, 1/8W, Metalized Glass	2322 734 62701
	4086	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4087	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4089	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4090	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	CBA	Top Control Panel Assembly	3139 187 20701

Cabinet & Accessory Parts

Cabinet & Accessory Parts

	Ref	Description	Part No.
S	AC01	AC Cord.	3139 128 76161
	AC03	Anode Lead Spacer.	3139 124 17541
	AC04	Batteries for Remote Control Transmitte	9299 000 65263
	AC05	Cabinet Back	3139 124 43531
S	AC09	CRT, A51ERF135X82.	9301 903 81301
S	AC12	Degaussing Coil.	3141 058 20131
	AC13	Front Interface Panel Bracket.	3139 124 32892
	AC14	Front Main PCB Bracket	3139 124 45641
	AC17	Owner's Manual	3139 125 30831
	AC19	Side Jack Panel Bracket.	3139 124 37061
	AC20A	Cabinet Front.	3139 177 53181
	AC20B	Chassis Guide.	3139 124 25893
	AC20B	Chassis Guide.	3139 124 45661
	AC20C	Light Guide.	3139 124 41421
	AC20D	Nameplate.	3139 120 01371
	AC20E	Power Button	3139 177 58491
	AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00411
	AC20J	Top Control Assembly	3139 177 56381
	AC20J1	Top Control Bracket.	3139 124 39172
	AC20J2	Top Control Buttons.	3139 124 39182
	REMOTE	Remote Control Transmitter, RC19036001/ 01.	3139 228 86493

S = Safety Part   Be sure to use exact replacement part.

21PT6331/44R - Manual no. 7638

Main Chassis Parts

S	Ref	Description	Part No.
		Main Chassis Parts	
	0022	Bracket.	3139 124 44421
	0040	Cover, 3 Pin Cinch	3139 124 25551
	0118	U-Cooling Plate.	3139 121 26731
	0122	Heatsink	3139 121 62214
	0123	Heatsink, Audio.	3139 121 62501
	0127	Socket Fuse.	2422 088 00271
	0129	NTC Holder	3139 120 10151
	0136	IC-Spring.	3104 301 22081
	0137	Spring	3139 121 24583
	0138	IC-Spring.	3104 301 22081
	0139	Spring	3135 011 01041
	0141	IC-Spring.	3104 301 22081
	0152	Cable, DIPMate, 6 Pin.	3139 121 08841
	0153	Cable, DIPMate, 5 Pin, 480mm	3139 121 07951
	0211	2 Pin Connector.	2422 025 16269
	0218	A/V Jack	2422 026 04742
	0232	Headphone Jack	2422 026 04747
S	0254	9 Pin CRT Socket	2422 500 80076
	0280	4 Pin Connector.	2422 025 12479
	0320	Factory Plate.	3122 120 01701
S	1000	Tuner, V+U, PLL	2422 542 90108
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1600	Tact Switch.	2422 128 02742
	1601	Tact Switch.	2422 128 02742
	1602	Tact Switch.	2422 128 02742
	1603	Tact Switch.	2422 128 02742
	1606	Tact Switch.	2422 128 02742
	1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344
	2004	Cap, 47n, +80/-20%, 50v, Ceramic	3198 024 44730
	2181	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2182	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2183	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2209	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2210	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2243	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
	2457	Cap, 270n, 5%, 250v, Metalized Polypropylene.	2222 479 90016
	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
S	2463	Cap, 390p, 10%, 2000v, Ceramic	2020 558 90482
S	2465	Cap, 9n1, 5%, 1600v, Polypropylene	2020 301 90248
	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
	2468	Cap, 33n, 10%, 400v, Polyester	2222 347 90227
	2472	Cap, 10n, 10%, 100v, Metalized Polyeste	2222 365 85103
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2482	Cap, 33n, 10%, 250v, Polyester	2222 347 90213
	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
S	2503	Cap, 330u, 20%, 450v, Electrolytic	2020 024 90774
	2509	Cap, 100n, 20%, 275v, Metalized Polypropylene	2222 336 29144
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90128
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
	2606	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2803	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2862	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2864	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2865	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2866	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
	2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
	2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
	2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
	2873	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2874	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
	2875	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
	2876	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2877	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2878	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2883	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710
	2884	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240
	2886	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2902	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
	2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
	2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
	2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
	2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
	2981	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2982	Cap, 470p, 10%, 50v, Ceramic	3198 017 34710
	2983	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2984	Cap, 470p, 10%, 50v, Ceramic	3198 017 34710
	3182	Wire Jumper.	3198 036 90010
	3184	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3185	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
	3186	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3187	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
	3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3247	Res, 270K, 5%, 1/16W, Metalized Glass.	2322 702 60274
	3258	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3443	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
	3447	Res, 56 ohm, 5%, 1/4W, Carbon Film	2122 101 02081
S	3451	Res, 10 ohm, 5%, 1/3W, Metal Film.	2306 204 03109
	3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102
	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
	3456	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3457	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320
	3470	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3471	Res, 6R8, 1%, 3/5W, Metal Film	2312 915 16808
	3472	Res, 6R8, 1%, 3/5W, Metal Film	2312 915 16808
	3473	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
	3481	Res, 18K, 1%, 3/5W, Metal Film	2312 915 11803
	3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
	3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3491	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3492	Res, 820 ohm, 5%, 1/10W, Metalized Glas	3198 021 58210
	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
	3495	Res, 22K, 5%, 1/10W, Metalized Glass .	3198 021 52230
	3496	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
	3497	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
	3498	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3500	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322 242 13335
	3501	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322 242 13335
S	3504	Res, PTC, 9 ohm, 265V.	2122 663 00021
	3521	Res, 22 ohm, 5%, 1/6W, Carbon Film	3198 011 02290
	3522	Res, 390K, 5%, 1/8W, Metalized Glass .	2322 730 61394
S	3523	Res, 47 ohm, 5%, 1/3W, Metal Film.	2306 204 03479
	3526	Res, 0R15, 5%, 3/5W, Metal Film.	3198 012 11570
	3527	Res, 0R22, 5%, 3/5W, Metal Film.	3198 012 12270
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3561	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
	3563	Res, 8K2, 5%, 1/10W, Metalized Glass .	3198 021 58220
S	3565	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310
	3622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3630	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3637	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3681	Res, 180 ohm, 1%, 1/8W, Metalized Glass	2322 734 61801
	3682	Res, 270 ohm, 1%, 1/8W, Metalized Glass	2322 734 62701
	3683	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322 734 63901
	3684	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322 734 63901
	3686	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3687	Res, 75 ohm, 1%, 1/8W, Metalized Glass	2322 734 67509
	3688	Res, 68 ohm, 1%, 1/8W, Metalized Glass	2322 734 66809
	3689	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
	3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198 021 31530
	3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198 021 31220
	3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3865	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3866	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3901	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030

S = Safety Part   Be sure to use exact replacement part.

21PT6331/44R (continued)

S	Ref	Description	Part No.
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
	3981	Res, 120 ohm, 5%, 1/6W, Carbon Film.	3198 011 01210
	3982	Res, 120 ohm, 5%, 1/6W, Carbon Film.	3198 011 01210
	4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4470	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4808	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4817	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4819	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5202	Wire Jumper.	3198 036 90010
	5241	Wire Jumper.	3198 036 90010
	5342	Coil, 22u.	2422 535 97333
S	5445	Transformer, LOT	2422 531 02519
	5453	Coil, 22u, 5%.	3198 018 12290
	5457	Coil, Linear Correction, 82u	2422 536 00425
	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
	5471	Coil, 6u8, 20%	3198 018 76880
	5480	Coil, 4u7, 5%.	2422 535 94213
S	5500	Mains Filter	2422 549 43567
S	5520	Transformer, SS42025-03.	2422 531 02462
	5861	Coil, 10u, 5%.	3198 018 11090
	6181	Zener Diode, 6.8 volt.	3198 020 56880
	6453	Zener Diode, 5.6 volt.	3198 020 55680
	6460	Diode, Rect, BY228/24.	9340 559 50112
	6463	Zener Diode, 9.1 volt.	9322 150 08685
	6476	Zener Diode, 15 volt	3198 010 21590
	6485	Diode, Rect, BYV95C.	9335 001 80133
	6487	Diode, Rect, BYV95A.	9335 000 90133
	6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667
	6520	Diode, Rect, BYV95A.	9335 000 90133
	6541	Zener Diode, 9.1 volt.	9322 150 08685
	6562	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6567	Zener Diode, 4.7 volt.	3198 020 54780
	6570	Zener Diode, 6.2 volt.	9322 163 91685
	6691	LED, LTL-10234WHCR	9322 185 69682
	6692	IR Receiver.	9322 127 54667
	7200	IC, TDA9577H/N1/AI/1130.	9352 731 51557
	7450	Transistor, PNP, PDTA114ET	3198 010 44010
S	7515	Optical Coupler, TCET1104(G)	9322 175 72667
	7521	Transistor, FET, STP10NK80ZFP.	9322 196 57687
	7560	IC, L78L33ACZ.	9322 134 92676
	7602	IC, M24C08-WBN6.	9322 154 38682
	7861	IC, TDA9853H/V1.	9352 671 19557
	7901	IC, AN7522N PH	9322 181 41682
	9001	Wire Jumper.	3198 036 90010
	9181	Wire Jumper.	3198 036 90010
	9182	Wire Jumper.	3198 036 90010
	9183	Wire Jumper.	3198 036 90010
	9184	Wire Jumper.	3198 036 90010
	9192	Wire Jumper.	3198 036 90010
	9193	Wire Jumper.	3198 036 90010
	9311	Wire Jumper.	3198 036 90010
	9312	Wire Jumper.	3198 036 90010
	9406	Wire Jumper.	3198 036 90010
	9407	Wire Jumper.	3198 036 90010
	9408	Wire Jumper.	3198 036 90010
	9409	Wire Jumper.	3198 036 90010
	9410	Wire Jumper.	3198 036 90010
	9411	Wire Jumper.	3198 036 90010
	9412	Wire Jumper.	3198 036 90010
	9413	Wire Jumper.	3198 036 90010
	9415	Wire Jumper.	3198 036 90010
	9416	Wire Jumper.	3198 036 90010
	9417	Wire Jumper.	3198 036 90010
	9418	Wire Jumper.	3198 036 90010
	9419	Wire Jumper.	3198 036 90010
	9421	Wire Jumper.	3198 036 90010
	9422	Wire Jumper.	3198 036 90010
	9423	Wire Jumper.	3198 036 90010
	9425	Wire Jumper.	3198 036 90010
	9427	Wire Jumper.	3198 036 90010
	9451	Wire Jumper.	3198 036 90010
	9453	Wire Jumper.	3198 036 90010
	9460	Wire Jumper.	3198 036 90010
	9472	Wire Jumper.	3198 036 90010
	9500	Wire Jumper.	3198 036 90010
	9501	Wire Jumper.	3198 036 90010
	9503	Wire Jumper.	3198 036 90010
	9510	Wire Jumper.	3198 036 90010
	9511	Wire Jumper.	3198 036 90010
	9512	Wire Jumper.	3198 036 90010
	9513	Wire Jumper.	3198 036 90010
	9514	Wire Jumper.	3198 036 90010
	9515	Wire Jumper.	3198 036 90010
	9516	Wire Jumper.	3198 036 90010
	9518	Wire Jumper.	3198 036 90010
	9520	Wire Jumper.	3198 036 90010
	9521	Wire Jumper.	3198 036 90010
	9522	Wire Jumper.	3198 036 90010
	9524	Wire Jumper.	3198 036 90010
	9528	Wire Jumper.	3198 036 90010
	9530	Wire Jumper.	3198 036 90010
	9612	Wire Jumper.	3198 036 90010
	9613	Wire Jumper.	3198 036 90010
	9614	Wire Jumper.	3198 036 90010
	9617	Wire Jumper.	3198 036 90010
	9619	Wire Jumper.	3198 036 90010
	9620	Wire Jumper.	3198 036 90010
	9621	Wire Jumper.	3198 036 90010
	9622	Wire Jumper.	3198 036 90010
	9623	Wire Jumper.	3198 036 90010
	9626	Wire Jumper.	3198 036 90010
	9627	Wire Jumper.	3198 036 90010
	9628	Wire Jumper.	3198 036 90010
	9629	Wire Jumper.	3198 036 90010
	9631	Wire Jumper.	3198 036 90010
	9632	Wire Jumper.	3198 036 90010
	9633	Wire Jumper.	3198 036 90010
	9637	Wire Jumper.	3198 036 90010
	9638	Wire Jumper.	3198 036 90010
	9639	Wire Jumper.	3198 036 90010
	9640	Wire Jumper.	3198 036 90010
	9641	Wire Jumper.	3198 036 90010
	9642	Wire Jumper.	3198 036 90010
	9643	Wire Jumper.	3198 036 90010
	9648	Wire Jumper.	3198 036 90010
	9650	Wire Jumper.	3198 036 90010
	9654	Wire Jumper.	3198 036 90010
	9657	Wire Jumper.	3198 036 90010
	9658	Wire Jumper.	3198 036 90010
	9659	Wire Jumper.	3198 036 90010
	9660	Wire Jumper.	3198 036 90010
	9664	Wire Jumper.	3198 036 90010
	9665	Wire Jumper.	3198 036 90010
	9666	Wire Jumper.	3198 036 90010
	9668	Wire Jumper.	3198 036 90010
	9669	Wire Jumper.	3198 036 90010
	9670	Wire Jumper.	3198 036 90010
	9671	Wire Jumper.	3198 036 90010
	9674	Wire Jumper.	3198 036 90010
	9675	Wire Jumper.	3198 036 90010
	9676	Wire Jumper.	3198 036 90010
	9679	Wire Jumper.	3198 036 90010
	9680	Wire Jumper.	3198 036 90010
	9686	Wire Jumper.	3198 036 90010
	9687	Wire Jumper.	3198 036 90010
	9688	Wire Jumper.	3198 036 90010
	9690	Wire Jumper.	3198 036 90010
	9691	Wire Jumper.	3198 036 90010
	9695	Wire Jumper.	3198 036 90010
	9697	Wire Jumper.	3198 036 90010
	9698	Wire Jumper.	3198 036 90010
	9699	Wire Jumper.	3198 036 90010
	9821	Wire Jumper.	3198 036 90010
	9822	Wire Jumper.	3198 036 90010
	9825	Wire Jumper.	3198 036 90010
	9828	Wire Jumper.	3198 036 90010
	9829	Wire Jumper.	3198 036 90010
	9831	Wire Jumper.	3198 036 90010
	9832	Wire Jumper.	3198 036 90010
	9837	Wire Jumper.	3198 036 90010
	9838	Wire Jumper.	3198 036 90010
	9839	Wire Jumper.	3198 036 90010
	9846	Wire Jumper.	3198 036 90010
	9847	Wire Jumper.	3198 036 90010
	9849	Wire Jumper.	3198 036 90010
	9850	Wire Jumper.	3198 036 90010
	9851	Wire Jumper.	3198 036 90010
	9852	Wire Jumper.	3198 036 90010
	9853	Wire Jumper.	3198 036 90010
	9856	Wire Jumper.	3198 036 90010
	9860	Wire Jumper.	3198 036 90010
	9861	Wire Jumper.	3198 036 90010
	9862	Wire Jumper.	3198 036 90010
	9864	Wire Jumper.	3198 036 90010
	9865	Wire Jumper.	3198 036 90010
	9868	Wire Jumper.	3198 036 90010
	9873	Wire Jumper.	3198 036 90010
	9877	Wire Jumper.	3198 036 90010
	9903	Wire Jumper.	3198 036 90010
	9904	Wire Jumper.	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

21PT6331/44R (continued)

9905	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9912	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9916	Wire Jumper.	3198 036 90010
9918	Wire Jumper.	3198 036 90010
9919	Wire Jumper.	3198 036 90010
9920	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9993	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9997	Wire Jumper.	3198 036 90010
CBA	Main Chassis	3141 058 58201

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S	AC01	AC Cord.	3121 231 00081
	AC04	Batteries for Remote Control Transmitte	9299 000 65263
	AC05	Cabinet Back	3139 124 40813
	AC09	CRT, A51QDX992X003	9322 182 97682
	AC10	Customer Control Buttons	3139 177 60291
S	AC12	Degaussing Coil.	2422 549 45507
	AC15	Holder, Degaussing Coil (4 Used) . . .	3135 013 01641
	AC17	Owner's Manual	3121 235 20942
	AC20	Cabinet Front Assembly	3121 237 53042
	AC20A	Cabinet Front.	3139 177 60311
	AC20B	Chassis Guide.	3139 124 37561
	AC20C	Light Guide.	3139 124 41241
	AC20D	Nameplate.	3139 120 01371
	AC20E	Power Button	3139 177 60301
	AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00411
	AC32	Yoke Wedge (2 Used).	3135 013 00311
	REMOTE	Remote Control Transmitter, RC19335004/ 01.	3139 228 86464

21PT633R85C - Manual no. 7638

Main Chassis Parts

Main Chassis Parts

S	Ref	Description	Part No.
	0211	2 Pin Connector	2422 025 16269
	0212	2 Pin Connector	2422 025 16375
	0218	A/V Jack	2422 026 04742
	0220	5 Pin Connector	2422 025 04853
	0221	2 Pin Connector	2422 025 15503
	0222	2 Pin Connector	2422 025 10646
	0232	Headphone Jack	2422 026 04747
	0243	6 Pin Connector	2422 025 04854
	0244	5 Pin Connector	2422 025 04853
	0245	6 Pin Connector	2422 025 04854
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector	2412 020 00725
	0280	4 Pin Connector	2422 025 12479
S	1000	Tuner, V+U PLL	2422 542 90098
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC	2422 086 10914
S	1515	Relay, 5 Amp, 12V	2422 132 07444
	1600	Tact Switch	2422 128 02742
	1601	Tact Switch	2422 128 02742
	1602	Tact Switch	2422 128 02742
	1603	Tact Switch	2422 128 02742
	1606	Tact Switch	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344
	2004	Cap, 47n, 10%, 50v, Ceramic	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2181	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2182	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2183	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2209	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2210	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2226	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2241	Cap, 1n5, 10%, 50v, Ceramic	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2243	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2405	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2441	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic	2020 021 91139
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 270n, 5%, 250v, Metalized Polypropylene	2222 479 90016
	2458	Cap, 2u2, 20%, 100v, Electrolytic	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
S	2463	Cap, 390p, 10%, 2000v, Ceramic	2020 558 90482
	2465	Cap, 9n1, 5%, 1600v, Polypropylene	2222 375 90153
	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
	2468	Cap, 33n, 10%, 400v, Polyester	2222 347 90227
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 10n, 10%, 100v, Metalized Polyeste	2222 365 85103
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2482	Cap, 33n, 10%, 250v, Polyester	2222 347 90213
	2485	Cap, 4u7, 20%, 250v, Electrolytic	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic	3198 019 41020
	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2222 336 29148
	2501	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2606	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic	3198 017 21050
	2691	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2803	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2862	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2864	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2865	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2866	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2867	Cap, 1n8, 10%, 50v, Ceramic	2238 586 15626
	2868	Cap, 150p, 5%, 50v, Ceramic	3198 016 31510
	2869	Cap, 68n, 10%, 50v, Polyester	3198 014 06830
	2870	Cap, 68n, 10%, 50v, Polyester	3198 014 06830
	2871	Cap, 150p, 5%, 50v, Ceramic	3198 016 31510
	2872	Cap, 1n8, 10%, 50v, Ceramic	2238 586 15626
	2873	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2874	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
	2875	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
	2876	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2877	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2878	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2879	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
	2880	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2883	Cap, 470u, 20%, 16v, Electrolytic	3198 025 24710
	2884	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240
	2886	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2902	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2903	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2904	Cap, 27n, 10%, 50v, Ceramic	2238 580 15642
	2905	Cap, 1n2, 10%, 50v, Ceramic	2238 586 15624
	2906	Cap, 27n, 10%, 50v, Ceramic	2238 580 15642
	2907	Cap, 1n2, 10%, 50v, Ceramic	2238 586 15624
	2908	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2910	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
	2911	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
	2950	Cap, 330p, 5%, 50v, Ceramic	3198 016 33310
	2981	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2982	Cap, 470p, 10%, 50v, Ceramic	3198 017 34710
	2983	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2984	Cap, 470p, 10%, 50v, Ceramic	3198 017 34710

	Ref	Description	Part No.
	3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3182	Wire Jumper.	3198 036 90010
	3184	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3185	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3186	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3187	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
	3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
	3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
	3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
	3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3247	Res, 270K, 5%, 1/16W, Metalized Glass.	2322 702 60274
	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
	3258	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
	3341	Res, 1R, 5%, 0,33W	4822 052 10108
S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3443	Res, 1M, 5%, 1/10W, Metalized Glass. .	3198 021 51050
	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3447	Res, 56 ohm, 5%, 1/4W, Carbon Film . .	2122 101 02081
	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
	3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102
	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
S	3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
	3456	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3457	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S	3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
	3470	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3471	Res, 6R8, 1%, 3/5W, Metal Film	2312 915 16808
	3472	Res, 6R8, 1%, 3/5W, Metal Film	2312 915 16808
	3473	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
	3481	Res, 18K, 1%, 3/5W, Metal Film	2312 915 11803
	3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3491	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3492	Res, 820 ohm, 5%, 1/10W, Metalized Glas	3198 021 58210
	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3495	Res, 22K, 5%, 1/10W, Metalized Glass .	3198 021 52230
	3496	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
	3497	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
	3498	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S	3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3630	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3637	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3681	Res, 180 ohm, 1%, 1/8W, Metalized Glass	2322 734 61801
	3682	Res, 270 ohm, 1%, 1/8W, Metalized Glass	2322 734 62701
	3683	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322 734 63901
	3684	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322 734 63901
	3686	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3687	Res, 75 ohm, 1%, 1/8W, Metalized Glass	2322 734 67509
	3688	Res, 68 ohm, 1%, 1/8W, Metalized Glass	2322 734 66809
	3689	Res, 2K7, 1%, 1/8W, Metalized Glass. .	2322 734 62702
	3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198 021 31530
	3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198 021 31220
	3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320

S = Safety Part   Be sure to use exact replacement part.

21PT633R85C (continued)

	Ref	Description	Part No.
	3906	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
	3981	Res, 120 ohm, 5%, 1/6W, Carbon Film.	3198 011 01210
	3982	Res, 120 ohm, 5%, 1/6W, Carbon Film.	3198 011 01210
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4470	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4808	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4817	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4819	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5202	Wire Jumper.	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5241	Wire Jumper.	3198 036 90010
	5242	Coil, 10u, 5%.	3198 018 11090
	5342	Coil, 22u.	2422 535 97333
S	5445	Transformer, LOT	2422 531 02519
	5452	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5453	Coil, 22u, 5%.	3198 018 12290
	5457	Coil, Linear Correction, 82u	2422 536 00425
	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
	5471	Coil, 6u8, 20%	3198 018 76880
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 4u7, 5%.	2422 535 94213
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04.	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5861	Coil, 10u, 5%.	3198 018 11090
	6001	Zener Diode, 33 volt	3198 010 23390
	6181	Zener Diode, 6.8 volt.	3198 020 56880
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630
	6206	Zener Diode, 6.8 volt.	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316.	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148.	3198 010 10010
	6448	Zener Diode, 6.2 volt.	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6453	Zener Diode, 5.6 volt.	3198 020 55680
	6460	Diode, Rect, BY228/24.	9340 559 50112
	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
	6463	Zener Diode, 9.1 volt.	9322 150 08685
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316.	3198 010 10630
	6468	Diode, Signal, BAS316.	3198 010 10630
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt.	3198 010 25680
	6482	Zener Diode, 9.1 volt.	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYD33J.	9337 234 20133
	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6487	Diode, Rect, BYD33D.	9337 234 00133
	6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667
	6520	Diode, Rect, BYD33D.	9337 234 00133
	6523	Diode, Signal, 1N4148.	3198 010 10010
	6524	Diode, Rect, 1N5062.	3198 010 10120
	6525	Diode, Rect, 1N5062.	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt.	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500.	9340 555 59127
	6562	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6563	Diode, Signal, BAS316.	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148.	3198 010 10010
	6569	Diode, Signal, BAS316.	3198 010 10630
	6570	Zener Diode, 6.8 volt.	3198 020 56880
	6580	Diode, Signal, BAS316.	3198 010 10630
	6691	LED, LTL-10234WHCR	9322 185 69682
	6692	IR Receiver.	9322 127 54667
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7200	IC, TDA9577H/N1/AI/1130.	9352 731 51557
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7450	Transistor, PNP, PDTA114ET	3198 010 44010
	7460	Transistor, NPN, BU4508DX.	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2.	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1.	9352 673 56112
	7521	Power FET, FQPF9N50.	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, L78L33ACZ.	9322 134 92676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C08-WBN6.	9322 154 38682
	7861	IC, TDA9853H/V1.	9352 671 19557
	7901	IC, AN7522N PH	9322 181 41682
	9001	Wire Jumper.	3198 036 90010
	9181	Wire Jumper.	3198 036 90010
	9182	Wire Jumper.	3198 036 90010
	9183	Wire Jumper.	3198 036 90010
	9184	Wire Jumper.	3198 036 90010
	9192	Wire Jumper.	3198 036 90010
	9193	Wire Jumper.	3198 036 90010
	9311	Wire Jumper.	3198 036 90010
	9312	Wire Jumper.	3198 036 90010
	9406	Wire Jumper.	3198 036 90010
	9407	Wire Jumper.	3198 036 90010
	9408	Wire Jumper.	3198 036 90010
	9409	Wire Jumper.	3198 036 90010
	9410	Wire Jumper.	3198 036 90010
	9411	Wire Jumper.	3198 036 90010
	9412	Wire Jumper.	3198 036 90010
	9413	Wire Jumper.	3198 036 90010
	9415	Wire Jumper.	3198 036 90010
	9416	Wire Jumper.	3198 036 90010
	9417	Wire Jumper.	3198 036 90010
	9418	Wire Jumper.	3198 036 90010
	9419	Wire Jumper.	3198 036 90010
	9421	Wire Jumper.	3198 036 90010
	9422	Wire Jumper.	3198 036 90010
	9423	Wire Jumper.	3198 036 90010
	9425	Wire Jumper.	3198 036 90010
	9427	Wire Jumper.	3198 036 90010
	9451	Wire Jumper.	3198 036 90010
	9453	Wire Jumper.	3198 036 90010
	9460	Wire Jumper.	3198 036 90010
	9472	Wire Jumper.	3198 036 90010
	9500	Wire Jumper.	3198 036 90010
	9501	Wire Jumper.	3198 036 90010
	9503	Wire Jumper.	3198 036 90010
	9506	Wire Jumper.	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

21PT633R85C (continued)

Ref	Description	Part No.
9507	Wire Jumper	3198 036 90010
9510	Wire Jumper	3198 036 90010
9511	Wire Jumper	3198 036 90010
9512	Wire Jumper	3198 036 90010
9513	Wire Jumper	3198 036 90010
9514	Wire Jumper	3198 036 90010
9515	Wire Jumper	3198 036 90010
9516	Wire Jumper	3198 036 90010
9518	Wire Jumper	3198 036 90010
9520	Wire Jumper	3198 036 90010
9521	Wire Jumper	3198 036 90010
9522	Wire Jumper	3198 036 90010
9524	Wire Jumper	3198 036 90010
9528	Wire Jumper	3198 036 90010
9530	Wire Jumper	3198 036 90010
9611	Coil, 27u, 10%	3198 018 22790
9612	Wire Jumper	3198 036 90010
9613	Wire Jumper	3198 036 90010
9614	Wire Jumper	3198 036 90010
9617	Wire Jumper	3198 036 90010
9619	Wire Jumper	3198 036 90010
9620	Wire Jumper	3198 036 90010
9621	Wire Jumper	3198 036 90010
9622	Wire Jumper	3198 036 90010
9623	Wire Jumper	3198 036 90010
9626	Wire Jumper	3198 036 90010
9627	Wire Jumper	3198 036 90010
9628	Wire Jumper	3198 036 90010
9629	Wire Jumper	3198 036 90010
9631	Wire Jumper	3198 036 90010
9632	Wire Jumper	3198 036 90010
9633	Wire Jumper	3198 036 90010
9637	Wire Jumper	3198 036 90010
9638	Wire Jumper	3198 036 90010
9639	Wire Jumper	3198 036 90010
9640	Wire Jumper	3198 036 90010
9641	Wire Jumper	3198 036 90010
9642	Wire Jumper	3198 036 90010
9643	Wire Jumper	3198 036 90010
9648	Wire Jumper	3198 036 90010
9650	Wire Jumper	3198 036 90010
9654	Wire Jumper	3198 036 90010
9657	Wire Jumper	3198 036 90010
9658	Wire Jumper	3198 036 90010
9659	Wire Jumper	3198 036 90010
9660	Wire Jumper	3198 036 90010
9664	Wire Jumper	3198 036 90010
9665	Wire Jumper	3198 036 90010
9666	Wire Jumper	3198 036 90010
9668	Wire Jumper	3198 036 90010
9669	Wire Jumper	3198 036 90010
9670	Wire Jumper	3198 036 90010
9671	Wire Jumper	3198 036 90010
9672	Coil, 22u, 10%	3198 018 22290
9674	Wire Jumper	3198 036 90010
9675	Wire Jumper	3198 036 90010
9676	Wire Jumper	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper	3198 036 90010
9680	Wire Jumper	3198 036 90010
9686	Wire Jumper	3198 036 90010
9687	Wire Jumper	3198 036 90010
9688	Wire Jumper	3198 036 90010
9690	Wire Jumper	3198 036 90010
9691	Wire Jumper	3198 036 90010
9695	Wire Jumper	3198 036 90010
9697	Wire Jumper	3198 036 90010
9698	Wire Jumper	3198 036 90010
9699	Wire Jumper	3198 036 90010
9821	Wire Jumper	3198 036 90010
9822	Wire Jumper	3198 036 90010
9825	Wire Jumper	3198 036 90010
9828	Wire Jumper	3198 036 90010
9829	Wire Jumper	3198 036 90010
9831	Wire Jumper	3198 036 90010
9832	Wire Jumper	3198 036 90010
9837	Wire Jumper	3198 036 90010
9838	Wire Jumper	3198 036 90010
9839	Wire Jumper	3198 036 90010
9846	Wire Jumper	3198 036 90010
9847	Wire Jumper	3198 036 90010
9849	Wire Jumper	3198 036 90010
9850	Wire Jumper	3198 036 90010
9851	Wire Jumper	3198 036 90010
9852	Wire Jumper	3198 036 90010
9853	Wire Jumper	3198 036 90010
9856	Wire Jumper	3198 036 90010
9860	Wire Jumper	3198 036 90010
9861	Wire Jumper	3198 036 90010
9862	Wire Jumper	3198 036 90010
9864	Wire Jumper	3198 036 90010
9865	Wire Jumper	3198 036 90010
9868	Wire Jumper	3198 036 90010
9873	Wire Jumper	3198 036 90010
9877	Wire Jumper	3198 036 90010
9901	Wire Jumper	3198 036 90010
9902	Wire Jumper	3198 036 90010
9903	Wire Jumper	3198 036 90010
9904	Wire Jumper	3198 036 90010
9905	Wire Jumper	3198 036 90010
9911	Wire Jumper	3198 036 90010
9912	Wire Jumper	3198 036 90010
9913	Wire Jumper	3198 036 90010
9914	Wire Jumper	3198 036 90010
9915	Wire Jumper	3198 036 90010
9916	Wire Jumper	3198 036 90010
9918	Wire Jumper	3198 036 90010
9919	Wire Jumper	3198 036 90010
9920	Wire Jumper	3198 036 90010
9991	Wire Jumper	3198 036 90010
9993	Wire Jumper	3198 036 90010
9994	Wire Jumper	3198 036 90010
9996	Wire Jumper	3198 036 90010
9997	Wire Jumper	3198 036 90010
CBA	Main Chassis Assembly	3141 058 57931

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

Ref	Description	Part No.
S AC01	AC Cord	3135 010 03831
AC03	Anode Lead Spacer (3 Used)	3135 014 04471
AC04	Batteries for Remote Control Transmitte	9299 000 65263
AC05	Cabinet Back	3139 124 40813
S AC09	CRT, A51QDX992X001	9322 182 96682
AC10	Customer Control Buttons	3139 177 60291
S AC12	Degaussing Coil	3139 128 23841
AC17	Owner's Manual	3121 235 20731
AC20	Cabinet Front Assembly	3121 237 53041
AC20A	Cabinet Front	3139 177 60311
AC20B	Chassis Guide	3139 124 37561
AC20C	Light Guide	3139 124 41241
AC20D	Nameplate	3139 120 01371
AC20E	Power Button	3139 177 60301
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00411
REMOTE	Remote Control Transmitter, RC19335004/01	3139 228 86463

S = Safety Part   Be sure to use exact replacement part.

21PT6431/44R - Manual no. 7638

Main Chassis Parts

S	Ref	Description	Part No.
		Main Chassis Parts	
	0122	Heatsink	3139 121 62214
	0123	Heatsink, Audio.	3139 121 62501
	0127	Socket Fuse.	2422 088 00271
	0129	NTC Holder	3139 120 10151
	0136	IC-Spring.	3104 301 22081
	0137	Spring	3139 121 24583
	0138	IC-Spring.	3104 301 22081
	0139	Spring for Bracket	3122 121 24786
	0141	IC-Spring.	3104 301 22081
	0152	Cable, DIPMate, 6 Pin.	3139 121 08841
	0153	Cable, DIPMate, 5 Pin, 480mm	3139 121 07951
	0211	2 Pin Connector.	2422 025 16269
	0212	2 Pin Connector.	2422 025 16375
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0229	3 Pin Connector.	2412 020 00725
	0239	3 Pin Connector.	2422 025 16382
	0244	5 Pin Connector.	2422 025 04853
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector.	2412 020 00725
	0269	Jack	2422 026 05182
	0280	4 Pin Connector.	2422 025 12479
	0320	Factory Plate.	3122 120 01701
S	1000	Tuner, V+U, PLL	2422 542 90108
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1606	Tact Switch.	2422 128 02742
	1811	3 Pin Connector.	2412 020 00725
	1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344
	2004	Cap, 47n, +80/-20%, 50v, Ceramic . . .	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic. . .	2238 786 19852
	2201	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2209	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2210	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2243	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyest er.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic. . .	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic. . .	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic . .	2020 558 90445
	2405	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2441	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic . . .	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic. . .	2020 021 91139
	2455	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
	2457	Cap, 270n, 5%, 250v, Metalized Polyprop ylene.	2222 479 90016
	2458	Cap, 2u2, 20%, 100v, Electrolytic. . .	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
S	2463	Cap, 390p, 10%, 2000v, Ceramic	2020 558 90482
S	2465	Cap, 9n1, 5%, 1600v, Polypropylene . .	2020 301 90248
	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
	2468	Cap, 33n, 10%, 400v, Polyester	2222 347 90227
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 10n, 10%, 100v, Metalized Polyeste	2222 365 85103
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic . . .	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 33n, 10%, 250v, Polyester	2222 347 90213
	2485	Cap, 4u7, 20%, 250v, Electrolytic. . .	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic. . .	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic . . .	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic . .	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic. . .	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypro pylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
S	2503	Cap, 330u, 20%, 450v, Electrolytic . .	2020 024 90774
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
	2509	Cap, 100n, 20%, 275v, Metalized Polypro pylene	2222 336 29144
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90128
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic . . .	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic . .	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic . . .	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic . . .	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic . . .	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic. . .	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic. . .	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2606	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050
	2691	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
	2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2803	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
	2862	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
	2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
	2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
	2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510

S = Safety Part   Be sure to use exact replacement part.

21PT6431/44R (continued)

Ref	Description	Part No.
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3124	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3126	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3132	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3134	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3247	Res, 270K, 5%, 1/16W, Metalized Glass.	2322 702 60274
3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020

Ref	Description	Part No.
3258	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3442	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3443	Res, 1M, 5%, 1/10W, Metalized Glass. .	3198 021 51050
3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3447	Res, 56 ohm, 5%, 1/4W, Carbon Film . .	2122 101 02081
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102
3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3456	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3457	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3470	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
3471	Res, 6R8, 1%, 3/5W, Metal Film	2312 915 16808
3472	Res, 6R8, 1%, 3/5W, Metal Film	2312 915 16808
3473	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3481	Res, 18K, 1%, 3/5W, Metal Film	2312 915 11803
3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3491	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3492	Res, 820 ohm, 5%, 1/10W, Metalized Glas	3198 021 58210
3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3495	Res, 22K, 5%, 1/10W, Metalized Glass .	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3497	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3498	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S 3504	Res, PTC, 9R 220V.	2120 661 00024
3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3507	Surge Protector.	2422 549 43073
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3521	Res, 22 ohm, 5%, 1/6W, Carbon Film . .	3198 011 02290
3522	Res, 390K, 5%, 1/8W, Metalized Glass .	2322 730 61394
S 3523	Res, 47 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03479
3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3526	Res, 0R15, 5%, 3/5W, Metal Film. . . .	3198 012 11570
3527	Res, 0R22, 5%, 3/5W, Metal Film. . . .	3198 012 12270
3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3561	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
3563	Res, 8K2, 5%, 1/10W, Metalized Glass .	3198 021 58220
S 3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310

S = Safety Part   Be sure to use exact replacement part.

21PT6431/44R (continued)

Ref	Description	Part No.
3601	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3605	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3606	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220
3607	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3610	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3618	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820
3622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3626	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3627	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3628	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3630	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3636	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3637	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3640	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3685	Res, 1K2, 1%, 1/8W, Metalized Glass.	2322 734 61202
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3694	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3802	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3862	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3863	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3867	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
3901	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3902	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3903	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3904	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3905	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3906	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3907	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4122	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4123	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4127	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4470	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4807	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4829	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030

Ref	Description	Part No.
4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4876	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4879	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
5001	Coil, 27u, 10%	3198 018 22790
5201	Coil, 6u8, 5%.	3198 018 16880
5202	Wire Jumper.	3198 036 90010
5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5205	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5206	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5241	Wire Jumper.	3198 036 90010
5242	Coil, 10u, 5%.	3198 018 11090
5342	Coil, 22u.	2422 535 97333
S 5445	Transformer, LOT	2422 531 02519
5452	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5453	Coil, 22u, 5%.	3198 018 12290
5457	Coil, Linear Correction, 82u	2422 536 00425
5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
5471	Coil, 6u8, 20%	3198 018 76880
5472	Coil, 3u3, 10%	3198 018 23380
5480	Coil, 4u7, 5%.	2422 535 94213
S 5500	Mains Filter	2422 549 43567
S 5501	Mains Filter	2422 549 43432
S 5520	Transformer, SS42025-03.	2422 531 02462
5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5561	Coil, 27u, 5%.	2422 535 95366
5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5602	Coil, 5u6, 5%.	3198 018 15680
5603	Coil, 5u6, 5%.	3198 018 15680
5604	Coil, 5u6, 5%.	3198 018 15680
5861	Coil, 10u, 5%.	3198 018 11090
6001	Zener Diode, 33 volt	3198 010 23390
6150	Diode, Signal, BAS316.	3198 010 10630
6201	Diode, Signal, BAS316.	3198 010 10630
6202	Diode, Signal, BAS316.	3198 010 10630
6206	Zener Diode, 6.8 volt.	3198 020 56880
6331	Diode, Signal, BAV21	3198 010 10070
6332	Diode, Signal, BAS316.	3198 010 10630
6333	Diode, Signal, BAV21	3198 010 10070
6335	Diode, Signal, BAV21	3198 010 10070
6445	Zener Diode, 10 volt	3198 020 51090
6447	Diode, Signal, 1N4148.	3198 010 10010
6448	Zener Diode, 6.2 volt.	9331 668 30133
6449	Diode, Signal, BAV99	3198 010 10620
6453	Zener Diode, 5.6 volt.	3198 020 55680
6460	Diode, Rect, BY228/24.	9340 559 50112
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
6463	Zener Diode, 9.1 volt.	9322 150 08685
6465	Diode, Signal, BAV21	3198 010 10070
6466	Diode, Signal, BAV21	3198 010 10070
6467	Diode, Signal, BAS316.	3198 010 10630
6468	Diode, Signal, BAS316.	3198 010 10630
6470	Diode, Signal, BAV99	3198 010 10620
6476	Zener Diode, 15 volt	3198 010 21590
6481	Zener Diode, 5.6 volt.	3198 010 25680
6482	Zener Diode, 9.1 volt.	9331 177 80133
6483	Zener Diode, 33 volt	3198 010 23390
6485	Diode, Rect, BYV95C.	9335 001 80133
6487	Diode, Rect, BYV95A.	9335 000 90133
6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667
6520	Diode, Rect, BYV95A.	9335 000 90133
6523	Diode, Signal, 1N4148.	3198 010 10010
6524	Diode, Rect, 1N5062.	3198 010 10120
6525	Diode, Rect, 1N5062.	3198 010 10120
6526	Zener Diode, 22 volt	3198 020 52290
6540	Zener Diode, 6.2 volt.	9331 668 30133
6541	Zener Diode, 9.1 volt.	9322 150 08685
6560	Diode, Rect, BYV29X-500.	9340 555 59127
6562	Diode, Rect, EGP20DL-5100.	9322 164 42682
6563	Diode, Signal, BAS316.	3198 010 10630
6565	Diode, Signal, BAV70	9331 849 10215
6566	Diode, Signal, 1N4148.	3198 010 10010

S = Safety Part   Be sure to use exact replacement part.

21PT6431/44R (continued)

	Ref	Description	Part No.
	6567	Zener Diode, 4.7 volt.	3198 020 54780
	6569	Diode, Signal, BAS316.	3198 010 10630
	6570	Zener Diode, 6.2 volt.	9322 163 91685
	6580	Diode, Signal, BAS316.	3198 010 10630
	6691	LED, LTL-10234WHCR	9322 185 69682
	6692	IR Receiver.	9322 127 54667
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7102	Transistor, PNP, BC857B(COL)	3198 010 42150
	7103	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9577H/N1/AI/1130.	9352 731 51557
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7450	Transistor, PNP, PDTA114ET	3198 010 44010
	7460	Transistor, NPN, BU4508DX.	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1104(G)	9322 175 72667
	7521	Transistor, FET, STP10NK80ZFP.	9322 196 57687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, L78L33ACZ.	9322 134 92676
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C08-WBN6.	9322 154 38682
	7802	IC, HEF4053BT.	9333 729 60653
	7861	IC, TDA9853H/V1.	9352 671 19557
	7891	Transistor, NPN, BC847B(COL)	3198 010 42030
	7892	Transistor, NPN, BC847B(COL)	3198 010 42030
	7901	IC, AN7522N PH	9322 181 41682
	9001	Wire Jumper.	3198 036 90010
	9101	Wire Jumper.	3198 036 90010
	9102	Wire Jumper.	3198 036 90010
	9103	Wire Jumper.	3198 036 90010
	9104	Wire Jumper.	3198 036 90010
	9123	Wire Jumper.	3198 036 90010
	9171	Wire Jumper.	3198 036 90010
	9173	Wire Jumper.	3198 036 90010
	9175	Wire Jumper.	3198 036 90010
	9176	Wire Jumper.	3198 036 90010
	9178	Wire Jumper.	3198 036 90010
	9179	Wire Jumper.	3198 036 90010
	9182	Wire Jumper.	3198 036 90010
	9183	Wire Jumper.	3198 036 90010
	9192	Wire Jumper.	3198 036 90010
	9193	Wire Jumper.	3198 036 90010
	9311	Wire Jumper.	3198 036 90010
	9312	Wire Jumper.	3198 036 90010
	9406	Wire Jumper.	3198 036 90010
	9407	Wire Jumper.	3198 036 90010
	9408	Wire Jumper.	3198 036 90010
	9409	Wire Jumper.	3198 036 90010
	9410	Wire Jumper.	3198 036 90010
	9411	Wire Jumper.	3198 036 90010
	9412	Wire Jumper.	3198 036 90010
	9413	Wire Jumper.	3198 036 90010
	9415	Wire Jumper.	3198 036 90010
	9416	Wire Jumper.	3198 036 90010
	9417	Wire Jumper.	3198 036 90010
	9418	Wire Jumper.	3198 036 90010
	9419	Wire Jumper.	3198 036 90010
	9421	Wire Jumper.	3198 036 90010
	9422	Wire Jumper.	3198 036 90010
	9423	Wire Jumper.	3198 036 90010
	9425	Wire Jumper.	3198 036 90010
	9427	Wire Jumper.	3198 036 90010
	9451	Wire Jumper.	3198 036 90010
	9453	Wire Jumper.	3198 036 90010
	9460	Wire Jumper.	3198 036 90010
	9472	Wire Jumper.	3198 036 90010
	9500	Wire Jumper.	3198 036 90010
	9501	Wire Jumper.	3198 036 90010
	9503	Wire Jumper.	3198 036 90010
	9510	Wire Jumper.	3198 036 90010
	9511	Wire Jumper.	3198 036 90010
	9512	Wire Jumper.	3198 036 90010
	9513	Wire Jumper.	3198 036 90010
	9514	Wire Jumper.	3198 036 90010
	9515	Wire Jumper.	3198 036 90010
	9516	Wire Jumper.	3198 036 90010
	9518	Wire Jumper.	3198 036 90010
	9520	Wire Jumper.	3198 036 90010
	9521	Wire Jumper.	3198 036 90010
	9522	Wire Jumper.	3198 036 90010
	9524	Wire Jumper.	3198 036 90010
	9528	Wire Jumper.	3198 036 90010
	9530	Wire Jumper.	3198 036 90010
	9611	Coil, 27u, 10%	3198 018 22790
	9612	Wire Jumper.	3198 036 90010
	9613	Wire Jumper.	3198 036 90010
	9614	Wire Jumper.	3198 036 90010
	9615	Wire Jumper.	3198 036 90010
	9617	Wire Jumper.	3198 036 90010
	9618	Wire Jumper.	3198 036 90010
	9619	Wire Jumper.	3198 036 90010
	9620	Wire Jumper.	3198 036 90010
	9621	Wire Jumper.	3198 036 90010
	9622	Wire Jumper.	3198 036 90010
	9623	Wire Jumper.	3198 036 90010
	9624	Wire Jumper.	3198 036 90010
	9626	Wire Jumper.	3198 036 90010
	9627	Wire Jumper.	3198 036 90010
	9628	Wire Jumper.	3198 036 90010
	9629	Wire Jumper.	3198 036 90010
	9631	Wire Jumper.	3198 036 90010
	9632	Wire Jumper.	3198 036 90010
	9633	Wire Jumper.	3198 036 90010
	9637	Wire Jumper.	3198 036 90010
	9638	Wire Jumper.	3198 036 90010
	9639	Wire Jumper.	3198 036 90010
	9640	Wire Jumper.	3198 036 90010
	9641	Wire Jumper.	3198 036 90010
	9642	Wire Jumper.	3198 036 90010
	9643	Wire Jumper.	3198 036 90010
	9648	Wire Jumper.	3198 036 90010
	9650	Wire Jumper.	3198 036 90010
	9652	Wire Jumper.	3198 036 90010
	9654	Wire Jumper.	3198 036 90010
	9657	Wire Jumper.	3198 036 90010
	9658	Wire Jumper.	3198 036 90010
	9659	Wire Jumper.	3198 036 90010
	9660	Wire Jumper.	3198 036 90010
	9661	Wire Jumper.	3198 036 90010
	9662	Wire Jumper.	3198 036 90010
	9663	Wire Jumper.	3198 036 90010
	9664	Wire Jumper.	3198 036 90010
	9665	Wire Jumper.	3198 036 90010
	9666	Wire Jumper.	3198 036 90010
	9667	Wire Jumper.	3198 036 90010
	9668	Wire Jumper.	3198 036 90010
	9669	Wire Jumper.	3198 036 90010
	9670	Wire Jumper.	3198 036 90010
	9671	Wire Jumper.	3198 036 90010
	9672	Coil, 22u, 10%	3198 018 22290
	9674	Wire Jumper.	3198 036 90010
	9675	Wire Jumper.	3198 036 90010
	9676	Wire Jumper.	3198 036 90010
	9678	Coil, 22u, 10%	3198 018 22290
	9679	Wire Jumper.	3198 036 90010
	9680	Wire Jumper.	3198 036 90010
	9681	Wire Jumper.	3198 036 90010
	9686	Wire Jumper.	3198 036 90010
	9687	Wire Jumper.	3198 036 90010
	9688	Wire Jumper.	3198 036 90010
	9689	Wire Jumper.	3198 036 90010
	9690	Wire Jumper.	3198 036 90010
	9691	Wire Jumper.	3198 036 90010
	9694	Wire Jumper.	3198 036 90010
	9695	Wire Jumper.	3198 036 90010
	9697	Wire Jumper.	3198 036 90010
	9698	Wire Jumper.	3198 036 90010
	9810	Wire Jumper.	3198 036 90010
	9821	Wire Jumper.	3198 036 90010
	9822	Wire Jumper.	3198 036 90010
	9825	Wire Jumper.	3198 036 90010
	9828	Wire Jumper.	3198 036 90010
	9829	Wire Jumper.	3198 036 90010
	9831	Wire Jumper.	3198 036 90010
	9832	Wire Jumper.	3198 036 90010
	9837	Wire Jumper.	3198 036 90010
	9838	Wire Jumper.	3198 036 90010
	9839	Wire Jumper.	3198 036 90010
	9846	Wire Jumper.	3198 036 90010
	9847	Wire Jumper.	3198 036 90010
	9849	Wire Jumper.	3198 036 90010
	9850	Wire Jumper.	3198 036 90010
	9851	Wire Jumper.	3198 036 90010
	9852	Wire Jumper.	3198 036 90010
	9853	Wire Jumper.	3198 036 90010
	9856	Wire Jumper.	3198 036 90010
	9860	Wire Jumper.	3198 036 90010
	9861	Wire Jumper.	3198 036 90010
	9862	Wire Jumper.	3198 036 90010
	9864	Wire Jumper.	3198 036 90010
	9865	Wire Jumper.	3198 036 90010
	9868	Wire Jumper.	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

21PT6431/44R (continued)

Ref	Description	Part No.
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9891	Wire Jumper.	3198 036 90010
9892	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010
9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9905	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9918	Wire Jumper.	3198 036 90010
9919	Wire Jumper.	3198 036 90010
9920	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9993	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9997	Wire Jumper.	3198 036 90010
9998	Wire Jumper.	3198 036 90010
CBA	Main Chassis	3141 058 58191

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Ref	Description	Part No.
0215	3 Pin Connector.	2422 025 09191
1091	Tact Switch.	2422 128 02742
1092	Tact Switch.	2422 128 02742
1093	Tact Switch.	2422 128 02742
1094	Tact Switch.	2422 128 02742
3088	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3089	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3093	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322 734 63901
3094	Res, 180 ohm, 1%, 1/8W, Metalized Glass	2322 734 61801
3095	Res, 270 ohm, 1%, 1/8W, Metalized Glass	2322 734 62701
3096	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3097	Res, 2K7, 1%, 1/8W, Metalized Glass. .	2322 734 62702
3098	Res, 75 ohm, 1%, 1/8W, Metalized Glass	2322 734 67509
3099	Res, 68 ohm, 1%, 1/8W, Metalized Glass	2322 734 66809
4091	Res, Zero ohm, "Chip" Jumper	3198 021 90020
CBA	Top Control Panel Assembly	3139 177 26241

Cabinet & Accessory Parts

Cabinet & Accessory Parts

	Ref	Description	Part No.
S	AC01	AC Cord.	3121 231 00081
	AC04	Batteries for Remote Control Transmitte	9299 000 65263
	AC05	Cabinet Back	3139 124 44701
	AC09	CRT, A51QDX992X003	9322 182 97682
S	AC12	Degaussing Coil.	2422 549 45507
	AC15	Holder, Degaussing Coil (4 Used) . . .	3135 013 01641
	AC17	Owner's Manual	3121 235 20942
	AC20	Cabinet Front Assembly	3121 237 53291
	AC20A	Cabinet Front.	3139 177 59711
	AC20B	Chassis Guide.	3139 124 37561
	AC20C	Light Guide.	3139 124 41241
	AC20D	Nameplate.	3139 120 01371
	AC20E	Power Button	3139 177 60301
	AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00411
	AC20J1	Top Control Bracket.	3139 124 30381
	AC20J3	Top Control Cover.	3139 124 31131
	AC20J4	Top Control Rubber	3139 124 30391
	AC20J5	Top Control Button Assembly.	3139 137 66921
	REMOTE	Remote Control Transmitter, RC19335004/ 01.	3139 228 86464

S = Safety Part   Be sure to use exact replacement part.

21PT643R85C - Manual no. 7638

Main Chassis Parts

Ref	Description	Part No.
	Main Chassis Parts	
0211	2 Pin Connector.	2422 025 16269
0212	2 Pin Connector.	2422 025 16375
0220	5 Pin Connector.	2422 025 04853
0221	2 Pin Connector.	2422 025 15503
0222	2 Pin Connector.	2422 025 10646
0223	A/V Jack	2422 026 05236
0225	SVHS Jack.	2422 026 04926
0229	3 Pin Connector.	2412 020 00725
0239	3 Pin Connector.	2422 025 16382
0243	6 Pin Connector.	2422 025 04854
0244	5 Pin Connector.	2422 025 04853
0245	6 Pin Connector.	2422 025 04854
S 0254	9 Pin CRT Socket	2422 500 80076
0267	3 Pin Connector.	2412 020 00725
0269	Jack	2422 026 05182
0280	4 Pin Connector.	2422 025 12479
S 1000	Tuner, V+U PLL	2422 542 90098
1002	SAW Filter, 45.75MHz	2422 549 44518
1200	Filter, Ceramic, 4MHz5	2422 549 40807
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S 1515	Relay, 5 Amp, 12V.	2422 132 07444
1606	Tact Switch.	2422 128 02742
1660	Crystal, 12MHz000	2422 543 01203
1811	3 Pin Connector.	2412 020 00725
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344
2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
2005	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2006	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
2007	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2008	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
2101	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2105	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2106	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2123	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2125	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2132	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2134	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2143	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2150	Cap, 150n, +80/-20%, 16v, Ceramic. . .	2238 786 19852
2201	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2202	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2203	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2204	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2205	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2208	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2209	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2210	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2211	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
2216	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
2219	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210
2229	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
2242	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
2243	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
2245	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2247	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
2250	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
2330	Cap, 100n, 10%, 250v, Metalized Polyest er.	2222 368 90177
2331	Cap, 10n, +80/-20% 1000v, Ceramic. . .	2020 558 90445
2340	Cap, 10u, 20%, 250v, Electrolytic. . .	2020 012 93495
2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
2344	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 21040
2345	Cap, 10n, +80/-20%, 1000v, Ceramic . .	2020 558 90445
2405	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
2441	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2443	Cap, 47n, +80/-20%, 50v, Ceramic . . .	3198 017 24730
2444	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2450	Cap, 47u, 20%, 160v, Electrolytic. . .	2020 021 91139
2455	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
2457	Cap, 270n, 5%, 250v, Metalized Polyprop ylene.	2222 479 90016
2458	Cap, 2u2, 20%, 100v, Electrolytic. . .	2020 021 91331
2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
S 2463	Cap, 390p, 10%, 2000v, Ceramic	2020 558 90482
S 2465	Cap, 9n1, 5%, 1600v, Polypropylene . .	2020 301 90248
2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
2468	Cap, 33n, 10%, 400v, Polyester	2222 347 90227
2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2472	Cap, 10n, 10%, 100v, Metalized Polyeste	2222 365 85103
2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
2480	Cap, 47u, 20%, 25v, Electrolytic . . .	2020 021 90586
2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
2482	Cap, 33n, 10%, 250v, Polyester	2222 347 90213
2485	Cap, 4u7, 20%, 250v, Electrolytic. . .	2020 021 90856
2486	Cap, 470u, 20%, 16v, Electrolytic. . .	2020 021 91577
2487	Cap, 47u, 20%, 50v, Electrolytic . . .	2020 021 90854
2488	Cap, 1000u, 20%, 16v, Electrolytic . .	2020 021 91049
2489	Cap, 470u, 20%, 16v, Electrolytic. . .	2020 021 91577
2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S 2500	Cap, 470n, 20%, 275v, Metalized Polypro pylene	2022 330 00018
2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2503	Cap, 470u, 20%, 200v, Electrolytic . .	2020 024 90647
2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2521	Cap, 22u, 20%, 50v, Electrolytic . . .	3198 025 52290
2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
2561	Cap, 100u, 20%, 160v, Electrolytic . .	2020 021 91654
2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2564	Cap, 2u2, 20%, 25v, Electrolytic . . .	2020 021 91353
2567	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
2568	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2580	Cap, 47u, 20%, 16v, Electrolytic . . .	3198 028 24790
2581	Cap, 22u, 20%, 50v, Electrolytic . . .	3198 025 52290
2590	Cap, 330n, +80/-20%, 25v, Ceramic. . .	2222 910 19856
2601	Cap, 220n, +80/-20%, 25v, Ceramic. . .	3198 023 22240
2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
2606	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2608	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2611	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050
2691	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2803	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2810	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
2862	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626

S = Safety Part   Be sure to use exact replacement part.

21PT643R85C (continued)

Ref	Description	Part No.
2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3247	Res, 270K, 5%, 1/16W, Metalized Glass.	2322 702 60274
3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
3258	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
3341	Res, 1R, 5%, 0,33W	4822 052 10108
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3442	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3443	Res, 1M, 5%, 1/10W, Metalized Glass. .	3198 021 51050
3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3447	Res, 56 ohm, 5%, 1/4W, Carbon Film . .	2122 101 02081
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102
3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3456	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3457	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3470	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
3471	Res, 6R8, 1%, 3/5W, Metal Film	2312 915 16808
3472	Res, 6R8, 1%, 3/5W, Metal Film	2312 915 16808
3473	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3481	Res, 18K, 1%, 3/5W, Metal Film	2312 915 11803
3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3491	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3492	Res, 820 ohm, 5%, 1/10W, Metalized Glas	3198 021 58210
3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3495	Res, 22K, 5%, 1/10W, Metalized Glass .	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3497	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3498	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3507	Surge Protector.	2422 549 43073
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S 3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620

S = Safety Part   Be sure to use exact replacement part.

21PT643R85C (continued)

	Ref	Description	Part No.
S	3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3630	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3637	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3685	Res, 1K5, 1%, 1/8W, Metalized Glass. .	2322 734 61502
	3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198 021 31530
	3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198 021 31220
	3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4122	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4123	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4127	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4470	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4807	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4829	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5202	Wire Jumper.	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5241	Wire Jumper.	3198 036 90010
	5242	Coil, 10u, 5%.	3198 018 11090
	5342	Coil, 22u.	2422 535 97333
S	5445	Transformer, LOT	2422 531 02519
	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5453	Coil, 22u, 5%.	3198 018 12290
	5457	Coil, Linear Correction, 82u	2422 536 00425
	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
	5471	Coil, 6u8, 20%	3198 018 76880
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 4u7, 5%.	2422 535 94213
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04.	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5861	Coil, 10u, 5%.	3198 018 11090
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316.	3198 010 10630
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630
	6206	Zener Diode, 6.8 volt.	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316.	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148.	3198 010 10010
	6448	Zener Diode, 6.2 volt.	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6453	Zener Diode, 5.6 volt.	3198 020 55680
	6460	Diode, Rect, BY228/24.	9340 559 50112
	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
	6463	Zener Diode, 9.1 volt.	9322 150 08685
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316.	3198 010 10630
	6468	Diode, Signal, BAS316.	3198 010 10630
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt.	3198 010 25680
	6482	Zener Diode, 9.1 volt.	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYD33J.	9337 234 20133
	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6487	Diode, Rect, BYD33D.	9337 234 00133
	6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6500	Diode, Bridge Rect, GBU6JL-7002. . . .	9322 138 08667
	6520	Diode, Rect, BYD33D.	9337 234 00133
	6523	Diode, Signal, 1N4148.	3198 010 10010
	6524	Diode, Rect, 1N5062.	3198 010 10120

S = Safety Part   Be sure to use exact replacement part.

21PT643R85C (continued)

	Ref.	Description	Part No.
	6525	Diode, Rect, 1N5062.	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt.	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500.	9340 555 59127
	6562	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6563	Diode, Signal, BAS316.	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148.	3198 010 10010
	6569	Diode, Signal, BAS316.	3198 010 10630
	6570	Zener Diode, 6.8 volt.	3198 020 56880
	6580	Diode, Signal, BAS316.	3198 010 10630
	6691	LED, LTL-10234WHCR	9322 185 69682
	6692	IR Receiver.	9322 127 54667
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7102	Transistor, PNP, BC857B(COL)	3198 010 42150
	7103	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9577H/N1/AI/1130.	9352 731 51557
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7450	Transistor, PNP, PDTA114ET	3198 010 44010
	7460	Transistor, NPN, BU4508DX.	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2.	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1.	9352 673 56112
	7521	Power FET, FQPF9N50.	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, L78L33ACZ.	9322 134 92676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C08-WBN6.	9322 154 38682
	7802	IC, HEF4053BT.	9333 729 60653
	7861	IC, TDA9853H/V1.	9352 671 19557
	7891	Transistor, NPN, BC847B(COL)	3198 010 42030
	7892	Transistor, NPN, BC847B(COL)	3198 010 42030
	7901	IC, AN7522N PH	9322 181 41682
	9001	Wire Jumper.	3198 036 90010
	9101	Wire Jumper.	3198 036 90010
	9102	Wire Jumper.	3198 036 90010
	9103	Wire Jumper.	3198 036 90010
	9104	Wire Jumper.	3198 036 90010
	9123	Wire Jumper.	3198 036 90010
	9171	Wire Jumper.	3198 036 90010
	9173	Wire Jumper.	3198 036 90010
	9175	Wire Jumper.	3198 036 90010
	9176	Wire Jumper.	3198 036 90010
	9178	Wire Jumper.	3198 036 90010
	9179	Wire Jumper.	3198 036 90010
	9182	Wire Jumper.	3198 036 90010
	9183	Wire Jumper.	3198 036 90010
	9192	Wire Jumper.	3198 036 90010
	9193	Wire Jumper.	3198 036 90010
	9311	Wire Jumper.	3198 036 90010
	9312	Wire Jumper.	3198 036 90010
	9406	Wire Jumper.	3198 036 90010
	9407	Wire Jumper.	3198 036 90010
	9408	Wire Jumper.	3198 036 90010
	9409	Wire Jumper.	3198 036 90010
	9410	Wire Jumper.	3198 036 90010
	9411	Wire Jumper.	3198 036 90010
	9412	Wire Jumper.	3198 036 90010
	9413	Wire Jumper.	3198 036 90010
	9415	Wire Jumper.	3198 036 90010
	9416	Wire Jumper.	3198 036 90010
	9417	Wire Jumper.	3198 036 90010
	9418	Wire Jumper.	3198 036 90010
	9419	Wire Jumper.	3198 036 90010
	9421	Wire Jumper.	3198 036 90010
	9422	Wire Jumper.	3198 036 90010
	9423	Wire Jumper.	3198 036 90010
	9425	Wire Jumper.	3198 036 90010
	9427	Wire Jumper.	3198 036 90010
	9451	Wire Jumper.	3198 036 90010
	9453	Wire Jumper.	3198 036 90010
	9460	Wire Jumper.	3198 036 90010
	9472	Wire Jumper.	3198 036 90010
	9500	Wire Jumper.	3198 036 90010
	9501	Wire Jumper.	3198 036 90010
	9503	Wire Jumper.	3198 036 90010
	9506	Wire Jumper.	3198 036 90010
	9507	Wire Jumper.	3198 036 90010
	9510	Wire Jumper.	3198 036 90010
	9511	Wire Jumper.	3198 036 90010
	9512	Wire Jumper.	3198 036 90010
	9513	Wire Jumper.	3198 036 90010
	9514	Wire Jumper.	3198 036 90010
	9515	Wire Jumper.	3198 036 90010
	9516	Wire Jumper.	3198 036 90010
	9518	Wire Jumper.	3198 036 90010
	9520	Wire Jumper.	3198 036 90010
	9521	Wire Jumper.	3198 036 90010
	9522	Wire Jumper.	3198 036 90010
	9524	Wire Jumper.	3198 036 90010
	9528	Wire Jumper.	3198 036 90010
	9530	Wire Jumper.	3198 036 90010
	9611	Coil, 27u, 10%	3198 018 22790
	9612	Wire Jumper.	3198 036 90010
	9613	Wire Jumper.	3198 036 90010
	9614	Wire Jumper.	3198 036 90010
	9615	Wire Jumper.	3198 036 90010
	9617	Wire Jumper.	3198 036 90010
	9618	Wire Jumper.	3198 036 90010
	9619	Wire Jumper.	3198 036 90010
	9620	Wire Jumper.	3198 036 90010
	9621	Wire Jumper.	3198 036 90010
	9622	Wire Jumper.	3198 036 90010
	9623	Wire Jumper.	3198 036 90010
	9624	Wire Jumper.	3198 036 90010
	9626	Wire Jumper.	3198 036 90010
	9627	Wire Jumper.	3198 036 90010
	9628	Wire Jumper.	3198 036 90010
	9629	Wire Jumper.	3198 036 90010
	9631	Wire Jumper.	3198 036 90010
	9632	Wire Jumper.	3198 036 90010
	9633	Wire Jumper.	3198 036 90010
	9637	Wire Jumper.	3198 036 90010
	9638	Wire Jumper.	3198 036 90010
	9639	Wire Jumper.	3198 036 90010
	9640	Wire Jumper.	3198 036 90010
	9641	Wire Jumper.	3198 036 90010
	9642	Wire Jumper.	3198 036 90010
	9643	Wire Jumper.	3198 036 90010
	9648	Wire Jumper.	3198 036 90010
	9650	Wire Jumper.	3198 036 90010
	9652	Wire Jumper.	3198 036 90010
	9654	Wire Jumper.	3198 036 90010
	9657	Wire Jumper.	3198 036 90010
	9658	Wire Jumper.	3198 036 90010
	9659	Wire Jumper.	3198 036 90010
	9660	Wire Jumper.	3198 036 90010
	9661	Wire Jumper.	3198 036 90010
	9662	Wire Jumper.	3198 036 90010
	9663	Wire Jumper.	3198 036 90010
	9664	Wire Jumper.	3198 036 90010
	9665	Wire Jumper.	3198 036 90010
	9666	Wire Jumper.	3198 036 90010
	9667	Wire Jumper.	3198 036 90010
	9668	Wire Jumper.	3198 036 90010
	9669	Wire Jumper.	3198 036 90010
	9670	Wire Jumper.	3198 036 90010
	9671	Wire Jumper.	3198 036 90010
	9672	Coil, 22u, 10%	3198 018 22290
	9674	Wire Jumper.	3198 036 90010
	9675	Wire Jumper.	3198 036 90010
	9676	Wire Jumper.	3198 036 90010
	9678	Coil, 22u, 10%	3198 018 22290
	9679	Wire Jumper.	3198 036 90010
	9680	Wire Jumper.	3198 036 90010
	9681	Wire Jumper.	3198 036 90010
	9686	Wire Jumper.	3198 036 90010
	9687	Wire Jumper.	3198 036 90010
	9688	Wire Jumper.	3198 036 90010
	9689	Wire Jumper.	3198 036 90010
	9690	Wire Jumper.	3198 036 90010
	9691	Wire Jumper.	3198 036 90010
	9694	Wire Jumper.	3198 036 90010
	9695	Wire Jumper.	3198 036 90010
	9697	Wire Jumper.	3198 036 90010
	9698	Wire Jumper.	3198 036 90010
	9810	Wire Jumper.	3198 036 90010
	9821	Wire Jumper.	3198 036 90010
	9822	Wire Jumper.	3198 036 90010
	9825	Wire Jumper.	3198 036 90010
	9828	Wire Jumper.	3198 036 90010
	9829	Wire Jumper.	3198 036 90010
	9831	Wire Jumper.	3198 036 90010
	9832	Wire Jumper.	3198 036 90010
	9837	Wire Jumper.	3198 036 90010
	9838	Wire Jumper.	3198 036 90010
	9839	Wire Jumper.	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

Ref	Description	Part No.
9846	Wire Jumper.	3198 036 90010
9847	Wire Jumper.	3198 036 90010
9849	Wire Jumper.	3198 036 90010
9850	Wire Jumper.	3198 036 90010
9851	Wire Jumper.	3198 036 90010
9852	Wire Jumper.	3198 036 90010
9853	Wire Jumper.	3198 036 90010
9856	Wire Jumper.	3198 036 90010
9860	Wire Jumper.	3198 036 90010
9861	Wire Jumper.	3198 036 90010
9862	Wire Jumper.	3198 036 90010
9864	Wire Jumper.	3198 036 90010
9865	Wire Jumper.	3198 036 90010
9868	Wire Jumper.	3198 036 90010
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9891	Wire Jumper.	3198 036 90010
9892	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010
9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9905	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9918	Wire Jumper.	3198 036 90010
9919	Wire Jumper.	3198 036 90010
9920	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9993	Wire Jumper.	3198 036 90010
9994	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9997	Wire Jumper.	3198 036 90010
9998	Wire Jumper.	3198 036 90010
CBA	Main Chassis Assembly.	3141 058 57941

Channel One Card Parts
Channel One Card Parts

2D 3 Line Comb Filter Parts
2D 3 Line Comb Filter Parts

DAF Panel Parts
DAF Panel Parts

DVD Eject Panel Parts
DVD Eject Panel Parts

DVD Interface Panel Parts
DVD Interface Panel Parts

Front Interface Panel Parts
Front Interface Panel Parts

ITV Front Jack Panel Parts
ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)
Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)
Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts
Side Jack Panel Parts

Subwoofer Panel Parts
Subwoofer Panel Parts

Top Control Panel Parts
Top Control Panel Parts

Ref	Description	Part No.
0215	3 Pin Connector.	2422 025 09191
1091	Tact Switch.	2422 128 02742
1092	Tact Switch.	2422 128 02742
1093	Tact Switch.	2422 128 02742
1094	Tact Switch.	2422 128 02742
3088	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3089	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3093	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322 734 63901
3094	Res, 180 ohm, 1%, 1/8W, Metalized Glass	2322 734 61801
3095	Res, 270 ohm, 1%, 1/8W, Metalized Glass	2322 734 62701
3096	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3097	Res, 2K7, 1%, 1/8W, Metalized Glass. .	2322 734 62702
3098	Res, 75 ohm, 1%, 1/8W, Metalized Glass	2322 734 67509
3099	Res, 68 ohm, 1%, 1/8W, Metalized Glass	2322 734 66809
4091	Res, Zero ohm, "Chip" Jumper	3198 021 90020
CBA	Top Control Panel Assembly	3139 177 26241

Cabinet & Accessory Parts
Cabinet & Accessory Parts

Ref	Description	Part No.
S AC01	AC Cord.	3135 010 03831
AC03	Anode Lead Spacer (3 Used)	3135 014 04471
AC04	Batteries for Remote Control Transmitte	9299 000 65263
AC05	Cabinet Back	3139 124 44701
S AC09	CRT, A51QDX992X001	9322 182 96682
S AC12	Degaussing Coil.	3139 128 23841
AC17	Owner's Manual	3121 235 20941
AC20	Cabinet Front Assembly	3121 237 53291
AC20A	Cabinet Front.	3139 177 59711
AC20B	Chassis Guide.	3139 124 37561
AC20C	Light Guide.	3139 124 41241
AC20D	Nameplate.	3139 120 01371
AC20E	Power Button	3139 177 60301
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00411
AC20J1	Top Control Bracket.	3139 124 30381
AC20J3	Top Control Cover.	3139 124 31131
AC20J4	Top Control Rubber	3139 124 30391
AC20J5	Top Control Button Assembly.	3139 137 66921
REMOTE	Remote Control Transmitter, RC19335004/ 01.	3139 228 86463

S = Safety Part   Be sure to use exact replacement part.

Main Chassis Parts

S	Ref	Description	Part No.
		Main Chassis Parts	
	0127	Socket Fuse.	2422 088 00271
	0129	NTC Holder	3139 120 10151
	0136	IC-Spring.	3104 301 22081
	0137	Spring	3139 121 24583
	0138	IC-Spring.	3104 301 22081
	0139	Spring for Bracket	3122 121 24786
	0140	Spring	3139 121 24583
	0141	IC-Spring.	3104 301 22081
	0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421
	0153	Cable, DIPMate	3104 301 08381
	0211	2 Pin Connector.	2422 025 16269
	0212	2 Pin Connector.	2422 025 16375
	0219	6 Pin Connector.	2422 025 12482
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0222	2 Pin Connector.	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0229	3 Pin Connector.	2412 020 00725
	0243	6 Pin Connector.	2422 025 04854
	0244	5 Pin Connector.	2422 025 04853
	0245	6 Pin Connector.	2422 025 04854
	0246	5 Pin Connector.	2422 025 12481
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector.	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U, PLL	2422 542 90108
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07467
	1600	Tact Switch.	2422 128 02742
	1601	Tact Switch.	2422 128 02742
	1602	Tact Switch.	2422 128 02742
	1603	Tact Switch.	2422 128 02742
	1606	Tact Switch.	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1811	3 Pin Connector.	2412 020 00725
	1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2401	Cap, 2u2, 20%, 50v, Electrolytic	2038 035 13503
	2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2448	Cap, 100p, 10%, 1000v, Ceramic	3198 019 51010
	2450	Cap, 47u, 20%, 160v, Electrolytic.	2022 031 00103
	2451	Cap, 15n, 10%, 50v, Polyester.	3198 014 01530
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 390n, 5%, 250v, Metalized Polypropylene.	2222 479 90021
	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2022 031 00138
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
	2463	Cap, 220p, 10%, 2000v, Ceramic	2020 558 90478
	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene	2222 479 90042
	2465	Cap, 15n, 5%, 1600v, Polypropylene	2222 375 90158
	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
	2468	Cap, 18n, 10%, 400v, Polyester	2222 347 90222
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2038 035 13301
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2022 031 00137
	2486	Cap, 470u, 20%, 16v, Electrolytic.	2022 031 00139
	2487	Cap, 47u, 20%, 50v, Electrolytic	2038 035 13508
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2022 031 00144
	2489	Cap, 470u, 20%, 16v, Electrolytic.	2022 031 00139
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2222 336 29148
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90626
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90128
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050

S = Safety Part   Be sure to use exact replacement part.

24PT633F/35R (continued)

Ref	Description	Part No.
2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2611	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050
2691	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2803	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2810	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
2862	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 580 15624
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 580 15624
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840
3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
3401	Res, 220K, 5%, 1/6W, Carbon Film . . .	3198 011 02240
3403	Res, 82K, 5%, 1/6W, Carbon Film. . . .	3198 011 08230
3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3405	Res, 10 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01090
3406	Res, 10 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01090
3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3442	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3443	Res, 1M, 5%, 1/10W, Metalized Glass. .	3198 021 51050
3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3451	Res, 2R7, 5%, 1/3W, Metal Film	2306 204 03278
3452	Res, 4K7, 1%, 3/5W, Metal Film	2312 915 14702
3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3454	Res, 1K8, 1%, 3/5W, Metal Film	2312 915 11802
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3468	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3470	Res, 470K, 5%, 1/10W, Metalized Glass.	3198 021 54740
3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
3481	Res, 15K, 1%, 3/5W, Metal Film	2312 915 11503
3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 33390
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3491	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3495	Res, 22K, 5%, 1/10W, Metalized Glass .	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3497	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040

S = Safety Part   Be sure to use exact replacement part.

24PT633F/35R (continued)

S	Ref	Description	Part No.
	3498	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
	3500	Res, 3M3, 5%, 1/2W, Metalized Glass	2322 242 13335
	3501	Res, 3M3, 5%, 1/2W, Metalized Glass	2322 242 13335
S	3504	Res, PTC, 3 ohm, 144V	2122 663 00019
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass	2322 242 13155
	3507	Surge Protector	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass	3198 021 53340
	3523	Res, 100 ohm, 5%, 1/3W, Metal Film	2306 204 03101
	3524	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3682	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
	3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3686	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
	3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3814	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3861	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3862	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
	3863	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
	3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3865	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3866	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3867	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3901	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4122	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4123	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4127	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%	3198 018 18270
	5201	Coil, 6u8, 5%	3198 018 16880
	5204	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5242	Coil, 10u, 5%	3198 018 11090
	5341	Coil, 22u	2422 535 97333
	5342	Coil, 15u	2422 535 97331
	5401	Coil, 1mH, 10%	3198 018 71020
S	5445	Transformer, LOT AT2078	3128 138 21401
	5451	Coil, 33u, 10%	3198 018 73390
	5452	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5457	Coil, Linear Correction	2422 536 00511
	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
	5463	Coil, Choke	3128 138 37021
	5471	Coil, 3u3, 20%	3198 018 73380
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 39u, 10%	2422 535 97336
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5561	Coil, 27u, 5%	2422 535 95366

S = Safety Part   Be sure to use exact replacement part.

Ref	Description	Part No.
5562	Fixed, Inductor, 100MHz, 50R	3198 018 90010
5564	Fixed, Inductor, 100MHz, 50R	3198 018 90010
5602	Coil, 5u6, 5%	3198 018 15680
5603	Coil, 5u6, 5%	3198 018 15680
5604	Coil, 5u6, 5%	3198 018 15680
5861	Coil, 10u, 5%	3198 018 11090
6001	Zener Diode, 33 volt	3198 010 23390
6150	Diode, Signal, BAS316	3198 010 10630
6201	Diode, Signal, BAS316	3198 010 10630
6202	Diode, Signal, BAS316	3198 010 10630
6206	Zener Diode, 6.8 volt	3198 020 56880
6331	Diode, Signal, BAV21	3198 010 10070
6332	Diode, Signal, BAS316	3198 010 10630
6333	Diode, Signal, BAV21	3198 010 10070
6335	Diode, Signal, BAV21	3198 010 10070
6400	Res, 1K, 1%, 3/5W, Metal Film	2312 915 11002
6401	Zener Diode, 47 volt	3198 010 24790
6445	Zener Diode, 10 volt	3198 020 51090
6447	Diode, Signal, 1N4148	3198 010 10010
6448	Zener Diode, 6.2 volt	9331 668 30133
6449	Diode, Signal, BAV99	3198 010 10620
6460	Diode, Rect, BY228/24	9340 559 50112
6461	Diode, Rect, RGP30J-L7004	9338 617 60682
6462	Zener Diode, 10 volt	3198 010 21090
6465	Diode, Signal, BAV21	3198 010 10070
6466	Diode, Signal, BAV21	3198 010 10070
6467	Diode, Signal, BAS316	3198 010 10630
6468	Diode, Signal, BAS316	3198 010 10630
6469	Diode, Rect, BYD33J	9337 234 20133
6470	Diode, Signal, BAV99	3198 010 10620
6476	Zener Diode, 15 volt	3198 010 21590
6481	Zener Diode, 5.6 volt	3198 010 25680
6482	Zener Diode, 9.1 volt	9331 177 80133
6483	Zener Diode, 33 volt	3198 010 23390
6485	Diode, Rect, BYV95C	9335 001 80133
6486	Diode, Rect, EGP20DL-5100	9322 164 42682
6487	Diode, Rect, BYV95A	9335 000 90133
6488	Diode, Rect, EGP20DL-5100	9322 164 42682
6500	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
6520	Diode, Rect, BYV95A	9335 000 90133
6523	Diode, Signal, 1N4148	3198 010 10010
6524	Diode, Rect, 1N5062	3198 010 10120
6525	Diode, Rect, 1N5062	3198 010 10120
6526	Zener Diode, 22 volt	3198 020 52290
6540	Zener Diode, 6.2 volt	9331 668 30133
6541	Zener Diode, 10 volt	3198 020 51090
6560	Diode, Rect, BYV29X-500	9340 555 59127
6562	Diode, Rect, EGP20DL-5100	9322 164 42682
6563	Diode, Signal, BAS316	3198 010 10630
6565	Diode, Signal, BAV70	9331 849 10215
6566	Diode, Signal, 1N4148	3198 010 10010
6569	Diode, Signal, BAS316	3198 010 10630
6570	Zener Diode, 6.8 volt	3198 020 56880
6580	Diode, Signal, BAS316	3198 010 10630
6681	Diode, Signal, BAT85	9336 247 60133
6691	LED, LTL-10234WHCR	9322 185 69682
6692	IR Receiver	9322 127 54667
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
7101	Transistor, NPN, BC847B(COL)	3198 010 42030
7102	Transistor, PNP, BC857B(COL)	3198 010 42150
7103	Transistor, NPN, BC847B(COL)	3198 010 42030
7200	IC, TDA9588H/N1/3I/1129	9352 731 49557
7201	Transistor, NPN, BC847B(COL)	3198 010 42030
7204	Transistor, PNP, BC857B(COL)	3198 010 42150
7205	Transistor, PNP, BC857B(COL)	3198 010 42150
7330	IC, TDA6107JF/N3	9352 713 37112
7400	Power FET, STP3NC60FP	9322 157 37687
7441	Transistor, PNP, BC857B(COL)	3198 010 42150
7443	Transistor, PNP, BC557B(COL)	3198 020 40110
7460	Transistor, NPN, BU4508DX	9340 550 92127
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
7462	Transistor, NPN, PDTC143ZT	9340 547 00215
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
7471	IC, TDA8359J/N2	9352 701 64112
7480	Transistor, NPN, BD135	3198 020 41010
7482	Transistor, NPN, BD135	3198 020 41010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667
7520	IC, TEA1507P/N1	9352 673 56112
7521	Power FET, FQPF9N50	9322 187 16687
7522	Transistor, NPN, BC847B(COL)	3198 010 42030
7540	Transistor, NPN, BC547B(COL)	3198 020 40030
7541	Transistor, NPN, PDTC114ET	9340 310 10215
7542	Transistor, PNP, BC857B(COL)	3198 010 42150
7560	IC, L78L33ACZ	9322 134 92676
7561	Transistor, NPN, PDTC143ZT	9340 547 00215
7580	Transistor, PNP, BC857B(COL)	3198 010 42150
7602	IC, M24C08-WBN6	9322 154 38682
7606	Transistor, NPN, PDTC143ZT	9340 547 00215
7802	IC, HEF4053BT	9333 729 60653
7861	IC, TDA9853H/V1	9352 671 19557
7891	Transistor, NPN, BC847B(COL)	3198 010 42030
7892	Transistor, NPN, BC847B(COL)	3198 010 42030
7901	IC, AN7522N PH	9322 181 41682
9611	Coil, 27u, 10%	3198 018 22790
9672	Coil, 22u, 10%	3198 018 22290
9678	Coil, 22u, 10%	3198 018 22290
CBA	Main Chassis Assembly	3141 058 59231

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts

Side Jack Panel Parts

Ref	Description	Part No.
0232	Headphone Jack	2422 026 04747
0250	A/V Jack	2422 026 04815
0251	6 Pin Connector	2422 025 12482
0254	5 Pin Connector	2422 025 12481
0255	4 Pin Connector	2422 025 12479
1810	3 Pin Connector	2412 020 00725
1811	3 Pin Connector	2412 020 00725
2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2176	Cap, 470p, 5%, 50v, Ceramic	3198 016 34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2178	Cap, 470p, 5%, 50v, Ceramic	3198 016 34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4823	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4824	Res, Zero ohm, "Chip" Jumper	3198 021 90030
6161	Zener Diode, 6.8 volt	3198 010 26880
7802	IC, HEF4053BT	9333 729 60653
9150	Wire Jumper	3198 036 90010
9151	Wire Jumper	3198 036 90010
9152	Wire Jumper	3198 036 90010
9153	Wire Jumper	3198 036 90010
9154	Wire Jumper	3198 036 90010
9155	Wire Jumper	3198 036 90010
9170	Wire Jumper	3198 036 90010
CBA	Side Jack Panel Assembly	3139 187 28121

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S = Safety Part Be sure to use exact replacement part.

24PT633F/35R (continued)

	Ref	Description	Part No.
S	AC01	AC Cord.	2422 070 98202
	AC04	Batteries for Remote Control Transmitte	9299 000 65263
	AC05	Cabinet Back	3139 124 35181
S	AC09	CRT, A59QDF891X001(L).	9322 163 87682
	AC10	Customer Control Buttons	3139 177 65681
S	AC12	Degaussing Coil.	3139 128 76341
	AC15	Holder, Degaussing Coil (4 Used) . . .	3139 124 21802
	AC17	Owner's Manual	3139 125 30822
	AC17	Owner's Manual, French	3139 125 31591
	AC18	Quick Use Guide.	3139 125 31611
	AC19	Side Jack Panel Bracket.	3139 124 39111
	AC20A	Cabinet Front.	3139 177 60691
	AC20B	Chassis Guide.	3139 124 25893
	AC20C	Light Guide.	3139 124 32221
	AC20D	Nameplate.	3141 050 00161
	AC20E	Power Button	3139 177 65691
	AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00411
	REMOTE	Remote Control Transmitter, RC19036001/ 01A.	3139 238 04303

24PT633R37 - Manual no. 7638

Main Chassis Parts

Main Chassis Parts

S	Ref	Description	Part No.
	0211	2 Pin Connector	2422 025 16269
	0212	2 Pin Connector	2422 025 16375
	0219	6 Pin Connector	2422 025 12482
	0220	5 Pin Connector	2422 025 04853
	0221	2 Pin Connector	2422 025 15503
	0222	2 Pin Connector	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack	2422 026 04926
	0229	3 Pin Connector	2412 020 00725
	0243	6 Pin Connector	2422 025 04854
	0244	5 Pin Connector	2422 025 04853
	0245	6 Pin Connector	2422 025 04854
	0246	5 Pin Connector	2422 025 12481
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U, PLL	2422 542 90108
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC	2422 086 10914
S	1515	Relay, 5 Amp, 12V	2422 132 07467
	1600	Tact Switch	2422 128 02742
	1601	Tact Switch	2422 128 02742
	1602	Tact Switch	2422 128 02742
	1603	Tact Switch	2422 128 02742
	1606	Tact Switch	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1811	3 Pin Connector	2412 020 00725
	1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344
	2004	Cap, 47n, 10%, 50v, Ceramic	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2226	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2241	Cap, 1n5, 10%, 50v, Ceramic	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester	2222 368 90177
	2340	Cap, 10u, 20%, 250v, Electrolytic	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
	2402	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2441	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2448	Cap, 100p, 10%, 1000v, Ceramic	3198 019 51010
	2450	Cap, 47u, 20%, 160v, Electrolytic	2020 021 91139
	2451	Cap, 15n, 10%, 50v, Polyester	3198 014 01530
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 390n, 5%, 250v, Metalized Polypropylene	2222 479 90021
	2458	Cap, 2u2, 20%, 100v, Electrolytic	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
	2463	Cap, 220p, 10%, 2000v, Ceramic	2020 558 90478
	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene	2222 479 90042
	2465	Cap, 15n, 5%, 1600v, Polypropylene	2222 375 90158
	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
	2468	Cap, 18n, 10%, 400v, Polyester	2222 347 90222
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic	3198 019 41020
	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2222 336 29148
	2501	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90626
	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic	2020 554 90128
	2520	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic	3198 017 21050
	2691	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2802	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2803	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250

S = Safety Part   Be sure to use exact replacement part.

24PT633R37 (continued)

Ref	Description	Part No.
2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
2862	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 580 15624
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 580 15624
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840
3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
3401	Res, 220K, 5%, 1/6W, Carbon Film . . .	3198 011 02240
3403	Res, 82K, 5%, 1/6W, Carbon Film. . . .	3198 011 08230
3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3405	Res, 10 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01090
3406	Res, 10 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01090
3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3442	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3443	Res, 1M, 5%, 1/10W, Metalized Glass. .	3198 021 51050
3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3451	Res, 2R7, 5%, 1/3W, Metal Film	2306 204 03278
3452	Res, 4K7, 1%, 3/5W, Metal Film	2312 915 14702
3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3454	Res, 1K8, 1%, 3/5W, Metal Film	2312 915 11802
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3468	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3470	Res, 470K, 5%, 1/10W, Metalized Glass.	3198 021 54740
3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
3481	Res, 15K, 1%, 3/5W, Metal Film	2312 915 11503
3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 33390
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3491	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3495	Res, 22K, 5%, 1/10W, Metalized Glass .	3198 021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3497	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3498	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3507	Surge Protector.	2422 549 43073
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630

S = Safety Part   Be sure to use exact replacement part.

24PT633R37 (continued)

	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198 021 53320
	3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198 021 31530
	3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198 021 31220
	3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030

	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4122	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4123	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4127	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5242	Coil, 10u, 5%.	3198 018 11090
	5341	Coil, 22u.	2422 535 97333
	5342	Coil, 22u.	2422 535 97333
	5401	Coil, 1mH, 10%	3198 018 71020
S	5445	Transformer, LOT AT2078.	3128 138 21401
	5451	Coil, 33u, 10%	3198 018 73390
	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5453	Diode, Rect, BYD33J.	9337 234 20133
	5457	Coil, Linear Correction.	2422 536 00511
	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
	5463	Coil, Choke.	3128 138 37021
	5471	Coil, 3u3, 20%	3198 018 73380
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 56u.	2422 535 97338
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04.	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5861	Coil, 10u, 5%.	3198 018 11090
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316.	3198 010 10630
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630
	6206	Zener Diode, 6.8 volt.	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316.	3198 010 10630

S = Safety Part   Be sure to use exact replacement part.

```
  6333   Diode, Signal, BAV21 . . . . . . . . .  3198 010 10070
  6335   Diode, Signal, BAV21 . . . . . . . . .  3198 010 10070
  6400   Res, 1K, 1%, 3/5W, Metal Film. . . . .  2312 915 11002
  6401   Zener Diode, 47 volt . . . . . . . . .  3198 010 24790
  6445   Zener Diode, 10 volt . . . . . . . . .  3198 020 51090
  6447   Diode, Signal, 1N4148. . . . . . . . .  3198 010 10010
  6448   Zener Diode, 6.2 volt. . . . . . . . .  9331 668 30133
  6449   Diode, Signal, BAV99 . . . . . . . . .  3198 010 10620
  6460   Diode, Rect, BY228/24. . . . . . . . .  9340 559 50112
  6461   Diode, Rect, RGP30J-L7004. . . . . . .  9338 617 60682
  6462   Zener Diode, 10 volt . . . . . . . . .  3198 010 21090
  6465   Diode, Signal, BAV21 . . . . . . . . .  3198 010 10070
  6466   Diode, Signal, BAV21 . . . . . . . . .  3198 010 10070
  6467   Diode, Signal, BAS316. . . . . . . . .  3198 010 10630
  6468   Diode, Signal, BAS316. . . . . . . . .  3198 010 10630
  6470   Diode, Signal, BAV99 . . . . . . . . .  3198 010 10620
  6476   Zener Diode, 15 volt . . . . . . . . .  3198 010 21590
  6481   Zener Diode, 5.6 volt. . . . . . . . .  3198 010 25680
  6482   Zener Diode, 9.1 volt. . . . . . . . .  9331 177 80133
  6483   Zener Diode, 33 volt . . . . . . . . .  3198 010 23390
  6485   Diode, Rect, BYD33J. . . . . . . . . .  9337 234 20133
  6486   Diode, Rect, EGP20DL-5100. . . . . . .  9322 164 42682
  6487   Diode, Rect, BYD33D. . . . . . . . . .  9337 234 00133
  6488   Diode, Rect, EGP20DL-5100. . . . . . .  9322 164 42682
  6500   Diode, Bridge Rect, GBU6JL-7002. . . .  9322 138 08667
  6520   Diode, Rect, BYD33D. . . . . . . . . .  9337 234 00133
  6523   Diode, Signal, 1N4148. . . . . . . . .  3198 010 10010
  6524   Diode, Rect, 1N5062. . . . . . . . . .  3198 010 10120
  6525   Diode, Rect, 1N5062. . . . . . . . . .  3198 010 10120
  6526   Zener Diode, 22 volt . . . . . . . . .  3198 020 52290
  6540   Zener Diode, 6.2 volt. . . . . . . . .  9331 668 30133
  6541   Zener Diode, 10 volt . . . . . . . . .  3198 020 51090
  6560   Diode, Rect, BYV29X-500. . . . . . . .  9340 555 59127
  6562   Diode, Rect, EGP20DL-5100. . . . . . .  9322 164 42682
  6563   Diode, Signal, BAS316. . . . . . . . .  3198 010 10630
  6565   Diode, Signal, BAV70 . . . . . . . . .  9331 849 10215
  6566   Diode, Signal, 1N4148. . . . . . . . .  3198 010 10010
  6569   Diode, Signal, BAS316. . . . . . . . .  3198 010 10630
  6570   Zener Diode, 6.8 volt. . . . . . . . .  3198 020 56880
  6580   Diode, Signal, BAS316. . . . . . . . .  3198 010 10630
  6681   Diode, Signal, BAT85 . . . . . . . . .  9336 247 60133
  6691   LED, LTL-10234WHCR . . . . . . . . . .  9322 185 69682
  6692   IR Receiver. . . . . . . . . . . . . .  9322 127 54667
  6901   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90020
  6904   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90020
  7101   Transistor, NPN, BC847B(COL) . . . . .  3198 010 42030
  7102   Transistor, PNP, BC857B(COL) . . . . .  3198 010 42150
  7103   Transistor, NPN, BC847B(COL) . . . . .  3198 010 42030
  7200   IC, TDA9588H/N1/3I/1053. . . . . . . .  9352 728 40557
  7201   Transistor, NPN, BC847B(COL) . . . . .  3198 010 42030
  7204   Transistor, PNP, BC857B(COL) . . . . .  3198 010 42150
  7205   Transistor, PNP, BC857B(COL) . . . . .  3198 010 42150
  7330   IC, TDA6107JF/N3 . . . . . . . . . . .  9352 713 37112
  7400   Power FET, STP3NC60FP. . . . . . . . .  9322 157 37687
  7441   Transistor, PNP, BC857B(COL) . . . . .  3198 010 42150
  7443   Transistor, PNP, BC557B(COL) . . . . .  3198 020 40110
  7460   Transistor, NPN, BU4508DX. . . . . . .  9340 550 92127
  7461   Transistor, NPN, BC337-25(COL) . . . .  3198 020 43530
  7462   Transistor, NPN, PDTC143ZT . . . . . .  9340 547 00215
  7463   Transistor, PNP, BC327-25(COL) . . . .  3198 020 43430
  7471   IC, TDA8359J/N2. . . . . . . . . . . .  9352 701 64112
  7480   Transistor, NPN, BD135 . . . . . . . .  3198 020 41010
  7482   Transistor, NPN, BD135 . . . . . . . .  3198 020 41010
S 7515   Optical Coupler, TCET1103(G) . . . . .  9322 140 14667
  7520   IC, TEA1507P/N1. . . . . . . . . . . .  9352 673 56112
  7521   Power FET, FQPF9N50. . . . . . . . . .  9322 187 16687
  7522   Transistor, NPN, BC847B(COL) . . . . .  3198 010 42030
  7540   Transistor, NPN, BC547B(COL) . . . . .  3198 020 40030
  7541   Transistor, NPN, PDTC114ET . . . . . .  9340 310 10215
  7542   Transistor, PNP, BC857B(COL) . . . . .  3198 010 42150
  7560   IC, L78L33ACZ. . . . . . . . . . . . .  9322 134 92676
  7561   Transistor, NPN, PDTC143ZT . . . . . .  9340 547 00215
  7580   Transistor, PNP, BC857B(COL) . . . . .  3198 010 42150
  7602   IC, M24C08-WBN6. . . . . . . . . . . .  9322 154 38682
  7606   Transistor, NPN, PDTC143ZT . . . . . .  9340 547 00215
  7802   IC, HEF4053BT. . . . . . . . . . . . .  9333 729 60653
  7861   IC, TDA9853H/V1. . . . . . . . . . . .  9352 671 19557
  7891   Transistor, NPN, BC847B(COL) . . . . .  3198 010 42030
  7892   Transistor, NPN, BC847B(COL) . . . . .  3198 010 42030
  7901   IC, AN7522N PH . . . . . . . . . . . .  9322 181 41682
  9611   Coil, 27u, 10% . . . . . . . . . . . .  3198 018 22790
  9672   Coil, 22u, 10% . . . . . . . . . . . .  3198 018 22290
  9678   Coil, 22u, 10% . . . . . . . . . . . .  3198 018 22290
  CBA    Main Chassis Assembly. . . . . . . . .  3139 187 15171
```

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

S = Safety Part   Be sure to use exact replacement part.

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts

Side Jack Panel Parts

```
  0232   Headphone Jack . . . . . . . . . . . .  2422 026 04747
  0250   A/V Jack . . . . . . . . . . . . . . .  2422 026 04815
  0251   6 Pin Connector. . . . . . . . . . . .  2422 025 12482
  0254   5 Pin Connector. . . . . . . . . . . .  2422 025 12481
  0255   4 Pin Connector. . . . . . . . . . . .  2422 025 12479
  1810   3 Pin Connector. . . . . . . . . . . .  2412 020 00725
  1811   3 Pin Connector. . . . . . . . . . . .  2412 020 00725
  2171   Cap, 330p, 10%, 50v, Ceramic . . . . .  3198 017 33310
  2172   Cap, 330p, 10%, 50v, Ceramic . . . . .  3198 017 33310
  2173   Cap, 330p, 10%, 50v, Ceramic . . . . .  3198 017 33310
  2174   Cap, 330p, 10%, 50v, Ceramic . . . . .  3198 017 33310
  2176   Cap, 470p, 5%, 50v, Ceramic. . . . . .  3198 016 34710
  2177   Cap, 10u, 20%, 50v, Electrolytic . . .  3198 025 51090
  2178   Cap, 470p, 5%, 50v, Ceramic. . . . . .  3198 016 34710
  2179   Cap, 10u, 20%, 50v, Electrolytic . . .  3198 025 51090
  2180   Cap, 2u2, +80/-20%, 10v, Ceramic . . .  3198 017 22250
  2181   Cap, 2u2, +80/-20%, 10v, Ceramic . . .  3198 017 22250
  2802   Cap, 220n, +80/-20%, 16v, Ceramic. . .  3198 017 42240
  3150   Res, 47K, 5%, 1/16W, Metalized Glass .  3198 021 34730
  3151   Res, 150 ohm, 5%, 1/6W, Carbon . . . .  3198 011 01510
  3152   Res, 47K, 5%, 1/16W, Metalized Glass .  3198 021 34730
  3153   Res, 150 ohm, 5%, 1/6W, Carbon . . . .  3198 011 01510
  3156   Res, 120 ohm, 5%, 1/16W, Metalized Glas 3198 021 31210
  3157   Res, 120 ohm, 5%, 1/16W, Metalized Glas 3198 021 31210
  3814   Res, 100K, 5%, 1/16W, Metalized Glass.  3198 021 31040
  3815   Res, 100K, 5%, 1/16W, Metalized Glass.  3198 021 31040
  3816   Res, 100K, 5%, 1/10W, Metalized Glass.  3198 021 51040
  3817   Res, 100K, 5%, 1/16W, Metalized Glass.  3198 021 31040
  3818   Res, 100K, 5%, 1/16W, Metalized Glass.  3198 021 31040
  3819   Res, 100K, 5%, 1/16W, Metalized Glass.  3198 021 31040
  3820   Res, 100K, 5%, 1/16W, Metalized Glass.  3198 021 31040
  3821   Res, 100K, 5%, 1/16W, Metalized Glass.  3198 021 31040
  4820   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90030
  4823   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90030
  4824   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90030
  6161   Zener Diode, 6.8 volt. . . . . . . . .  3198 010 26880
  7802   IC, HEF4053BT. . . . . . . . . . . . .  9333 729 60653
  CBA    Side Jack Panel Assembly . . . . . . .  3139 187 28121
```

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

```
S AC01   AC Cord. . . . . . . . . . . . . . . .  2422 070 98202
  AC03   Anode Lead Spacer. . . . . . . . . . .  3139 124 17541
  AC04   Batteries for Remote Control Transmitte 9299 000 65263
  AC05   Cabinet Back . . . . . . . . . . . . .  3139 124 35181
S AC09   CRT, A59QDF891X001(L). . . . . . . . .  9322 163 87682
  AC10   Customer Control Buttons . . . . . . .  3139 177 60711
S AC12   Degaussing Coil. . . . . . . . . . . .  3139 128 76341
  AC19   Side Jack Panel Bracket. . . . . . . .  3139 124 39111
  AC20A  Cabinet Front. . . . . . . . . . . . .  3139 177 60691
  AC20B  Chassis Guide. . . . . . . . . . . . .  3139 124 25893
  AC20C  Light Guide. . . . . . . . . . . . . .  3139 124 32221
  AC20D  Nameplate. . . . . . . . . . . . . . .  3141 050 00161
  AC20E  Power Button . . . . . . . . . . . . .  3139 177 60701
  AC20H  Speaker, 16 ohm, 5W (2 Used) . . . . .  2422 264 00411
  REMOTE Remote Control Transmitter, RC19036001/
         01. . . . . . . . . . . . . . . . . . . 3139 228 86493
```

25LT220L/17 - Manual no. 7638

Main Chassis Parts

Main Chassis Parts

S	Ref	Description	Part No.
	0211	2 Pin Connector	2422 025 16269
	0212	2 Pin Connector	2422 025 16375
	0218	A/V Jack	2422 026 04742
	0220	5 Pin Connector	2422 025 04853
	0221	2 Pin Connector	2422 025 15503
	0222	2 Pin Connector	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack	2422 026 04926
	0240	7 Pin Connector	2422 025 11244
	0243	6 Pin Connector	2422 025 04854
	0244	5 Pin Connector	2422 025 04853
	0245	6 Pin Connector	2422 025 04854
	0251	3 Pin Connector	2412 020 00725
S	0254	9 Pin CRT Socket	2422 500 80076
	0259	5 Pin Connector	2422 025 15848
	0262	3 Pin Connector	2422 025 16937
	0267	3 Pin Connector	2412 020 00725
	0280	4 Pin Connector	2422 025 12479
S	1000	Tuner, V+U, PLL	2422 542 90108
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC	2422 086 10914
S	1515	Relay, 5 Amp, 12V	2422 132 07444
	1600	Tact Switch	2422 128 02742
	1601	Tact Switch	2422 128 02742
	1602	Tact Switch	2422 128 02742
	1603	Tact Switch	2422 128 02742
	1606	Tact Switch	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344
	2004	Cap, 47n, 10%, 50v, Ceramic	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2123	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2125	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2181	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2182	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2183	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2226	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2241	Cap, 1n5, 10%, 50v, Ceramic	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2405	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic	3198 016 03310
	2441	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic	2020 021 91139
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 470n, 5%, 250v, Metalized Polypropylene	2022 333 00086
	2458	Cap, 2u2, 20%, 100v, Electrolytic	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
	2462	Cap, 330n, 10%, 250v, MPP	2022 333 00084
S	2463	Cap, 470p, 10%, 2000v, Ceramic	2020 558 90483
S	2465	Cap, 13n, 5%, 1600v, Polypropylene	2020 301 90254
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2616	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2618	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic	3198 017 21050
	2691	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2802	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2803	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2816	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2862	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2864	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2865	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2866	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2867	Cap, 1n8, 10%, 50v, Ceramic	2238 586 15626

S = Safety Part   Be sure to use exact replacement part.

25LT220L/17 (continued)

Ref	Description	Part No.
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3121	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3123	Wire Jumper.	3198 036 90010
3124	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3125	Wire Jumper.	3198 036 90010
3126	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3182	Wire Jumper.	3198 036 90010
3184	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3185	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3186	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3187	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840
3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
S 3452	Res, 5K6, 1%, 3/5W, Metal Film	2312 915 15602
3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3454	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3470	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
3481	Res, 8K2, 1%, 3/5W, Metal Film	2312 915 18202
3482	Res, 22K, 1%, 3/5W, Metal Film	2312 915 12203
3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3507	Surge Protector.	2422 549 43073
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S 3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
S 3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310

S = Safety Part   Be sure to use exact replacement part.

25LT220L/17 (continued)

Ref	Description	Part No.
3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198 021 53320
3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198 021 31530
3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198 021 31220
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4101	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4102	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4104	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4128	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4604	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
5001	Coil, 27u, 10%	3198 018 22790
5002	Coil, 820n, 10%.	3198 018 18270
5201	Coil, 6u8, 5%.	3198 018 16880
5202	Wire Jumper.	3198 036 90010
5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
5241	Wire Jumper.	3198 036 90010
5242	Coil, 10u, 5%.	3198 018 11090
5342	Coil, 12u, 10%	3198 018 21290
S 5445	Transformer, LOT	2422 531 02519
5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
5457	Coil, Linear Correction.	3128 138 56801
5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
5471	Coil, 3u3, 20%	3198 018 73380
5472	Coil, 3u3, 10%	3198 018 23380
5480	Coil, 27u, 10%	3198 018 22790
S 5501	Mains Filter	2422 549 43432
S 5520	Transformer, SS39009-04.	2422 531 02459
5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5561	Coil, 27u, 5%.	2422 535 95366
5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5602	Coil, 5u6, 5%.	3198 018 15680
5603	Coil, 5u6, 5%.	3198 018 15680
5604	Coil, 5u6, 5%.	3198 018 15680
5861	Coil, 10u, 5%.	3198 018 11090
6001	Zener Diode, 33 volt	3198 010 23390
6181	Zener Diode, 6.8 volt.	3198 020 56880
6201	Diode, Signal, BAS316.	3198 010 10630
6202	Diode, Signal, BAS316.	3198 010 10630
6206	Zener Diode, 6.8 volt.	3198 020 56880
6331	Diode, Signal, BAV21	3198 010 10070
6332	Diode, Signal, BAS316.	3198 010 10630
6333	Diode, Signal, BAV21	3198 010 10070
6335	Diode, Signal, BAV21	3198 010 10070
6445	Zener Diode, 10 volt	3198 020 51090
6447	Diode, Signal, 1N4148.	3198 010 10010
6448	Zener Diode, 6.2 volt.	9331 668 30133
6449	Diode, Signal, BAV99	3198 010 10620
6460	Diode, Rect, DG3-7005L	9336 436 10682
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
6462	Zener Diode, 8.2 volt.	3198 010 28280
6465	Diode, Signal, BAV21	3198 010 10070
6466	Diode, Signal, BAV21	3198 010 10070
6467	Diode, Signal, BAS316.	3198 010 10630
6468	Diode, Signal, BAS316.	3198 010 10630
6469	Diode, Rect, BYV95C.	9335 001 80133
6470	Diode, Signal, BAV99	3198 010 10620
6476	Zener Diode, 15 volt	3198 010 21590
6481	Zener Diode, 5.6 volt.	3198 010 25680
6482	Zener Diode, 9.1 volt.	9331 177 80133
6483	Zener Diode, 33 volt	3198 010 23390
6485	Diode, Rect, BYV95C.	9335 001 80133
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
6487	Diode, Rect, BYV95A.	9335 000 90133
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
6500	Diode, Bridge Rect, GBU6JL-7002. . . .	9322 138 08667
6520	Diode, Rect, BYV95A.	9335 000 90133

S = Safety Part   Be sure to use exact replacement part.

25LT220L/17 (continued)

	Ref	Description	Part No.
	6523	Diode, Signal, 1N4148	3198 010 10010
	6524	Diode, Rect, 1N5062	3198 010 10120
	6525	Diode, Rect, 1N5062	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500	9340 555 59127
	6562	Diode, Rect, EGP20DL-5100	9322 164 42682
	6563	Diode, Signal, BAS316	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148	3198 010 10010
	6569	Diode, Signal, BAS316	3198 010 10630
	6570	Zener Diode, 6.8 volt	3198 020 56880
	6580	Diode, Signal, BAS316	3198 010 10630
	6681	Diode, Signal, BAT85	9336 247 60133
	6691	LED, LTL-10234WHCR	9322 185 69682
	6692	IR Receiver	9322 127 54667
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9588H/N1/3I	4835 310 57622
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7460	Transistor, NPN, BU4508DX	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1	9352 673 56112
	7521	Power FET, FQPF9N50	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, LE33CZ	9322 106 11676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C16-WBN6	9322 147 25682
	7802	IC, HEF4053BT	9333 729 60653
	7861	IC, TDA9853H/V1	9352 671 19557
	7891	Transistor, NPN, BC847B(COL)	3198 010 42030
	7892	Transistor, NPN, BC847B(COL)	3198 010 42030
	7901	IC, AN7522N PH	9322 181 41682
	9001	Wire Jumper	3198 036 90010
	9104	Wire Jumper	3198 036 90010
	9123	Wire Jumper	3198 036 90010
	9171	Wire Jumper	3198 036 90010
	9173	Wire Jumper	3198 036 90010
	9181	Wire Jumper	3198 036 90010
	9182	Wire Jumper	3198 036 90010
	9183	Wire Jumper	3198 036 90010
	9192	Wire Jumper	3198 036 90010
	9193	Wire Jumper	3198 036 90010
	9311	Wire Jumper	3198 036 90010
	9312	Wire Jumper	3198 036 90010
	9406	Wire Jumper	3198 036 90010
	9407	Wire Jumper	3198 036 90010
	9408	Wire Jumper	3198 036 90010
	9409	Wire Jumper	3198 036 90010
	9410	Wire Jumper	3198 036 90010
	9411	Wire Jumper	3198 036 90010
	9412	Wire Jumper	3198 036 90010
	9413	Wire Jumper	3198 036 90010
	9415	Wire Jumper	3198 036 90010
	9416	Wire Jumper	3198 036 90010
	9417	Wire Jumper	3198 036 90010
	9418	Wire Jumper	3198 036 90010
	9419	Wire Jumper	3198 036 90010
	9421	Wire Jumper	3198 036 90010
	9422	Wire Jumper	3198 036 90010
	9423	Wire Jumper	3198 036 90010
	9425	Wire Jumper	3198 036 90010
	9427	Wire Jumper	3198 036 90010
	9451	Wire Jumper	3198 036 90010
	9453	Wire Jumper	3198 036 90010
	9460	Wire Jumper	3198 036 90010
	9500	Wire Jumper	3198 036 90010
	9501	Wire Jumper	3198 036 90010
	9503	Wire Jumper	3198 036 90010
	9506	Wire Jumper	3198 036 90010
	9507	Wire Jumper	3198 036 90010
	9510	Wire Jumper	3198 036 90010
	9511	Wire Jumper	3198 036 90010
	9512	Wire Jumper	3198 036 90010
	9513	Wire Jumper	3198 036 90010
	9514	Wire Jumper	3198 036 90010
	9515	Wire Jumper	3198 036 90010
	9516	Wire Jumper	3198 036 90010
	9518	Wire Jumper	3198 036 90010
	9520	Wire Jumper	3198 036 90010
	9521	Wire Jumper	3198 036 90010
	9522	Wire Jumper	3198 036 90010
	9524	Wire Jumper	3198 036 90010
	9528	Wire Jumper	3198 036 90010
	9530	Wire Jumper	3198 036 90010
	9611	Coil, 27u, 10%	3198 018 22790
	9612	Wire Jumper	3198 036 90010
	9613	Wire Jumper	3198 036 90010
	9614	Wire Jumper	3198 036 90010
	9615	Wire Jumper	3198 036 90010
	9617	Wire Jumper	3198 036 90010
	9618	Wire Jumper	3198 036 90010
	9619	Wire Jumper	3198 036 90010
	9622	Wire Jumper	3198 036 90010
	9623	Wire Jumper	3198 036 90010
	9626	Wire Jumper	3198 036 90010
	9627	Wire Jumper	3198 036 90010
	9628	Wire Jumper	3198 036 90010
	9629	Wire Jumper	3198 036 90010
	9631	Wire Jumper	3198 036 90010
	9632	Wire Jumper	3198 036 90010
	9637	Wire Jumper	3198 036 90010
	9638	Wire Jumper	3198 036 90010
	9640	Wire Jumper	3198 036 90010
	9641	Wire Jumper	3198 036 90010
	9642	Wire Jumper	3198 036 90010
	9643	Wire Jumper	3198 036 90010
	9647	Wire Jumper	3198 036 90010
	9648	Wire Jumper	3198 036 90010
	9650	Wire Jumper	3198 036 90010
	9652	Wire Jumper	3198 036 90010
	9654	Wire Jumper	3198 036 90010
	9655	Wire Jumper	3198 036 90010
	9657	Wire Jumper	3198 036 90010
	9658	Wire Jumper	3198 036 90010
	9659	Wire Jumper	3198 036 90010
	9660	Wire Jumper	3198 036 90010
	9661	Wire Jumper	3198 036 90010
	9662	Wire Jumper	3198 036 90010
	9663	Wire Jumper	3198 036 90010
	9664	Wire Jumper	3198 036 90010
	9665	Wire Jumper	3198 036 90010
	9666	Wire Jumper	3198 036 90010
	9667	Wire Jumper	3198 036 90010
	9668	Wire Jumper	3198 036 90010
	9669	Wire Jumper	3198 036 90010
	9670	Wire Jumper	3198 036 90010
	9671	Wire Jumper	3198 036 90010
	9672	Coil, 22u, 10%	3198 018 22290
	9674	Wire Jumper	3198 036 90010
	9675	Wire Jumper	3198 036 90010
	9676	Wire Jumper	3198 036 90010
	9678	Coil, 22u, 10%	3198 018 22290
	9679	Wire Jumper	3198 036 90010
	9680	Wire Jumper	3198 036 90010
	9681	Wire Jumper	3198 036 90010
	9685	Wire Jumper	3198 036 90010
	9686	Wire Jumper	3198 036 90010
	9687	Wire Jumper	3198 036 90010
	9688	Wire Jumper	3198 036 90010
	9689	Wire Jumper	3198 036 90010
	9690	Wire Jumper	3198 036 90010
	9691	Wire Jumper	3198 036 90010
	9694	Wire Jumper	3198 036 90010
	9695	Wire Jumper	3198 036 90010
	9697	Wire Jumper	3198 036 90010
	9698	Wire Jumper	3198 036 90010
	9699	Wire Jumper	3198 036 90010
	9821	Wire Jumper	3198 036 90010
	9822	Wire Jumper	3198 036 90010
	9825	Wire Jumper	3198 036 90010
	9828	Wire Jumper	3198 036 90010
	9829	Wire Jumper	3198 036 90010
	9831	Wire Jumper	3198 036 90010
	9832	Wire Jumper	3198 036 90010
	9837	Wire Jumper	3198 036 90010
	9838	Wire Jumper	3198 036 90010
	9839	Wire Jumper	3198 036 90010
	9846	Wire Jumper	3198 036 90010
	9847	Wire Jumper	3198 036 90010
	9849	Wire Jumper	3198 036 90010
	9850	Wire Jumper	3198 036 90010
	9851	Wire Jumper	3198 036 90010
	9852	Wire Jumper	3198 036 90010
	9853	Wire Jumper	3198 036 90010
	9856	Wire Jumper	3198 036 90010
	9860	Wire Jumper	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

25LT220L/17 (continued)

9861	Wire Jumper.	3198 036 90010
9862	Wire Jumper.	3198 036 90010
9864	Wire Jumper.	3198 036 90010
9865	Wire Jumper.	3198 036 90010
9868	Wire Jumper.	3198 036 90010
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9891	Wire Jumper.	3198 036 90010
9892	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010
9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9905	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9918	Wire Jumper.	3198 036 90010
9919	Wire Jumper.	3198 036 90010
9920	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9998	Wire Jumper.	3198 036 90010
CBA	SP/LS Module (Vertical) (ITV).	3139 127 27372
CBA	Main Chassis Assembly.	3139 187 26771

Channel One Card Parts
Channel One Card Parts

2D 3 Line Comb Filter Parts
2D 3 Line Comb Filter Parts

DAF Panel Parts
DAF Panel Parts

DVD Eject Panel Parts
DVD Eject Panel Parts

DVD Interface Panel Parts
DVD Interface Panel Parts

Front Interface Panel Parts
Front Interface Panel Parts

ITV Front Jack Panel Parts
ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)
Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)
Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts
Side Jack Panel Parts

Subwoofer Panel Parts
Subwoofer Panel Parts

Top Control Panel Parts
Top Control Panel Parts

Cabinet & Accessory Parts
Cabinet & Accessory Parts

S	AC01	AC Cord.	3135 010 07161
	AC03	Anode Lead Spacer (3 Used)	3135 014 04471
	AC05	Cabinet Back	3139 124 45291
S	AC09	CRT, A63QDB891X01.	9322 151 39682
	AC10	Customer Control Buttons	3139 124 27351
S	AC12	Degaussing Coil.	2422 549 44489
	AC15	Holder, Degaussing Coil (4 Used) . . .	3135 013 01641
	AC20	Cabinet Front Assembly	3121 237 53351
	AC20A	Cabinet Front.	3139 177 62031
	AC20B	Chassis Guide (2 Used)	3139 124 31381
	AC20C	Light Guide.	3139 124 26461
	AC20D	Nameplate.	3135 015 03571
	AC20E	Power Button	3139 124 26444
	AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00401
	AC22	Cinch Cover.	3139 124 25551

25LT421L/17 - Manual no. 7638

Main Chassis Parts

S	Ref	Description	Part No.
		Main Chassis Parts	
	0211	2 Pin Connector.	2422 025 16269
	0212	2 Pin Connector.	2422 025 16375
	0219	6 Pin Connector.	2422 025 12482
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0222	2 Pin Connector.	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0240	7 Pin Connector.	2422 025 11244
	0243	6 Pin Connector.	2422 025 04854
	0244	5 Pin Connector.	2422 025 04853
	0245	6 Pin Connector.	2422 025 04854
	0246	5 Pin Connector.	2422 025 12481
	0251	3 Pin Connector.	2412 020 00725
S	0254	9 Pin CRT Socket	2422 500 80076
	0259	5 Pin Connector.	2422 025 15848
	0262	3 Pin Connector.	2422 025 16937
	0267	3 Pin Connector.	2412 020 00725
S	1000	Tuner, V+U, PLL	2422 542 90108
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1600	Tact Switch.	2422 128 02742
	1601	Tact Switch.	2422 128 02742
	1602	Tact Switch.	2422 128 02742
	1603	Tact Switch.	2422 128 02742
	1606	Tact Switch.	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1831	Crystal, Resonator, 18MHz432, 12 Pin, H C49/U A.	2422 543 00842
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2123	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2125	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyest er.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic. . .	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic. . .	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic . .	2020 558 90445
	2405	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2441	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic . . .	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic. . .	2020 021 91139
	2455	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
	2457	Cap, 470n, 5%, 250v, Metalized Polyprop ylene.	2022 333 00086
	2458	Cap, 2u2, 20%, 100v, Electrolytic. . .	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
	2462	Cap, 330n, 10%, 250v, MPP.	2022 333 00084
S	2463	Cap, 470p, 10%, 2000v, Ceramic	2020 558 90483
S	2465	Cap, 13n, 5%, 1600v, Polypropylene . .	2020 301 90254
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic . . .	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic. . .	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic. . .	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic . . .	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic . .	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic. . .	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypro pylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic . .	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic . . .	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic . .	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic . . .	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic . . .	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic . . .	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic. . .	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic. . .	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2616	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
	2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050
	2691	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
	2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
	2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
	2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
	2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
	2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
	2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2837	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
	2840	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2841	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2843	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2844	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040

S = Safety Part   Be sure to use exact replacement part.

25LT421L/17 (continued)

S	Ref	Description	Part No.
	2846	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
	2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
	2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
	2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610
	2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910
	2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
	2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
	2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2910	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320
	2911	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320
	2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
	3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3121	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3123	Wire Jumper.	3198 036 90010
	3124	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3125	Wire Jumper.	3198 036 90010
	3126	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
	3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
	3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
	3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840
	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
S	3452	Res, 5K6, 1%, 3/5W, Metal Film	2312 915 15602
	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3454	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
S	3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S	3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
	3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
	3470	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
	3481	Res, 8K2, 1%, 3/5W, Metal Film	2312 915 18202
	3482	Res, 22K, 1%, 3/5W, Metal Film	2312 915 12203
	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S	3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710

S = Safety Part   Be sure to use exact replacement part.

25LT421L/17 (continued)

Ref	Description	Part No.
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198 021 53320
3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3831	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3843	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4101	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4102	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4104	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4128	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4604	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
5001	Coil, 27u, 10%	3198 018 22790
5002	Coil, 820n, 10%.	3198 018 18270
5201	Coil, 6u8, 5%.	3198 018 16880
5202	Wire Jumper.	3198 036 90010
5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
5241	Wire Jumper.	3198 036 90010
5242	Coil, 10u, 5%.	3198 018 11090
5342	Coil, 12u, 10%	3198 018 21290
S 5445	Transformer, LOT	2422 531 02519
5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
5457	Coil, Linear Correction.	3128 138 56801
5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
5471	Coil, 3u3, 20%	3198 018 73380
5472	Coil, 3u3, 10%	3198 018 23380
5480	Coil, 27u, 10%	3198 018 22790
S 5501	Mains Filter	2422 549 43432
S 5520	Transformer, SS39009-04.	2422 531 02459
5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5561	Coil, 27u, 5%.	2422 535 95366
5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5602	Coil, 5u6, 5%.	3198 018 15680
5603	Coil, 5u6, 5%.	3198 018 15680
5604	Coil, 5u6, 5%.	3198 018 15680
5831	Coil, 6u8, 5%.	3198 018 16880
5832	Coil, 6u8, 5%.	3198 018 16880
5833	Coil, 6u8, 5%.	3198 018 16880
5835	Coil, 12u, 10%	3198 018 31290
6001	Zener Diode, 33 volt	3198 010 23390
6201	Diode, Signal, BAS316.	3198 010 10630
6202	Diode, Signal, BAS316.	3198 010 10630
6206	Zener Diode, 6.8 volt.	3198 020 56880
6331	Diode, Signal, BAV21	3198 010 10070
6332	Diode, Signal, BAS316.	3198 010 10630
6333	Diode, Signal, BAV21	3198 010 10070
6335	Diode, Signal, BAV21	3198 010 10070
6445	Zener Diode, 10 volt	3198 020 51090
6447	Diode, Signal, 1N4148.	3198 010 10010
6448	Zener Diode, 6.2 volt.	9331 668 30133
6449	Diode, Signal, BAV99	3198 010 10620
6460	Diode, Rect, DG3-7005L	9336 436 10682
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
6462	Zener Diode, 8.2 volt.	3198 010 28280
6465	Diode, Signal, BAV21	3198 010 10070
6466	Diode, Signal, BAV21	3198 010 10070
6467	Diode, Signal, BAS316.	3198 010 10630
6468	Diode, Signal, BAS316.	3198 010 10630
6469	Diode, Rect, BYV95C.	9335 001 80133
6470	Diode, Signal, BAV99	3198 010 10620
6476	Zener Diode, 15 volt	3198 010 21590
6481	Zener Diode, 5.6 volt.	3198 010 25680
6482	Zener Diode, 9.1 volt.	9331 177 80133
6483	Zener Diode, 33 volt	3198 010 23390
6485	Diode, Rect, BYV95C.	9335 001 80133
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
6487	Diode, Rect, BYV95A.	9335 000 90133
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
6500	Diode, Bridge Rect, GBU6JL-7002. . . .	9322 138 08667
6520	Diode, Rect, BYV95A.	9335 000 90133
6523	Diode, Signal, 1N4148.	3198 010 10010
6524	Diode, Rect, 1N5062.	3198 010 10120
6525	Diode, Rect, 1N5062.	3198 010 10120
6526	Zener Diode, 22 volt	3198 020 52290
6540	Zener Diode, 6.2 volt.	9331 668 30133
6541	Zener Diode, 10 volt	3198 020 51090
6560	Diode, Rect, BYV29X-500.	9340 555 59127
6562	Diode, Rect, EGP20DL-5100.	9322 164 42682
6563	Diode, Signal, BAS316.	3198 010 10630
6565	Diode, Signal, BAV70	9331 849 10215
6566	Diode, Signal, 1N4148.	3198 010 10010
6569	Diode, Signal, BAS316.	3198 010 10630
6570	Zener Diode, 6.8 volt.	3198 020 56880
6580	Diode, Signal, BAS316.	3198 010 10630
6681	Diode, Signal, BAT85	9336 247 60133
6691	LED, LTL-10234WHCR	9322 185 69682
6692	IR Receiver.	9322 127 54667

S = Safety Part   Be sure to use exact replacement part.

25LT421L/17 (continued)

	Ref	Description	Part No.
	6831	Diode, Signal, 1N4148.	3198 010 10010
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9588H/N1/3I	4835 310 57626
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7460	Transistor, NPN, BU4508DX.	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2.	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1.	9352 673 56112
	7521	Power FET, FQPF9N50.	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, LE33CZ	9322 106 11676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C16-WBN6.	9322 147 25682
	7802	IC, HEF4053BT.	9333 729 60653
	7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682
	7901	IC, AN7522N PH	9322 181 41682
	9001	Wire Jumper.	3198 036 90010
	9104	Wire Jumper.	3198 036 90010
	9123	Wire Jumper.	3198 036 90010
	9171	Wire Jumper.	3198 036 90010
	9173	Wire Jumper.	3198 036 90010
	9181	Wire Jumper.	3198 036 90010
	9182	Wire Jumper.	3198 036 90010
	9183	Wire Jumper.	3198 036 90010
	9192	Wire Jumper.	3198 036 90010
	9193	Wire Jumper.	3198 036 90010
	9311	Wire Jumper.	3198 036 90010
	9312	Wire Jumper.	3198 036 90010
	9406	Wire Jumper.	3198 036 90010
	9407	Wire Jumper.	3198 036 90010
	9408	Wire Jumper.	3198 036 90010
	9409	Wire Jumper.	3198 036 90010
	9410	Wire Jumper.	3198 036 90010
	9411	Wire Jumper.	3198 036 90010
	9412	Wire Jumper.	3198 036 90010
	9413	Wire Jumper.	3198 036 90010
	9415	Wire Jumper.	3198 036 90010
	9416	Wire Jumper.	3198 036 90010
	9417	Wire Jumper.	3198 036 90010
	9418	Wire Jumper.	3198 036 90010
	9419	Wire Jumper.	3198 036 90010
	9421	Wire Jumper.	3198 036 90010
	9422	Wire Jumper.	3198 036 90010
	9423	Wire Jumper.	3198 036 90010
	9425	Wire Jumper.	3198 036 90010
	9427	Wire Jumper.	3198 036 90010
	9451	Wire Jumper.	3198 036 90010
	9453	Wire Jumper.	3198 036 90010
	9460	Wire Jumper.	3198 036 90010
	9500	Wire Jumper.	3198 036 90010
	9501	Wire Jumper.	3198 036 90010
	9503	Wire Jumper.	3198 036 90010
	9506	Wire Jumper.	3198 036 90010
	9507	Wire Jumper.	3198 036 90010
	9510	Wire Jumper.	3198 036 90010
	9511	Wire Jumper.	3198 036 90010
	9512	Wire Jumper.	3198 036 90010
	9513	Wire Jumper.	3198 036 90010
	9514	Wire Jumper.	3198 036 90010
	9515	Wire Jumper.	3198 036 90010
	9516	Wire Jumper.	3198 036 90010
	9518	Wire Jumper.	3198 036 90010
	9520	Wire Jumper.	3198 036 90010
	9521	Wire Jumper.	3198 036 90010
	9522	Wire Jumper.	3198 036 90010
	9524	Wire Jumper.	3198 036 90010
	9528	Wire Jumper.	3198 036 90010
	9530	Wire Jumper.	3198 036 90010
	9611	Coil, 27u, 10%	3198 018 22790
	9612	Wire Jumper.	3198 036 90010
	9613	Wire Jumper.	3198 036 90010
	9614	Wire Jumper.	3198 036 90010
	9615	Wire Jumper.	3198 036 90010
	9618	Wire Jumper.	3198 036 90010
	9619	Wire Jumper.	3198 036 90010
	9622	Wire Jumper.	3198 036 90010

Ref	Description	Part No.
9623	Wire Jumper.	3198 036 90010
9626	Wire Jumper.	3198 036 90010
9627	Wire Jumper.	3198 036 90010
9628	Wire Jumper.	3198 036 90010
9629	Wire Jumper.	3198 036 90010
9631	Wire Jumper.	3198 036 90010
9632	Wire Jumper.	3198 036 90010
9637	Wire Jumper.	3198 036 90010
9638	Wire Jumper.	3198 036 90010
9640	Wire Jumper.	3198 036 90010
9641	Wire Jumper.	3198 036 90010
9642	Wire Jumper.	3198 036 90010
9643	Wire Jumper.	3198 036 90010
9647	Wire Jumper.	3198 036 90010
9648	Wire Jumper.	3198 036 90010
9650	Wire Jumper.	3198 036 90010
9652	Wire Jumper.	3198 036 90010
9654	Wire Jumper.	3198 036 90010
9655	Wire Jumper.	3198 036 90010
9657	Wire Jumper.	3198 036 90010
9658	Wire Jumper.	3198 036 90010
9659	Wire Jumper.	3198 036 90010
9660	Wire Jumper.	3198 036 90010
9661	Wire Jumper.	3198 036 90010
9662	Wire Jumper.	3198 036 90010
9663	Wire Jumper.	3198 036 90010
9664	Wire Jumper.	3198 036 90010
9665	Wire Jumper.	3198 036 90010
9666	Wire Jumper.	3198 036 90010
9667	Wire Jumper.	3198 036 90010
9668	Wire Jumper.	3198 036 90010
9669	Wire Jumper.	3198 036 90010
9670	Wire Jumper.	3198 036 90010
9671	Wire Jumper.	3198 036 90010
9672	Coil, 22u, 10%	3198 018 22290
9674	Wire Jumper.	3198 036 90010
9675	Wire Jumper.	3198 036 90010
9676	Wire Jumper.	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper.	3198 036 90010
9680	Wire Jumper.	3198 036 90010
9685	Wire Jumper.	3198 036 90010
9686	Wire Jumper.	3198 036 90010
9687	Wire Jumper.	3198 036 90010
9688	Wire Jumper.	3198 036 90010
9689	Wire Jumper.	3198 036 90010
9690	Wire Jumper.	3198 036 90010
9691	Wire Jumper.	3198 036 90010
9694	Wire Jumper.	3198 036 90010
9695	Wire Jumper.	3198 036 90010
9697	Wire Jumper.	3198 036 90010
9698	Wire Jumper.	3198 036 90010
9699	Wire Jumper.	3198 036 90010
9821	Wire Jumper.	3198 036 90010
9822	Wire Jumper.	3198 036 90010
9825	Wire Jumper.	3198 036 90010
9828	Wire Jumper.	3198 036 90010
9829	Wire Jumper.	3198 036 90010
9831	Wire Jumper.	3198 036 90010
9832	Wire Jumper.	3198 036 90010
9837	Wire Jumper.	3198 036 90010
9838	Wire Jumper.	3198 036 90010
9839	Wire Jumper.	3198 036 90010
9846	Wire Jumper.	3198 036 90010
9847	Wire Jumper.	3198 036 90010
9849	Wire Jumper.	3198 036 90010
9851	Wire Jumper.	3198 036 90010
9856	Wire Jumper.	3198 036 90010
9858	Wire Jumper.	3198 036 90010
9859	Wire Jumper.	3198 036 90010
9860	Wire Jumper.	3198 036 90010
9862	Wire Jumper.	3198 036 90010
9864	Wire Jumper.	3198 036 90010
9865	Wire Jumper.	3198 036 90010
9867	Wire Jumper.	3198 036 90010
9868	Wire Jumper.	3198 036 90010
9869	Wire Jumper.	3198 036 90010
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010
9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9905	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

9998	Wire Jumper.	3198 036 90010
CBA	SP/LS Module (Vertical) (ITV).	3139 127 27372
CBA	Main Chassis Assembly.	3139 187 26781

Channel One Card Parts
Channel One Card Parts

2D 3 Line Comb Filter Parts
2D 3 Line Comb Filter Parts

DAF Panel Parts
DAF Panel Parts

DVD Eject Panel Parts
DVD Eject Panel Parts

DVD Interface Panel Parts
DVD Interface Panel Parts

Front Interface Panel Parts
Front Interface Panel Parts

ITV Front Jack Panel Parts
ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)
Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)
Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts
Side Jack Panel Parts

0232	Headphone Jack	2422 026 04747
0250	A/V Jack	2422 026 04815
0251	6 Pin Connector.	2422 025 12482
0254	5 Pin Connector.	2422 025 12481
0255	4 Pin Connector.	2422 025 12479
2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2177	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2179	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
3150	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
4817	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4819	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4821	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4822	Res, Zero ohm, "Chip" Jumper	3198 021 90020
6161	Zener Diode, 6.8 volt.	3198 010 26880
9151	Wire Jumper.	3198 036 90010
9152	Wire Jumper.	3198 036 90010
9153	Wire Jumper.	3198 036 90010
9170	Wire Jumper.	3198 036 90010
CBA	Side Jack Panel Assembly	3139 187 15141

Subwoofer Panel Parts
Subwoofer Panel Parts

Top Control Panel Parts
Top Control Panel Parts

Cabinet & Accessory Parts
Cabinet & Accessory Parts

S AC01	AC Cord.	3135 010 07161
AC03	Anode Lead Spacer (3 Used)	3135 014 04471
AC05	Cabinet Back	3121 237 52933
S AC09	CRT, A63QDB891X01.	9322 151 39682
AC10	Customer Control Buttons	3139 177 60721
S AC12	Degaussing Coil.	2422 549 44489
AC15	Holder, Degaussing Coil (4 Used) . . .	3135 013 01641
AC19	Side Jack Panel Bracket.	3139 124 37061
AC20	Cabinet Front Assembly	3121 237 53431
AC20A	Cabinet Front.	3139 177 60741
AC20B	Chassis Guide.	3139 124 37561
AC20C	Light Guide.	3139 124 36551
AC20D	Nameplate.	3141 050 00161
AC20E	Power Button	3139 177 60731
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00411

S = Safety Part   Be sure to use exact replacement part.

25PT533S37C - Manual no. 7638

Main Chassis Parts

S	Ref	Description	Part No.
		Main Chassis Parts	
	0211	2 Pin Connector	2422 025 16269
	0212	2 Pin Connector	2422 025 16375
	0219	6 Pin Connector	2422 025 12482
	0220	5 Pin Connector	2422 025 04853
	0221	2 Pin Connector	2422 025 15503
	0222	2 Pin Connector	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack	2422 026 04926
	0229	3 Pin Connector	2412 020 00725
	0243	6 Pin Connector	2422 025 04854
	0244	5 Pin Connector	2422 025 04853
	0245	6 Pin Connector	2422 025 04854
	0246	5 Pin Connector	2422 025 12481
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U PLL	2422 542 90098
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC	2422 086 10914
S	1515	Relay, 5 Amp, 12V	2422 132 07444
	1600	Tact Switch	2422 128 02742
	1601	Tact Switch	2422 128 02742
	1602	Tact Switch	2422 128 02742
	1603	Tact Switch	2422 128 02742
	1606	Tact Switch	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1811	3 Pin Connector	2412 020 00725
	1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344
	2004	Cap, 47n, 10%, 50v, Ceramic	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2226	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2241	Cap, 1n5, 10%, 50v, Ceramic	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2405	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2415	Cap, 330p, 10%, 50v, Ceramic	3198 017 03310
	2441	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic	2020 021 91139
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 470n, 5%, 250v, Metalized Polypropylene	2022 333 00086
	2458	Cap, 2u2, 20%, 100v, Electrolytic	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
	2462	Cap, 330n, 10%, 250v, MPP	2022 333 00084
S	2463	Cap, 470p, 10%, 2000v, Ceramic	2020 558 90483
S	2465	Cap, 13n, 5%, 1600v, Polypropylene	2020 301 90254
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2606	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic	3198 017 21050
	2691	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2802	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2803	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2816	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2862	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2864	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2865	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2866	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250

S = Safety Part   Be sure to use exact replacement part.

	Ref	Description	Part No.
	2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
	2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
	2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
	2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
	2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
	2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
	2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240
	2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
	2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
	2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
	2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
	2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
	3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
	3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
	3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202
	3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
	3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
	3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
	3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
	3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840
	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
S	3452	Res, 5K6, 1%, 3/5W, Metal Film	2312 915 15602
	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3454	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
S	3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S	3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
	3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
	3470	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
	3481	Res, 8K2, 1%, 3/5W, Metal Film	2312 915 18202
	3482	Res, 22K, 1%, 3/5W, Metal Film	2312 915 12203
	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S	3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530

S = Safety Part   Be sure to use exact replacement part.

25PT533S37C (continued)

S	Ref	Description	Part No.
	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3630	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3681	Res, 180 ohm, 1%, 1/8W, Metalized Glass	2322 734 61801
	3682	Res, 270 ohm, 1%, 1/8W, Metalized Glass	2322 734 62701
	3683	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322 734 63901
	3684	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322 734 63901
	3686	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3687	Res, 75 ohm, 1%, 1/8W, Metalized Glass	2322 734 67509
	3688	Res, 68 ohm, 1%, 1/8W, Metalized Glass	2322 734 66809
	3689	Res, 2K7, 1%, 1/8W, Metalized Glass. .	2322 734 62702
	3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198 021 31530
	3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198 021 31220
	3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4122	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4123	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4127	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5202	Wire Jumper.	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5241	Wire Jumper.	3198 036 90010
	5242	Coil, 10u, 5%.	3198 018 11090
	5342	Coil, 12u.	2422 535 97329
S	5445	Transformer, LOT	2422 531 02519
	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5457	Coil, Linear Correction.	3128 138 56801
	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
	5471	Coil, 3u3, 20%	3198 018 73380
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 27u, 10%	3198 018 22790
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04.	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5861	Coil, 10u, 5%.	3198 018 11090
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316.	3198 010 10630
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630
	6206	Zener Diode, 6.8 volt.	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316.	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148.	3198 010 10010
	6448	Zener Diode, 6.2 volt.	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6460	Diode, Rect, DG3-7005L	9336 436 10682
	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
	6462	Zener Diode, 8.2 volt.	3198 010 28280
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316.	3198 010 10630
	6468	Diode, Signal, BAS316.	3198 010 10630
	6469	Diode, Rect, BYD33J.	9337 234 20133

S = Safety Part   Be sure to use exact replacement part.

25PT533S37C (continued)

Ref	Description	Part No.
6470	Diode, Signal, BAV99	3198 010 10620
6476	Zener Diode, 15 volt	3198 010 21590
6481	Zener Diode, 5.6 volt.	3198 010 25680
6482	Zener Diode, 9.1 volt.	9331 177 80133
6483	Zener Diode, 33 volt	3198 010 23390
6485	Diode, Rect, BYD33J.	9337 234 20133
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
6487	Diode, Rect, BYD33D.	9337 234 00133
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667
6520	Diode, Rect, BYD33D.	9337 234 00133
6523	Diode, Signal, 1N4148.	3198 010 10010
6524	Diode, Rect, 1N5062.	3198 010 10120
6525	Diode, Rect, 1N5062.	3198 010 10120
6526	Zener Diode, 22 volt	3198 020 52290
6540	Zener Diode, 6.2 volt.	9331 668 30133
6541	Zener Diode, 10 volt	3198 020 51090
6560	Diode, Rect, BYV29X-500.	9340 555 59127
6562	Diode, Rect, EGP20DL-5100.	9322 164 42682
6563	Diode, Signal, BAS316.	3198 010 10630
6565	Diode, Signal, BAV70	9331 849 10215
6566	Diode, Signal, 1N4148.	3198 010 10010
6569	Diode, Signal, BAS316.	3198 010 10630
6570	Zener Diode, 6.8 volt.	3198 020 56880
6580	Diode, Signal, BAS316.	3198 010 10630
6691	LED, LTL-10234WHCR	9322 185 69682
6692	IR Receiver.	9322 127 54667
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
7101	Transistor, NPN, BC847B(COL)	3198 010 42030
7102	Transistor, PNP, BC857B(COL)	3198 010 42150
7103	Transistor, NPN, BC847B(COL)	3198 010 42030
7200	IC, TDA9577H/N1/AI/1130.	9352 731 51557
7201	Transistor, NPN, BC847B(COL)	3198 010 42030
7204	Transistor, PNP, BC857B(COL)	3198 010 42150
7205	Transistor, PNP, BC857B(COL)	3198 010 42150
7330	IC, TDA6107JF/N3	9352 713 37112
7441	Transistor, PNP, BC857B(COL)	3198 010 42150
7443	Transistor, PNP, BC557B(COL)	3198 020 40110
7460	Transistor, NPN, BU4508DX.	9340 550 92127
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
7462	Transistor, NPN, PDTC143ZT	9340 547 00215
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
7471	IC, TDA8359J/N2.	9352 701 64112
7480	Transistor, NPN, BD135	3198 020 41010
7482	Transistor, NPN, BD135	3198 020 41010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667
7520	IC, TEA1507P/N1.	9352 673 56112
7521	Power FET, FQPF9N50.	9322 187 16687
7522	Transistor, NPN, BC847B(COL)	3198 010 42030
7540	Transistor, NPN, BC547B(COL)	3198 020 40030
7541	Transistor, NPN, PDTC114ET	9340 310 10215
7542	Transistor, PNP, BC857B(COL)	3198 010 42150
7560	IC, L78L33ACZ.	9322 134 92676
7561	Transistor, NPN, PDTC143ZT	9340 547 00215
7580	Transistor, PNP, BC857B(COL)	3198 010 42150
7602	IC, M24C08-WBN6.	9322 154 38682
7802	IC, HEF4053BT.	9333 729 60653
7861	IC, TDA9853H/V1.	9352 671 19557
7891	Transistor, NPN, BC847B(COL)	3198 010 42030
7892	Transistor, NPN, BC847B(COL)	3198 010 42030
7901	IC, AN7522N PH	9322 181 41682
9001	Wire Jumper.	3198 036 90010
9101	Wire Jumper.	3198 036 90010
9102	Wire Jumper.	3198 036 90010
9103	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010
9175	Wire Jumper.	3198 036 90010
9176	Wire Jumper.	3198 036 90010
9178	Wire Jumper.	3198 036 90010
9179	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010
9182	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010
9184	Wire Jumper.	3198 036 90010
9192	Wire Jumper.	3198 036 90010
9193	Wire Jumper.	3198 036 90010
9311	Wire Jumper.	3198 036 90010
9312	Wire Jumper.	3198 036 90010
9406	Wire Jumper.	3198 036 90010
9407	Wire Jumper.	3198 036 90010
9408	Wire Jumper.	3198 036 90010
9409	Wire Jumper.	3198 036 90010
9410	Wire Jumper.	3198 036 90010
9411	Wire Jumper.	3198 036 90010
9412	Wire Jumper.	3198 036 90010
9413	Wire Jumper.	3198 036 90010
9415	Wire Jumper.	3198 036 90010
9416	Wire Jumper.	3198 036 90010
9417	Wire Jumper.	3198 036 90010
9418	Wire Jumper.	3198 036 90010
9419	Wire Jumper.	3198 036 90010
9421	Wire Jumper.	3198 036 90010
9422	Wire Jumper.	3198 036 90010
9423	Wire Jumper.	3198 036 90010
9425	Wire Jumper.	3198 036 90010
9427	Wire Jumper.	3198 036 90010
9451	Wire Jumper.	3198 036 90010
9453	Wire Jumper.	3198 036 90010
9460	Wire Jumper.	3198 036 90010
9500	Wire Jumper.	3198 036 90010
9501	Wire Jumper.	3198 036 90010
9503	Wire Jumper.	3198 036 90010
9506	Wire Jumper.	3198 036 90010
9507	Wire Jumper.	3198 036 90010
9510	Wire Jumper.	3198 036 90010
9511	Wire Jumper.	3198 036 90010
9512	Wire Jumper.	3198 036 90010
9513	Wire Jumper.	3198 036 90010
9514	Wire Jumper.	3198 036 90010
9515	Wire Jumper.	3198 036 90010
9516	Wire Jumper.	3198 036 90010
9518	Wire Jumper.	3198 036 90010
9520	Wire Jumper.	3198 036 90010
9521	Wire Jumper.	3198 036 90010
9522	Wire Jumper.	3198 036 90010
9524	Wire Jumper.	3198 036 90010
9528	Wire Jumper.	3198 036 90010
9530	Wire Jumper.	3198 036 90010
9611	Coil, 27u, 10%	3198 018 22790
9612	Wire Jumper.	3198 036 90010
9613	Wire Jumper.	3198 036 90010
9614	Wire Jumper.	3198 036 90010
9615	Wire Jumper.	3198 036 90010
9617	Wire Jumper.	3198 036 90010
9618	Wire Jumper.	3198 036 90010
9619	Wire Jumper.	3198 036 90010
9620	Wire Jumper.	3198 036 90010
9621	Wire Jumper.	3198 036 90010
9622	Wire Jumper.	3198 036 90010
9623	Wire Jumper.	3198 036 90010
9624	Wire Jumper.	3198 036 90010
9626	Wire Jumper.	3198 036 90010
9627	Wire Jumper.	3198 036 90010
9628	Wire Jumper.	3198 036 90010
9629	Wire Jumper.	3198 036 90010
9631	Wire Jumper.	3198 036 90010
9632	Wire Jumper.	3198 036 90010
9633	Wire Jumper.	3198 036 90010
9637	Wire Jumper.	3198 036 90010
9638	Wire Jumper.	3198 036 90010
9640	Wire Jumper.	3198 036 90010
9641	Wire Jumper.	3198 036 90010
9642	Wire Jumper.	3198 036 90010
9643	Wire Jumper.	3198 036 90010
9648	Wire Jumper.	3198 036 90010
9650	Wire Jumper.	3198 036 90010
9651	Wire Jumper.	3198 036 90010
9652	Wire Jumper.	3198 036 90010
9654	Wire Jumper.	3198 036 90010
9655	Wire Jumper.	3198 036 90010
9657	Wire Jumper.	3198 036 90010
9658	Wire Jumper.	3198 036 90010
9659	Wire Jumper.	3198 036 90010
9660	Wire Jumper.	3198 036 90010
9661	Wire Jumper.	3198 036 90010
9662	Wire Jumper.	3198 036 90010
9663	Wire Jumper.	3198 036 90010
9664	Wire Jumper.	3198 036 90010
9665	Wire Jumper.	3198 036 90010
9666	Wire Jumper.	3198 036 90010
9667	Wire Jumper.	3198 036 90010
9668	Wire Jumper.	3198 036 90010
9669	Wire Jumper.	3198 036 90010
9670	Wire Jumper.	3198 036 90010
9671	Wire Jumper.	3198 036 90010
9672	Coil, 22u, 10%	3198 018 22290
9674	Wire Jumper.	3198 036 90010
9675	Wire Jumper.	3198 036 90010
9676	Wire Jumper.	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper.	3198 036 90010
9680	Wire Jumper.	3198 036 90010
9681	Wire Jumper.	3198 036 90010
9685	Wire Jumper.	3198 036 90010
9686	Wire Jumper.	3198 036 90010
9687	Wire Jumper.	3198 036 90010
9688	Wire Jumper.	3198 036 90010
9689	Wire Jumper.	3198 036 90010
9690	Wire Jumper.	3198 036 90010
9691	Wire Jumper.	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

25PT533S37C (continued)

9694	Wire Jumper.	3198 036 90010
9695	Wire Jumper.	3198 036 90010
9697	Wire Jumper.	3198 036 90010
9698	Wire Jumper.	3198 036 90010
9699	Wire Jumper.	3198 036 90010
9821	Wire Jumper.	3198 036 90010
9822	Wire Jumper.	3198 036 90010
9825	Wire Jumper.	3198 036 90010
9828	Wire Jumper.	3198 036 90010
9829	Wire Jumper.	3198 036 90010
9831	Wire Jumper.	3198 036 90010
9832	Wire Jumper.	3198 036 90010
9837	Wire Jumper.	3198 036 90010
9838	Wire Jumper.	3198 036 90010
9839	Wire Jumper.	3198 036 90010
9846	Wire Jumper.	3198 036 90010
9847	Wire Jumper.	3198 036 90010
9849	Wire Jumper.	3198 036 90010
9850	Wire Jumper.	3198 036 90010
9851	Wire Jumper.	3198 036 90010
9852	Wire Jumper.	3198 036 90010
9853	Wire Jumper.	3198 036 90010
9856	Wire Jumper.	3198 036 90010
9860	Wire Jumper.	3198 036 90010
9861	Wire Jumper.	3198 036 90010
9862	Wire Jumper.	3198 036 90010
9864	Wire Jumper.	3198 036 90010
9865	Wire Jumper.	3198 036 90010
9868	Wire Jumper.	3198 036 90010
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9891	Wire Jumper.	3198 036 90010
9892	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010
9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9905	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9918	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9998	Wire Jumper.	3198 036 90010
CBA	Main Chassis Assembly.	3139 187 14431

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb ly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422 026 04747
0250	A/V Jack	2422 026 04815
0251	6 Pin Connector.	2422 025 12482
0254	5 Pin Connector.	2422 025 12481
0255	4 Pin Connector.	2422 025 12479
1810	3 Pin Connector.	2412 020 00725
1811	3 Pin Connector.	2412 020 00725
2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2177	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2179	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
6161	Zener Diode, 6.8 volt.	3198 010 26880
7802	IC, HEF4053BT.	9333 729 60653
9150	Wire Jumper.	3198 036 90010
9151	Wire Jumper.	3198 036 90010
9152	Wire Jumper.	3198 036 90010
9153	Wire Jumper.	3198 036 90010
9154	Wire Jumper.	3198 036 90010
9170	Wire Jumper.	3198 036 90010
CBA	Side Jack Panel Assembly	3139 177 26231

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S	AC01	AC Cord.	3135 010 03831
	AC03	Anode Lead Spacer (3 Used)	3135 014 04471
	AC04	Batteries for Remote Control Transmitte	9299 000 65263
	AC05	Cabinet Back	3121 237 53311
S	AC09	CRT, A63QDB891X01.	9322 151 39682
	AC10	Customer Control Buttons	3139 177 60721
S	AC12	Degaussing Coil.	2422 549 44489
	AC15	Holder, Degaussing Coil (4 Used) . . .	3135 013 01651
	AC17	Owner's Manual	3121 235 20631
	AC19	Side Jack Panel Bracket.	3139 124 37061
	AC20	Cabinet Front Assembly	3121 237 53061
	AC20A	Cabinet Front.	3139 177 60741
	AC20B	Chassis Guide.	3139 124 37561
	AC20C	Light Guide.	3139 124 36551
	AC20D	Nameplate.	3141 050 00161
	AC20E	Power Button	3139 177 60731
	AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00411
	REMOTE	Remote Control Transmitter, RC19335004/ 01.	3139 228 86463

S = Safety Part   Be sure to use exact replacement part.

25PT633R85C - Manual no. 7638

Main Chassis Parts

Main Chassis Parts

S	Ref	Description	Part No.
	0211	2 Pin Connector.	2422 025 16269
	0212	2 Pin Connector.	2422 025 16375
	0219	6 Pin Connector.	2422 025 12482
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0222	2 Pin Connector.	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0229	3 Pin Connector.	2412 020 00725
	0243	6 Pin Connector.	2422 025 04854
	0244	5 Pin Connector.	2422 025 04853
	0245	6 Pin Connector.	2422 025 04854
	0246	5 Pin Connector.	2422 025 15848
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector.	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U PLL	2422 542 90098
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1600	Tact Switch.	2422 128 02742
	1601	Tact Switch.	2422 128 02742
	1602	Tact Switch.	2422 128 02742
	1603	Tact Switch.	2422 128 02742
	1606	Tact Switch.	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1811	3 Pin Connector.	2412 020 00725
	1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
	2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2448	Cap, 100p, 10%, 1000v, Ceramic	3198 019 51010
	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
	2451	Cap, 15n, 10%, 50v, Polyester.	3198 014 01530
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 390n, 5%, 250v, Metalized Polypropylene.	2022 333 00085
	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
	2463	Cap, 1n5, 10%, 2000v, Ceramic Only with 5445 (JF0501-21835) Layer Wound.	2020 558 90489
	2463	Cap, 220p, 10%, 2000v, Ceramic	2020 558 90478
	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene	2222 479 90042
S	2465	Cap, 15n, 5%, 1600v, Polypropylene	2020 301 90255
	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
	2468	Cap, 18n, 10%, 400v, Polyester	2222 347 90222
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210

S = Safety Part   Be sure to use exact replacement part.

25PT633R85C (continued)

Ref	Description	Part No.
2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2803	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2810	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
2862	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840
3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
3401	Res, 220K, 5%, 1/6W, Carbon Film . . .	3198 011 02240
3403	Res, 82K, 5%, 1/6W, Carbon Film. . . .	3198 011 08230
3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3405	Res, 10 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01090
3406	Res, 10 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01090
3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3451	Res, 2R7, 5%, 1/3W, Metal Film	2306 204 03278
3452	Res, 5K6, 1%, 3/5W, Metal Film Only wit h 5445 (JF0501-21835) Layer Wound. . .	2312 915 15602
3452	Res, 4K7, 1%, 3/5W, Metal Film	2312 915 14702
3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3454	Res, 1K8, 1%, 3/5W, Metal Film	2312 915 11802
3454	Res, 2K, 1%, 3/5W, Metal Film Only with 5445 (JF0501-21835) Layer Wound. . . .	2312 915 12002
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3468	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3470	Res, 470K, 5%, 1/10W, Metalized Glass.	3198 021 54740
3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
3481	Res, 15K, 1%, 3/5W, Metal Film	2312 915 11503
3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 33390
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3491	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019

S = Safety Part   Be sure to use exact replacement part.

25PT633R85C (continued)

S	Ref	Description	Part No.
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass.	2322 242 13155
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3523	Res, 100 ohm, 5%, 1/3W, Metal Film	2306 204 03101
	3524	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film.	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass.	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3682	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
	3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3686	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
	3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3862	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
	3863	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
	3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3865	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3866	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3867	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3901	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4122	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4123	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4127	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5202	Wire Jumper.	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5241	Wire Jumper.	3198 036 90010
	5242	Coil, 10u, 5%.	3198 018 11090
	5341	Coil, 22u.	2422 535 97333
	5342	Coil, 15u.	2422 535 97331
	5401	Coil, 1mH, 10%	3198 018 71020
S	5445	Transformer, LOT (JF0501-21835) Layer Wound	2422 531 02611
S	5445	Transformer, LOT AT2078.	3128 138 21401
	5451	Coil, 33u, 10%	3198 018 73390
	5452	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5453	Diode, Rect, BYD33J.	9337 234 20133
S	5457	Coil, 33u.	2422 535 91021
	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
	5463	Coil, Choke.	3128 138 37021
	5471	Coil, 3u3, 20%	3198 018 73380
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 47u, 10%	2422 535 97337
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04.	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010

S = Safety Part   Be sure to use exact replacement part.

25PT633R85C (continued)

Ref	Description	Part No.
5561	Coil, 27u, 5%.	2422 535 95366
5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5602	Coil, 5u6, 5%.	3198 018 15680
5603	Coil, 5u6, 5%.	3198 018 15680
5604	Coil, 5u6, 5%.	3198 018 15680
5861	Coil, 10u, 5%.	3198 018 11090
6001	Zener Diode, 33 volt	3198 010 23390
6150	Diode, Signal, BAS316.	3198 010 10630
6201	Diode, Signal, BAS316.	3198 010 10630
6202	Diode, Signal, BAS316.	3198 010 10630
6206	Zener Diode, 6.8 volt.	3198 020 56880
6331	Diode, Signal, BAV21	3198 010 10070
6332	Diode, Signal, BAS316.	3198 010 10630
6333	Diode, Signal, BAV21	3198 010 10070
6335	Diode, Signal, BAV21	3198 010 10070
6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002
6401	Zener Diode, 47 volt	3198 010 24790
6445	Zener Diode, 10 volt	3198 020 51090
6447	Diode, Signal, 1N4148.	3198 010 10010
6448	Zener Diode, 6.2 volt.	9331 668 30133
6449	Diode, Signal, BAV99	3198 010 10620
6460	Diode, Rect, BY228/24.	9340 559 50112
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
6462	Zener Diode, 10 volt	3198 010 21090
6465	Diode, Signal, BAV21	3198 010 10070
6466	Diode, Signal, BAV21	3198 010 10070
6467	Diode, Signal, BAS316.	3198 010 10630
6468	Diode, Signal, BAS316.	3198 010 10630
6470	Diode, Signal, BAV99	3198 010 10620
6476	Zener Diode, 15 volt	3198 010 21590
6481	Zener Diode, 5.6 volt.	3198 010 25680
6482	Zener Diode, 9.1 volt.	9331 177 80133
6483	Zener Diode, 33 volt	3198 010 23390
6485	Diode, Rect, BYD33J.	9337 234 20133
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
6487	Diode, Rect, BYD33D.	9337 234 00133
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
6500	Diode, Bridge Rect, GBU6JL-7002. . . .	9322 138 08667
6520	Diode, Rect, BYD33D.	9337 234 00133
6523	Diode, Signal, 1N4148.	3198 010 10010
6524	Diode, Rect, 1N5062.	3198 010 10120
6525	Diode, Rect, 1N5062.	3198 010 10120
6526	Zener Diode, 22 volt	3198 020 52290
6540	Zener Diode, 6.2 volt.	9331 668 30133
6541	Zener Diode, 10 volt	3198 020 51090
6560	Diode, Rect, BYV29X-500.	9340 555 59127
6562	Diode, Rect, EGP20DL-5100.	9322 164 42682
6563	Diode, Signal, BAS316.	3198 010 10630
6565	Diode, Signal, BAV70	9331 849 10215
6566	Diode, Signal, 1N4148.	3198 010 10010
6569	Diode, Signal, BAS316.	3198 010 10630
6570	Zener Diode, 6.8 volt.	3198 020 56880
6580	Diode, Signal, BAS316.	3198 010 10630
6681	Diode, Signal, BAT85	9336 247 60133
6691	LED, LTL-10234WHCR	9322 185 69682
6692	IR Receiver.	9322 127 54667
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
7101	Transistor, NPN, BC847B(COL)	3198 010 42030
7102	Transistor, PNP, BC857B(COL)	3198 010 42150
7103	Transistor, NPN, BC847B(COL)	3198 010 42030
7200	IC, TDA9588H/N1/3I/1053.	9352 728 40557
7201	Transistor, NPN, BC847B(COL)	3198 010 42030
7204	Transistor, PNP, BC857B(COL)	3198 010 42150
7205	Transistor, PNP, BC857B(COL)	3198 010 42150
7330	IC, TDA6107JF/N3	9352 713 37112
7400	Power FET, STP3NC60FP.	9322 157 37687
7441	Transistor, PNP, BC857B(COL)	3198 010 42150
7443	Transistor, PNP, BC557B(COL)	3198 020 40110
7460	Transistor, NPN, BU4508DX.	9340 550 92127
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
7462	Transistor, NPN, PDTC143ZT	9340 547 00215
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
7471	IC, TDA8359J/N2.	9352 701 64112
7480	Transistor, NPN, BD135	3198 020 41010
7482	Transistor, NPN, BD135	3198 020 41010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667
7520	IC, TEA1507P/N1.	9352 673 56112
7521	Power FET, FQPF9N50.	9322 187 16687
7522	Transistor, NPN, BC847B(COL)	3198 010 42030
7540	Transistor, NPN, BC547B(COL)	3198 020 40030
7541	Transistor, NPN, PDTC114ET	9340 310 10215
7542	Transistor, PNP, BC857B(COL)	3198 010 42150
7560	IC, L78L33ACZ.	9322 134 92676
7561	Transistor, NPN, PDTC143ZT	9340 547 00215
7580	Transistor, PNP, BC857B(COL)	3198 010 42150
7602	IC, M24C08-WBN6.	9322 154 38682
7606	Transistor, NPN, PDTC143ZT	9340 547 00215
7802	IC, HEF4053BT.	9333 729 60653
7861	IC, TDA9853H/V1.	9352 671 19557
7891	Transistor, NPN, BC847B(COL)	3198 010 42030
7892	Transistor, NPN, BC847B(COL)	3198 010 42030
7901	IC, AN7522N PH	9322 181 41682
9001	Wire Jumper.	3198 036 90010
9101	Wire Jumper.	3198 036 90010
9102	Wire Jumper.	3198 036 90010
9103	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010
9175	Wire Jumper.	3198 036 90010
9176	Wire Jumper.	3198 036 90010
9178	Wire Jumper.	3198 036 90010
9179	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010
9182	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010
9192	Wire Jumper.	3198 036 90010
9193	Wire Jumper.	3198 036 90010
9311	Wire Jumper.	3198 036 90010
9312	Wire Jumper.	3198 036 90010
9406	Wire Jumper.	3198 036 90010
9407	Wire Jumper.	3198 036 90010
9408	Wire Jumper.	3198 036 90010
9409	Wire Jumper.	3198 036 90010
9410	Wire Jumper.	3198 036 90010
9411	Wire Jumper.	3198 036 90010
9412	Wire Jumper.	3198 036 90010
9413	Wire Jumper.	3198 036 90010
9414	Wire Jumper.	3198 036 90010
9415	Wire Jumper.	3198 036 90010
9416	Wire Jumper.	3198 036 90010
9417	Wire Jumper.	3198 036 90010
9418	Wire Jumper.	3198 036 90010
9419	Wire Jumper.	3198 036 90010
9421	Wire Jumper.	3198 036 90010
9422	Wire Jumper.	3198 036 90010
9423	Wire Jumper.	3198 036 90010
9424	Wire Jumper.	3198 036 90010
9425	Wire Jumper.	3198 036 90010
9426	Wire Jumper.	3198 036 90010
9427	Wire Jumper.	3198 036 90010
9453	Wire Jumper.	3198 036 90010
9460	Wire Jumper.	3198 036 90010
9463	Wire Jumper.	3198 036 90010
9500	Wire Jumper.	3198 036 90010
9501	Wire Jumper.	3198 036 90010
9503	Wire Jumper.	3198 036 90010
9506	Wire Jumper.	3198 036 90010
9507	Wire Jumper.	3198 036 90010
9510	Wire Jumper.	3198 036 90010
9511	Wire Jumper.	3198 036 90010
9512	Wire Jumper.	3198 036 90010
9513	Wire Jumper.	3198 036 90010
9514	Wire Jumper.	3198 036 90010
9515	Wire Jumper.	3198 036 90010
9516	Wire Jumper.	3198 036 90010
9518	Wire Jumper.	3198 036 90010
9520	Wire Jumper.	3198 036 90010
9521	Wire Jumper.	3198 036 90010
9522	Wire Jumper.	3198 036 90010
9524	Wire Jumper.	3198 036 90010
9528	Wire Jumper.	3198 036 90010
9530	Wire Jumper.	3198 036 90010
9611	Coil, 27u, 10%	3198 018 22790
9612	Wire Jumper.	3198 036 90010
9613	Wire Jumper.	3198 036 90010
9614	Wire Jumper.	3198 036 90010
9615	Wire Jumper.	3198 036 90010
9617	Wire Jumper.	3198 036 90010
9618	Wire Jumper.	3198 036 90010
9619	Wire Jumper.	3198 036 90010
9620	Wire Jumper.	3198 036 90010
9621	Wire Jumper.	3198 036 90010
9622	Wire Jumper.	3198 036 90010
9623	Wire Jumper.	3198 036 90010
9624	Wire Jumper.	3198 036 90010
9626	Wire Jumper.	3198 036 90010
9627	Wire Jumper.	3198 036 90010
9628	Wire Jumper.	3198 036 90010
9629	Wire Jumper.	3198 036 90010
9631	Wire Jumper.	3198 036 90010
9632	Wire Jumper.	3198 036 90010
9633	Wire Jumper.	3198 036 90010
9637	Wire Jumper.	3198 036 90010
9638	Wire Jumper.	3198 036 90010
9639	Wire Jumper.	3198 036 90010
9640	Wire Jumper.	3198 036 90010
9641	Wire Jumper.	3198 036 90010
9642	Wire Jumper.	3198 036 90010
9643	Wire Jumper.	3198 036 90010
9648	Wire Jumper.	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

Ref	Description	Part No.
9650	Wire Jumper	3198 036 90010
9651	Wire Jumper	3198 036 90010
9652	Wire Jumper	3198 036 90010
9654	Wire Jumper	3198 036 90010
9655	Wire Jumper	3198 036 90010
9656	Wire Jumper	3198 036 90010
9657	Wire Jumper	3198 036 90010
9658	Wire Jumper	3198 036 90010
9659	Wire Jumper	3198 036 90010
9660	Wire Jumper	3198 036 90010
9661	Wire Jumper	3198 036 90010
9662	Wire Jumper	3198 036 90010
9663	Wire Jumper	3198 036 90010
9664	Wire Jumper	3198 036 90010
9665	Wire Jumper	3198 036 90010
9666	Wire Jumper	3198 036 90010
9667	Wire Jumper	3198 036 90010
9668	Wire Jumper	3198 036 90010
9669	Wire Jumper	3198 036 90010
9670	Wire Jumper	3198 036 90010
9671	Wire Jumper	3198 036 90010
9672	Coil, 22u, 10%	3198 018 22290
9674	Wire Jumper	3198 036 90010
9675	Wire Jumper	3198 036 90010
9676	Wire Jumper	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper	3198 036 90010
9680	Wire Jumper	3198 036 90010
9681	Wire Jumper	3198 036 90010
9685	Wire Jumper	3198 036 90010
9686	Wire Jumper	3198 036 90010
9687	Wire Jumper	3198 036 90010
9688	Wire Jumper	3198 036 90010
9689	Wire Jumper	3198 036 90010
9690	Wire Jumper	3198 036 90010
9691	Wire Jumper	3198 036 90010
9694	Wire Jumper	3198 036 90010
9695	Wire Jumper	3198 036 90010
9697	Wire Jumper	3198 036 90010
9698	Wire Jumper	3198 036 90010
9699	Wire Jumper	3198 036 90010
9821	Wire Jumper	3198 036 90010
9822	Wire Jumper	3198 036 90010
9825	Wire Jumper	3198 036 90010
9828	Wire Jumper	3198 036 90010
9829	Wire Jumper	3198 036 90010
9831	Wire Jumper	3198 036 90010
9832	Wire Jumper	3198 036 90010
9837	Wire Jumper	3198 036 90010
9838	Wire Jumper	3198 036 90010
9839	Wire Jumper	3198 036 90010
9846	Wire Jumper	3198 036 90010
9847	Wire Jumper	3198 036 90010
9849	Wire Jumper	3198 036 90010
9850	Wire Jumper	3198 036 90010
9851	Wire Jumper	3198 036 90010
9852	Wire Jumper	3198 036 90010
9853	Wire Jumper	3198 036 90010
9856	Wire Jumper	3198 036 90010
9860	Wire Jumper	3198 036 90010
9861	Wire Jumper	3198 036 90010
9862	Wire Jumper	3198 036 90010
9864	Wire Jumper	3198 036 90010
9865	Wire Jumper	3198 036 90010
9868	Wire Jumper	3198 036 90010
9873	Wire Jumper	3198 036 90010
9874	Wire Jumper	3198 036 90010
9875	Wire Jumper	3198 036 90010
9877	Wire Jumper	3198 036 90010
9891	Wire Jumper	3198 036 90010
9892	Wire Jumper	3198 036 90010
9901	Wire Jumper	3198 036 90010
9902	Wire Jumper	3198 036 90010
9903	Wire Jumper	3198 036 90010
9904	Wire Jumper	3198 036 90010
9905	Wire Jumper	3198 036 90010
9911	Wire Jumper	3198 036 90010
9913	Wire Jumper	3198 036 90010
9914	Wire Jumper	3198 036 90010
9915	Wire Jumper	3198 036 90010
9918	Wire Jumper	3198 036 90010
9991	Wire Jumper	3198 036 90010
9993	Wire Jumper	3198 036 90010
9996	Wire Jumper	3198 036 90010
9997	Wire Jumper	3198 036 90010
9998	Wire Jumper	3198 036 90010
CBA	Main Chassis Assembly	3141 058 57961

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

S = Safety Part   Be sure to use exact replacement part.

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

Ref	Description	Part No.
0232	Headphone Jack	2422 026 04747
0250	A/V Jack	2422 026 04815
0251	6 Pin Connector	2422 025 12482
0254	5 Pin Connector	2422 025 12481
0255	4 Pin Connector	2422 025 12479
1810	3 Pin Connector	2412 020 00725
1811	3 Pin Connector	2412 020 00725
2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4823	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4824	Res, Zero ohm, "Chip" Jumper	3198 021 90030
6161	Zener Diode, 6.8 volt.	3198 010 26880
7802	IC, HEF4053BT.	9333 729 60653
9150	Wire Jumper	3198 036 90010
9151	Wire Jumper	3198 036 90010
9152	Wire Jumper	3198 036 90010
9153	Wire Jumper	3198 036 90010
9154	Wire Jumper	3198 036 90010
9155	Wire Jumper	3198 036 90010
9170	Wire Jumper	3198 036 90010
CBA	Side Jack Panel Assembly	3139 187 28121

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

	Ref	Description	Part No.
S	AC01	AC Cord.	3139 128 75281
	AC03	Anode Lead Spacer (3 Used)	3135 014 04471
	AC04	Batteries for Remote Control Transmitte	9299 000 65263
	AC05	Cabinet Back	3139 124 35181
S	AC09	CRT, A59QDF891X001(L).	9322 163 87682
	AC10	Customer Control Buttons	3139 138 13911
S	AC12	Degaussing Coil.	2422 549 44489
	AC15	Holder, Degaussing Coil (4 Used)	3135 013 01641
	AC17	Owner's Manual	3121 235 20951
	AC19	Side Jack Panel Bracket.	3139 124 39111
	AC20	Cabinet Front Assembly	3121 237 53161
	AC20A	Cabinet Front.	3139 177 60691

25PT633R85C (continued)

```
AC20B  Chassis Guide. . . . . . . . . . . . .  3139 124 25893
AC20C  Light Guide. . . . . . . . . . . . . .  3139 124 41241
AC20D  Nameplate. . . . . . . . . . . . . . .  3141 050 00161
AC20E  Power Button . . . . . . . . . . . . .  3139 138 13871
AC20H  Speaker, 16 ohm, 5W (2 Used) . . . . .  2422 264 00411
REMOTE Remote Control Transmitter, RC19335004/
       01. . . . . . . . . . . . . . . . . . . 3139 228 86463
```

25ST220L/17 - Manual no. 7638

Main Chassis Parts

Main Chassis Parts

S	Ref	Description	Part No.
	0211	2 Pin Connector	2422 025 16269
	0212	2 Pin Connector	2422 025 16375
	0213	2 Pin Connector	2422 025 16374
	0217	6 Pin Connector	2422 025 12482
	0218	A/V Jack	2422 026 04742
	0220	5 Pin Connector	2422 025 04853
	0221	2 Pin Connector	2422 025 15503
	0222	2 Pin Connector	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack	2422 026 04926
	0227	6 Pin Connector	2422 025 15849
	0229	3 Pin Connector	2412 020 00725
	0240	7 Pin Connector	2422 025 11244
	0242	7 Pin Connector	2422 025 17042
	0243	6 Pin Connector	2422 025 04854
	0244	5 Pin Connector	2422 025 04853
	0245	6 Pin Connector	2422 025 04854
S	0254	9 Pin CRT Socket	2422 500 80076
	0259	5 Pin Connector	2422 025 15848
	0262	3 Pin Connector	2422 025 16937
	0267	3 Pin Connector	2412 020 00725
	0280	4 Pin Connector	2422 025 12479
S	1000	Tuner, V+U, PLL	2422 542 90108
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC	2422 086 10914
S	1515	Relay, 5 Amp, 12V	2422 132 07444
	1600	Tact Switch	2422 128 02742
	1601	Tact Switch	2422 128 02742
	1602	Tact Switch	2422 128 02742
	1603	Tact Switch	2422 128 02742
	1606	Tact Switch	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344
	2004	Cap, 47n, 10%, 50v, Ceramic	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2123	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2125	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	2127	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
	2128	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2181	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2182	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2183	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2226	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2241	Cap, 1n5, 10%, 50v, Ceramic	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2405	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic	3198 016 03310
	2441	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic	2020 021 91139
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 470n, 5%, 250v, Metalized Polypropylene	2022 333 00086
	2458	Cap, 2u2, 20%, 100v, Electrolytic	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
	2462	Cap, 330n, 10%, 250v, MPP	2022 333 00084
S	2463	Cap, 470p, 10%, 2000v, Ceramic	2020 558 90483
S	2465	Cap, 13n, 5%, 1600v, Polypropylene	2020 301 90254
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2616	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2618	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic	3198 017 21050
	2691	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2802	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2803	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250

S = Safety Part   Be sure to use exact replacement part.

25ST220L/17 (continued)

	Ref	Description	Part No.
	2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
	2862	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
	2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
	2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
	2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
	2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
	2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
	2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240
	2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
	2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
	2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
	2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
	2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
	3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3121	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3122	Res, 680 ohm, 5%, 1/6W, Carbon Film. .	3198 011 06810
	3123	Res, 680 ohm, 5%, 1/6W, Carbon Film. .	3198 011 06810
	3125	Res, 680 ohm, 5%, 1/6W, Carbon Film. .	3198 011 06810
	3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3182	Wire Jumper.	3198 036 90010
	3184	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3185	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3186	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3187	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
	3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
	3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
	3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3223	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
	3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840
	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
S	3452	Res, 5K6, 1%, 3/5W, Metal Film	2312 915 15602
	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3454	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
S	3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S	3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
	3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
	3470	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
	3481	Res, 8K2, 1%, 3/5W, Metal Film	2312 915 18202
	3482	Res, 22K, 1%, 3/5W, Metal Film	2312 915 12203
	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S	3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030

S = Safety Part   Be sure to use exact replacement part.

25ST220L/17 (continued)

S	Ref	Description	Part Number
S	3558	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198 021 53320
	3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198 021 31530
	3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198 021 31220
	3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4101	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4102	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4104	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4126	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4128	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4181	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4604	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5202	Wire Jumper.	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5241	Wire Jumper.	3198 036 90010
	5242	Coil, 10u, 5%.	3198 018 11090
	5342	Coil, 12u, 10%	3198 018 21290
S	5445	Transformer, LOT	2422 531 02519
	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5457	Coil, Linear Correction.	3128 138 56801
	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
	5471	Coil, 3u3, 20%	3198 018 73380
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 27u, 10%	3198 018 22790
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04.	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5861	Coil, 10u, 5%.	3198 018 11090
	6001	Zener Diode, 33 volt	3198 010 23390
	6181	Zener Diode, 6.8 volt.	3198 020 56880
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630
	6206	Zener Diode, 6.8 volt.	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316.	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148.	3198 010 10010
	6448	Zener Diode, 6.2 volt.	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6460	Diode, Rect, DG3-7005L	9336 436 10682
	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
	6462	Zener Diode, 8.2 volt.	3198 010 28280
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316.	3198 010 10630
	6468	Diode, Signal, BAS316.	3198 010 10630
	6469	Diode, Rect, BYV95C.	9335 001 80133
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt.	3198 010 25680
	6482	Zener Diode, 9.1 volt.	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390

S = Safety Part   Be sure to use exact replacement part.

25ST220L/17 (continued)

	Ref	Description	Part No.
	6485	Diode, Rect, BYV95C	9335 001 80133
	6486	Diode, Rect, EGP20DL-5100	9322 164 42682
	6487	Diode, Rect, BYV95A	9335 000 90133
	6488	Diode, Rect, EGP20DL-5100	9322 164 42682
	6500	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
	6520	Diode, Rect, BYV95A	9335 000 90133
	6523	Diode, Signal, 1N4148	3198 010 10010
	6524	Diode, Rect, 1N5062	3198 010 10120
	6525	Diode, Rect, 1N5062	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500	9340 555 59127
	6561	Diode, Rect, SB340L-7010	9322 128 18682
	6563	Diode, Signal, BAS316	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148	3198 010 10010
	6569	Diode, Signal, BAS316	3198 010 10630
	6570	Zener Diode, 6.8 volt	3198 020 56880
	6580	Diode, Signal, BAS316	3198 010 10630
	6681	Diode, Signal, BAT85	9336 247 60133
	6691	LED, LTL-10234WHCR	9322 185 69682
	6692	IR Receiver	9322 127 54667
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9588H/N1/3I	4835 310 57622
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7460	Transistor, NPN, BU4508DX	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1	9352 673 56112
	7521	Power FET, FQPF9N50	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, LE33CZ	9322 106 11676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C16-WBN6	9322 147 25682
	7802	IC, HEF4053BT	9333 729 60653
	7861	IC, TDA9853H/V1	9352 671 19557
	7891	Transistor, NPN, BC847B(COL)	3198 010 42030
	7892	Transistor, NPN, BC847B(COL)	3198 010 42030
	7901	IC, AN7522N PH	9322 181 41682
	9001	Wire Jumper	3198 036 90010
	9104	Wire Jumper	3198 036 90010
	9171	Wire Jumper	3198 036 90010
	9173	Wire Jumper	3198 036 90010
	9175	Wire Jumper	3198 036 90010
	9181	Wire Jumper	3198 036 90010
	9182	Wire Jumper	3198 036 90010
	9183	Wire Jumper	3198 036 90010
	9192	Wire Jumper	3198 036 90010
	9193	Wire Jumper	3198 036 90010
	9311	Wire Jumper	3198 036 90010
	9312	Wire Jumper	3198 036 90010
	9406	Wire Jumper	3198 036 90010
	9407	Wire Jumper	3198 036 90010
	9408	Wire Jumper	3198 036 90010
	9409	Wire Jumper	3198 036 90010
	9410	Wire Jumper	3198 036 90010
	9411	Wire Jumper	3198 036 90010
	9412	Wire Jumper	3198 036 90010
	9413	Wire Jumper	3198 036 90010
	9415	Wire Jumper	3198 036 90010
	9416	Wire Jumper	3198 036 90010
	9417	Wire Jumper	3198 036 90010
	9418	Wire Jumper	3198 036 90010
	9419	Wire Jumper	3198 036 90010
	9421	Wire Jumper	3198 036 90010
	9422	Wire Jumper	3198 036 90010
	9423	Wire Jumper	3198 036 90010
	9425	Wire Jumper	3198 036 90010
	9427	Wire Jumper	3198 036 90010
	9451	Wire Jumper	3198 036 90010
	9453	Wire Jumper	3198 036 90010
	9460	Wire Jumper	3198 036 90010
	9500	Wire Jumper	3198 036 90010
	9501	Wire Jumper	3198 036 90010
	9503	Wire Jumper	3198 036 90010
	9506	Wire Jumper	3198 036 90010
	9507	Wire Jumper	3198 036 90010
	9510	Wire Jumper	3198 036 90010
	9511	Wire Jumper	3198 036 90010
	9512	Wire Jumper	3198 036 90010
	9513	Wire Jumper	3198 036 90010
	9514	Wire Jumper	3198 036 90010
	9515	Wire Jumper	3198 036 90010
	9516	Wire Jumper	3198 036 90010
	9518	Wire Jumper	3198 036 90010
	9520	Wire Jumper	3198 036 90010
	9521	Wire Jumper	3198 036 90010
	9522	Wire Jumper	3198 036 90010
	9524	Wire Jumper	3198 036 90010
	9528	Wire Jumper	3198 036 90010
	9530	Wire Jumper	3198 036 90010
	9611	Coil, 27u, 10%	3198 018 22790
	9612	Wire Jumper	3198 036 90010
	9613	Wire Jumper	3198 036 90010
	9614	Wire Jumper	3198 036 90010
	9615	Wire Jumper	3198 036 90010
	9616	Wire Jumper	3198 036 90010
	9617	Wire Jumper	3198 036 90010
	9618	Wire Jumper	3198 036 90010
	9619	Wire Jumper	3198 036 90010
	9622	Wire Jumper	3198 036 90010
	9623	Wire Jumper	3198 036 90010
	9626	Wire Jumper	3198 036 90010
	9627	Wire Jumper	3198 036 90010
	9628	Wire Jumper	3198 036 90010
	9629	Wire Jumper	3198 036 90010
	9631	Wire Jumper	3198 036 90010
	9632	Wire Jumper	3198 036 90010
	9634	Wire Jumper	3198 036 90010
	9637	Wire Jumper	3198 036 90010
	9638	Wire Jumper	3198 036 90010
	9640	Wire Jumper	3198 036 90010
	9641	Wire Jumper	3198 036 90010
	9642	Wire Jumper	3198 036 90010
	9643	Wire Jumper	3198 036 90010
	9647	Wire Jumper	3198 036 90010
	9648	Wire Jumper	3198 036 90010
	9650	Wire Jumper	3198 036 90010
	9652	Wire Jumper	3198 036 90010
	9654	Wire Jumper	3198 036 90010
	9655	Wire Jumper	3198 036 90010
	9657	Wire Jumper	3198 036 90010
	9658	Wire Jumper	3198 036 90010
	9659	Wire Jumper	3198 036 90010
	9660	Wire Jumper	3198 036 90010
	9661	Wire Jumper	3198 036 90010
	9662	Wire Jumper	3198 036 90010
	9663	Wire Jumper	3198 036 90010
	9664	Wire Jumper	3198 036 90010
	9665	Wire Jumper	3198 036 90010
	9666	Wire Jumper	3198 036 90010
	9667	Wire Jumper	3198 036 90010
	9668	Wire Jumper	3198 036 90010
	9669	Wire Jumper	3198 036 90010
	9670	Wire Jumper	3198 036 90010
	9671	Wire Jumper	3198 036 90010
	9672	Coil, 22u, 10%	3198 018 22290
	9674	Wire Jumper	3198 036 90010
	9675	Wire Jumper	3198 036 90010
	9676	Wire Jumper	3198 036 90010
	9678	Coil, 22u, 10%	3198 018 22290
	9679	Wire Jumper	3198 036 90010
	9680	Wire Jumper	3198 036 90010
	9681	Wire Jumper	3198 036 90010
	9685	Wire Jumper	3198 036 90010
	9686	Wire Jumper	3198 036 90010
	9687	Wire Jumper	3198 036 90010
	9688	Wire Jumper	3198 036 90010
	9689	Wire Jumper	3198 036 90010
	9690	Wire Jumper	3198 036 90010
	9691	Wire Jumper	3198 036 90010
	9694	Wire Jumper	3198 036 90010
	9695	Wire Jumper	3198 036 90010
	9697	Wire Jumper	3198 036 90010
	9698	Wire Jumper	3198 036 90010
	9699	Wire Jumper	3198 036 90010
	9821	Wire Jumper	3198 036 90010
	9822	Wire Jumper	3198 036 90010
	9825	Wire Jumper	3198 036 90010
	9828	Wire Jumper	3198 036 90010
	9829	Wire Jumper	3198 036 90010
	9831	Wire Jumper	3198 036 90010
	9832	Wire Jumper	3198 036 90010
	9837	Wire Jumper	3198 036 90010
	9838	Wire Jumper	3198 036 90010
	9839	Wire Jumper	3198 036 90010
	9846	Wire Jumper	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

25ST220L/17 (continued)

S	Ref	Description	Part No.
	9847	Wire Jumper.	3198 036 90010
	9849	Wire Jumper.	3198 036 90010
	9850	Wire Jumper.	3198 036 90010
	9851	Wire Jumper.	3198 036 90010
	9852	Wire Jumper.	3198 036 90010
	9853	Wire Jumper.	3198 036 90010
	9856	Wire Jumper.	3198 036 90010
	9860	Wire Jumper.	3198 036 90010
	9861	Wire Jumper.	3198 036 90010
	9862	Wire Jumper.	3198 036 90010
	9864	Wire Jumper.	3198 036 90010
	9865	Wire Jumper.	3198 036 90010
	9868	Wire Jumper.	3198 036 90010
	9873	Wire Jumper.	3198 036 90010
	9874	Wire Jumper.	3198 036 90010
	9875	Wire Jumper.	3198 036 90010
	9877	Wire Jumper.	3198 036 90010
	9891	Wire Jumper.	3198 036 90010
	9892	Wire Jumper.	3198 036 90010
	9901	Wire Jumper.	3198 036 90010
	9902	Wire Jumper.	3198 036 90010
	9903	Wire Jumper.	3198 036 90010
	9904	Wire Jumper.	3198 036 90010
	9905	Wire Jumper.	3198 036 90010
	9911	Wire Jumper.	3198 036 90010
	9913	Wire Jumper.	3198 036 90010
	9914	Wire Jumper.	3198 036 90010
	9915	Wire Jumper.	3198 036 90010
	9918	Wire Jumper.	3198 036 90010
	9919	Wire Jumper.	3198 036 90010
	9920	Wire Jumper.	3198 036 90010
	9991	Wire Jumper.	3198 036 90010
	9996	Wire Jumper.	3198 036 90010
	9998	Wire Jumper.	3198 036 90010
	CBA	SP/LS Module (Vertical) (ITV).	3139 127 27372
	CBA	EPS Module (ITV)	3139 137 22961
	CBA	Main Chassis Assembly.	3139 187 26791
	CBA	Interface Panel (ITV).	3139 188 04541

Channel One Card Parts
Channel One Card Parts

2D 3 Line Comb Filter Parts
2D 3 Line Comb Filter Parts

DAF Panel Parts
DAF Panel Parts

DVD Eject Panel Parts
DVD Eject Panel Parts

DVD Interface Panel Parts
DVD Interface Panel Parts

Front Interface Panel Parts
Front Interface Panel Parts

ITV Front Jack Panel Parts
ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)
Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)
Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts
Side Jack Panel Parts

Subwoofer Panel Parts
Subwoofer Panel Parts

Top Control Panel Parts
Top Control Panel Parts

Cabinet & Accessory Parts
Cabinet & Accessory Parts

S	Ref	Description	Part No.
S	AC01	AC Cord.	3135 010 07161
	AC03	Anode Lead Spacer (3 Used)	3135 014 04471
	AC05	Cabinet Back	3139 124 45281
S	AC09	CRT, A63QDB891X01.	9322 151 39682
	AC10	Customer Control Buttons	3139 124 27351
S	AC12	Degaussing Coil.	2422 549 44489
	AC15	Holder, Degaussing Coil (4 Used) . . .	3135 013 01641
	AC20	Cabinet Front Assembly	3121 237 53351
	AC20A	Cabinet Front.	3139 177 62031
	AC20B	Chassis Guide (2 Used)	3139 124 31381
	AC20C	Light Guide.	3139 124 26461
	AC20D	Nameplate.	3135 015 03571
	AC20E	Power Button	3139 124 26444
	AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00401
	AC22	Cinch Cover.	3139 124 25551
	AC26	EPS Bracket.	3119 107 17241
	AC27	ITV Card Bracket	3139 124 37933
	AC28	ITV Card Slot Cover.	3139 124 30571

S = Safety Part   Be sure to use exact replacement part.

27DV693R37A - Manual no. 7638

Main Chassis Parts

S	Ref	Description	Part No.
		Main Chassis Parts	
	0211	2 Pin Connector.	2422 025 16374
	0212	2 Pin Connector.	2422 025 16375
	0214	5 Pin Connector.	2422 025 12481
	0217	3 Pin Connector.	2412 020 00725
	0219	6 Pin Connector.	2422 025 12482
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0222	2 Pin Connector.	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0229	7 Pin Connector.	2422 025 11244
	0239	3 Pin Connector.	2422 025 16382
	0240	4 Pin Connector.	2422 025 12479
	0243	6 Pin Connector.	2422 025 04854
	0244	5 Pin Connector.	2422 025 04853
	0245	6 Pin Connector.	2422 025 04854
	0246	5 Pin Connector.	2422 025 12481
	0251	4 Pin Connector.	2422 025 15847
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector.	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U, PLL	2422 542 90108
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1660	Crystal, 12MHz000	2422 543 01203
	1810	6 Pin Connector.	2422 025 15849
	1831	Crystal, Resonator, 18MHz432, 12 Pin, HC49/U A.	2422 543 00842
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic. . .	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic. . .	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic. . .	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic . .	2020 558 90445
	2401	Cap, 2u2, 20%, 50v, Electrolytic . . .	2020 021 90552
	2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic . . .	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2441	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic . . .	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic. . .	2020 021 91139
	2451	Cap, 22n, 10%, 50v, Polyester.	3198 014 02230
	2452	Cap, 180p, 5%, 50v, Ceramic.	3198 016 01810
	2455	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
	2457	Cap, 360n, 5%, 250v, Metalized Polypropylene.	2022 333 00163
	2458	Cap, 2u2, 20%, 100v, Electrolytic. . .	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
S	2463	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene	2222 479 90042
S	2465	Cap, 15n, 5%, 1600v, Polypropylene . .	2020 301 90255
	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
	2468	Cap, 27n, 10%, 400v, Polyester	2222 347 90232
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic . . .	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 120n, 5%, 250v, Metalized Polypropylene.	2222 479 90051
	2485	Cap, 4u7, 20%, 250v, Electrolytic. . .	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic. . .	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic . . .	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic . .	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic. . .	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic . .	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic . . .	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic . .	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic . . .	2020 021 91374
	2567	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic . . .	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic . . .	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic. . .	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic. . .	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2604	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050
	2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250

S = Safety Part   Be sure to use exact replacement part.

27DV693R37A (continued)

Ref	Description	Part No.
2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2834	Cap, 470p, 5%, 50v, Ceramic	3198 016 34710
2835	Cap, 220p, 5%, 50v, Ceramic	3198 016 32210
2836	Cap, 1n5, 10%, 50v, Ceramic	3198 017 31520
2837	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
2840	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
2841	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2842	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
2843	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2844	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2845	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
2846	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
2849	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
2850	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
2852	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
2854	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2857	Cap, 150p, 5%, 50v, Ceramic	3198 016 31510
2860	Cap, 180p, 5%, 50v, Ceramic	3198 016 31810
2894	Cap, 220p, 5%, 50v, Ceramic	3198 016 32210
2895	Cap, 560p, 5%, 25v, Ceramic	3198 016 35610
2897	Cap, 390p, 5%, 50v, Ceramic	3198 016 33910
2898	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2902	Cap, 1000u, 20%, 25v, Electrolytic	3198 026 31020
2903	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
2904	Cap, 470n, +80/-20%, 16v, Ceramic	3198 017 24740
2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2906	Cap, 470n, +80/-20%, 16v, Ceramic	3198 017 24740
2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2908	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass	3198 021 32240
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film	3198 011 01510
3124	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film	3198 011 01510
3126	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film	3198 011 01510
3134	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3149	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3150	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3154	Res, 5K6, 5%, 1/6W, Carbon Film	3198 011 05620
3156	Res, 10K, 5%, 1/6W, Carbon Film	3198 011 01030
3157	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3158	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3159	Res, 1K2, 1%, 1/8W, Metalized Glass	2322 734 61202
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film	3198 011 02230
3205	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
3206	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film	3198 011 05610
3217	Res, 330K, 5%, 1/16W, Metalized Glass	3198 021 33340
3218	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film	3198 011 05610
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3241	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3242	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film	3198 011 08210
3245	Res, 39K, 1%, 1/16W, Metalized Glass	2322 704 63903
3246	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3247	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3248	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film	3198 011 08210
3250	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
3257	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3258	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3259	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film	3198 013 01020
3340	Res, 10 ohm, 5%, 1/2W, Metal Film	2306 207 03109
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
3343	Res, 1K5, 20%, 1/2W, Carbon Film	3198 013 01520
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
S 3345	Varactor, 1MA/50V, Max 115V	2322 593 13507
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3400	Res, 330 ohm, 5%, 1/6W, Carbon Film	3198 011 03310
3401	Res, 33K, 5%, 1/6W, Carbon Film	3198 011 03330
3403	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3405	Res, 4R7, 5%, 1/6W, Carbon Film	3198 011 04780
3406	Res, 4R7, 5%, 1/6W, Carbon Film	3198 011 04780
3408	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3410	Res, 10K, 5%, 1/6W, Carbon Film	3198 011 01030
3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3443	Res, 1M, 5%, 1/16W, Metalized Glass	3198 021 31050
3445	Res, 15K, 5%, 1/6W, Carbon Film	3198 011 01530
3446	Res, 5K6, 5%, 1/6W, Carbon Film	3198 011 05620
3447	Res, 180 ohm, 5%, 1/6W, Carbon Film	3198 011 01810
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film	3198 011 08210
3449	Res, 68 ohm, 5%, 1/6W, Carbon Film	3198 011 06890
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film	2306 204 03109
3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102
3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3454	Res, 2K, 1%, 3/5W, Metal Film	2312 915 12002
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film	3198 012 26880
3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S 3459	Res, 15K, 5%, 1 1/3W, Metal Film	3198 012 21530
3460	Res, 3K9, 5%, 1/6W, Carbon Film	3198 011 03920
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3468	Res, 220 ohm, 5%, 1/6W, Carbon Film	3198 011 02210
3469	Res, 3K3, 5%, 1/6W, Carbon Film	3198 011 03320
3470	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3471	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3472	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3473	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film	3198 011 01510
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film	3198 011 01510
3479	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3480	Res, 1R5, 5%, 1/4W, Carbon Film	2120 101 74158
3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
3484	Res, 3K9, 5%, 1/6W, Carbon Film	3198 011 03920
S 3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film	3198 012 32290
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3490	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
3492	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3495	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3496	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3497	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3498	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3499	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
S 3504	Res, PTC, 3 ohm, 144V	2122 663 00019
3506	Res, 1M5, 5%, 1/2W, Metalized Glass	2322 242 13155
3507	Surge Protector	2422 549 43073
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film	3198 013 02210
S 3510	Res, NTC, 4R7, 20%, 3W1	2122 612 00056
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film	3198 011 02710
3520	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3521	Res, 4R7, 5%, 1/6W, Carbon Film	3198 011 04780
3522	Res, 330K, 5%, 1/10W, Metalized Glass	3198 021 53340
3523	Res, 100 ohm, 5%, 1/3W, Metal Film	2306 204 03101
3524	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3525	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S 3527	Res, 0R33, 5%, 3/5W, Metal Film	3198 012 13370

S = Safety Part   Be sure to use exact replacement part.

27DV693R37A (continued)

S	Ref	Description	Part No.
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
S	3591	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3831	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3843	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3901	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198 021 36820
	3903	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3905	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3909	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3910	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3912	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4837	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4838	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5202	Wire Jumper.	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5241	Wire Jumper.	3198 036 90010
	5242	Coil, 10u, 5%.	3198 018 11090
	5341	Coil, 22u.	2422 535 97333
	5342	Coil, 3u9, 10%	2422 535 97323
	5401	Coil, 1mH, 10%	3198 018 71020
S	5445	Transformer, LOT	2422 531 02574
	5451	Coil, 22u, 10%	3198 018 72290
	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
S	5457	Coil, 25u.	2422 535 91028
	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
	5463	Coil, Choke.	3128 138 37021
	5471	Coil, 6u8, 20%	3198 018 76880
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 47u, 10%	2422 535 97337
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS42202-00 B.	2422 531 02562
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5831	Coil, 6u8, 5%.	3198 018 16880
	5832	Coil, 6u8, 5%.	3198 018 16880
	5833	Coil, 6u8, 5%.	3198 018 16880
	5835	Coil, 12u, 10%	3198 018 31290
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316.	3198 010 10630
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630
	6206	Zener Diode, 6.8 volt.	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316.	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002
	6401	Zener Diode, 47 volt	3198 010 24790
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148.	3198 010 10010
	6448	Zener Diode, 6.2 volt.	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6460	Diode, Rect, BY228/24.	9340 559 50112
	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
	6462	Zener Diode, 9.1 volt.	9331 177 80133
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316.	3198 010 10630
	6468	Diode, Signal, BAS316.	3198 010 10630

S = Safety Part   Be sure to use exact replacement part.

27DV693R37A (continued)

Ref	Description	Part No.
6469	Diode, Rect, BYV95C.	9335 001 80133
6470	Diode, Signal, BAV99	3198 010 10620
6476	Zener Diode, 15 volt	3198 010 21590
6481	Zener Diode, 5.6 volt.	3198 010 25680
6482	Zener Diode, 9.1 volt.	9331 177 80133
6483	Zener Diode, 33 volt	3198 010 23390
6485	Diode, Rect, BYV95C.	9335 001 80133
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
6487	Diode, Rect, BYV95A.	9335 000 90133
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
6490	Diode, Rect, BYV95C.	9335 001 80133
6500	Diode, Bridge Rect, GBU4JL-7002.	9322 132 55667
6520	Diode, Rect, BYV95A.	9335 000 90133
6523	Diode, Signal, 1N4148.	3198 010 10010
6524	Diode, Rect, 1N5062.	3198 010 10120
6525	Diode, Rect, 1N5062.	3198 010 10120
6526	Zener Diode, 22 volt	3198 020 52290
6540	Zener Diode, 6.2 volt.	9331 668 30133
6541	Zener Diode, 10 volt	3198 020 51090
6560	Diode, Rect, BYV29X-500.	9340 555 59127
6563	Diode, Signal, BAS316.	3198 010 10630
6565	Diode, Signal, BAV70	9331 849 10215
6566	Diode, Signal, 1N4148.	3198 010 10010
6569	Diode, Signal, BAS316.	3198 010 10630
6570	Zener Diode, 6.8 volt.	3198 020 56880
6580	Diode, Signal, BAS316.	3198 010 10630
6582	Diode, Rect, STPS10L60D.	9322 175 70667
6831	Diode, Signal, 1N4148.	3198 010 10010
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
7101	Transistor, NPN, BC847B(COL)	3198 010 42030
7102	Transistor, PNP, BC857B(COL)	3198 010 42150
7103	Transistor, NPN, BC847B(COL)	3198 010 42030
7200	IC, TDA9569H/N1/4I/1313.	9352 743 94557
7201	Transistor, NPN, BC847B(COL)	3198 010 42030
7204	Transistor, PNP, BC857B(COL)	3198 010 42150
7205	Transistor, PNP, BC857B(COL)	3198 010 42150
7330	IC, TDA6107JF/N3	9352 713 37112
7400	Power FET, IR.	9322 053 35687
7441	Transistor, PNP, BC857B(COL)	3198 010 42150
7443	Transistor, PNP, BC557B(COL)	3198 020 40110
7460	Transistor, NPN, BU4508DX.	9340 550 92127
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
7462	Transistor, NPN, PDTC143ZT	9340 547 00215
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
7471	IC, TDA8359J/N2.	9352 701 64112
7480	Transistor, NPN, BD135	3198 020 41010
7482	Transistor, NPN, BD135	3198 020 41010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667
7520	IC, TEA1507P/N1.	9352 673 56112
7521	Power FET, FQPF9N50.	9322 187 16687
7522	Transistor, NPN, BC847B(COL)	3198 010 42030
7540	Transistor, NPN, BC547B(COL)	3198 020 40030
7541	Transistor, NPN, PDTC114ET	9340 310 10215
7542	Transistor, PNP, BC857B(COL)	3198 010 42150
7560	IC, L78L33ACZ.	9322 134 92676
7561	Transistor, NPN, PDTC143ZT	9340 547 00215
7580	Transistor, PNP, BC857B(COL)	3198 010 42150
7602	IC, M24C08-WBN6.	9322 154 38682
7606	Transistor, NPN, PDTC143ZT	9340 547 00215
7802	IC, HEF4053BT.	9333 729 60653
7803	IC, HEF4053BT.	9333 729 60653
7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682
7901	IC, AN7580	9322 166 29682
7903	Transistor, NPN, BC847B(COL)	3198 010 42030
9001	Wire Jumper.	3198 036 90010
9101	Wire Jumper.	3198 036 90010
9102	Wire Jumper.	3198 036 90010
9103	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010
9175	Wire Jumper.	3198 036 90010
9176	Wire Jumper.	3198 036 90010
9178	Wire Jumper.	3198 036 90010
9179	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010
9182	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010
9192	Wire Jumper.	3198 036 90010
9193	Wire Jumper.	3198 036 90010
9311	Wire Jumper.	3198 036 90010
9312	Wire Jumper.	3198 036 90010
9406	Wire Jumper.	3198 036 90010
9407	Wire Jumper.	3198 036 90010
9408	Wire Jumper.	3198 036 90010
9409	Wire Jumper.	3198 036 90010
9410	Wire Jumper.	3198 036 90010
9411	Wire Jumper.	3198 036 90010
9412	Wire Jumper.	3198 036 90010
9413	Wire Jumper.	3198 036 90010
9414	Wire Jumper.	3198 036 90010
9415	Wire Jumper.	3198 036 90010
9416	Wire Jumper.	3198 036 90010
9417	Wire Jumper.	3198 036 90010
9418	Wire Jumper.	3198 036 90010
9419	Wire Jumper.	3198 036 90010
9421	Wire Jumper.	3198 036 90010
9422	Wire Jumper.	3198 036 90010
9424	Wire Jumper.	3198 036 90010
9425	Wire Jumper.	3198 036 90010
9426	Wire Jumper.	3198 036 90010
9427	Wire Jumper.	3198 036 90010
9453	Wire Jumper.	3198 036 90010
9460	Wire Jumper.	3198 036 90010
9463	Wire Jumper.	3198 036 90010
9500	Wire Jumper.	3198 036 90010
9501	Wire Jumper.	3198 036 90010
9503	Wire Jumper.	3198 036 90010
9506	Wire Jumper.	3198 036 90010
9507	Wire Jumper.	3198 036 90010
9511	Wire Jumper.	3198 036 90010
9512	Wire Jumper.	3198 036 90010
9513	Wire Jumper.	3198 036 90010
9514	Wire Jumper.	3198 036 90010
9515	Wire Jumper.	3198 036 90010
9516	Wire Jumper.	3198 036 90010
9518	Wire Jumper.	3198 036 90010
9520	Wire Jumper.	3198 036 90010
9521	Wire Jumper.	3198 036 90010
9522	Wire Jumper.	3198 036 90010
9524	Wire Jumper.	3198 036 90010
9528	Wire Jumper.	3198 036 90010
9530	Wire Jumper.	3198 036 90010
9611	Coil, 27u, 10%	3198 018 22790
9612	Wire Jumper.	3198 036 90010
9613	Wire Jumper.	3198 036 90010
9614	Wire Jumper.	3198 036 90010
9615	Wire Jumper.	3198 036 90010
9618	Wire Jumper.	3198 036 90010
9619	Wire Jumper.	3198 036 90010
9620	Wire Jumper.	3198 036 90010
9621	Wire Jumper.	3198 036 90010
9622	Wire Jumper.	3198 036 90010
9623	Wire Jumper.	3198 036 90010
9624	Wire Jumper.	3198 036 90010
9626	Wire Jumper.	3198 036 90010
9627	Wire Jumper.	3198 036 90010
9628	Wire Jumper.	3198 036 90010
9629	Wire Jumper.	3198 036 90010
9631	Wire Jumper.	3198 036 90010
9632	Wire Jumper.	3198 036 90010
9633	Wire Jumper.	3198 036 90010
9637	Wire Jumper.	3198 036 90010
9638	Wire Jumper.	3198 036 90010
9640	Wire Jumper.	3198 036 90010
9641	Wire Jumper.	3198 036 90010
9642	Wire Jumper.	3198 036 90010
9643	Wire Jumper.	3198 036 90010
9644	Wire Jumper.	3198 036 90010
9645	Wire Jumper.	3198 036 90010
9648	Wire Jumper.	3198 036 90010
9650	Wire Jumper.	3198 036 90010
9652	Wire Jumper.	3198 036 90010
9654	Wire Jumper.	3198 036 90010
9655	Wire Jumper.	3198 036 90010
9656	Wire Jumper.	3198 036 90010
9657	Wire Jumper.	3198 036 90010
9658	Wire Jumper.	3198 036 90010
9659	Wire Jumper.	3198 036 90010
9660	Wire Jumper.	3198 036 90010
9661	Wire Jumper.	3198 036 90010
9662	Wire Jumper.	3198 036 90010
9663	Wire Jumper.	3198 036 90010
9664	Wire Jumper.	3198 036 90010
9665	Wire Jumper.	3198 036 90010
9666	Wire Jumper.	3198 036 90010
9667	Wire Jumper.	3198 036 90010
9668	Wire Jumper.	3198 036 90010
9669	Wire Jumper.	3198 036 90010
9670	Wire Jumper.	3198 036 90010
9671	Wire Jumper.	3198 036 90010
9672	Coil, 22u, 10%	3198 018 22290
9674	Wire Jumper.	3198 036 90010
9675	Wire Jumper.	3198 036 90010
9676	Wire Jumper.	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper.	3198 036 90010
9680	Wire Jumper.	3198 036 90010
9681	Wire Jumper.	3198 036 90010
9685	Wire Jumper.	3198 036 90010
9686	Wire Jumper.	3198 036 90010
9687	Wire Jumper.	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

	Ref	Description	Part No.
	9688	Wire Jumper	3198 036 90010
	9689	Wire Jumper	3198 036 90010
	9690	Wire Jumper	3198 036 90010
	9691	Wire Jumper	3198 036 90010
	9694	Wire Jumper	3198 036 90010
	9695	Wire Jumper	3198 036 90010
	9697	Wire Jumper	3198 036 90010
	9698	Wire Jumper	3198 036 90010
	9699	Wire Jumper	3198 036 90010
	9821	Wire Jumper	3198 036 90010
	9822	Wire Jumper	3198 036 90010
	9825	Wire Jumper	3198 036 90010
	9828	Wire Jumper	3198 036 90010
	9829	Wire Jumper	3198 036 90010
	9831	Wire Jumper	3198 036 90010
	9832	Wire Jumper	3198 036 90010
	9837	Wire Jumper	3198 036 90010
	9838	Wire Jumper	3198 036 90010
	9839	Wire Jumper	3198 036 90010
	9846	Wire Jumper	3198 036 90010
	9847	Wire Jumper	3198 036 90010
	9849	Wire Jumper	3198 036 90010
	9851	Wire Jumper	3198 036 90010
	9856	Wire Jumper	3198 036 90010
	9858	Wire Jumper	3198 036 90010
	9859	Wire Jumper	3198 036 90010
	9860	Wire Jumper	3198 036 90010
	9862	Wire Jumper	3198 036 90010
	9864	Wire Jumper	3198 036 90010
	9865	Wire Jumper	3198 036 90010
	9867	Wire Jumper	3198 036 90010
	9868	Wire Jumper	3198 036 90010
	9869	Wire Jumper	3198 036 90010
	9873	Wire Jumper	3198 036 90010
	9874	Wire Jumper	3198 036 90010
	9875	Wire Jumper	3198 036 90010
	9876	Wire Jumper	3198 036 90010
	9877	Wire Jumper	3198 036 90010
	9901	Wire Jumper	3198 036 90010
	9902	Wire Jumper	3198 036 90010
	9903	Wire Jumper	3198 036 90010
	9904	Wire Jumper	3198 036 90010
	9911	Wire Jumper	3198 036 90010
	9913	Wire Jumper	3198 036 90010
	9914	Wire Jumper	3198 036 90010
	9915	Wire Jumper	3198 036 90010
	9923	Wire Jumper	3198 036 90010
	9991	Wire Jumper	3198 036 90010
	9996	Wire Jumper	3198 036 90010
	9998	Wire Jumper	3198 036 90010
	CBA	Main Chassis Assembly	3139 187 23581
	CBA	DVD Loader SD5.12	3139 188 55471
	CBA	DVD MPEG Assembly SD5.12	3139 188 55481
	CBA	DVD Module SD5.12 (contains Loader and MPEG Assembly)	4835 310 57599

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

	Ref	Description	Part No.
	0267	3 Pin Board Connector	2422 025 09191
	0361	Eject Button	3139 177 63451
	1110	Tact Switch	2422 128 02742
	CBA	DVD Eject Panel Assembly	3139 187 23311

DVD Interface Panel Parts

DVD Interface Panel Parts

	Ref	Description	Part No.
	0226	Connector, 6 Pin	2422 025 12482
	0228	Connector, 3 Pin	2412 020 00725
	0251	Connector, 4 Pin	2422 025 15847
	0253	Connector, 7 Pin	2422 025 11244
	0254	Connector, 3 Pin	2422 025 16382
	0266	Connector, 6 Pin	2422 025 15849
	0269	Connector, 5 Pin	2422 025 15848
	1100	Socket, Cinch, 1 Pin	2422 026 04425
	1101	Connector, 8 Pin	2422 025 12483
S	1330	Fuse, 2A, 250V	2422 086 10422
S	1331	Fuse, 2A, 250V	2422 086 10422
S	1332	Fuse, 2A, 250V	2422 086 10421
	2101	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
	2102	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
	2103	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
	2104	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2110	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2111	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2112	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2113	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2114	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2185	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2260	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2262	Cap, 4u7, +80/-20%, 10V, Ceramic	2020 552 96305
	2300	Cap, 10u, 20%, 250v, Electrolytic	2020 012 93495
	2301	Cap, 22n, 10%, 400v, Metalized Polyeste	2222 365 55223
	2302	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
	2310	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
	2311	Cap, 470n, 10%, 25v, Ceramic	2020 552 96465
	2313	Cap, 470p, 5%, 50v, Ceramic	3198 016 34710
	2315	Cap, 220p, 10%, 1KV, Ceramic	3198 019 62210
	2316	Cap, 33n, 10%, 16v, Ceramic	3198 017 33330
	2319	Cap, 220n, +80/-20%, 25v, Ceramic	3198 023 22240
	2330	Cap, 2u2, 20%, 25v, Electrolytic	3198 026 32220
	2331	Cap, 470u, 20%, 10v, Electrolytic	3198 025 14710
	2332	Cap, 2u2, 20%, 25v, Electrolytic	3198 026 32220
	2333	Cap, 470u, 20%, 10v, Electrolytic	3198 025 14710
	2337	Cap, 1000u, 20%, 25v, Electrolytic	3198 026 31020
	2338	Cap, 470u, 20%, 16v, Electrolytic	3198 025 24710
	2339	Cap, 470u, 20%, 16v, Electrolytic	3198 025 24710
	2341	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2342	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2350	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2351	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2353	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	3101	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3102	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
	3110	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3111	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3112	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3113	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3114	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3115	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3116	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3117	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3118	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3180	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3182	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3262	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3263	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
	3264	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3265	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
	3271	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3272	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
S	3300	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
S	3301	Power Resistor, 68K, 5%, 2W	3198 012 26830
	3308	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3309	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3310	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3311	Res, 180 ohm, 5%, 1/16W, Metalized Glas	3198 021 31810
	3312	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
	3313	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3314	Res, 1 ohm, 5%, 1/6W, Carbon Film	3198 011 01080
	3315	Res, 1 ohm, 5%, 1/6W, Carbon Film	3198 011 01080
	3317	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3318	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3319	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3320	Res, 100K, 1%, 1/16W, Metalized Glass	2322 704 61004
	3339	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
	3340	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3342	Res, 4K7, 1%, 1/16W, Metalized Glass	2322 704 64702
	3344	Res, 4K7, 1%, 1/16W, Metalized Glass	2322 704 64702
	3360	Res, 4R7, 5%, 1/16W, Metalized Glass	3198 021 34780
	3361	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	4105	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4106	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4185	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4226	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4261	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4265	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4316	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4342	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4343	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4361	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4363	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4364	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	5100	Inductor, Variable, 100uH, 10%	2422 549 41663
	5110	Coil, 220n	3198 018 12270
	5300	Coil, 27u	3198 018 22790
	5301	Fixed, Inductor, 100MHz, 50R	3198 018 90010
S	5315	Transformer, SS25113-00	2422 531 02596
	5331	Coil, 10u, 5%	2422 535 95363
	5333	Coil, 10u, 5%	2422 535 95363
	5337	Coil, 10u, 10%	2422 535 97328
	5339	Coil, 10u, 10%	2422 535 97328
	6100	Diode, Signal, BAS316	3198 010 10630
	6101	Diode, Signal, BAS316	3198 010 10630
	6300	Diode, Rect, BYD33J	9337 234 20133
	6311	Diode, Signal, BAS316	3198 010 10630

S = Safety Part   Be sure to use exact replacement part.

27DV693R37A (continued)

	Ref	Description	Part No.
	6312	Zener Diode, 22 volt	3198 020 52290
	6330	Diode, Rect, EGP20DL-5100	9322 164 42682
	6332	Diode, Rect, SB340L-7024.	9322 161 76682
	6336	Diode, Rect, BYV27-200.	9335 526 80133
	7110	IC, HEF4053BT.	9333 729 60653
	7260	Transistor, NPN, BC847B.	3198 010 42030
	7261	Transistor, NPN, BC847B.	3198 010 42030
	7262	Transistor, NPN, PDTC124ET	9340 310 20215
	7310	Transistor, NPN, PDTC114ET	3198 010 44110
	7311	Transistor, PNP, PDTA114ET	3198 010 44010
	7312	Transistor, PNP, BC857B.	3198 010 42150
	7313	Transistor, NPN, BC847B.	3198 010 42030
	7315	IC, TEA1523P/N2.	9352 699 68112
S	7340	Optical Coupler, TCET1103(G)	9322 140 14667
	7341	IC, TL431CLP	9337 711 00676
	9110	Wire Jumper.	3198 036 90010
	9111	Wire Jumper.	3198 036 90010
	9183	Wire Jumper.	3198 036 90010
	9266	Wire Jumper.	3198 036 90010
	9315	Wire Jumper.	3198 036 90010
	9350	Wire Jumper.	3198 036 90010
	9351	Wire Jumper.	3198 036 90010
	9352	Wire Jumper.	3198 036 90010
	9355	Wire Jumper.	3198 036 90010
	9357	Wire Jumper.	3198 036 90010
	CBA	DVD Interface Panel Assembly	3139 187 20761

Front Interface Panel Parts

Front Interface Panel Parts

	Ref	Description	Part No.
S	0211	2 Pin Connector.	2422 025 16268
S	0212	2 Pin Connector.	2422 025 16559
	0214	5 Pin Connector.	2422 025 06353
	1606	Tact Switch.	2422 128 02742
	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2692	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
	2693	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
	2694	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
	2695	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
	2698	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
S	3500	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322 242 13335
S	3501	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322 242 13335
	3685	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
	3691	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
	3693	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
	6691	LED, LTL-10234WHCR	9322 185 69682
	6692	IR Receiver, TSOP1836UH3V.	9322 127 54667
	9001	Wire Jumper.	3198 036 90010
	9002	Wire Jumper.	3198 036 90010
	CBA	Front Interface Panel Assembly	3139 177 26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts

Side Jack Panel Parts

	Ref	Description	Part No.
	0232	Headphone Jack	2422 026 04747
	0250	A/V Jack	2422 026 04815
	0251	6 Pin Connector.	2422 025 15849
	0254	5 Pin Connector.	2422 025 12481
	0255	4 Pin Connector.	2422 025 12479
	2171	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
	2172	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
	2173	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
	2174	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
	2176	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
	2177	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2178	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
	2179	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	3150	Res, 47k, 5%, 1/6W, Carbon	3198 011 04730
	3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
	3152	Res, 47k, 5%, 1/6W, Carbon	3198 011 04730
	3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
	3156	Res, 120 ohm, 5%, 1/6W, Carbon Film.	3198 011 01210
	3157	Res, 120 ohm, 5%, 1/6W, Carbon Film.	3198 011 01210
	6161	Zener Diode, 6.8 volt.	3198 010 26880
	9153	Wire Jumper.	3198 036 90010
	9170	Wire Jumper.	3198 036 90010
	9171	Wire Jumper.	3198 036 90010
	CBA	Side Jack Panel Assembly	3139 188 03541

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

	Ref	Description	Part No.
	0215	3 Pin Connector.	2422 025 16601
	1091	Tact Switch.	2422 128 02742
	1092	Tact Switch.	2422 128 02742
	1093	Tact Switch.	2422 128 02742
	1094	Tact Switch.	2422 128 02742
	3091	Res, 560 ohm, 5%, Metalized Glass.	3198 021 35610
	3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
	3093	Res, 560 ohm, 5%, Metalized Glass.	3198 021 35610
	3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
	3095	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3096	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
	4085	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4089	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4090	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	6091	Diode, Signal.	9340 453 90115
	CBA	Top Control Panel Assembly	3139 187 15841

Cabinet & Accessory Parts

Cabinet & Accessory Parts

	Ref	Description	Part No.
S	AC01	AC Cord.	3135 010 03831
	AC03	Anode Lead Spacer (3 Used)	3135 014 04471
	AC04	Batteries for Remote Control Transmitte	9299 000 65263
	AC05	Cabinet Back	3139 124 44931
	AC06	Cabinet Back Screw Cover (2 Used).	3139 124 39301
	AC08	Chassis Tray	3139 124 31325
S	AC09	CRT, A68QCU754X73(N)	9301 925 60527
S	AC12	Degaussing Coil.	2422 549 43967
	AC15	Holder, Degaussing Coil (4 Used)	3139 124 31122
	AC17	Owner's Manual	3121 235 21121
	AC18	Quick Use Guide.	3121 233 44461
	AC20	Cabinet Front Assembly	3121 237 53502
	AC20A	Cabinet Front.	3139 138 10391
	AC20H	Speaker, 8 ohm, 10W (2 Used)	3139 128 76521
	AC20J	Top Control Assembly	3139 177 56381
	AC23	DVD Door	3139 177 63441
	AC24	DVD Interface Panel Bracket.	3139 124 43291
	REMOTE	Remote Control Transmitter, RC19042007/ 01.	3128 147 14521

27LT220L/17 - Manual no. 7638

Main Chassis Parts

Main Chassis Parts

S	Ref	Description	Part No.
	0211	2 Pin Connector.	2422 025 16269
	0212	2 Pin Connector.	2422 025 16375
	0218	A/V Jack	2422 026 04742
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0222	2 Pin Connector.	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0240	7 Pin Connector.	2422 025 11244
	0243	6 Pin Connector.	2422 025 04854
	0244	5 Pin Connector.	2422 025 04853
	0245	6 Pin Connector.	2422 025 04854
	0251	3 Pin Connector.	2412 020 00725
S	0254	9 Pin CRT Socket	2422 500 80076
	0259	5 Pin Connector.	2422 025 15848
	0262	3 Pin Connector.	2422 025 16937
	0267	3 Pin Connector.	2412 020 00725
	0280	4 Pin Connector.	2422 025 12479
S	1000	Tuner, V+U, PLL	2422 542 90108
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1600	Tact Switch.	2422 128 02742
	1601	Tact Switch.	2422 128 02742
	1602	Tact Switch.	2422 128 02742
	1603	Tact Switch.	2422 128 02742
	1606	Tact Switch.	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2123	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2125	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2181	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2182	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2183	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic. . .	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic. . .	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic . .	2020 558 90445
	2405	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2441	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic . . .	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic. . .	2020 021 91139
	2451	Cap, 15n, 10%, 50v, Polyester.	3198 014 01530
	2455	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
	2457	Cap, 470n, 5%, 250v, Metalized Polypropylene.	2022 333 00086
	2458	Cap, 2u2, 20%, 100v, Electrolytic. . .	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
	2462	Cap, 330n, 10%, 250v, MPP.	2022 333 00084
	2463	Cap, 1nf, 10%, 2000v, Ceramic Only with 5445 (JF0501-21835) Layer Wound. . . .	2020 558 90487
	2463	Cap, 680p, 10%, 2000v, Ceramic	2020 558 90485
S	2465	Cap, 11n, 5%, 1600v, Polypropylene . .	2020 301 90251
S	2465	Cap, 12n, 5%, 1600v, Polypropylene Only with 5445 (JF0501-21835) Layer Wound .	2222 375 90156
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic . . .	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic. . .	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic. . .	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic . . .	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic . .	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic. . .	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic . .	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic . . .	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic . .	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic . . .	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic . . .	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic . . .	3198 025 52290
	2601	Cap, 220n, +80/-20%, 25v, Ceramic. . .	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2616	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
	2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050
	2691	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
	2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2803	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
	2862	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250

S = Safety Part   Be sure to use exact replacement part.

27LT220L/17 (continued)

Ref	Description	Part No.
2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3121	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3123	Wire Jumper.	3198 036 90010
3124	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3125	Wire Jumper.	3198 036 90010
3126	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3182	Wire Jumper.	3198 036 90010
3184	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3185	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3186	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3187	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840
3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330

	Ref	Description	Part No.
	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
	3452	Res, 5K6, 1%, 3/5W, Metal Film Only wit h 5445 (JF0501-21835) Layer Wound. . .	2312 915 15602
	3452	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3454	Res, 2K, 1%, 3/5W, Metal Film Only with 5445 (JF0501-21835) Layer Wound. . . .	2312 915 12002
	3454	Res, 3K9, 1%, 3/5W, Metal Film	2312 915 13902
S	3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S	3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
	3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
	3470	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
	3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S	3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 33390
	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S	3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203

S = Safety Part   Be sure to use exact replacement part.

27LT220L/17 (continued)

	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198 021 53320
	3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198 021 31530
	3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198 021 31220
	3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4101	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4102	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4104	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4128	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4604	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5202	Wire Jumper.	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5241	Wire Jumper.	3198 036 90010
	5242	Coil, 10u, 5%.	3198 018 11090
	5342	Coil, 22u.	2422 535 97333
S	5445	Transformer, LOT (JF0501-21835) Layer W ound	2422 531 02611
S	5445	Transformer, LOT (1342.0043B).	2422 531 02506
	5451	Coil, 33u, 10%	3198 018 73390
	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
S	5457	Coil, 42u.	2422 535 94865
	5461	Transformer, Signal Driver, SC10027-00	2422 531 02478
	5471	Coil, 3u3, 20%	3198 018 73380
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 39u, 10%	2422 535 97336
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04.	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5861	Coil, 10u, 5%.	3198 018 11090
	6001	Zener Diode, 33 volt	3198 010 23390
	6181	Zener Diode, 6.8 volt.	3198 020 56880
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630
	6206	Zener Diode, 6.8 volt.	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316.	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148.	3198 010 10010
	6448	Zener Diode, 6.2 volt.	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6460	Diode, Rect, BY228/24.	9340 559 50112
	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
	6462	Zener Diode, 9.1 volt.	9331 177 80133
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316.	3198 010 10630
	6468	Diode, Signal, BAS316.	3198 010 10630

S = Safety Part   Be sure to use exact replacement part.

27LT220L/17 (continued)

Ref	Description	Part No.
6469	Diode, Rect, BYV95C	9335 001 80133
6470	Diode, Signal, BAV99	3198 010 10620
6476	Zener Diode, 15 volt	3198 010 21590
6481	Zener Diode, 5.6 volt	3198 010 25680
6482	Zener Diode, 9.1 volt	9331 177 80133
6483	Zener Diode, 33 volt	3198 010 23390
6485	Diode, Rect, BYV95C	9335 001 80133
6486	Diode, Rect, EGP20DL-5100	9322 164 42682
6487	Diode, Rect, BYV95A	9335 000 90133
6488	Diode, Rect, EGP20DL-5100	9322 164 42682
6500	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
6520	Diode, Rect, BYV95A	9335 000 90133
6523	Diode, Signal, 1N4148	3198 010 10010
6524	Diode, Rect, 1N5062	3198 010 10120
6525	Diode, Rect, 1N5062	3198 010 10120
6526	Zener Diode, 22 volt	3198 020 52290
6540	Zener Diode, 6.2 volt	9331 668 30133
6541	Zener Diode, 10 volt	3198 020 51090
6560	Diode, Rect, BYV29X-500	9340 555 59127
6562	Diode, Rect, EGP20DL-5100	9322 164 42682
6563	Diode, Signal, BAS316	3198 010 10630
6565	Diode, Signal, BAV70	9331 849 10215
6566	Diode, Signal, 1N4148	3198 010 10010
6569	Diode, Signal, BAS316	3198 010 10630
6570	Zener Diode, 6.8 volt	3198 020 56880
6580	Diode, Signal, BAS316	3198 010 10630
6681	Diode, Signal, BAT85	9336 247 60133
6691	LED, LTL-10234WHCR	9322 185 69682
6692	IR Receiver	9322 127 54667
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
7101	Transistor, NPN, BC847B(COL)	3198 010 42030
7200	IC, TDA9588H/N1/3I	4835 310 57622
7201	Transistor, NPN, BC847B(COL)	3198 010 42030
7204	Transistor, PNP, BC857B(COL)	3198 010 42150
7205	Transistor, PNP, BC857B(COL)	3198 010 42150
7330	IC, TDA6107JF/N3	9352 713 37112
7441	Transistor, PNP, BC857B(COL)	3198 010 42150
7443	Transistor, PNP, BC557B(COL)	3198 020 40110
7460	Transistor, NPN, BU4508DX	9340 550 92127
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
7462	Transistor, NPN, PDTC143ZT	9340 547 00215
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
7471	IC, TDA8359J/N2	9352 701 64112
7480	Transistor, NPN, BD135	3198 020 41010
7482	Transistor, NPN, BD135	3198 020 41010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667
7520	IC, TEA1507P/N1	9352 673 56112
7521	Power FET, FQPF9N50	9322 187 16687
7522	Transistor, NPN, BC847B(COL)	3198 010 42030
7540	Transistor, NPN, BC547B(COL)	3198 020 40030
7541	Transistor, NPN, PDTC114ET	9340 310 10215
7542	Transistor, PNP, BC857B(COL)	3198 010 42150
7560	IC, LE33CZ	9322 106 11676
7561	Transistor, NPN, PDTC143ZT	9340 547 00215
7580	Transistor, PNP, BC857B(COL)	3198 010 42150
7602	IC, M24C16-WBN6	9322 147 25682
7802	IC, HEF4053BT	9333 729 60653
7861	IC, TDA9853H/V1	9352 671 19557
7891	Transistor, NPN, BC847B(COL)	3198 010 42030
7892	Transistor, NPN, BC847B(COL)	3198 010 42030
7901	IC, AN7522N PH	9322 181 41682
9001	Wire Jumper	3198 036 90010
9104	Wire Jumper	3198 036 90010
9123	Wire Jumper	3198 036 90010
9171	Wire Jumper	3198 036 90010
9173	Wire Jumper	3198 036 90010
9181	Wire Jumper	3198 036 90010
9182	Wire Jumper	3198 036 90010
9183	Wire Jumper	3198 036 90010
9192	Wire Jumper	3198 036 90010
9193	Wire Jumper	3198 036 90010
9311	Wire Jumper	3198 036 90010
9312	Wire Jumper	3198 036 90010
9406	Wire Jumper	3198 036 90010
9407	Wire Jumper	3198 036 90010
9408	Wire Jumper	3198 036 90010
9409	Wire Jumper	3198 036 90010
9410	Wire Jumper	3198 036 90010
9411	Wire Jumper	3198 036 90010
9412	Wire Jumper	3198 036 90010
9413	Wire Jumper	3198 036 90010
9415	Wire Jumper	3198 036 90010
9416	Wire Jumper	3198 036 90010
9417	Wire Jumper	3198 036 90010
9418	Wire Jumper	3198 036 90010
9419	Wire Jumper	3198 036 90010
9421	Wire Jumper	3198 036 90010
9422	Wire Jumper	3198 036 90010
9423	Wire Jumper	3198 036 90010
9425	Wire Jumper	3198 036 90010
9427	Wire Jumper	3198 036 90010
9453	Wire Jumper	3198 036 90010
9460	Wire Jumper	3198 036 90010
9500	Wire Jumper	3198 036 90010
9501	Wire Jumper	3198 036 90010
9503	Wire Jumper	3198 036 90010
9506	Wire Jumper	3198 036 90010
9507	Wire Jumper	3198 036 90010
9510	Wire Jumper	3198 036 90010
9511	Wire Jumper	3198 036 90010
9512	Wire Jumper	3198 036 90010
9513	Wire Jumper	3198 036 90010
9514	Wire Jumper	3198 036 90010
9515	Wire Jumper	3198 036 90010
9516	Wire Jumper	3198 036 90010
9518	Wire Jumper	3198 036 90010
9520	Wire Jumper	3198 036 90010
9521	Wire Jumper	3198 036 90010
9522	Wire Jumper	3198 036 90010
9524	Wire Jumper	3198 036 90010
9528	Wire Jumper	3198 036 90010
9530	Wire Jumper	3198 036 90010
9611	Coil, 27u, 10%	3198 018 22790
9612	Wire Jumper	3198 036 90010
9613	Wire Jumper	3198 036 90010
9614	Wire Jumper	3198 036 90010
9615	Wire Jumper	3198 036 90010
9617	Wire Jumper	3198 036 90010
9618	Wire Jumper	3198 036 90010
9619	Wire Jumper	3198 036 90010
9622	Wire Jumper	3198 036 90010
9623	Wire Jumper	3198 036 90010
9626	Wire Jumper	3198 036 90010
9627	Wire Jumper	3198 036 90010
9628	Wire Jumper	3198 036 90010
9629	Wire Jumper	3198 036 90010
9631	Wire Jumper	3198 036 90010
9632	Wire Jumper	3198 036 90010
9637	Wire Jumper	3198 036 90010
9638	Wire Jumper	3198 036 90010
9640	Wire Jumper	3198 036 90010
9641	Wire Jumper	3198 036 90010
9642	Wire Jumper	3198 036 90010
9643	Wire Jumper	3198 036 90010
9647	Wire Jumper	3198 036 90010
9648	Wire Jumper	3198 036 90010
9650	Wire Jumper	3198 036 90010
9652	Wire Jumper	3198 036 90010
9654	Wire Jumper	3198 036 90010
9655	Wire Jumper	3198 036 90010
9657	Wire Jumper	3198 036 90010
9658	Wire Jumper	3198 036 90010
9659	Wire Jumper	3198 036 90010
9660	Wire Jumper	3198 036 90010
9661	Wire Jumper	3198 036 90010
9662	Wire Jumper	3198 036 90010
9663	Wire Jumper	3198 036 90010
9664	Wire Jumper	3198 036 90010
9665	Wire Jumper	3198 036 90010
9666	Wire Jumper	3198 036 90010
9667	Wire Jumper	3198 036 90010
9668	Wire Jumper	3198 036 90010
9669	Wire Jumper	3198 036 90010
9670	Wire Jumper	3198 036 90010
9671	Wire Jumper	3198 036 90010
9672	Coil, 22u, 10%	3198 018 22290
9674	Wire Jumper	3198 036 90010
9675	Wire Jumper	3198 036 90010
9676	Wire Jumper	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper	3198 036 90010
9680	Wire Jumper	3198 036 90010
9681	Wire Jumper	3198 036 90010
9685	Wire Jumper	3198 036 90010
9686	Wire Jumper	3198 036 90010
9687	Wire Jumper	3198 036 90010
9688	Wire Jumper	3198 036 90010
9689	Wire Jumper	3198 036 90010
9690	Wire Jumper	3198 036 90010
9691	Wire Jumper	3198 036 90010
9694	Wire Jumper	3198 036 90010
9695	Wire Jumper	3198 036 90010
9697	Wire Jumper	3198 036 90010
9698	Wire Jumper	3198 036 90010
9699	Wire Jumper	3198 036 90010
9821	Wire Jumper	3198 036 90010
9822	Wire Jumper	3198 036 90010
9825	Wire Jumper	3198 036 90010
9828	Wire Jumper	3198 036 90010
9829	Wire Jumper	3198 036 90010
9831	Wire Jumper	3198 036 90010
9832	Wire Jumper	3198 036 90010
9837	Wire Jumper	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

27LT220L/17 (continued)

```
  9838   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9839   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9846   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9847   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9849   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9850   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9851   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9852   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9853   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9856   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9860   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9861   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9862   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9864   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9865   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9868   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9873   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9874   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9875   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9877   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9891   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9892   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9901   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9902   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9903   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9904   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9905   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9911   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9913   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9914   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9915   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9918   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9919   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9920   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9991   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9996   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9998   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  CBA    SP/LS Module (Vertical) (ITV). . . . .  3139 127 27372
  CBA    Main Chassis Assembly. . . . . . . . .  3139 187 26841
```

Channel One Card Parts
Channel One Card Parts

2D 3 Line Comb Filter Parts
2D 3 Line Comb Filter Parts

DAF Panel Parts
DAF Panel Parts

DVD Eject Panel Parts
DVD Eject Panel Parts

DVD Interface Panel Parts
DVD Interface Panel Parts

Front Interface Panel Parts
Front Interface Panel Parts

ITV Front Jack Panel Parts
ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)
Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)
Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts
Side Jack Panel Parts

Subwoofer Panel Parts
Subwoofer Panel Parts

Top Control Panel Parts
Top Control Panel Parts

Cabinet & Accessory Parts
Cabinet & Accessory Parts

```
S AC01   AC Cord. . . . . . . . . . . . . . . .  3135 010 07161
  AC03   Anode Lead Spacer (3 Used) . . . . . .  3135 014 04471
  AC05   Cabinet Back . . . . . . . . . . . . .  3139 124 45271
S AC09   CRT, A68AJB82X11 . . . . . . . . . . .  9301 891 90631
  AC10   Customer Control Buttons . . . . . . .  3139 124 30901
S AC12   Degaussing Coil. . . . . . . . . . . .  2422 549 43967
  AC15   Holder, Degaussing Coil (4 Used) . . .  3135 013 01641
  AC20   Cabinet Front Assembly . . . . . . . .  3121 237 52392
  AC20A  Cabinet Front. . . . . . . . . . . . .  3135 127 50011
  AC20B  Chassis Guide (2 Used) . . . . . . . .  3139 124 31381
  AC20B  Chassis Guide. . . . . . . . . . . . .  3139 124 41711
  AC20C  Light Guide. . . . . . . . . . . . . .  3139 124 26461
  AC20D  Nameplate. . . . . . . . . . . . . . .  3135 015 03571
  AC20E  Power Button . . . . . . . . . . . . .  3139 124 26444
  AC20H  Speaker, 16 ohm, 5W (2 Used) . . . . .  2422 264 00401
  AC22   Cinch Cover. . . . . . . . . . . . . .  3139 124 25551
```

S = Safety Part   Be sure to use exact replacement part.

Main Chassis Parts

S	Ref	Description	Part No.
		Main Chassis Parts	
	0211	2 Pin Connector.	2422 025 16374
	0212	2 Pin Connector.	2422 025 16375
	0214	5 Pin Connector.	2422 025 12481
	0219	6 Pin Connector.	2422 025 12482
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0222	2 Pin Connector.	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0239	3 Pin Connector.	2422 025 16382
	0240	7 Pin Connector.	2422 025 11244
	0243	6 Pin Connector.	2422 025 04854
	0244	5 Pin Connector.	2422 025 04853
	0245	6 Pin Connector.	2422 025 04854
	0246	5 Pin Connector.	2422 025 12481
	0251	3 Pin Connector.	2412 020 00725
S	0254	9 Pin CRT Socket	2422 500 80076
	0259	5 Pin Connector.	2422 025 15848
	0262	3 Pin Connector.	2422 025 16937
	0267	3 Pin Connector.	2412 020 00725
S	1000	Tuner, V+U, PLL	2422 542 90108
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1660	Crystal, 12MHz000	2422 543 01203
	1831	Crystal, Resonator, 18MHz432, 12 Pin, H C49/U A.	2422 543 00842
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic. . . .	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic. . . .	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2123	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2125	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic. . . .	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic . . .	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic . . .	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyest er.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic. . . .	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic. . . .	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic . . .	2020 558 90445
	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
	2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic. . . .	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic. . . .	2020 021 91139
	2451	Cap, 22n, 10%, 50v, Polyester.	3198 014 02230
	2452	Cap, 180p, 5%, 50v, Ceramic.	3198 016 01810
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 360n, 5%, 250v, Metalized Polyprop ylene.	2022 333 00163
	2458	Cap, 2u2, 20%, 100v, Electrolytic. . . .	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
S	2463	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2464	Cap, 2u2, 5%, 160v, Metalized Polypropy lene	2222 479 90042
S	2465	Cap, 15n, 5%, 1600v, Polypropylene . . .	2020 301 90255
	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
	2468	Cap, 27n, 10%, 400v, Polyester	2222 347 90232
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 120n, 5%, 250v, Metalized Polyprop ylene.	2222 479 90051
	2485	Cap, 4u7, 20%, 250v, Electrolytic. . . .	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic. . . .	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic . . .	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic. . . .	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypro pylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic . . .	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic . . .	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2601	Cap, 220n, +80/-20%, 25v, Ceramic. . . .	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2616	Cap, 470n, +80/-20%, 10v, Ceramic. . . .	3198 017 44740
	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
	2802	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
	2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
	2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
	2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
	2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
	2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2837	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2840	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040
	2841	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090

S = Safety Part   Be sure to use exact replacement part.

27LT621L/17 (continued)

	Ref	Description	Part No.
	2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2843	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2844	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2846	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
	2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
	2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
	2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610
	2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910
	2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
	2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
	2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2910	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320
	2911	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320
	2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
	3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3121	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3124	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3126	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
	3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
	3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
	3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
	3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
	3403	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
	3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102
	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
S	3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S	3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
	3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
	3470	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3471	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
	3472	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
	3473	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208
	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2120 101 74158
	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
	3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S	3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 32290
	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
S	3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220

S = Safety Part   Be sure to use exact replacement part.

27LT621L/17 (continued)

Ref	Description	Part No.
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3831	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3843	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4101	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4102	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4104	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4128	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4604	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4876	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4879	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
5001	Coil, 27u, 10%	3198 018 22790
5002	Coil, 820n, 10%.	3198 018 18270
5201	Coil, 6u8, 5%.	3198 018 16880
5202	Wire Jumper.	3198 036 90010
5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
5241	Wire Jumper.	3198 036 90010
5242	Coil, 10u, 5%.	3198 018 11090
5341	Coil, 22u.	2422 535 97333
5342	Coil, 3u9, 10%	2422 535 97323
5401	Coil, 1mH, 10%	3198 018 71020
S 5445	Transformer, LOT	2422 531 02574
5451	Coil, 22u, 10%	3198 018 72290
5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
S 5457	Coil, 25u.	2422 535 91028
5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
5463	Coil, Choke.	3128 138 37021
5471	Coil, 6u8, 20%	3198 018 76880
5472	Coil, 3u3, 10%	3198 018 23380
5480	Coil, 47u, 10%	2422 535 97337
S 5501	Mains Filter	2422 549 43432
S 5520	Transformer, SS39009-04.	2422 531 02459
5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5561	Coil, 27u, 5%.	2422 535 95366
5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5602	Coil, 5u6, 5%.	3198 018 15680
5603	Coil, 5u6, 5%.	3198 018 15680
5604	Coil, 5u6, 5%.	3198 018 15680
5831	Coil, 6u8, 5%.	3198 018 16880
5832	Coil, 6u8, 5%.	3198 018 16880
5833	Coil, 6u8, 5%.	3198 018 16880
5835	Coil, 12u, 10%	3198 018 31290
6001	Zener Diode, 33 volt	3198 010 23390
6201	Diode, Signal, BAS316.	3198 010 10630
6202	Diode, Signal, BAS316.	3198 010 10630
6206	Zener Diode, 6.8 volt.	3198 020 56880
6331	Diode, Signal, BAV21	3198 010 10070
6332	Diode, Signal, BAS316.	3198 010 10630
6333	Diode, Signal, BAV21	3198 010 10070
6335	Diode, Signal, BAV21	3198 010 10070
6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002
6401	Zener Diode, 47 volt	3198 010 24790
6445	Zener Diode, 10 volt	3198 020 51090
6447	Diode, Signal, 1N4148.	3198 010 10010
6448	Zener Diode, 6.2 volt.	9331 668 30133
6449	Diode, Signal, BAV99	3198 010 10620
6460	Diode, Rect, BY228/24.	9340 559 50112
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
6462	Zener Diode, 9.1 volt.	9331 177 80133
6464	Diode, Signal, BAS316.	3198 010 10630
6465	Diode, Signal, BAV21	3198 010 10070
6466	Diode, Signal, BAV21	3198 010 10070
6467	Diode, Signal, BAS316.	3198 010 10630
6468	Diode, Signal, BAS316.	3198 010 10630
6469	Diode, Rect, BYV95C.	9335 001 80133
6470	Diode, Signal, BAV99	3198 010 10620
6476	Zener Diode, 15 volt	3198 010 21590
6481	Zener Diode, 5.6 volt.	3198 010 25680
6482	Zener Diode, 9.1 volt.	9331 177 80133
6483	Zener Diode, 33 volt	3198 010 23390
6485	Diode, Rect, BYV95C.	9335 001 80133
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
6487	Diode, Rect, BYV95A.	9335 000 90133
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
6500	Diode, Bridge Rect, GBU6JL-7002. . . .	9322 138 08667
6520	Diode, Rect, BYV95A.	9335 000 90133
6523	Diode, Signal, 1N4148.	3198 010 10010
6524	Diode, Rect, 1N5062.	3198 010 10120
6525	Diode, Rect, 1N5062.	3198 010 10120
6526	Zener Diode, 22 volt	3198 020 52290
6540	Zener Diode, 6.2 volt.	9331 668 30133
6541	Zener Diode, 10 volt	3198 020 51090
6560	Diode, Rect, BYV29X-500.	9340 555 59127
6562	Diode, Rect, EGP20DL-5100.	9322 164 42682
6563	Diode, Signal, BAS316.	3198 010 10630
6565	Diode, Signal, BAV70	9331 849 10215

S = Safety Part   Be sure to use exact replacement part.

27LT621L/17 (continued)

	Ref	Description	Part No.
	6566	Diode, Signal, 1N4148.	3198 010 10010
	6569	Diode, Signal, BAS316.	3198 010 10630
	6570	Zener Diode, 6.8 volt.	3198 020 56880
	6580	Diode, Signal, BAS316.	3198 010 10630
	6831	Diode, Signal, 1N4148.	3198 010 10010
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9588H/N1/3I	4835 310 57626
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7400	Power FET, IR.	9322 053 35687
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7460	Transistor, NPN, BU4508DX.	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2.	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1.	9352 673 56112
	7521	Power FET, FQPF9N50.	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, LE33CZ	9322 106 11676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C16-WBN6.	9322 147 25682
	7606	Transistor, NPN, PDTC143ZT	9340 547 00215
	7802	IC, HEF4053BT.	9333 729 60653
	7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682
	7901	IC, AN7522N PH	9322 181 41682
	9001	Wire Jumper.	3198 036 90010
	9104	Wire Jumper.	3198 036 90010
	9123	Wire Jumper.	3198 036 90010
	9124	Wire Jumper.	3198 036 90010
	9125	Wire Jumper.	3198 036 90010
	9171	Wire Jumper.	3198 036 90010
	9173	Wire Jumper.	3198 036 90010
	9181	Wire Jumper.	3198 036 90010
	9182	Wire Jumper.	3198 036 90010
	9183	Wire Jumper.	3198 036 90010
	9192	Wire Jumper.	3198 036 90010
	9193	Wire Jumper.	3198 036 90010
	9311	Wire Jumper.	3198 036 90010
	9312	Wire Jumper.	3198 036 90010
	9406	Wire Jumper.	3198 036 90010
	9407	Wire Jumper.	3198 036 90010
	9408	Wire Jumper.	3198 036 90010
	9409	Wire Jumper.	3198 036 90010
	9410	Wire Jumper.	3198 036 90010
	9411	Wire Jumper.	3198 036 90010
	9412	Wire Jumper.	3198 036 90010
	9413	Wire Jumper.	3198 036 90010
	9414	Wire Jumper.	3198 036 90010
	9415	Wire Jumper.	3198 036 90010
	9416	Wire Jumper.	3198 036 90010
	9417	Wire Jumper.	3198 036 90010
	9418	Wire Jumper.	3198 036 90010
	9419	Wire Jumper.	3198 036 90010
	9421	Wire Jumper.	3198 036 90010
	9422	Wire Jumper.	3198 036 90010
	9423	Wire Jumper.	3198 036 90010
	9424	Wire Jumper.	3198 036 90010
	9425	Wire Jumper.	3198 036 90010
	9426	Wire Jumper.	3198 036 90010
	9427	Wire Jumper.	3198 036 90010
	9453	Wire Jumper.	3198 036 90010
	9460	Wire Jumper.	3198 036 90010
	9463	Wire Jumper.	3198 036 90010
	9500	Wire Jumper.	3198 036 90010
	9501	Wire Jumper.	3198 036 90010
	9503	Wire Jumper.	3198 036 90010
	9506	Wire Jumper.	3198 036 90010
	9507	Wire Jumper.	3198 036 90010
	9510	Wire Jumper.	3198 036 90010
	9511	Wire Jumper.	3198 036 90010
	9512	Wire Jumper.	3198 036 90010
	9513	Wire Jumper.	3198 036 90010
	9514	Wire Jumper.	3198 036 90010
	9515	Wire Jumper.	3198 036 90010
	9516	Wire Jumper.	3198 036 90010
	9518	Wire Jumper.	3198 036 90010
	9520	Wire Jumper.	3198 036 90010
	9521	Wire Jumper.	3198 036 90010
	9522	Wire Jumper.	3198 036 90010
	9524	Wire Jumper.	3198 036 90010
	9528	Wire Jumper.	3198 036 90010
	9530	Wire Jumper.	3198 036 90010
	9611	Coil, 27u, 10%	3198 018 22790
	9612	Wire Jumper.	3198 036 90010
	9613	Wire Jumper.	3198 036 90010
	9614	Wire Jumper.	3198 036 90010
	9615	Wire Jumper.	3198 036 90010
	9618	Wire Jumper.	3198 036 90010
	9619	Wire Jumper.	3198 036 90010
	9622	Wire Jumper.	3198 036 90010
	9623	Wire Jumper.	3198 036 90010
	9626	Wire Jumper.	3198 036 90010
	9627	Wire Jumper.	3198 036 90010
	9628	Wire Jumper.	3198 036 90010
	9629	Wire Jumper.	3198 036 90010
	9631	Wire Jumper.	3198 036 90010
	9632	Wire Jumper.	3198 036 90010
	9637	Wire Jumper.	3198 036 90010
	9638	Wire Jumper.	3198 036 90010
	9640	Wire Jumper.	3198 036 90010
	9641	Wire Jumper.	3198 036 90010
	9642	Wire Jumper.	3198 036 90010
	9643	Wire Jumper.	3198 036 90010
	9647	Wire Jumper.	3198 036 90010
	9648	Wire Jumper.	3198 036 90010
	9650	Wire Jumper.	3198 036 90010
	9652	Wire Jumper.	3198 036 90010
	9654	Wire Jumper.	3198 036 90010
	9655	Wire Jumper.	3198 036 90010
	9656	Wire Jumper.	3198 036 90010
	9657	Wire Jumper.	3198 036 90010
	9658	Wire Jumper.	3198 036 90010
	9659	Wire Jumper.	3198 036 90010
	9660	Wire Jumper.	3198 036 90010
	9661	Wire Jumper.	3198 036 90010
	9662	Wire Jumper.	3198 036 90010
	9663	Wire Jumper.	3198 036 90010
	9664	Wire Jumper.	3198 036 90010
	9665	Wire Jumper.	3198 036 90010
	9666	Wire Jumper.	3198 036 90010
	9667	Wire Jumper.	3198 036 90010
	9668	Wire Jumper.	3198 036 90010
	9669	Wire Jumper.	3198 036 90010
	9670	Wire Jumper.	3198 036 90010
	9671	Wire Jumper.	3198 036 90010
	9672	Coil, 22u, 10%	3198 018 22290
	9674	Wire Jumper.	3198 036 90010
	9675	Wire Jumper.	3198 036 90010
	9676	Wire Jumper.	3198 036 90010
	9678	Coil, 22u, 10%	3198 018 22290
	9679	Wire Jumper.	3198 036 90010
	9680	Wire Jumper.	3198 036 90010
	9685	Wire Jumper.	3198 036 90010
	9686	Wire Jumper.	3198 036 90010
	9687	Wire Jumper.	3198 036 90010
	9688	Wire Jumper.	3198 036 90010
	9689	Wire Jumper.	3198 036 90010
	9690	Wire Jumper.	3198 036 90010
	9691	Wire Jumper.	3198 036 90010
	9694	Wire Jumper.	3198 036 90010
	9695	Wire Jumper.	3198 036 90010
	9697	Wire Jumper.	3198 036 90010
	9698	Wire Jumper.	3198 036 90010
	9699	Wire Jumper.	3198 036 90010
	9821	Wire Jumper.	3198 036 90010
	9822	Wire Jumper.	3198 036 90010
	9825	Wire Jumper.	3198 036 90010
	9828	Wire Jumper.	3198 036 90010
	9829	Wire Jumper.	3198 036 90010
	9831	Wire Jumper.	3198 036 90010
	9832	Wire Jumper.	3198 036 90010
	9837	Wire Jumper.	3198 036 90010
	9838	Wire Jumper.	3198 036 90010
	9839	Wire Jumper.	3198 036 90010
	9846	Wire Jumper.	3198 036 90010
	9847	Wire Jumper.	3198 036 90010
	9849	Wire Jumper.	3198 036 90010
	9851	Wire Jumper.	3198 036 90010
	9856	Wire Jumper.	3198 036 90010
	9858	Wire Jumper.	3198 036 90010
	9859	Wire Jumper.	3198 036 90010
	9860	Wire Jumper.	3198 036 90010
	9862	Wire Jumper.	3198 036 90010
	9864	Wire Jumper.	3198 036 90010
	9865	Wire Jumper.	3198 036 90010
	9867	Wire Jumper.	3198 036 90010
	9868	Wire Jumper.	3198 036 90010
	9869	Wire Jumper.	3198 036 90010
	9873	Wire Jumper.	3198 036 90010
	9874	Wire Jumper.	3198 036 90010
	9875	Wire Jumper.	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

27LT621L/17 (continued)

	Ref	Description	Part No.
	9877	Wire Jumper	3198 036 90010
	9901	Wire Jumper	3198 036 90010
	9902	Wire Jumper	3198 036 90010
	9903	Wire Jumper	3198 036 90010
	9904	Wire Jumper	3198 036 90010
	9905	Wire Jumper	3198 036 90010
	9911	Wire Jumper	3198 036 90010
	9913	Wire Jumper	3198 036 90010
	9914	Wire Jumper	3198 036 90010
	9915	Wire Jumper	3198 036 90010
	9991	Wire Jumper	3198 036 90010
	9996	Wire Jumper	3198 036 90010
	9998	Wire Jumper	3198 036 90010
	CBA	SP/LS Module (Vertical) (ITV)	3139 127 27374
	CBA	Main Chassis Assembly	3139 188 04101

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

	Ref	Description	Part No.
S	0211	2 Pin Connector	2422 025 16268
S	0212	2 Pin Connector	2422 025 16559
	0214	5 Pin Connector	2422 025 06353
	1606	Tact Switch	2422 128 02742
	2691	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2692	Cap, 47n, 10%, 25v, Ceramic	3198 023 04730
	2693	Cap, 47n, 10%, 25v, Ceramic	3198 023 04730
	2694	Cap, 47n, 10%, 25v, Ceramic	3198 023 04730
	2695	Cap, 47n, 10%, 25v, Ceramic	3198 023 04730
	2698	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
S	3500	Res, 3M3, 5%, 1/2W, Metalized Glass	2322 242 13335
S	3501	Res, 3M3, 5%, 1/2W, Metalized Glass	2322 242 13335
	3685	Res, 560 ohm, 5%, 1/6W, Carbon Film	3198 011 05610
	3691	Res, 330 ohm, 5%, 1/6W, Carbon Film	3198 011 03310
	3693	Res, 220 ohm, 5%, 1/6W, Carbon Film	3198 011 02210
	6691	LED, LTL-10234WHCR	9322 185 69682
	6692	IR Receiver, TSOP1836UH3V	9322 127 54667
	9001	Wire Jumper	3198 036 90010
	9002	Wire Jumper	3198 036 90010
	CBA	Front Interface Panel Assembly	3139 177 26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts

Side Jack Panel Parts

	Ref	Description	Part No.
	0232	Headphone Jack	2422 026 04747
	0250	A/V Jack	2422 026 04815
	0251	6 Pin Connector	2422 025 12482
	0254	5 Pin Connector	2422 025 12481
	0255	4 Pin Connector	2422 025 12479
	2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2176	Cap, 470p, 5%, 50v, Ceramic	3198 016 34710
	2177	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2178	Cap, 470p, 5%, 50v, Ceramic	3198 016 34710
	2179	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
	3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
	3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
	3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
	4817	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4819	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4821	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4822	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6161	Zener Diode, 6.8 volt	3198 010 26880
	9151	Wire Jumper	3198 036 90010
	9152	Wire Jumper	3198 036 90010
	9153	Wire Jumper	3198 036 90010
	9170	Wire Jumper	3198 036 90010
	CBA	Side Jack Panel Assembly	3139 187 15141

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

	Ref	Description	Part No.
	0215	3 Pin Connector	2422 025 09191
	1091	Tact Switch	2422 128 02742
	1092	Tact Switch	2422 128 02742
	1093	Tact Switch	2422 128 02742
	1094	Tact Switch	2422 128 02742
	3088	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3089	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3091	Res, 560 ohm, 5%, Metalized Glass	3198 021 35610
	3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
	3093	Res, 560 ohm, 5%, Metalized Glass	3198 021 35610
	3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
	3095	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3096	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
	4092	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	6092	Diode, Signal	9340 453 90115
	CBA	Top Control Panel	3139 187 10251

Cabinet & Accessory Parts

Cabinet & Accessory Parts

	Ref	Description	Part No.
S	AC01	AC Cord	3135 010 07161
	AC03	Anode Lead Spacer (3 Used)	3135 014 04471
	AC05	Cabinet Back	3139 124 41812
	AC08	Chassis Tray	3139 124 31325
S	AC09	CRT, A68QCU754X73(N)	9301 925 60527
S	AC12	Degaussing Coil	2422 549 43967
	AC13	Front Interface Panel Bracket	3139 124 32891
	AC15	Holder, Degaussing Coil (4 Used)	3139 124 31122
	AC19	Side Jack Panel Bracket	3139 124 37061
	AC20	Cabinet Front Assembly	3121 237 52922
	AC20A	Cabinet Front	3139 177 62041
	AC20C	Light Guide	3139 124 33811
	AC20D	Nameplate	3111 250 00571
	AC20F	Power Button Cover	3139 124 32921
	AC20G	Power Button Shaft	3139 124 32791
	AC20H	Speaker, 16 ohm, 5W (2 Used)	3139 128 76071
	AC20J1	Top Control Bracket	3139 124 33941
	AC20J3	Top Control Cover	3139 124 31131
	AC20J4	Top Control Rubber	3139 124 30391

S = Safety Part   Be sure to use exact replacement part.

27MS3404/17 - Manual no. 7638

Main Chassis Parts

Main Chassis Parts

S	Ref	Description	Part No.
	0211	2 Pin Connector.	2422 025 16269
	0212	2 Pin Connector.	2422 025 16375
	0219	6 Pin Connector.	2422 025 12482
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0222	2 Pin Connector.	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0229	3 Pin Connector.	2412 020 00725
	0243	6 Pin Connector.	2422 025 04854
	0244	5 Pin Connector.	2422 025 04853
	0245	6 Pin Connector.	2422 025 04854
	0246	5 Pin Connector.	2422 025 12481
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector.	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U PLL	2422 542 90141
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1600	Tact Switch.	2422 128 02742
	1601	Tact Switch.	2422 128 02742
	1602	Tact Switch.	2422 128 02742
	1603	Tact Switch.	2422 128 02742
	1606	Tact Switch.	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1811	3 Pin Connector.	2412 020 00725
	1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
	2451	Cap, 15n, 10%, 50v, Polyester.	3198 014 01530
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 470n, 5%, 250v, Metalized Polypropylene.	2022 333 00086
	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
	2462	Cap, 330n, 10%, 250v, MPP.	2022 333 00084
	2463	Cap, 1nf, 10%, 2000v, Ceramic Only with 5445 (JF0501-21835) Layer Wound.	2020 558 90487
	2463	Cap, 680p, 10%, 2000v, Ceramic	2020 558 90485
S	2465	Cap, 11n, 5%, 1600v, Polypropylene	2020 301 90251
S	2465	Cap, 12n, 5%, 1600v, Polypropylene Only with 5445 (JF0501-21835) Layer Wound .	2222 375 90156
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2606	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2803	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250

S = Safety Part   Be sure to use exact replacement part.

27MS3404/17 (continued)

Ref	Description	Part No.
2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
2862	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010

Ref	Description	Part No.
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840
3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
3452	Res, 5K6, 1%, 3/5W, Metal Film Only wit h 5445 (JF0501-21835) Layer Wound. . .	2312 915 15602
3452	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3454	Res, 2K, 1%, 3/5W, Metal Film Only with 5445 (JF0501-21835) Layer Wound. . . .	2312 915 12002
3454	Res, 3K9, 1%, 3/5W, Metal Film	2312 915 13902
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3470	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 33390
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3507	Surge Protector.	2422 549 43073
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S 3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020

S = Safety Part   Be sure to use exact replacement part.

27MS3404/17 (continued)

Ref	Description	Part No.
3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
S 3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
3622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3630	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3681	Res, 180 ohm, 1%, 1/8W, Metalized Glass	2322 734 61801
3682	Res, 270 ohm, 1%, 1/8W, Metalized Glass	2322 734 62701
3683	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322 734 63901
3684	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322 734 63901
3686	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3687	Res, 75 ohm, 1%, 1/8W, Metalized Glass	2322 734 67509
3688	Res, 68 ohm, 1%, 1/8W, Metalized Glass	2322 734 66809
3689	Res, 2K7, 1%, 1/8W, Metalized Glass. .	2322 734 62702
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198 021 31530
3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198 021 31220
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4122	Res, Zero ohm, "Chip" Jumper	3198 021 90030

Ref	Description	Part No.
4123	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4127	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
5001	Coil, 27u, 10%	3198 018 22790
5002	Coil, 820n, 10%.	3198 018 18270
5201	Coil, 6u8, 5%.	3198 018 16880
5202	Wire Jumper.	3198 036 90010
5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
5241	Wire Jumper.	3198 036 90010
5242	Coil, 10u, 5%.	3198 018 11090
5342	Coil, 22u.	2422 535 97333
S 5445	Transformer, LOT (JF0501-21835) Layer W ound	2422 531 02611
S 5445	Transformer, LOT (1342.0043B).	2422 531 02506
5451	Coil, 33u, 10%	3198 018 73390
5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
S 5457	Coil, 42u.	2422 535 94865
5461	Transformer, Signal Driver, SC10027-00	2422 531 02478
5471	Coil, 3u3, 20%	3198 018 73380
5472	Coil, 3u3, 10%	3198 018 23380
5480	Coil, 39u, 10%	2422 535 97336
S 5501	Mains Filter	2422 549 43432
S 5520	Transformer, SS39009-04.	2422 531 02459
5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5561	Coil, 27u, 5%.	2422 535 95366
5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5602	Coil, 5u6, 5%.	3198 018 15680
5603	Coil, 5u6, 5%.	3198 018 15680
5604	Coil, 5u6, 5%.	3198 018 15680
5861	Coil, 10u, 5%.	3198 018 11090
6001	Zener Diode, 33 volt	3198 010 23390
6150	Diode, Signal, BAS316.	3198 010 10630
6201	Diode, Signal, BAS316.	3198 010 10630
6202	Diode, Signal, BAS316.	3198 010 10630
6206	Zener Diode, 6.8 volt.	3198 020 56880
6331	Diode, Signal, BAV21	3198 010 10070
6332	Diode, Signal, BAS316.	3198 010 10630
6333	Diode, Signal, BAV21	3198 010 10070

S = Safety Part   Be sure to use exact replacement part.

27MS3404/17 (continued)

	Ref	Description	Part No.
	6335	Diode, Signal, BAV21	3198 010 10070
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148.	3198 010 10010
	6448	Zener Diode, 6.2 volt.	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6460	Diode, Rect, BY228/24.	9340 559 50112
	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
	6462	Zener Diode, 9.1 volt.	9331 177 80133
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316.	3198 010 10630
	6468	Diode, Signal, BAS316.	3198 010 10630
	6469	Diode, Rect, BYV95C.	9335 001 80133
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt.	3198 010 25680
	6482	Zener Diode, 9.1 volt.	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYV95C.	9335 001 80133
	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6487	Diode, Rect, BYV95A.	9335 000 90133
	6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667
	6520	Diode, Rect, BYV95A.	9335 000 90133
	6523	Diode, Signal, 1N4148.	3198 010 10010
	6524	Diode, Rect, 1N5062.	3198 010 10120
	6525	Diode, Rect, 1N5062.	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt.	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500.	9340 555 59127
	6562	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6563	Diode, Signal, BAS316.	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148.	3198 010 10010
	6569	Diode, Signal, BAS316.	3198 010 10630
	6570	Zener Diode, 6.8 volt.	3198 020 56880
	6580	Diode, Signal, BAS316.	3198 010 10630
	6691	LED, LTL-10234WHCR	9322 185 69682
	6692	IR Receiver.	9322 127 54667
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7102	Transistor, PNP, BC857B(COL)	3198 010 42150
	7103	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9577H/N1/AI/1130.	9352 731 51557
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7460	Transistor, NPN, BU4508DX.	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2.	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1.	9352 673 56112
	7521	Power FET, FQPF9N50.	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, L78L33ACZ.	9322 134 92676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C08-WBN6.	9322 154 38682
	7802	IC, HEF4053BT.	9333 729 60653
	7861	IC, TDA9853H/V1.	9352 671 19557
	7891	Transistor, NPN, BC847B(COL)	3198 010 42030
	7892	Transistor, NPN, BC847B(COL)	3198 010 42030
	7901	IC, AN7522N PH	9322 181 41682
	9001	Wire Jumper.	3198 036 90010
	9101	Wire Jumper.	3198 036 90010
	9102	Wire Jumper.	3198 036 90010
	9103	Wire Jumper.	3198 036 90010
	9104	Wire Jumper.	3198 036 90010
	9123	Wire Jumper.	3198 036 90010
	9171	Wire Jumper.	3198 036 90010
	9173	Wire Jumper.	3198 036 90010
	9175	Wire Jumper.	3198 036 90010
	9176	Wire Jumper.	3198 036 90010
	9178	Wire Jumper.	3198 036 90010
	9179	Wire Jumper.	3198 036 90010
	9181	Wire Jumper.	3198 036 90010
	9182	Wire Jumper.	3198 036 90010
	9183	Wire Jumper.	3198 036 90010
	9184	Wire Jumper.	3198 036 90010
	9192	Wire Jumper.	3198 036 90010
	9193	Wire Jumper.	3198 036 90010
	9311	Wire Jumper.	3198 036 90010
	9312	Wire Jumper.	3198 036 90010
	9406	Wire Jumper.	3198 036 90010
	9407	Wire Jumper.	3198 036 90010
	9408	Wire Jumper.	3198 036 90010
	9409	Wire Jumper.	3198 036 90010
	9410	Wire Jumper.	3198 036 90010
	9411	Wire Jumper.	3198 036 90010
	9412	Wire Jumper.	3198 036 90010
	9413	Wire Jumper.	3198 036 90010
	9415	Wire Jumper.	3198 036 90010
	9416	Wire Jumper.	3198 036 90010
	9417	Wire Jumper.	3198 036 90010
	9418	Wire Jumper.	3198 036 90010
	9419	Wire Jumper.	3198 036 90010
	9421	Wire Jumper.	3198 036 90010
	9422	Wire Jumper.	3198 036 90010
	9423	Wire Jumper.	3198 036 90010
	9425	Wire Jumper.	3198 036 90010
	9427	Wire Jumper.	3198 036 90010
	9453	Wire Jumper.	3198 036 90010
	9460	Wire Jumper.	3198 036 90010
	9500	Wire Jumper.	3198 036 90010
	9501	Wire Jumper.	3198 036 90010
	9503	Wire Jumper.	3198 036 90010
	9506	Wire Jumper.	3198 036 90010
	9507	Wire Jumper.	3198 036 90010
	9510	Wire Jumper.	3198 036 90010
	9511	Wire Jumper.	3198 036 90010
	9512	Wire Jumper.	3198 036 90010
	9513	Wire Jumper.	3198 036 90010
	9514	Wire Jumper.	3198 036 90010
	9515	Wire Jumper.	3198 036 90010
	9516	Wire Jumper.	3198 036 90010
	9518	Wire Jumper.	3198 036 90010
	9520	Wire Jumper.	3198 036 90010
	9521	Wire Jumper.	3198 036 90010
	9522	Wire Jumper.	3198 036 90010
	9524	Wire Jumper.	3198 036 90010
	9528	Wire Jumper.	3198 036 90010
	9530	Wire Jumper.	3198 036 90010
	9611	Coil, 27u, 10%	3198 018 22790
	9612	Wire Jumper.	3198 036 90010
	9613	Wire Jumper.	3198 036 90010
	9614	Wire Jumper.	3198 036 90010
	9615	Wire Jumper.	3198 036 90010
	9617	Wire Jumper.	3198 036 90010
	9618	Wire Jumper.	3198 036 90010
	9619	Wire Jumper.	3198 036 90010
	9620	Wire Jumper.	3198 036 90010
	9621	Wire Jumper.	3198 036 90010
	9622	Wire Jumper.	3198 036 90010
	9623	Wire Jumper.	3198 036 90010
	9624	Wire Jumper.	3198 036 90010
	9626	Wire Jumper.	3198 036 90010
	9627	Wire Jumper.	3198 036 90010
	9628	Wire Jumper.	3198 036 90010
	9629	Wire Jumper.	3198 036 90010
	9631	Wire Jumper.	3198 036 90010
	9632	Wire Jumper.	3198 036 90010
	9633	Wire Jumper.	3198 036 90010
	9637	Wire Jumper.	3198 036 90010
	9638	Wire Jumper.	3198 036 90010
	9640	Wire Jumper.	3198 036 90010
	9641	Wire Jumper.	3198 036 90010
	9642	Wire Jumper.	3198 036 90010
	9643	Wire Jumper.	3198 036 90010
	9648	Wire Jumper.	3198 036 90010
	9650	Wire Jumper.	3198 036 90010
	9651	Wire Jumper.	3198 036 90010
	9652	Wire Jumper.	3198 036 90010
	9654	Wire Jumper.	3198 036 90010
	9655	Wire Jumper.	3198 036 90010
	9657	Wire Jumper.	3198 036 90010
	9658	Wire Jumper.	3198 036 90010
	9659	Wire Jumper.	3198 036 90010
	9660	Wire Jumper.	3198 036 90010
	9661	Wire Jumper.	3198 036 90010
	9662	Wire Jumper.	3198 036 90010
	9663	Wire Jumper.	3198 036 90010
	9664	Wire Jumper.	3198 036 90010
	9665	Wire Jumper.	3198 036 90010
	9666	Wire Jumper.	3198 036 90010
	9667	Wire Jumper.	3198 036 90010
	9668	Wire Jumper.	3198 036 90010
	9669	Wire Jumper.	3198 036 90010
	9670	Wire Jumper.	3198 036 90010
	9671	Wire Jumper.	3198 036 90010
	9672	Coil, 22u, 10%	3198 018 22290
	9674	Wire Jumper.	3198 036 90010
	9675	Wire Jumper.	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

27MS3404/17 (continued)

Ref	Description	Part No.
9676	Wire Jumper.	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper.	3198 036 90010
9680	Wire Jumper.	3198 036 90010
9681	Wire Jumper.	3198 036 90010
9685	Wire Jumper.	3198 036 90010
9686	Wire Jumper.	3198 036 90010
9687	Wire Jumper.	3198 036 90010
9688	Wire Jumper.	3198 036 90010
9689	Wire Jumper.	3198 036 90010
9690	Wire Jumper.	3198 036 90010
9691	Wire Jumper.	3198 036 90010
9694	Wire Jumper.	3198 036 90010
9695	Wire Jumper.	3198 036 90010
9697	Wire Jumper.	3198 036 90010
9698	Wire Jumper.	3198 036 90010
9699	Wire Jumper.	3198 036 90010
9821	Wire Jumper.	3198 036 90010
9822	Wire Jumper.	3198 036 90010
9825	Wire Jumper.	3198 036 90010
9828	Wire Jumper.	3198 036 90010
9829	Wire Jumper.	3198 036 90010
9831	Wire Jumper.	3198 036 90010
9832	Wire Jumper.	3198 036 90010
9837	Wire Jumper.	3198 036 90010
9838	Wire Jumper.	3198 036 90010
9839	Wire Jumper.	3198 036 90010
9846	Wire Jumper.	3198 036 90010
9847	Wire Jumper.	3198 036 90010
9849	Wire Jumper.	3198 036 90010
9850	Wire Jumper.	3198 036 90010
9851	Wire Jumper.	3198 036 90010
9852	Wire Jumper.	3198 036 90010
9853	Wire Jumper.	3198 036 90010
9856	Wire Jumper.	3198 036 90010
9860	Wire Jumper.	3198 036 90010
9861	Wire Jumper.	3198 036 90010
9862	Wire Jumper.	3198 036 90010
9864	Wire Jumper.	3198 036 90010
9865	Wire Jumper.	3198 036 90010
9868	Wire Jumper.	3198 036 90010
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9891	Wire Jumper.	3198 036 90010
9892	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010
9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9905	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9918	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9998	Wire Jumper.	3198 036 90010
CBA	Main Chassis Assembly.	3139 187 15081

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts

Side Jack Panel Parts

Ref	Description	Part No.
0232	Headphone Jack	2422 026 04747
0250	A/V Jack	2422 026 04815
0251	6 Pin Connector.	2422 025 12482
0254	5 Pin Connector.	2422 025 12481
0255	4 Pin Connector.	2422 025 12479
1810	3 Pin Connector.	2412 020 00725
1811	3 Pin Connector.	2412 020 00725
2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4823	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4824	Res, Zero ohm, "Chip" Jumper	3198 021 90030
6161	Zener Diode, 6.8 volt.	3198 010 26880
7802	IC, HEF4053BT.	9333 729 60653
9150	Wire Jumper.	3198 036 90010
9151	Wire Jumper.	3198 036 90010
9152	Wire Jumper.	3198 036 90010
9153	Wire Jumper.	3198 036 90010
9154	Wire Jumper.	3198 036 90010
9155	Wire Jumper.	3198 036 90010
9170	Wire Jumper.	3198 036 90010
CBA	Side Jack Panel Assembly	3141 058 81981

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

Ref	Description	Part No.
S AC01	AC Cord.	3135 010 03831
AC03	Anode Lead Spacer (3 Used)	3135 014 04471
AC04	Batteries for Remote Control Transmitte	9299 000 65263
AC05	Cabinet Back	3139 124 40513
AC08	Chassis Tray	3139 124 31325
S AC09	CRT, A68AJB82X11	9301 891 90631
AC10	Customer Control Buttons	3139 124 32701
S AC12	Degaussing Coil.	2422 549 45709
AC15	Holder, Degaussing Coil (4 Used)	3135 013 01641
AC17	Owner's Manual	3121 235 21741
AC19	Side Jack Panel Bracket.	3139 124 40481
AC20	Cabinet Front Assembly	3121 237 54861
AC20A	Cabinet Front.	3139 138 12621
AC20C	Light Guide.	3139 124 32671
AC20D	Nameplate.	3141 050 00401
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00371
REMOTE	Remote Control Transmitter, RC1112813/1	3139 238 05781

S = Safety Part - Be sure to use exact replacement part.

27MS4504/17 - Manual no. 7638

Main Chassis Parts

Main Chassis Parts

S	Ref	Description	Part No.
	0211	2 Pin Connector.	2422 025 16374
	0212	2 Pin Connector.	2422 025 16375
	0214	5 Pin Connector.	2422 025 12481
	0219	6 Pin Connector.	2422 025 12482
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0222	2 Pin Connector.	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0229	3 Pin Connector.	2412 020 00725
	0239	3 Pin Connector.	2422 025 16382
	0243	6 Pin Connector.	2422 025 04854
	0244	5 Pin Connector.	2422 025 04853
	0245	6 Pin Connector.	2422 025 04854
	0246	5 Pin Connector.	2422 025 12481
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector.	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U PLL	2422 542 90098
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1660	Crystal, 12MHz000	2422 543 01203
	1811	3 Pin Connector.	2412 020 00725
	1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic. . .	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic. . .	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic. . .	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic . .	2020 558 90445
	2401	Cap, 2u2, 20%, 50v, Electrolytic . . .	2020 021 90552
	2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic . . .	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2441	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic . . .	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic. . .	2020 021 91139
	2451	Cap, 22n, 10%, 50v, Polyester.	3198 014 02230
	2452	Cap, 180p, 5%, 50v, Ceramic.	3198 016 01810
	2455	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
	2457	Cap, 360n, 5%, 250v, Metalized Polypropylene.	2022 333 00163
	2458	Cap, 2u2, 20%, 100v, Electrolytic. . .	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
	2462	Cap, 330n, 10%, 250v, MPP.	2022 333 00084
S	2463	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene	2222 479 90042
S	2465	Cap, 15n, 5%, 1600v, Polypropylene . .	2020 301 90255
	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
	2468	Cap, 27n, 10%, 400v, Polyester	2222 347 90232
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic . . .	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 120n, 5%, 250v, Metalized Polypropylene.	2222 479 90051
	2485	Cap, 4u7, 20%, 250v, Electrolytic. . .	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic. . .	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic . . .	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic . .	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic. . .	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic . .	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic . . .	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic . .	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic . . .	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic . . .	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic . . .	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic. . .	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic. . .	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050
	2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2803	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250

S = Safety Part   Be sure to use exact replacement part.

27MS4504/17 (continued)

Ref	Description	Part No.
2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
2862	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220

Ref	Description	Part No.
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
3403	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102
3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3470	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3471	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3472	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3473	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2120 101 74158
3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S 3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 32290
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3507	Surge Protector.	2422 549 43073
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630

S = Safety Part   Be sure to use exact replacement part.

27MS4504/17 (continued)

S	Ref	Description	Part No.
	3525	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3814	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3861	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3862	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
	3863	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
	3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3865	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3866	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3867	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3901	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4122	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4123	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4127	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%	3198 018 18270
	5201	Coil, 6u8, 5%	3198 018 16880
	5202	Wire Jumper	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5241	Wire Jumper	3198 036 90010
	5242	Coil, 10u, 5%	3198 018 11090
	5341	Coil, 22u	2422 535 97333
	5342	Coil, 22u	2422 535 97333
	5401	Coil, 1mH, 10%	3198 018 71020
S	5445	Transformer, LOT	2422 531 02574
	5451	Coil, 22u, 10%	3198 018 72290
	5452	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
S	5457	Coil, 25u	2422 535 91028
	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
	5463	Coil, Choke	3128 138 37021
	5471	Coil, 6u8, 20%	3198 018 76880
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 27u, 10%	3198 018 22790
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5561	Coil, 27u, 5%	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5602	Coil, 5u6, 5%	3198 018 15680
	5603	Coil, 5u6, 5%	3198 018 15680
	5604	Coil, 5u6, 5%	3198 018 15680
	5861	Coil, 10u, 5%	3198 018 11090
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316	3198 010 10630
	6201	Diode, Signal, BAS316	3198 010 10630
	6202	Diode, Signal, BAS316	3198 010 10630
	6206	Zener Diode, 6.8 volt	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6400	Res, 1K, 1%, 3/5W, Metal Film	2312 915 11002
	6401	Zener Diode, 47 volt	3198 010 24790
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148	3198 010 10010
	6448	Zener Diode, 6.2 volt	9331 668 30133

S = Safety Part   Be sure to use exact replacement part.

27MS4504/17 (continued)

	Ref	Description	Part No.
	6449	Diode, Signal, BAV99	3198 010 10620
	6460	Diode, Rect, BY228/24.	9340 559 50112
	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316.	3198 010 10630
	6468	Diode, Signal, BAS316.	3198 010 10630
	6469	Diode, Rect, BYD33J.	9337 234 20133
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt.	3198 010 25680
	6482	Zener Diode, 9.1 volt.	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYD33J.	9337 234 20133
	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6487	Diode, Rect, BYD33D.	9337 234 00133
	6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667
	6520	Diode, Rect, BYD33D.	9337 234 00133
	6523	Diode, Signal, 1N4148.	3198 010 10010
	6524	Diode, Rect, 1N5062.	3198 010 10120
	6525	Diode, Rect, 1N5062.	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt.	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500.	9340 555 59127
	6562	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6563	Diode, Signal, BAS316.	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148.	3198 010 10010
	6569	Diode, Signal, BAS316.	3198 010 10630
	6570	Zener Diode, 6.8 volt.	3198 020 56880
	6580	Diode, Signal, BAS316.	3198 010 10630
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7102	Transistor, PNP, BC857B(COL)	3198 010 42150
	7103	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9588H/N1/3I/1053.	9352 728 40557
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7400	Power FET, IR.	9322 053 35687
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7460	Transistor, NPN, BU4508DX.	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2.	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1.	9352 673 56112
	7521	Power FET, FQPF9N50.	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, L78L33ACZ.	9322 134 92676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C08-WBN6.	9322 154 38682
	7606	Transistor, NPN, PDTC143ZT	9340 547 00215
	7802	IC, HEF4053BT.	9333 729 60653
	7861	IC, TDA9853H/V1.	9352 671 19557
	7891	Transistor, NPN, BC847B(COL)	3198 010 42030
	7892	Transistor, NPN, BC847B(COL)	3198 010 42030
	7901	IC, AN7522N PH	9322 181 41682
	9001	Wire Jumper.	3198 036 90010
	9101	Wire Jumper.	3198 036 90010
	9102	Wire Jumper.	3198 036 90010
	9103	Wire Jumper.	3198 036 90010
	9104	Wire Jumper.	3198 036 90010
	9123	Wire Jumper.	3198 036 90010
	9171	Wire Jumper.	3198 036 90010
	9173	Wire Jumper.	3198 036 90010
	9175	Wire Jumper.	3198 036 90010
	9176	Wire Jumper.	3198 036 90010
	9178	Wire Jumper.	3198 036 90010
	9179	Wire Jumper.	3198 036 90010
	9181	Wire Jumper.	3198 036 90010
	9182	Wire Jumper.	3198 036 90010
	9183	Wire Jumper.	3198 036 90010
	9192	Wire Jumper.	3198 036 90010
	9193	Wire Jumper.	3198 036 90010
	9311	Wire Jumper.	3198 036 90010
	9312	Wire Jumper.	3198 036 90010
	9406	Wire Jumper.	3198 036 90010
	9407	Wire Jumper.	3198 036 90010
	9408	Wire Jumper.	3198 036 90010
	9409	Wire Jumper.	3198 036 90010
	9410	Wire Jumper.	3198 036 90010
	9411	Wire Jumper.	3198 036 90010
	9412	Wire Jumper.	3198 036 90010
	9413	Wire Jumper.	3198 036 90010
	9414	Wire Jumper.	3198 036 90010
	9415	Wire Jumper.	3198 036 90010
	9416	Wire Jumper.	3198 036 90010
	9417	Wire Jumper.	3198 036 90010
	9418	Wire Jumper.	3198 036 90010
	9419	Wire Jumper.	3198 036 90010
	9421	Wire Jumper.	3198 036 90010
	9422	Wire Jumper.	3198 036 90010
	9423	Wire Jumper.	3198 036 90010
	9424	Wire Jumper.	3198 036 90010
	9425	Wire Jumper.	3198 036 90010
	9426	Wire Jumper.	3198 036 90010
	9427	Wire Jumper.	3198 036 90010
	9453	Wire Jumper.	3198 036 90010
	9460	Wire Jumper.	3198 036 90010
	9463	Wire Jumper.	3198 036 90010
	9500	Wire Jumper.	3198 036 90010
	9501	Wire Jumper.	3198 036 90010
	9503	Wire Jumper.	3198 036 90010
	9506	Wire Jumper.	3198 036 90010
	9507	Wire Jumper.	3198 036 90010
	9510	Wire Jumper.	3198 036 90010
	9511	Wire Jumper.	3198 036 90010
	9512	Wire Jumper.	3198 036 90010
	9513	Wire Jumper.	3198 036 90010
	9514	Wire Jumper.	3198 036 90010
	9515	Wire Jumper.	3198 036 90010
	9516	Wire Jumper.	3198 036 90010
	9518	Wire Jumper.	3198 036 90010
	9520	Wire Jumper.	3198 036 90010
	9521	Wire Jumper.	3198 036 90010
	9522	Wire Jumper.	3198 036 90010
	9524	Wire Jumper.	3198 036 90010
	9528	Wire Jumper.	3198 036 90010
	9530	Wire Jumper.	3198 036 90010
	9611	Coil, 27u, 10%	3198 018 22790
	9612	Wire Jumper.	3198 036 90010
	9613	Wire Jumper.	3198 036 90010
	9614	Wire Jumper.	3198 036 90010
	9615	Wire Jumper.	3198 036 90010
	9617	Wire Jumper.	3198 036 90010
	9618	Wire Jumper.	3198 036 90010
	9619	Wire Jumper.	3198 036 90010
	9620	Wire Jumper.	3198 036 90010
	9621	Wire Jumper.	3198 036 90010
	9622	Wire Jumper.	3198 036 90010
	9623	Wire Jumper.	3198 036 90010
	9624	Wire Jumper.	3198 036 90010
	9626	Wire Jumper.	3198 036 90010
	9627	Wire Jumper.	3198 036 90010
	9628	Wire Jumper.	3198 036 90010
	9629	Wire Jumper.	3198 036 90010
	9631	Wire Jumper.	3198 036 90010
	9632	Wire Jumper.	3198 036 90010
	9633	Wire Jumper.	3198 036 90010
	9637	Wire Jumper.	3198 036 90010
	9638	Wire Jumper.	3198 036 90010
	9639	Wire Jumper.	3198 036 90010
	9640	Wire Jumper.	3198 036 90010
	9641	Wire Jumper.	3198 036 90010
	9642	Wire Jumper.	3198 036 90010
	9643	Wire Jumper.	3198 036 90010
	9648	Wire Jumper.	3198 036 90010
	9650	Wire Jumper.	3198 036 90010
	9651	Wire Jumper.	3198 036 90010
	9652	Wire Jumper.	3198 036 90010
	9654	Wire Jumper.	3198 036 90010
	9655	Wire Jumper.	3198 036 90010
	9656	Wire Jumper.	3198 036 90010
	9657	Wire Jumper.	3198 036 90010
	9658	Wire Jumper.	3198 036 90010
	9659	Wire Jumper.	3198 036 90010
	9660	Wire Jumper.	3198 036 90010
	9661	Wire Jumper.	3198 036 90010
	9662	Wire Jumper.	3198 036 90010
	9663	Wire Jumper.	3198 036 90010
	9664	Wire Jumper.	3198 036 90010
	9665	Wire Jumper.	3198 036 90010
	9666	Wire Jumper.	3198 036 90010
	9667	Wire Jumper.	3198 036 90010
	9668	Wire Jumper.	3198 036 90010
	9669	Wire Jumper.	3198 036 90010
	9670	Wire Jumper.	3198 036 90010
	9671	Wire Jumper.	3198 036 90010
	9672	Coil, 22u, 10%	3198 018 22290
	9674	Wire Jumper.	3198 036 90010
	9675	Wire Jumper.	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

27MS4504/17 (continued)

Ref	Description	Part No.
9676	Wire Jumper	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper	3198 036 90010
9680	Wire Jumper	3198 036 90010
9681	Wire Jumper	3198 036 90010
9685	Wire Jumper	3198 036 90010
9686	Wire Jumper	3198 036 90010
9687	Wire Jumper	3198 036 90010
9688	Wire Jumper	3198 036 90010
9689	Wire Jumper	3198 036 90010
9690	Wire Jumper	3198 036 90010
9691	Wire Jumper	3198 036 90010
9694	Wire Jumper	3198 036 90010
9695	Wire Jumper	3198 036 90010
9697	Wire Jumper	3198 036 90010
9698	Wire Jumper	3198 036 90010
9699	Wire Jumper	3198 036 90010
9821	Wire Jumper	3198 036 90010
9822	Wire Jumper	3198 036 90010
9825	Wire Jumper	3198 036 90010
9828	Wire Jumper	3198 036 90010
9829	Wire Jumper	3198 036 90010
9831	Wire Jumper	3198 036 90010
9832	Wire Jumper	3198 036 90010
9837	Wire Jumper	3198 036 90010
9838	Wire Jumper	3198 036 90010
9839	Wire Jumper	3198 036 90010
9846	Wire Jumper	3198 036 90010
9847	Wire Jumper	3198 036 90010
9849	Wire Jumper	3198 036 90010
9850	Wire Jumper	3198 036 90010
9851	Wire Jumper	3198 036 90010
9852	Wire Jumper	3198 036 90010
9853	Wire Jumper	3198 036 90010
9856	Wire Jumper	3198 036 90010
9860	Wire Jumper	3198 036 90010
9861	Wire Jumper	3198 036 90010
9862	Wire Jumper	3198 036 90010
9864	Wire Jumper	3198 036 90010
9865	Wire Jumper	3198 036 90010
9868	Wire Jumper	3198 036 90010
9873	Wire Jumper	3198 036 90010
9874	Wire Jumper	3198 036 90010
9875	Wire Jumper	3198 036 90010
9877	Wire Jumper	3198 036 90010
9891	Wire Jumper	3198 036 90010
9892	Wire Jumper	3198 036 90010
9901	Wire Jumper	3198 036 90010
9902	Wire Jumper	3198 036 90010
9903	Wire Jumper	3198 036 90010
9904	Wire Jumper	3198 036 90010
9905	Wire Jumper	3198 036 90010
9911	Wire Jumper	3198 036 90010
9913	Wire Jumper	3198 036 90010
9914	Wire Jumper	3198 036 90010
9915	Wire Jumper	3198 036 90010
9918	Wire Jumper	3198 036 90010
9991	Wire Jumper	3198 036 90010
9993	Wire Jumper	3198 036 90010
9994	Wire Jumper	3198 036 90010
9996	Wire Jumper	3198 036 90010
9997	Wire Jumper	3198 036 90010
9998	Wire Jumper	3198 036 90010
CBA	Main Chassis	3141 058 58471

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

Ref	Description	Part No.
S 0211	2 Pin Connector	2422 025 16268
S 0212	2 Pin Connector	2422 025 16559
0214	5 Pin Connector	2422 025 06353
1606	Tact Switch	2422 128 02742
2691	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
2692	Cap, 47n, 10%, 25v, Ceramic	3198 023 04730
2693	Cap, 47n, 10%, 25v, Ceramic	3198 023 04730
2694	Cap, 47n, 10%, 25v, Ceramic	3198 023 04730
2695	Cap, 47n, 10%, 25v, Ceramic	3198 023 04730
2698	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass	2322 242 13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass	2322 242 13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film	3198 011 05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film	3198 011 03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film	3198 011 02210
6691	LED, LTL-10234WHCR	9322 185 69682
6692	IR Receiver, TSOP1836UH3V	9322 127 54667
9001	Wire Jumper	3198 036 90010
9002	Wire Jumper	3198 036 90010
CBA	Front Interface Panel Assembly	3139 177 26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts

Side Jack Panel Parts

Ref	Description	Part No.
0232	Headphone Jack	2422 026 04747
0250	A/V Jack	2422 026 04815
0251	6 Pin Connector	2422 025 12482
0254	5 Pin Connector	2422 025 12481
0255	4 Pin Connector	2422 025 12479
1810	3 Pin Connector	2412 020 00725
1811	3 Pin Connector	2412 020 00725
2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2176	Cap, 470p, 5%, 50v, Ceramic	3198 016 34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2178	Cap, 470p, 5%, 50v, Ceramic	3198 016 34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
6161	Zener Diode, 6.8 volt	3198 010 26880
7802	IC, HEF4053BT	9333 729 60653
9150	Wire Jumper	3198 036 90010
9151	Wire Jumper	3198 036 90010
9152	Wire Jumper	3198 036 90010
9153	Wire Jumper	3198 036 90010
9154	Wire Jumper	3198 036 90010
9170	Wire Jumper	3198 036 90010
CBA	Side Jack Panel Assembly	3139 177 26231

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Ref	Description	Part No.
0215	3 Pin Connector	2422 025 09191
1091	Tact Switch	2422 128 02742
1092	Tact Switch	2422 128 02742
1093	Tact Switch	2422 128 02742
1094	Tact Switch	2422 128 02742
3088	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3089	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3091	Res, 560 ohm, 5%, Metalized Glass	3198 021 35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3093	Res, 560 ohm, 5%, Metalized Glass	3198 021 35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
4092	Res, Zero ohm, "Chip" Jumper	3198 021 90030
6092	Diode, Signal	9340 453 90115
CBA	Top Control Panel	3139 187 10251

Cabinet & Accessory Parts

Cabinet & Accessory Parts

Ref	Description	Part No.
S AC01	AC Cord	3135 010 03831

S = Safety Part   Be sure to use exact replacement part.

27MS4504/17 (continued)

	Ref	Description	Part No.
	AC03	Anode Lead Spacer (3 Used)	3135 014 04471
	AC04	Batteries for Remote Control Transmitte	9299 000 65263
	AC05	Cabinet Back	3139 124 36763
	AC08	Chassis Tray	3139 124 31325
S	AC09	CRT, A68QCU754X73(N)	9301 925 60527
S	AC12	Degaussing Coil.	2422 549 45709
	AC13	Front Interface Panel Bracket.	3139 124 32891
	AC15	Holder, Degaussing Coil (4 Used) . . .	3135 013 01641
	AC17	Owner's Manual	3121 235 21751
	AC19	Side Jack Panel Bracket.	3139 124 37061
	AC20	Cabinet Front Assembly	3121 237 54871
	AC20A	Cabinet Front.	3139 177 60011
	AC20C	Light Guide.	3139 124 33811
	AC20D	Nameplate.	3141 050 00391
	AC20F	Power Button Cover	3139 124 32921
	AC20G	Power Button Shaft	3139 124 32791
	AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00371
	AC20J1	Top Control Bracket.	3139 124 30381
	AC20J3	Top Control Cover.	3139 124 31131
	AC20J4	Top Control Rubber	3139 124 30391
	REMOTE	Remote Control Transmitter, RC1112813/1	3139 238 05781

S = Safety Part   Be sure to use exact replacement part.

27PT541S37A - Manual no. 7638

Main Chassis Parts

S	Ref	Description	Part No.
		Main Chassis Parts	
	0211	2 Pin Connector	2422 025 16269
	0212	2 Pin Connector	2422 025 16375
	0219	6 Pin Connector	2422 025 12482
	0220	5 Pin Connector	2422 025 04853
	0221	2 Pin Connector	2422 025 15503
	0222	2 Pin Connector	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack	2422 026 04926
	0229	3 Pin Connector	2412 020 00725
	0243	6 Pin Connector	2422 025 04854
	0244	5 Pin Connector	2422 025 04853
	0245	6 Pin Connector	2422 025 04854
	0246	5 Pin Connector	2422 025 12481
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U PLL	2422 542 90141
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC	2422 086 10914
S	1515	Relay, 5 Amp, 12V	2422 132 07444
	1600	Tact Switch	2422 128 02742
	1601	Tact Switch	2422 128 02742
	1602	Tact Switch	2422 128 02742
	1603	Tact Switch	2422 128 02742
	1606	Tact Switch	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1811	3 Pin Connector	2412 020 00725
	1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344
	2004	Cap, 47n, 10%, 50v, Ceramic	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2226	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2241	Cap, 1n5, 10%, 50v, Ceramic	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2405	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic	3198 016 03310
	2441	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic	2020 021 91139
	2451	Cap, 15n, 10%, 50v, Polyester	3198 014 01530
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 470n, 5%, 250v, Metalized Polypropylene	2022 333 00086
	2458	Cap, 2u2, 20%, 100v, Electrolytic	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
	2462	Cap, 330n, 10%, 250v, MPP	2022 333 00084
	2463	Cap, 680p, 10%, 2000v, Ceramic	2020 558 90485
S	2465	Cap, 11n, 5%, 1600v, Polypropylene	2020 301 90251
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2601	Cap, 220n, +80/-20%, 25v, Ceramic	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2606	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic	3198 017 21050
	2691	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2802	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2803	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2816	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2862	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2864	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2865	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2866	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250

S = Safety Part   Be sure to use exact replacement part.

27PT541S37A (continued)

S	Ref	Description	Part No.
	2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
	2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
	2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
	2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
	2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
	2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
	2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240
	2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
	2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
	2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
	2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
	2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
	3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
	3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
	3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202
	3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
	3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
	3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
	3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
	3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840
	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
	3452	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3454	Res, 3K9, 1%, 3/5W, Metal Film	2312 915 13902
S	3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S	3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
	3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
	3470	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
	3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S	3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 33390
	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S	3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274

S = Safety Part   Be sure to use exact replacement part.

27PT541S37A (continued)

S	Ref	Description	Part No.
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3630	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3681	Res, 180 ohm, 1%, 1/8W, Metalized Glass	2322 734 61801
	3682	Res, 270 ohm, 1%, 1/8W, Metalized Glass	2322 734 62701
	3683	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322 734 63901
	3684	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322 734 63901
	3686	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3687	Res, 75 ohm, 1%, 1/8W, Metalized Glass	2322 734 67509
	3688	Res, 68 ohm, 1%, 1/8W, Metalized Glass	2322 734 66809
	3689	Res, 2K7, 1%, 1/8W, Metalized Glass. .	2322 734 62702
	3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198 021 31530
	3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198 021 31220
	3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4122	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4123	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4127	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5202	Wire Jumper.	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5241	Wire Jumper.	3198 036 90010
	5242	Coil, 10u, 5%.	3198 018 11090
	5342	Coil, 22u.	2422 535 97333
S	5445	Transformer, LOT (1342.0043B).	2422 531 02506
	5451	Coil, 33u, 10%	3198 018 73390
	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
S	5457	Coil, 42u.	2422 535 94865
	5461	Transformer, Signal Driver, SC10027-00	2422 531 02478
	5471	Coil, 3u3, 20%	3198 018 73380
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 39u, 10%	2422 535 97336
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04.	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5861	Coil, 10u, 5%.	3198 018 11090
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316.	3198 010 10630
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630
	6206	Zener Diode, 6.8 volt.	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316.	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148.	3198 010 10010
	6448	Zener Diode, 6.2 volt.	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6460	Diode, Rect, BY228/24.	9340 559 50112
	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
	6462	Zener Diode, 9.1 volt.	9331 177 80133
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316.	3198 010 10630

S = Safety Part   Be sure to use exact replacement part.

27PT541S37A (continued)

	Ref	Description	Part No.
	6468	Diode, Signal, BAS316.	3198 010 10630
	6469	Diode, Rect, BYV95C.	9335 001 80133
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt.	3198 010 25680
	6482	Zener Diode, 9.1 volt.	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYV95C.	9335 001 80133
	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6487	Diode, Rect, BYV95A.	9335 000 90133
	6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6500	Diode, Bridge Rect, GBU6JL-7002. . . .	9322 138 08667
	6520	Diode, Rect, BYV95A.	9335 000 90133
	6523	Diode, Signal, 1N4148.	3198 010 10010
	6524	Diode, Rect, 1N5062.	3198 010 10120
	6525	Diode, Rect, 1N5062.	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt.	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500.	9340 555 59127
	6562	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6563	Diode, Signal, BAS316.	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148.	3198 010 10010
	6569	Diode, Signal, BAS316.	3198 010 10630
	6570	Zener Diode, 6.8 volt.	3198 020 56880
	6580	Diode, Signal, BAS316.	3198 010 10630
	6691	LED, LTL-10234WHCR	9322 185 69682
	6692	IR Receiver.	9322 127 54667
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7102	Transistor, PNP, BC857B(COL)	3198 010 42150
	7103	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9577H/N1/AI/1130.	9352 731 51557
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7460	Transistor, NPN, BU4508DX.	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2.	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1.	9352 673 56112
	7521	Power FET, FQPF9N50.	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, L78L33ACZ.	9322 134 92676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C08-WBN6.	9322 154 38682
	7802	IC, HEF4053BT.	9333 729 60653
	7861	IC, TDA9853H/V1.	9352 671 19557
	7891	Transistor, NPN, BC847B(COL)	3198 010 42030
	7892	Transistor, NPN, BC847B(COL)	3198 010 42030
	7901	IC, AN7522N PH	9322 181 41682
	9001	Wire Jumper.	3198 036 90010
	9101	Wire Jumper.	3198 036 90010
	9102	Wire Jumper.	3198 036 90010
	9103	Wire Jumper.	3198 036 90010
	9104	Wire Jumper.	3198 036 90010
	9123	Wire Jumper.	3198 036 90010
	9171	Wire Jumper.	3198 036 90010
	9173	Wire Jumper.	3198 036 90010
	9175	Wire Jumper.	3198 036 90010
	9176	Wire Jumper.	3198 036 90010
	9178	Wire Jumper.	3198 036 90010
	9179	Wire Jumper.	3198 036 90010
	9181	Wire Jumper.	3198 036 90010
	9182	Wire Jumper.	3198 036 90010
	9183	Wire Jumper.	3198 036 90010
	9184	Wire Jumper.	3198 036 90010
	9192	Wire Jumper.	3198 036 90010
	9193	Wire Jumper.	3198 036 90010
	9311	Wire Jumper.	3198 036 90010
	9312	Wire Jumper.	3198 036 90010
	9406	Wire Jumper.	3198 036 90010
	9407	Wire Jumper.	3198 036 90010
	9408	Wire Jumper.	3198 036 90010
	9409	Wire Jumper.	3198 036 90010
	9410	Wire Jumper.	3198 036 90010
	9411	Wire Jumper.	3198 036 90010
	9412	Wire Jumper.	3198 036 90010
	9413	Wire Jumper.	3198 036 90010

Ref	Description	Part No.
9415	Wire Jumper.	3198 036 90010
9416	Wire Jumper.	3198 036 90010
9417	Wire Jumper.	3198 036 90010
9418	Wire Jumper.	3198 036 90010
9419	Wire Jumper.	3198 036 90010
9421	Wire Jumper.	3198 036 90010
9422	Wire Jumper.	3198 036 90010
9423	Wire Jumper.	3198 036 90010
9425	Wire Jumper.	3198 036 90010
9427	Wire Jumper.	3198 036 90010
9453	Wire Jumper.	3198 036 90010
9460	Wire Jumper.	3198 036 90010
9500	Wire Jumper.	3198 036 90010
9501	Wire Jumper.	3198 036 90010
9503	Wire Jumper.	3198 036 90010
9506	Wire Jumper.	3198 036 90010
9507	Wire Jumper.	3198 036 90010
9510	Wire Jumper.	3198 036 90010
9511	Wire Jumper.	3198 036 90010
9512	Wire Jumper.	3198 036 90010
9513	Wire Jumper.	3198 036 90010
9514	Wire Jumper.	3198 036 90010
9515	Wire Jumper.	3198 036 90010
9516	Wire Jumper.	3198 036 90010
9518	Wire Jumper.	3198 036 90010
9520	Wire Jumper.	3198 036 90010
9521	Wire Jumper.	3198 036 90010
9522	Wire Jumper.	3198 036 90010
9524	Wire Jumper.	3198 036 90010
9528	Wire Jumper.	3198 036 90010
9530	Wire Jumper.	3198 036 90010
9611	Coil, 27u, 10%	3198 018 22790
9612	Wire Jumper.	3198 036 90010
9613	Wire Jumper.	3198 036 90010
9614	Wire Jumper.	3198 036 90010
9615	Wire Jumper.	3198 036 90010
9617	Wire Jumper.	3198 036 90010
9618	Wire Jumper.	3198 036 90010
9619	Wire Jumper.	3198 036 90010
9620	Wire Jumper.	3198 036 90010
9621	Wire Jumper.	3198 036 90010
9622	Wire Jumper.	3198 036 90010
9623	Wire Jumper.	3198 036 90010
9624	Wire Jumper.	3198 036 90010
9626	Wire Jumper.	3198 036 90010
9627	Wire Jumper.	3198 036 90010
9628	Wire Jumper.	3198 036 90010
9629	Wire Jumper.	3198 036 90010
9631	Wire Jumper.	3198 036 90010
9632	Wire Jumper.	3198 036 90010
9633	Wire Jumper.	3198 036 90010
9637	Wire Jumper.	3198 036 90010
9638	Wire Jumper.	3198 036 90010
9640	Wire Jumper.	3198 036 90010
9641	Wire Jumper.	3198 036 90010
9642	Wire Jumper.	3198 036 90010
9643	Wire Jumper.	3198 036 90010
9648	Wire Jumper.	3198 036 90010
9650	Wire Jumper.	3198 036 90010
9651	Wire Jumper.	3198 036 90010
9652	Wire Jumper.	3198 036 90010
9654	Wire Jumper.	3198 036 90010
9655	Wire Jumper.	3198 036 90010
9657	Wire Jumper.	3198 036 90010
9658	Wire Jumper.	3198 036 90010
9659	Wire Jumper.	3198 036 90010
9660	Wire Jumper.	3198 036 90010
9661	Wire Jumper.	3198 036 90010
9662	Wire Jumper.	3198 036 90010
9663	Wire Jumper.	3198 036 90010
9664	Wire Jumper.	3198 036 90010
9665	Wire Jumper.	3198 036 90010
9666	Wire Jumper.	3198 036 90010
9667	Wire Jumper.	3198 036 90010
9668	Wire Jumper.	3198 036 90010
9669	Wire Jumper.	3198 036 90010
9670	Wire Jumper.	3198 036 90010
9671	Wire Jumper.	3198 036 90010
9672	Coil, 22u, 10%	3198 018 22290
9674	Wire Jumper.	3198 036 90010
9675	Wire Jumper.	3198 036 90010
9676	Wire Jumper.	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper.	3198 036 90010
9680	Wire Jumper.	3198 036 90010
9681	Wire Jumper.	3198 036 90010
9685	Wire Jumper.	3198 036 90010
9686	Wire Jumper.	3198 036 90010
9687	Wire Jumper.	3198 036 90010
9688	Wire Jumper.	3198 036 90010
9689	Wire Jumper.	3198 036 90010
9690	Wire Jumper.	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

27PT541S37A (continued)

	Ref	Description	Part No.
	9691	Wire Jumper.	3198 036 90010
	9694	Wire Jumper.	3198 036 90010
	9695	Wire Jumper.	3198 036 90010
	9697	Wire Jumper.	3198 036 90010
	9698	Wire Jumper.	3198 036 90010
	9699	Wire Jumper.	3198 036 90010
	9821	Wire Jumper.	3198 036 90010
	9822	Wire Jumper.	3198 036 90010
	9825	Wire Jumper.	3198 036 90010
	9828	Wire Jumper.	3198 036 90010
	9829	Wire Jumper.	3198 036 90010
	9831	Wire Jumper.	3198 036 90010
	9832	Wire Jumper.	3198 036 90010
	9837	Wire Jumper.	3198 036 90010
	9838	Wire Jumper.	3198 036 90010
	9839	Wire Jumper.	3198 036 90010
	9846	Wire Jumper.	3198 036 90010
	9847	Wire Jumper.	3198 036 90010
	9849	Wire Jumper.	3198 036 90010
	9850	Wire Jumper.	3198 036 90010
	9851	Wire Jumper.	3198 036 90010
	9852	Wire Jumper.	3198 036 90010
	9853	Wire Jumper.	3198 036 90010
	9856	Wire Jumper.	3198 036 90010
	9860	Wire Jumper.	3198 036 90010
	9861	Wire Jumper.	3198 036 90010
	9862	Wire Jumper.	3198 036 90010
	9864	Wire Jumper.	3198 036 90010
	9865	Wire Jumper.	3198 036 90010
	9868	Wire Jumper.	3198 036 90010
	9873	Wire Jumper.	3198 036 90010
	9874	Wire Jumper.	3198 036 90010
	9875	Wire Jumper.	3198 036 90010
	9877	Wire Jumper.	3198 036 90010
	9891	Wire Jumper.	3198 036 90010
	9892	Wire Jumper.	3198 036 90010
	9901	Wire Jumper.	3198 036 90010
	9902	Wire Jumper.	3198 036 90010
	9903	Wire Jumper.	3198 036 90010
	9904	Wire Jumper.	3198 036 90010
	9905	Wire Jumper.	3198 036 90010
	9911	Wire Jumper.	3198 036 90010
	9913	Wire Jumper.	3198 036 90010
	9914	Wire Jumper.	3198 036 90010
	9915	Wire Jumper.	3198 036 90010
	9918	Wire Jumper.	3198 036 90010
	9991	Wire Jumper.	3198 036 90010
	9996	Wire Jumper.	3198 036 90010
	9998	Wire Jumper.	3198 036 90010
	CBA	Main Chassis Assembly.	3139 187 15081

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb ly)

Side Jack Panel Parts

Side Jack Panel Parts

	Ref	Description	Part No.
	0232	Headphone Jack	2422 026 04747
	0250	A/V Jack	2422 026 04815
	0251	6 Pin Connector.	2422 025 12482
	0254	5 Pin Connector.	2422 025 12481
	0255	4 Pin Connector.	2422 025 12479
	1810	3 Pin Connector.	2412 020 00725
	1811	3 Pin Connector.	2412 020 00725
	2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2176	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
	2177	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2178	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
	2179	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2180	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2181	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
	3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
	3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
	3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	6161	Zener Diode, 6.8 volt.	3198 010 26880
	7802	IC, HEF4053BT.	9333 729 60653
	9150	Wire Jumper.	3198 036 90010
	9151	Wire Jumper.	3198 036 90010
	9152	Wire Jumper.	3198 036 90010
	9153	Wire Jumper.	3198 036 90010
	9154	Wire Jumper.	3198 036 90010
	9170	Wire Jumper.	3198 036 90010
	CBA	Side Jack Panel Assembly	3139 177 26231

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

	Ref	Description	Part No.
S	AC01	AC Cord.	3135 010 03831
	AC03	Anode Lead Spacer (3 Used)	3135 014 04471
	AC04	Batteries for Remote Control Transmitte	9082 100 90002
	AC05	Cabinet Back	3139 124 35862
	AC08	Chassis Tray	3139 124 31325
S	AC09	CRT, A68AJB82X11	9301 891 90631
	AC10	Customer Control Buttons	3139 124 32701
S	AC12	Degaussing Coil.	2422 549 43967
	AC15	Holder, Degaussing Coil (4 Used)	3135 013 01641
	AC17	Owner's Manual	3121 235 21351
	AC19	Side Jack Panel Bracket.	3139 124 37061
	AC20	Cabinet Front Assembly	3121 237 53601
	AC20A	Cabinet Front.	3139 137 70561
	AC20C	Light Guide.	3139 124 32671
	AC20D	Nameplate.	3139 120 01291
	AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00371
	REMOTE	Remote Control Transmitter, RC19335004/01.	3139 228 86464

S = Safety Part   Be sure to use exact replacement part.

27PT543F35A - Manual no. 7638

Main Chassis Parts

Main Chassis Parts

S	Ref	Description	Part No.
	0211	2 Pin Connector.	2422 025 16269
	0212	2 Pin Connector.	2422 025 16375
	0219	6 Pin Connector.	2422 025 12482
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0222	2 Pin Connector.	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0229	3 Pin Connector.	2412 020 00725
	0243	6 Pin Connector.	2422 025 04854
	0244	5 Pin Connector.	2422 025 04853
	0245	6 Pin Connector.	2422 025 04854
	0246	5 Pin Connector.	2422 025 12481
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector.	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U, PLL	2422 542 90108
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1600	Tact Switch.	2422 128 02742
	1601	Tact Switch.	2422 128 02742
	1602	Tact Switch.	2422 128 02742
	1603	Tact Switch.	2422 128 02742
	1606	Tact Switch.	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1811	3 Pin Connector.	2412 020 00725
	1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic. . .	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyest er.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic. . .	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic. . .	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic . .	2020 558 90445
	2405	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2441	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic . . .	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic. . .	2020 021 91139
	2451	Cap, 15n, 10%, 50v, Polyester.	3198 014 01530
	2455	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
	2457	Cap, 470n, 5%, 250v, Metalized Polyprop ylene.	2022 333 00086
	2458	Cap, 2u2, 20%, 100v, Electrolytic. . .	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
	2462	Cap, 330n, 10%, 250v, MPP.	2022 333 00084
	2463	Cap, 1nf, 10%, 2000v, Ceramic Only with 5445 (JF0501-21835) Layer Wound. . . .	2020 558 90487
	2463	Cap, 680p, 10%, 2000v, Ceramic	2020 558 90485
S	2465	Cap, 11n, 5%, 1600v, Polypropylene . .	2020 301 90251
S	2465	Cap, 12n, 5%, 1600v, Polypropylene Only with 5445 (JF0501-21835) Layer Wound .	2222 375 90156
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic . . .	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic. . .	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic. . .	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic . . .	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic . .	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic. . .	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypro pylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic . .	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic . . .	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic . .	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic . . .	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic . . .	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic . . .	3198 025 52290
	2601	Cap, 220n, +80/-20%, 25v, Ceramic. . .	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2606	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050
	2691	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
	2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2803	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740

S = Safety Part   Be sure to use exact replacement part.

27PT543F35A (continued)

Ref	Description	Part No.
2862	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2864	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
2865	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
2866	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2867	Cap, 1n8, 10%, 50v, Ceramic	2238 586 15626
2868	Cap, 150p, 5%, 50v, Ceramic	3198 016 31510
2869	Cap, 68n, 10%, 50v, Polyester	3198 014 06830
2870	Cap, 68n, 10%, 50v, Polyester	3198 014 06830
2871	Cap, 150p, 5%, 50v, Ceramic	3198 016 31510
2872	Cap, 1n8, 10%, 50v, Ceramic	2238 586 15626
2873	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2874	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
2875	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
2876	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
2877	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2878	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
2879	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
2880	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
2883	Cap, 470u, 20%, 16v, Electrolytic	3198 025 24710
2884	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240
2886	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
2892	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
2893	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
2902	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
2903	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
2904	Cap, 27n, 10%, 50v, Ceramic	2238 580 15642
2905	Cap, 1n2, 10%, 50v, Ceramic	2238 586 15624
2906	Cap, 27n, 10%, 50v, Ceramic	2238 580 15642
2907	Cap, 1n2, 10%, 50v, Ceramic	2238 586 15624
2908	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2910	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2911	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2950	Cap, 330p, 5%, 50v, Ceramic	3198 016 33310
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass	3198 021 32240
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film	3198 011 01510
3124	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film	3198 011 01510
3126	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film	3198 011 01510
3134	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3149	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3150	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3154	Res, 5K6, 5%, 1/6W, Carbon Film	3198 011 05620
3156	Res, 10K, 5%, 1/6W, Carbon Film	3198 011 01030
3157	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3158	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3159	Res, 1K2, 1%, 1/8W, Metalized Glass	2322 734 61202
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film	3198 011 02230
3205	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
3206	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film	3198 011 05610
3217	Res, 330K, 5%, 1/16W, Metalized Glass	3198 021 33340
3218	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film	3198 011 05610
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3232	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3241	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3242	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film	3198 011 08210
3245	Res, 39K, 1%, 1/16W, Metalized Glass	2322 704 63903
3246	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3247	Res, 680K, 5%, 1/16W, Metalized Glass	3198 021 36840
3248	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film	3198 011 08210
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
3257	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3258	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3259	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film	3198 013 01020
3340	Res, 10 ohm, 5%, 1/2W, Metal Film	2306 207 03109
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
3343	Res, 1K5, 20%, 1/2W, Carbon Film	3198 013 01520
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
S 3345	Varactor, 1MA/50V, Max 115V	2322 593 13507
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3443	Res, 1M, 5%, 1/16W, Metalized Glass	3198 021 31050
3445	Res, 15K, 5%, 1/6W, Carbon Film	3198 011 01530
3446	Res, 5K6, 5%, 1/6W, Carbon Film	3198 011 05620
3447	Res, 180 ohm, 5%, 1/6W, Carbon Film	3198 011 01810
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film	3198 011 08210
3449	Res, 68 ohm, 5%, 1/6W, Carbon Film	3198 011 06890
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film	2306 204 03109
3452	Res, 5K6, 1%, 3/5W, Metal Film Only wit h 5445 (JF0501-21835) Layer Wound	2312 915 15602
3452	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3454	Res, 2K, 1%, 3/5W, Metal Film Only with 5445 (JF0501-21835) Layer Wound	2312 915 12002
3454	Res, 3K9, 1%, 3/5W, Metal Film	2312 915 13902
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film	3198 012 26880
3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S 3459	Res, 15K, 5%, 1 1/3W, Metal Film	3198 012 21530
3460	Res, 3K9, 5%, 1/6W, Carbon Film	3198 011 03920
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3468	Res, 220 ohm, 5%, 1/6W, Carbon Film	3198 011 02210
3469	Res, 3K3, 5%, 1/6W, Carbon Film	3198 011 03320
3470	Res, 330K, 5%, 1/10W, Metalized Glass	3198 021 53340
3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film	3198 011 01510
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film	3198 011 01510
3479	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3480	Res, 1R5, 5%, 1/4W, Carbon Film	2122 101 02083
3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3484	Res, 3K9, 5%, 1/6W, Carbon Film	3198 011 03920
S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film	3198 012 33390
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3490	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
3492	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3495	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3496	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3497	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3498	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3499	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3500	Res, 3M3, 5%, 1/2W, Metalized Glass	2322 242 13335
3501	Res, 3M3, 5%, 1/2W, Metalized Glass	2322 242 13335
S 3504	Res, PTC, 3 ohm, 144V	2122 663 00019
3506	Res, 1M5, 5%, 1/2W, Metalized Glass	2322 242 13155
3507	Surge Protector	2422 549 43073
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film	3198 013 02210
S 3510	Res, NTC, 4R7, 20%, 3W1	2122 612 00056
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film	3198 011 02710
3520	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3521	Res, 4R7, 5%, 1/6W, Carbon Film	3198 011 04780
3522	Res, 330K, 5%, 1/10W, Metalized Glass	3198 021 53340
3523	Res, 100 ohm, 5%, 1/3W, Metal Film	2306 204 03101
3524	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3525	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S 3527	Res, 0R33, 5%, 3/5W, Metal Film	3198 012 13370
3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3529	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730

S = Safety Part   Be sure to use exact replacement part.

27PT543F35A (continued)

S	Ref	Description	Part No.
	3530	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film	3198 011 06820
	3622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3630	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3681	Res, 180 ohm, 1%, 1/8W, Metalized Glass	2322 734 61801
	3682	Res, 270 ohm, 1%, 1/8W, Metalized Glass	2322 734 62701
	3683	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322 734 63901
	3684	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322 734 63901
	3686	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3687	Res, 75 ohm, 1%, 1/8W, Metalized Glass	2322 734 67509
	3688	Res, 68 ohm, 1%, 1/8W, Metalized Glass	2322 734 66809
	3689	Res, 2K7, 1%, 1/8W, Metalized Glass	2322 734 62702
	3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3814	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3861	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3862	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
	3863	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
	3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3865	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3866	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3867	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3901	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4122	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4123	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4127	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%	3198 018 18270
	5201	Coil, 6u8, 5%	3198 018 16880
	5202	Wire Jumper	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5241	Wire Jumper	3198 036 90010
	5242	Coil, 10u, 5%	3198 018 11090
	5342	Coil, 22u	2422 535 97333
S	5445	Transformer, LOT (JF0501-21835) Layer Wound	2422 531 02611
S	5445	Transformer, LOT (1342.0043B)	2422 531 02506
	5451	Coil, 33u, 10%	3198 018 73390
	5452	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
S	5457	Coil, 42u	2422 535 94865
	5461	Transformer, Signal Driver, SC10027-00	2422 531 02478
	5471	Coil, 3u3, 20%	3198 018 73380
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 39u, 10%	2422 535 97336
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5561	Coil, 27u, 5%	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5602	Coil, 5u6, 5%	3198 018 15680
	5603	Coil, 5u6, 5%	3198 018 15680
	5604	Coil, 5u6, 5%	3198 018 15680
	5861	Coil, 10u, 5%	3198 018 11090
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316	3198 010 10630
	6201	Diode, Signal, BAS316	3198 010 10630
	6202	Diode, Signal, BAS316	3198 010 10630
	6206	Zener Diode, 6.8 volt	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070

S = Safety Part   Be sure to use exact replacement part.

27PT543F35A (continued)

	Ref.	Description	Part No.
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148.	3198 010 10010
	6448	Zener Diode, 6.2 volt.	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6460	Diode, Rect, BY228/24.	9340 559 50112
	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
	6462	Zener Diode, 9.1 volt.	9331 177 80133
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316.	3198 010 10630
	6468	Diode, Signal, BAS316.	3198 010 10630
	6469	Diode, Rect, BYV95C.	9335 001 80133
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt.	3198 010 25680
	6482	Zener Diode, 9.1 volt.	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYV95C.	9335 001 80133
	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6487	Diode, Rect, BYV95A.	9335 000 90133
	6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667
	6520	Diode, Rect, BYV95A.	9335 000 90133
	6523	Diode, Signal, 1N4148.	3198 010 10010
	6524	Diode, Rect, 1N5062.	3198 010 10120
	6525	Diode, Rect, 1N5062.	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt.	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500.	9340 555 59127
	6562	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6563	Diode, Signal, BAS316.	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148.	3198 010 10010
	6569	Diode, Signal, BAS316.	3198 010 10630
	6570	Zener Diode, 6.8 volt.	3198 020 56880
	6580	Diode, Signal, BAS316.	3198 010 10630
	6691	LED, LTL-10234WHCR	9322 185 69682
	6692	IR Receiver.	9322 127 54667
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7102	Transistor, PNP, BC857B(COL)	3198 010 42150
	7103	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9577H/N1/AI	9352 707 19557
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7460	Transistor, NPN, BU4508DX.	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2.	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1.	9352 673 56112
	7521	Power FET, FQPF9N50.	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, L78L33ACZ.	9322 134 92676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C08-WBN6.	9322 154 38682
	7802	IC, HEF4053BT.	9333 729 60653
	7861	IC, TDA9853H/V1.	9352 671 19557
	7891	Transistor, NPN, BC847B(COL)	3198 010 42030
	7892	Transistor, NPN, BC847B(COL)	3198 010 42030
	7901	IC, AN7522N PH	9322 181 41682
	9001	Wire Jumper.	3198 036 90010
	9101	Wire Jumper.	3198 036 90010
	9102	Wire Jumper.	3198 036 90010
	9103	Wire Jumper.	3198 036 90010
	9104	Wire Jumper.	3198 036 90010
	9123	Wire Jumper.	3198 036 90010
	9171	Wire Jumper.	3198 036 90010
	9173	Wire Jumper.	3198 036 90010
	9175	Wire Jumper.	3198 036 90010
	9176	Wire Jumper.	3198 036 90010
	9178	Wire Jumper.	3198 036 90010
	9179	Wire Jumper.	3198 036 90010
	9181	Wire Jumper.	3198 036 90010
	9182	Wire Jumper.	3198 036 90010
	9183	Wire Jumper.	3198 036 90010
	9184	Wire Jumper.	3198 036 90010
	9192	Wire Jumper.	3198 036 90010
	9193	Wire Jumper.	3198 036 90010
	9311	Wire Jumper.	3198 036 90010
	9312	Wire Jumper.	3198 036 90010
	9406	Wire Jumper.	3198 036 90010
	9407	Wire Jumper.	3198 036 90010
	9408	Wire Jumper.	3198 036 90010
	9409	Wire Jumper.	3198 036 90010
	9410	Wire Jumper.	3198 036 90010
	9411	Wire Jumper.	3198 036 90010
	9412	Wire Jumper.	3198 036 90010
	9413	Wire Jumper.	3198 036 90010
	9415	Wire Jumper.	3198 036 90010
	9416	Wire Jumper.	3198 036 90010
	9417	Wire Jumper.	3198 036 90010
	9418	Wire Jumper.	3198 036 90010
	9419	Wire Jumper.	3198 036 90010
	9421	Wire Jumper.	3198 036 90010
	9422	Wire Jumper.	3198 036 90010
	9423	Wire Jumper.	3198 036 90010
	9425	Wire Jumper.	3198 036 90010
	9427	Wire Jumper.	3198 036 90010
	9453	Wire Jumper.	3198 036 90010
	9460	Wire Jumper.	3198 036 90010
	9500	Wire Jumper.	3198 036 90010
	9501	Wire Jumper.	3198 036 90010
	9503	Wire Jumper.	3198 036 90010
	9506	Wire Jumper.	3198 036 90010
	9507	Wire Jumper.	3198 036 90010
	9510	Wire Jumper.	3198 036 90010
	9511	Wire Jumper.	3198 036 90010
	9512	Wire Jumper.	3198 036 90010
	9513	Wire Jumper.	3198 036 90010
	9514	Wire Jumper.	3198 036 90010
	9515	Wire Jumper.	3198 036 90010
	9516	Wire Jumper.	3198 036 90010
	9518	Wire Jumper.	3198 036 90010
	9520	Wire Jumper.	3198 036 90010
	9521	Wire Jumper.	3198 036 90010
	9522	Wire Jumper.	3198 036 90010
	9524	Wire Jumper.	3198 036 90010
	9528	Wire Jumper.	3198 036 90010
	9530	Wire Jumper.	3198 036 90010
	9611	Coil, 27u, 10%	3198 018 22790
	9612	Wire Jumper.	3198 036 90010
	9613	Wire Jumper.	3198 036 90010
	9614	Wire Jumper.	3198 036 90010
	9615	Wire Jumper.	3198 036 90010
	9617	Wire Jumper.	3198 036 90010
	9618	Wire Jumper.	3198 036 90010
	9619	Wire Jumper.	3198 036 90010
	9620	Wire Jumper.	3198 036 90010
	9621	Wire Jumper.	3198 036 90010
	9622	Wire Jumper.	3198 036 90010
	9623	Wire Jumper.	3198 036 90010
	9624	Wire Jumper.	3198 036 90010
	9626	Wire Jumper.	3198 036 90010
	9627	Wire Jumper.	3198 036 90010
	9628	Wire Jumper.	3198 036 90010
	9629	Wire Jumper.	3198 036 90010
	9631	Wire Jumper.	3198 036 90010
	9632	Wire Jumper.	3198 036 90010
	9633	Wire Jumper.	3198 036 90010
	9637	Wire Jumper.	3198 036 90010
	9638	Wire Jumper.	3198 036 90010
	9640	Wire Jumper.	3198 036 90010
	9641	Wire Jumper.	3198 036 90010
	9642	Wire Jumper.	3198 036 90010
	9643	Wire Jumper.	3198 036 90010
	9648	Wire Jumper.	3198 036 90010
	9650	Wire Jumper.	3198 036 90010
	9651	Wire Jumper.	3198 036 90010
	9652	Wire Jumper.	3198 036 90010
	9654	Wire Jumper.	3198 036 90010
	9655	Wire Jumper.	3198 036 90010
	9657	Wire Jumper.	3198 036 90010
	9658	Wire Jumper.	3198 036 90010
	9659	Wire Jumper.	3198 036 90010
	9660	Wire Jumper.	3198 036 90010
	9661	Wire Jumper.	3198 036 90010
	9662	Wire Jumper.	3198 036 90010
	9663	Wire Jumper.	3198 036 90010
	9664	Wire Jumper.	3198 036 90010
	9665	Wire Jumper.	3198 036 90010
	9666	Wire Jumper.	3198 036 90010
	9667	Wire Jumper.	3198 036 90010
	9668	Wire Jumper.	3198 036 90010
	9669	Wire Jumper.	3198 036 90010
	9670	Wire Jumper.	3198 036 90010
	9671	Wire Jumper.	3198 036 90010
	9672	Coil, 22u, 10%	3198 018 22290
	9674	Wire Jumper.	3198 036 90010
	9675	Wire Jumper.	3198 036 90010
	9676	Wire Jumper.	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

27PT543F35A (continued)

Ref	Description	Part No.
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper.	3198 036 90010
9680	Wire Jumper.	3198 036 90010
9681	Wire Jumper.	3198 036 90010
9685	Wire Jumper.	3198 036 90010
9686	Wire Jumper.	3198 036 90010
9687	Wire Jumper.	3198 036 90010
9688	Wire Jumper.	3198 036 90010
9689	Wire Jumper.	3198 036 90010
9690	Wire Jumper.	3198 036 90010
9691	Wire Jumper.	3198 036 90010
9694	Wire Jumper.	3198 036 90010
9695	Wire Jumper.	3198 036 90010
9697	Wire Jumper.	3198 036 90010
9698	Wire Jumper.	3198 036 90010
9699	Wire Jumper.	3198 036 90010
9821	Wire Jumper.	3198 036 90010
9822	Wire Jumper.	3198 036 90010
9825	Wire Jumper.	3198 036 90010
9828	Wire Jumper.	3198 036 90010
9829	Wire Jumper.	3198 036 90010
9831	Wire Jumper.	3198 036 90010
9832	Wire Jumper.	3198 036 90010
9837	Wire Jumper.	3198 036 90010
9838	Wire Jumper.	3198 036 90010
9839	Wire Jumper.	3198 036 90010
9846	Wire Jumper.	3198 036 90010
9847	Wire Jumper.	3198 036 90010
9849	Wire Jumper.	3198 036 90010
9850	Wire Jumper.	3198 036 90010
9851	Wire Jumper.	3198 036 90010
9852	Wire Jumper.	3198 036 90010
9853	Wire Jumper.	3198 036 90010
9856	Wire Jumper.	3198 036 90010
9860	Wire Jumper.	3198 036 90010
9861	Wire Jumper.	3198 036 90010
9862	Wire Jumper.	3198 036 90010
9864	Wire Jumper.	3198 036 90010
9865	Wire Jumper.	3198 036 90010
9868	Wire Jumper.	3198 036 90010
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9891	Wire Jumper.	3198 036 90010
9892	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010
9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9905	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9918	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9998	Wire Jumper.	3198 036 90010
CBA	Main Chassis Assembly.	3141 058 59211

Channel One Card Parts
Channel One Card Parts

2D 3 Line Comb Filter Parts
2D 3 Line Comb Filter Parts

DAF Panel Parts
DAF Panel Parts

DVD Eject Panel Parts
DVD Eject Panel Parts

DVD Interface Panel Parts
DVD Interface Panel Parts

Front Interface Panel Parts
Front Interface Panel Parts

ITV Front Jack Panel Parts
ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)
Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)
Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts
Side Jack Panel Parts

Ref	Description	Part No.
0232	Headphone Jack	2422 026 04747
0250	A/V Jack	2422 026 04815
0251	6 Pin Connector.	2422 025 12482
0254	5 Pin Connector.	2422 025 12481
0255	4 Pin Connector.	2422 025 12479
1810	3 Pin Connector.	2412 020 00725
1811	3 Pin Connector.	2412 020 00725
2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2177	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2179	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
6161	Zener Diode, 6.8 volt.	3198 010 26880
7802	IC, HEF4053BT.	9333 729 60653
9150	Wire Jumper.	3198 036 90010
9151	Wire Jumper.	3198 036 90010
9152	Wire Jumper.	3198 036 90010
9153	Wire Jumper.	3198 036 90010
9154	Wire Jumper.	3198 036 90010
9170	Wire Jumper.	3198 036 90010
CBA	Side Jack Panel Assembly	3139 177 26231

Subwoofer Panel Parts
Subwoofer Panel Parts

Top Control Panel Parts
Top Control Panel Parts

Cabinet & Accessory Parts
Cabinet & Accessory Parts

	Ref	Description	Part No.
S	AC01	AC Cord.	3135 010 03831
	AC03	Anode Lead Spacer (3 Used)	3135 014 04471
	AC04	Batteries for Remote Control Transmitte	9299 000 65263
	AC05	Cabinet Back	3121 237 52454
S	AC09	CRT, A68AJB82X11	9301 891 90631
	AC10	Customer Control Buttons	3139 177 60751
S	AC12	Degaussing Coil.	2422 549 43967
	AC15	Holder, Degaussing Coil (4 Used) . . .	3135 013 01641
	AC17	Owner's Manual, English.	3121 235 20641
	AC17	Owner's Manual, French	3121 235 21271
	AC19	Side Jack Panel Bracket.	3139 124 37061
	AC20	Cabinet Front Assembly	3121 237 53071
	AC20A	Cabinet Front.	3139 177 53551
	AC20B	Chassis Guide (2 Used)	3139 124 31381
	AC20C	Light Guide.	3139 124 35111
	AC20D	Nameplate.	3141 050 00161
	AC20E	Power Button	3139 177 60761
	AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00411
	REMOTE	Remote Control Transmitter, RC19335004/ 01.	3139 228 86464

S = Safety Part   Be sure to use exact replacement part.

27PT543S37A - Manual no. 7638

Main Chassis Parts

Main Chassis Parts

S	Ref	Description	Part No.
	0211	2 Pin Connector.	2422 025 16269
	0212	2 Pin Connector.	2422 025 16375
	0219	6 Pin Connector.	2422 025 12482
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0222	2 Pin Connector.	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0229	3 Pin Connector.	2412 020 00725
	0243	6 Pin Connector.	2422 025 04854
	0244	5 Pin Connector.	2422 025 04853
	0245	6 Pin Connector.	2422 025 04854
	0246	5 Pin Connector.	2422 025 12481
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector.	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U PLL	2422 542 90098
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1600	Tact Switch.	2422 128 02742
	1601	Tact Switch.	2422 128 02742
	1602	Tact Switch.	2422 128 02742
	1603	Tact Switch.	2422 128 02742
	1606	Tact Switch.	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1811	3 Pin Connector.	2412 020 00725
	1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic. . .	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic. . .	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic. . .	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic . .	2020 558 90445
	2405	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
	2415	Cap, 330p, 10%, 50v, Ceramic	3198 017 03310
	2441	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic . . .	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic. . .	2020 021 91139
	2451	Cap, 15n, 10%, 50v, Polyester.	3198 014 01530
	2455	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
	2457	Cap, 470n, 5%, 250v, Metalized Polypropylene.	2022 333 00086
	2458	Cap, 2u2, 20%, 100v, Electrolytic. . .	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
	2462	Cap, 330n, 10%, 250v, MPP.	2022 333 00084
	2463	Cap, 1nf, 10%, 2000v, Ceramic Only with 5445 (JF0501-21835) Layer Wound. . . .	2020 558 90487
	2463	Cap, 680p, 10%, 2000v, Ceramic	2020 558 90485
S	2465	Cap, 11n, 5%, 1600v, Polypropylene . .	2020 301 90251
S	2465	Cap, 12n, 5%, 1600v, Polypropylene Only with 5445 (JF0501-21835) Layer Wound .	2222 375 90156
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic . . .	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic. . .	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic. . .	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic . . .	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic . .	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic. . .	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic . .	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic . . .	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic . .	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic . . .	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic . . .	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic . . .	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic. . .	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic. . .	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2606	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050
	2691	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
	2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2803	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250

27PT543S37A (continued)

Ref	Description	Part No.
2816	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
2862	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2864	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
2865	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
2866	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2873	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2874	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2875	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2876	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
2877	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2878	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
2883	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710
2884	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240
2886	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
2892	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
2893	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
2902	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
2908	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3124	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3126	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3134	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
3154	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620
3156	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3157	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3158	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3159	Res, 1K2, 1%, 1/8W, Metalized Glass.	2322 734 61202
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
3205	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3206	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
3218	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3232	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010

Ref	Description	Part No.
3241	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3242	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
3245	Res, 39K, 1%, 1/16W, Metalized Glass	2322 704 63903
3246	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840
3248	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3257	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020
3340	Res, 10 ohm, 5%, 1/2W, Metal Film.	2306 207 03109
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
3343	Res, 1K5, 20%, 1/2W, Carbon Film	3198 013 01520
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3443	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3445	Res, 15K, 5%, 1/6W, Carbon Film.	3198 011 01530
3446	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620
3447	Res, 180 ohm, 5%, 1/6W, Carbon Film.	3198 011 01810
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
3449	Res, 68 ohm, 5%, 1/6W, Carbon Film	3198 011 06890
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film.	2306 204 03109
3452	Res, 5K6, 1%, 3/5W, Metal Film Only wit h 5445 (JF0501-21835) Layer Wound.	2312 915 15602
3452	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3454	Res, 2K, 1%, 3/5W, Metal Film Only with 5445 (JF0501-21835) Layer Wound.	2312 915 12002
3454	Res, 3K9, 1%, 3/5W, Metal Film	2312 915 13902
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film	3198 012 26880
3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S 3459	Res, 15K, 5%, 1 1/3W, Metal Film	3198 012 21530
3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3468	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320
3470	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3479	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2122 101 02083
3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film.	3198 012 33390
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3492	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3495	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3498	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3499	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3500	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322 242 13335
3501	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322 242 13335
S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3506	Res, 1M5, 5%, 1/2W, Metalized Glass.	2322 242 13155
3507	Surge Protector.	2422 549 43073
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film	3198 013 02210
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3520	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3521	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3523	Res, 100 ohm, 5%, 1/3W, Metal Film	2306 204 03101
3524	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3525	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S 3527	Res, 0R33, 5%, 3/5W, Metal Film.	3198 012 13370
3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020

S = Safety Part   Be sure to use exact replacement part.

27PT543S37A (continued)

S	Ref	Description	Part No.
	3529	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film	3198 011 06820
	3622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3630	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3681	Res, 180 ohm, 1%, 1/8W, Metalized Glass	2322 734 61801
	3682	Res, 270 ohm, 1%, 1/8W, Metalized Glass	2322 734 62701
	3683	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322 734 63901
	3684	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322 734 63901
	3686	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3687	Res, 75 ohm, 1%, 1/8W, Metalized Glass	2322 734 67509
	3688	Res, 68 ohm, 1%, 1/8W, Metalized Glass	2322 734 66809
	3689	Res, 2K7, 1%, 1/8W, Metalized Glass	2322 734 62702
	3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3814	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3861	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3862	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
	3863	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
	3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3865	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3866	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3867	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3901	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4122	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4123	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4127	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%	3198 018 18270
	5201	Coil, 6u8, 5%	3198 018 16880
	5202	Wire Jumper	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5241	Wire Jumper	3198 036 90010
	5242	Coil, 10u, 5%	3198 018 11090
	5342	Coil, 22u	2422 535 97333
S	5445	Transformer, LOT (JF0501-21835) Layer Wound	2422 531 02611
S	5445	Transformer, LOT (1342.0043B)	2422 531 02506
	5451	Coil, 33u, 10%	3198 018 73390
	5452	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
S	5457	Coil, 42u	2422 535 94865
	5461	Transformer, Signal Driver, SC10027-00	2422 531 02478
	5471	Coil, 3u3, 20%	3198 018 73380
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 39u, 10%	2422 535 97336
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5561	Coil, 27u, 5%	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5602	Coil, 5u6, 5%	3198 018 15680
	5603	Coil, 5u6, 5%	3198 018 15680
	5604	Coil, 5u6, 5%	3198 018 15680
	5861	Coil, 10u, 5%	3198 018 11090
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316	3198 010 10630
	6201	Diode, Signal, BAS316	3198 010 10630
	6202	Diode, Signal, BAS316	3198 010 10630
	6206	Zener Diode, 6.8 volt	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070

S = Safety Part   Be sure to use exact replacement part.

27PT543S37A (continued)

	Ref.	Description	Part No.
	6335	Diode, Signal, BAV21	3198 010 10070
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148	3198 010 10010
	6448	Zener Diode, 6.2 volt	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6460	Diode, Rect, BY228/24	9340 559 50112
	6461	Diode, Rect, RGP30J-L7004	9338 617 60682
	6462	Zener Diode, 9.1 volt	9331 177 80133
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316	3198 010 10630
	6468	Diode, Signal, BAS316	3198 010 10630
	6469	Diode, Rect, BYD33J	9337 234 20133
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt	3198 010 25680
	6482	Zener Diode, 9.1 volt	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYD33J	9337 234 20133
	6486	Diode, Rect, EGP20DL-5100	9322 164 42682
	6487	Diode, Rect, BYD33D	9337 234 00133
	6488	Diode, Rect, EGP20DL-5100	9322 164 42682
	6500	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
	6520	Diode, Rect, BYD33D	9337 234 00133
	6523	Diode, Signal, 1N4148	3198 010 10010
	6524	Diode, Rect, 1N5062	3198 010 10120
	6525	Diode, Rect, 1N5062	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500	9340 555 59127
	6562	Diode, Rect, EGP20DL-5100	9322 164 42682
	6563	Diode, Signal, BAS316	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148	3198 010 10010
	6569	Diode, Signal, BAS316	3198 010 10630
	6570	Zener Diode, 6.8 volt	3198 020 56880
	6580	Diode, Signal, BAS316	3198 010 10630
	6691	LED, LTL-10234WHCR	9322 185 69682
	6692	IR Receiver	9322 127 54667
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7102	Transistor, PNP, BC857B(COL)	3198 010 42150
	7103	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9577H/N1/AI/1130	9352 731 51557
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7460	Transistor, NPN, BU4508DX	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1	9352 673 56112
	7521	Power FET, FQPF9N50	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, L78L33ACZ	9322 134 92676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C08-WBN6	9322 154 38682
	7802	IC, HEF4053BT	9333 729 60653
	7861	IC, TDA9853H/V1	9352 671 19557
	7891	Transistor, NPN, BC847B(COL)	3198 010 42030
	7892	Transistor, NPN, BC847B(COL)	3198 010 42030
	7901	IC, AN7522N PH	9322 181 41682
	9001	Wire Jumper	3198 036 90010
	9101	Wire Jumper	3198 036 90010
	9102	Wire Jumper	3198 036 90010
	9103	Wire Jumper	3198 036 90010
	9104	Wire Jumper	3198 036 90010
	9123	Wire Jumper	3198 036 90010
	9171	Wire Jumper	3198 036 90010
	9173	Wire Jumper	3198 036 90010
	9175	Wire Jumper	3198 036 90010
	9176	Wire Jumper	3198 036 90010
	9178	Wire Jumper	3198 036 90010
	9179	Wire Jumper	3198 036 90010
	9181	Wire Jumper	3198 036 90010
	9182	Wire Jumper	3198 036 90010
	9183	Wire Jumper	3198 036 90010
	9184	Wire Jumper	3198 036 90010
	9192	Wire Jumper	3198 036 90010
	9193	Wire Jumper	3198 036 90010
	9311	Wire Jumper	3198 036 90010
	9312	Wire Jumper	3198 036 90010
	9406	Wire Jumper	3198 036 90010
	9407	Wire Jumper	3198 036 90010
	9408	Wire Jumper	3198 036 90010
	9409	Wire Jumper	3198 036 90010
	9410	Wire Jumper	3198 036 90010
	9411	Wire Jumper	3198 036 90010
	9412	Wire Jumper	3198 036 90010
	9413	Wire Jumper	3198 036 90010
	9415	Wire Jumper	3198 036 90010
	9416	Wire Jumper	3198 036 90010
	9417	Wire Jumper	3198 036 90010
	9418	Wire Jumper	3198 036 90010
	9419	Wire Jumper	3198 036 90010
	9421	Wire Jumper	3198 036 90010
	9422	Wire Jumper	3198 036 90010
	9423	Wire Jumper	3198 036 90010
	9425	Wire Jumper	3198 036 90010
	9427	Wire Jumper	3198 036 90010
	9453	Wire Jumper	3198 036 90010
	9460	Wire Jumper	3198 036 90010
	9500	Wire Jumper	3198 036 90010
	9501	Wire Jumper	3198 036 90010
	9503	Wire Jumper	3198 036 90010
	9506	Wire Jumper	3198 036 90010
	9507	Wire Jumper	3198 036 90010
	9510	Wire Jumper	3198 036 90010
	9511	Wire Jumper	3198 036 90010
	9512	Wire Jumper	3198 036 90010
	9513	Wire Jumper	3198 036 90010
	9514	Wire Jumper	3198 036 90010
	9515	Wire Jumper	3198 036 90010
	9516	Wire Jumper	3198 036 90010
	9518	Wire Jumper	3198 036 90010
	9520	Wire Jumper	3198 036 90010
	9521	Wire Jumper	3198 036 90010
	9522	Wire Jumper	3198 036 90010
	9524	Wire Jumper	3198 036 90010
	9528	Wire Jumper	3198 036 90010
	9530	Wire Jumper	3198 036 90010
	9611	Coil, 27u, 10%	3198 018 22790
	9612	Wire Jumper	3198 036 90010
	9613	Wire Jumper	3198 036 90010
	9614	Wire Jumper	3198 036 90010
	9615	Wire Jumper	3198 036 90010
	9617	Wire Jumper	3198 036 90010
	9618	Wire Jumper	3198 036 90010
	9619	Wire Jumper	3198 036 90010
	9620	Wire Jumper	3198 036 90010
	9621	Wire Jumper	3198 036 90010
	9622	Wire Jumper	3198 036 90010
	9623	Wire Jumper	3198 036 90010
	9624	Wire Jumper	3198 036 90010
	9626	Wire Jumper	3198 036 90010
	9627	Wire Jumper	3198 036 90010
	9628	Wire Jumper	3198 036 90010
	9629	Wire Jumper	3198 036 90010
	9631	Wire Jumper	3198 036 90010
	9632	Wire Jumper	3198 036 90010
	9633	Wire Jumper	3198 036 90010
	9637	Wire Jumper	3198 036 90010
	9638	Wire Jumper	3198 036 90010
	9640	Wire Jumper	3198 036 90010
	9641	Wire Jumper	3198 036 90010
	9642	Wire Jumper	3198 036 90010
	9643	Wire Jumper	3198 036 90010
	9648	Wire Jumper	3198 036 90010
	9650	Wire Jumper	3198 036 90010
	9651	Wire Jumper	3198 036 90010
	9652	Wire Jumper	3198 036 90010
	9654	Wire Jumper	3198 036 90010
	9655	Wire Jumper	3198 036 90010
	9657	Wire Jumper	3198 036 90010
	9658	Wire Jumper	3198 036 90010
	9659	Wire Jumper	3198 036 90010
	9660	Wire Jumper	3198 036 90010
	9661	Wire Jumper	3198 036 90010
	9662	Wire Jumper	3198 036 90010
	9663	Wire Jumper	3198 036 90010
	9664	Wire Jumper	3198 036 90010
	9665	Wire Jumper	3198 036 90010
	9666	Wire Jumper	3198 036 90010
	9667	Wire Jumper	3198 036 90010
	9668	Wire Jumper	3198 036 90010
	9669	Wire Jumper	3198 036 90010
	9670	Wire Jumper	3198 036 90010
	9671	Wire Jumper	3198 036 90010
	9672	Coil, 22u, 10%	3198 018 22290
	9674	Wire Jumper	3198 036 90010
	9675	Wire Jumper	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

Ref	Description	Part No.
9676	Wire Jumper.	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper.	3198 036 90010
9680	Wire Jumper.	3198 036 90010
9681	Wire Jumper.	3198 036 90010
9685	Wire Jumper.	3198 036 90010
9686	Wire Jumper.	3198 036 90010
9687	Wire Jumper.	3198 036 90010
9688	Wire Jumper.	3198 036 90010
9689	Wire Jumper.	3198 036 90010
9690	Wire Jumper.	3198 036 90010
9691	Wire Jumper.	3198 036 90010
9694	Wire Jumper.	3198 036 90010
9695	Wire Jumper.	3198 036 90010
9697	Wire Jumper.	3198 036 90010
9698	Wire Jumper.	3198 036 90010
9699	Wire Jumper.	3198 036 90010
9821	Wire Jumper.	3198 036 90010
9822	Wire Jumper.	3198 036 90010
9825	Wire Jumper.	3198 036 90010
9828	Wire Jumper.	3198 036 90010
9829	Wire Jumper.	3198 036 90010
9831	Wire Jumper.	3198 036 90010
9832	Wire Jumper.	3198 036 90010
9837	Wire Jumper.	3198 036 90010
9838	Wire Jumper.	3198 036 90010
9839	Wire Jumper.	3198 036 90010
9846	Wire Jumper.	3198 036 90010
9847	Wire Jumper.	3198 036 90010
9849	Wire Jumper.	3198 036 90010
9850	Wire Jumper.	3198 036 90010
9851	Wire Jumper.	3198 036 90010
9852	Wire Jumper.	3198 036 90010
9853	Wire Jumper.	3198 036 90010
9856	Wire Jumper.	3198 036 90010
9860	Wire Jumper.	3198 036 90010
9861	Wire Jumper.	3198 036 90010
9862	Wire Jumper.	3198 036 90010
9864	Wire Jumper.	3198 036 90010
9865	Wire Jumper.	3198 036 90010
9868	Wire Jumper.	3198 036 90010
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9891	Wire Jumper.	3198 036 90010
9892	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010
9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9905	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9918	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9998	Wire Jumper.	3198 036 90010
CBA	Main Chassis Assembly.	3139 187 15081

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts

Side Jack Panel Parts

Ref	Description	Part No.
0232	Headphone Jack	2422 026 04747
0250	A/V Jack	2422 026 04815
0251	6 Pin Connector.	2422 025 12482
0254	5 Pin Connector.	2422 025 12481
0255	4 Pin Connector.	2422 025 12479
1810	3 Pin Connector.	2412 020 00725
1811	3 Pin Connector.	2412 020 00725
2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2177	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2179	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
6161	Zener Diode, 6.8 volt.	3198 010 26880
7802	IC, HEF4053BT.	9333 729 60653
9150	Wire Jumper.	3198 036 90010
9151	Wire Jumper.	3198 036 90010
9152	Wire Jumper.	3198 036 90010
9153	Wire Jumper.	3198 036 90010
9154	Wire Jumper.	3198 036 90010
9170	Wire Jumper.	3198 036 90010
CBA	Side Jack Panel Assembly	3139 177 26231

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

Ref	Description	Part No.
S AC01	AC Cord.	3135 010 03831
AC03	Anode Lead Spacer (3 Used)	3135 014 04471
AC04	Batteries for Remote Control Transmitte	9299 000 65263
AC05	Cabinet Back	3121 237 52452
S AC09	CRT, A68AJB82X11	9301 891 90631
AC10	Customer Control Buttons	3139 177 60751
S AC12	Degaussing Coil.	2422 549 43967
AC15	Holder, Degaussing Coil (4 Used) . . .	3135 013 01641
AC17	Owner's Manual, English.	3121 235 20641
AC19	Side Jack Panel Bracket.	3139 124 37061
AC20	Cabinet Front Assembly	3121 237 53071
AC20A	Cabinet Front.	3139 177 53551
AC20B	Chassis Guide (2 Used)	3139 124 31381
AC20C	Light Guide.	3139 124 35111
AC20D	Nameplate.	3141 050 00161
AC20E	Power Button	3139 177 60761
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00411
REMOTE	Remote Control Transmitter, RC19335004/ 01.	3139 228 86463

27PT563S37A - Manual no. 7638

Main Chassis Parts

		Main Chassis Parts	
	0211	2 Pin Connector	2422 025 16269
	0212	2 Pin Connector	2422 025 16375
	0219	6 Pin Connector	2422 025 12482
	0220	5 Pin Connector	2422 025 04853
	0221	2 Pin Connector	2422 025 15503
	0222	2 Pin Connector	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack	2422 026 04926
	0243	6 Pin Connector	2422 025 04854
	0244	5 Pin Connector	2422 025 04853
	0245	6 Pin Connector	2422 025 04854
	0246	5 Pin Connector	2422 025 12481
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U PLL	2422 542 90141
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1600	Tact Switch.	2422 128 02742
	1601	Tact Switch.	2422 128 02742
	1602	Tact Switch.	2422 128 02742
	1603	Tact Switch.	2422 128 02742
	1606	Tact Switch.	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1810	6 Pin Connector	2422 025 16607
	1831	Crystal, Resonator, 18MHz432, 12 Pin, HC49/U A.	2422 543 00842
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
	2451	Cap, 15n, 10%, 50v, Polyester.	3198 014 01530
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 470n, 5%, 250v, Metalized Polypropylene.	2022 333 00086
	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
	2462	Cap, 330n, 10%, 250v, MPP.	2022 333 00084
	2463	Cap, 1nf, 10%, 2000v, Ceramic Only with 5445 (JF0501-21835) Layer Wound.	2020 558 90487
	2463	Cap, 680p, 10%, 2000v, Ceramic	2020 558 90485
S	2465	Cap, 11n, 5%, 1600v, Polypropylene	2020 301 90251
S	2465	Cap, 12n, 5%, 1600v, Polypropylene Only with 5445 (JF0501-21835) Layer Wound	2222 375 90156
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2807	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2816	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
	2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
	2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
	2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
	2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210

S = Safety Part   Be sure to use exact replacement part.

Ref	Description	Part No.
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
2837	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
2840	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2841	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2843	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2844	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2846	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2910	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320
2911	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840
3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
3452	Res, 5K6, 1%, 3/5W, Metal Film Only wit h 5445 (JF0501-21835) Layer Wound. . .	2312 915 15602
3452	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3454	Res, 2K, 1%, 3/5W, Metal Film Only with 5445 (JF0501-21835) Layer Wound. . . .	2312 915 12002
3454	Res, 3K9, 1%, 3/5W, Metal Film	2312 915 13902
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3470	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 33390
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3507	Surge Protector.	2422 549 43073
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S 3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710

S = Safety Part   Be sure to use exact replacement part.

27PT563S37A (continued)

	Ref	Description	Part No.
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198 021 53320
	3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3811	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3812	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3813	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3831	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3843	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4824	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4837	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4838	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4884	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5202	Wire Jumper.	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5241	Wire Jumper.	3198 036 90010
	5242	Coil, 10u, 5%.	3198 018 11090
	5342	Coil, 22u.	2422 535 97333
S	5445	Transformer, LOT (JF0501-21835) Layer Wound	2422 531 02611
S	5445	Transformer, LOT (1342.0043B).	2422 531 02506
	5451	Coil, 33u, 10%	3198 018 73390
	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
S	5457	Coil, 42u.	2422 535 94865
	5461	Transformer, Signal Driver, SC10027-00	2422 531 02478
	5471	Coil, 3u3, 20%	3198 018 73380
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 39u, 10%	2422 535 97336
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04.	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5810	Coil, 10u, 10%	3198 018 51090
	5831	Coil, 6u8, 5%.	3198 018 16880
	5832	Coil, 6u8, 5%.	3198 018 16880
	5833	Coil, 6u8, 5%.	3198 018 16880
	5835	Coil, 12u, 10%	3198 018 31290
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316.	3198 010 10630
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630
	6206	Zener Diode, 6.8 volt.	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316.	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148.	3198 010 10010

S = Safety Part   Be sure to use exact replacement part.

27PT563S37A (continued)

	Ref	Description	Part No.
	6448	Zener Diode, 6.2 volt.	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6460	Diode, Rect, BY228/24.	9340 559 50112
	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
	6462	Zener Diode, 9.1 volt.	9331 177 80133
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316.	3198 010 10630
	6468	Diode, Signal, BAS316.	3198 010 10630
	6469	Diode, Rect, BYV95C.	9335 001 80133
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt.	3198 010 25680
	6482	Zener Diode, 9.1 volt.	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYV95C.	9335 001 80133
	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6487	Diode, Rect, BYV95A.	9335 000 90133
	6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6500	Diode, Bridge Rect, GBU6JL-7002. . . .	9322 138 08667
	6520	Diode, Rect, BYV95A.	9335 000 90133
	6523	Diode, Signal, 1N4148.	3198 010 10010
	6524	Diode, Rect, 1N5062.	3198 010 10120
	6525	Diode, Rect, 1N5062.	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt.	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500.	9340 555 59127
	6562	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6563	Diode, Signal, BAS316.	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148.	3198 010 10010
	6569	Diode, Signal, BAS316.	3198 010 10630
	6570	Zener Diode, 6.8 volt.	3198 020 56880
	6580	Diode, Signal, BAS316.	3198 010 10630
	6681	Diode, Signal, BAT85	9336 247 60133
	6691	LED, LTL-10234WHCR	9322 185 69682
	6692	IR Receiver.	9322 127 54667
	6831	Diode, Signal, 1N4148.	3198 010 10010
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7102	Transistor, PNP, BC857B(COL)	3198 010 42150
	7103	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9587H/N1/3I/0990.	9352 725 47557
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7460	Transistor, NPN, BU4508DX.	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2.	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1.	9352 673 56112
	7521	Power FET, FQPF9N50.	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, L78L33ACZ.	9322 134 92676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C08-WBN6.	9322 154 38682
	7802	IC, HEF4053BT.	9333 729 60653
	7803	IC, HEF4053BT.	9333 729 60653
	7804	Transistor, NPN, BC847B(COL)	3198 010 42030
	7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682
	7901	IC, AN7522N PH	9322 181 41682
	9001	Wire Jumper.	3198 036 90010
	9101	Wire Jumper.	3198 036 90010
	9102	Wire Jumper.	3198 036 90010
	9103	Wire Jumper.	3198 036 90010
	9104	Wire Jumper.	3198 036 90010
	9123	Wire Jumper.	3198 036 90010
	9171	Wire Jumper.	3198 036 90010
	9173	Wire Jumper.	3198 036 90010
	9175	Wire Jumper.	3198 036 90010
	9176	Wire Jumper.	3198 036 90010
	9178	Wire Jumper.	3198 036 90010
	9179	Wire Jumper.	3198 036 90010
	9181	Wire Jumper.	3198 036 90010
	9182	Wire Jumper.	3198 036 90010
	9183	Wire Jumper.	3198 036 90010
	9192	Wire Jumper.	3198 036 90010
	9193	Wire Jumper.	3198 036 90010
	9311	Wire Jumper.	3198 036 90010
	9312	Wire Jumper.	3198 036 90010
	9406	Wire Jumper.	3198 036 90010
	9407	Wire Jumper.	3198 036 90010
	9408	Wire Jumper.	3198 036 90010
	9409	Wire Jumper.	3198 036 90010
	9410	Wire Jumper.	3198 036 90010
	9411	Wire Jumper.	3198 036 90010
	9412	Wire Jumper.	3198 036 90010
	9413	Wire Jumper.	3198 036 90010
	9415	Wire Jumper.	3198 036 90010
	9416	Wire Jumper.	3198 036 90010
	9417	Wire Jumper.	3198 036 90010
	9418	Wire Jumper.	3198 036 90010
	9419	Wire Jumper.	3198 036 90010
	9421	Wire Jumper.	3198 036 90010
	9422	Wire Jumper.	3198 036 90010
	9423	Wire Jumper.	3198 036 90010
	9425	Wire Jumper.	3198 036 90010
	9427	Wire Jumper.	3198 036 90010
	9453	Wire Jumper.	3198 036 90010
	9460	Wire Jumper.	3198 036 90010
	9500	Wire Jumper.	3198 036 90010
	9501	Wire Jumper.	3198 036 90010
	9503	Wire Jumper.	3198 036 90010
	9506	Wire Jumper.	3198 036 90010
	9507	Wire Jumper.	3198 036 90010
	9510	Wire Jumper.	3198 036 90010
	9511	Wire Jumper.	3198 036 90010
	9512	Wire Jumper.	3198 036 90010
	9513	Wire Jumper.	3198 036 90010
	9514	Wire Jumper.	3198 036 90010
	9515	Wire Jumper.	3198 036 90010
	9516	Wire Jumper.	3198 036 90010
	9518	Wire Jumper.	3198 036 90010
	9520	Wire Jumper.	3198 036 90010
	9521	Wire Jumper.	3198 036 90010
	9522	Wire Jumper.	3198 036 90010
	9524	Wire Jumper.	3198 036 90010
	9528	Wire Jumper.	3198 036 90010
	9530	Wire Jumper.	3198 036 90010
	9611	Coil, 27u, 10%	3198 018 22790
	9612	Wire Jumper.	3198 036 90010
	9613	Wire Jumper.	3198 036 90010
	9614	Wire Jumper.	3198 036 90010
	9615	Wire Jumper.	3198 036 90010
	9618	Wire Jumper.	3198 036 90010
	9619	Wire Jumper.	3198 036 90010
	9620	Wire Jumper.	3198 036 90010
	9621	Wire Jumper.	3198 036 90010
	9622	Wire Jumper.	3198 036 90010
	9623	Wire Jumper.	3198 036 90010
	9624	Wire Jumper.	3198 036 90010
	9626	Wire Jumper.	3198 036 90010
	9627	Wire Jumper.	3198 036 90010
	9628	Wire Jumper.	3198 036 90010
	9629	Wire Jumper.	3198 036 90010
	9631	Wire Jumper.	3198 036 90010
	9632	Wire Jumper.	3198 036 90010
	9633	Wire Jumper.	3198 036 90010
	9637	Wire Jumper.	3198 036 90010
	9638	Wire Jumper.	3198 036 90010
	9640	Wire Jumper.	3198 036 90010
	9641	Wire Jumper.	3198 036 90010
	9642	Wire Jumper.	3198 036 90010
	9643	Wire Jumper.	3198 036 90010
	9648	Wire Jumper.	3198 036 90010
	9650	Wire Jumper.	3198 036 90010
	9651	Wire Jumper.	3198 036 90010
	9652	Wire Jumper.	3198 036 90010
	9654	Wire Jumper.	3198 036 90010
	9655	Wire Jumper.	3198 036 90010
	9657	Wire Jumper.	3198 036 90010
	9658	Wire Jumper.	3198 036 90010
	9659	Wire Jumper.	3198 036 90010
	9660	Wire Jumper.	3198 036 90010
	9661	Wire Jumper.	3198 036 90010
	9662	Wire Jumper.	3198 036 90010
	9663	Wire Jumper.	3198 036 90010
	9664	Wire Jumper.	3198 036 90010
	9665	Wire Jumper.	3198 036 90010
	9666	Wire Jumper.	3198 036 90010
	9667	Wire Jumper.	3198 036 90010
	9668	Wire Jumper.	3198 036 90010
	9669	Wire Jumper.	3198 036 90010
	9670	Wire Jumper.	3198 036 90010
	9671	Wire Jumper.	3198 036 90010
	9672	Coil, 22u, 10%	3198 018 22290
	9674	Wire Jumper.	3198 036 90010
	9675	Wire Jumper.	3198 036 90010
	9676	Wire Jumper.	3198 036 90010
	9678	Coil, 22u, 10%	3198 018 22290
	9679	Wire Jumper.	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

27PT563S37A (continued)

9680 Wire Jumper. 3198 036 90010
9681 Wire Jumper. 3198 036 90010
9682 Wire Jumper. 3198 036 90010
9685 Wire Jumper. 3198 036 90010
9686 Wire Jumper. 3198 036 90010
9687 Wire Jumper. 3198 036 90010
9688 Wire Jumper. 3198 036 90010
9689 Wire Jumper. 3198 036 90010
9690 Wire Jumper. 3198 036 90010
9691 Wire Jumper. 3198 036 90010
9694 Wire Jumper. 3198 036 90010
9695 Wire Jumper. 3198 036 90010
9697 Wire Jumper. 3198 036 90010
9698 Wire Jumper. 3198 036 90010
9699 Wire Jumper. 3198 036 90010
9821 Wire Jumper. 3198 036 90010
9822 Wire Jumper. 3198 036 90010
9825 Wire Jumper. 3198 036 90010
9828 Wire Jumper. 3198 036 90010
9829 Wire Jumper. 3198 036 90010
9831 Wire Jumper. 3198 036 90010
9832 Wire Jumper. 3198 036 90010
9837 Wire Jumper. 3198 036 90010
9838 Wire Jumper. 3198 036 90010
9839 Wire Jumper. 3198 036 90010
9846 Wire Jumper. 3198 036 90010
9847 Wire Jumper. 3198 036 90010
9849 Wire Jumper. 3198 036 90010
9851 Wire Jumper. 3198 036 90010
9856 Wire Jumper. 3198 036 90010
9858 Wire Jumper. 3198 036 90010
9859 Wire Jumper. 3198 036 90010
9860 Wire Jumper. 3198 036 90010
9862 Wire Jumper. 3198 036 90010
9863 Wire Jumper. 3198 036 90010
9864 Wire Jumper. 3198 036 90010
9865 Wire Jumper. 3198 036 90010
9867 Wire Jumper. 3198 036 90010
9868 Wire Jumper. 3198 036 90010
9869 Wire Jumper. 3198 036 90010
9870 Wire Jumper. 3198 036 90010
9871 Wire Jumper. 3198 036 90010
9873 Wire Jumper. 3198 036 90010
9874 Wire Jumper. 3198 036 90010
9875 Wire Jumper. 3198 036 90010
9876 Wire Jumper. 3198 036 90010
9877 Wire Jumper. 3198 036 90010
9878 Wire Jumper. 3198 036 90010
9901 Wire Jumper. 3198 036 90010
9902 Wire Jumper. 3198 036 90010
9903 Wire Jumper. 3198 036 90010
9904 Wire Jumper. 3198 036 90010
9905 Wire Jumper. 3198 036 90010
9911 Wire Jumper. 3198 036 90010
9913 Wire Jumper. 3198 036 90010
9914 Wire Jumper. 3198 036 90010
9915 Wire Jumper. 3198 036 90010
9991 Wire Jumper. 3198 036 90010
9996 Wire Jumper. 3198 036 90010
9998 Wire Jumper. 3198 036 90010
CBA Main Chassis Assembly. 3139 187 21101

Channel One Card Parts
Channel One Card Parts

2D 3 Line Comb Filter Parts
2D 3 Line Comb Filter Parts
0266 6 Pin Connector. 2422 025 16609
2401 Cap, 47u, 20%, 16v, Electrolytic . . . 3198 028 24790
2402 Cap, 4u7, 20%, 35v, Electrolytic . . . 3198 028 44780
2403 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2407 Cap, 15p, 5%, 50v, Ceramic 3198 016 31590
2408 Cap, 56p, 5%, 50v, Ceramic 3198 016 35690
2409 Cap, 15p, 5%, 50v, Ceramic 3198 016 31590
2411 Cap, 470n, +80/-20%, 10v, Ceramic. . . 3198 017 44740
2412 Cap, 4n7, 10%, 50v, Ceramic. 3198 017 34720
2413 Cap, 10n, 10%, 50v, Ceramic. 3198 017 31030
2414 Cap, 10n, 10%, 50v, Ceramic. 3198 017 31030
2415 Cap, 10n, 10%, 50v, Ceramic. 3198 017 31030
2416 Cap, 10n, 10%, 50v, Ceramic. 3198 017 31030
2419 Cap, 10n, 10%, 50v, Ceramic. 3198 017 31030
2420 Cap, 180p, 5%, 50v, Ceramic. 3198 016 31810
2425 Cap, 10n, 10%, 50v, Ceramic. 3198 017 31030
2426 Cap, 47u, 20%, 25v, Electrolytic . . . 3198 025 34790
2427 Cap, 10n, 10%, 50v, Ceramic. 3198 017 31030
2428 Cap, 100u, 20%, 25v, Electrolytic. . . 3198 025 31010
2429 Cap, 100u, 20%, 25v, Electrolytic. . . 3198 025 31010
2430 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2431 Cap, 100u, 20%, 25v, Electrolytic. . . 3198 025 31010
2432 Cap, 10n, 10%, 50v, Ceramic. 3198 017 31030
2433 Cap, 10n, 10%, 50v, Ceramic. 3198 017 31030
2434 Cap, 10n, 10%, 50v, Ceramic. 3198 017 31030
2435 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2436 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2440 Cap, 10u, 20%, 16v, Electrolytic . . . 3198 028 21090
2442 Cap, 56p, 5%, 50v, Ceramic 3198 016 35690
2443 Cap, 56p, 5%, 50v, Ceramic 3198 016 35690
2450 Cap, 10u, 20%, 16v, Electrolytic . . . 3198 028 21090
2452 Cap, 56p, 5%, 50v, Ceramic 3198 016 35690
2453 Cap, 56p, 5%, 50v, Ceramic 3198 016 35690
3401 Res, 560 ohm, 5%, 1/16W, Metalized Glas 3198 021 35610
3402 Res, 10K, 5%, 1/16W, Metalized Glass . 3198 021 31030
3403 Res, 1K8, 5%, 1/16W, Metalized Glass . 3198 021 31820
3404 Res, 1K5, 5%, 1/16W, Metalized Glass . 3198 021 31520
3405 Res, 820 ohm, 5%, 1/16W, Metalized Glas 3198 021 38210
3406 Res, 6K8, 5%, 1/16W, Metalized Glass . 3198 021 36820
3407 Res, 1K, 5%, 1/16W, Metalized Glass. . 3198 021 31020
3408 Res, 820 ohm, 5%, 1/16W, Metalized Glas 3198 021 38210
3412 Res, 510K, 5%, 1/10W, Metalized Glass. 2122 118 05951
3419 Res, 820 ohm, 5%, 1/16W, Metalized Glas 3198 021 38210
3425 Res, 10K, 5%, 1/16W, Metalized Glass . 3198 021 31030
3427 Res, 10K, 5%, 1/16W, Metalized Glass . 3198 021 31030
3431 Res, 8K2, 1%, 1/16W, Metalized Glass . 2322 704 68202
3432 Res, 12K, 5%, 1/16W, Metalized Glass . 3198 021 31230
3440 Res, 820 ohm, 5%, 1/16W, Metalized Glas 3198 021 38210
3441 Res, 470 ohm, 5%, 1/16W, Metalized Glas 3198 021 34710
3442 Res, 12K, 5%, 1/16W, Metalized Glass . 3198 021 31230
3443 Res, 2K7, 5%, 1/16W, Metalized Glass . 3198 021 32720
3444 Res, 560 ohm, 5%, 1/16W, Metalized Glas 3198 021 35610
3450 Res, 820 ohm, 5%, 1/16W, Metalized Glas 3198 021 38210
3451 Res, 470 ohm, 5%, 1/16W, Metalized Glas 3198 021 34710
3452 Res, 12K, 5%, 1/16W, Metalized Glass . 3198 021 31230
3453 Res, 2K7, 5%, 1/16W, Metalized Glass . 3198 021 32720
3454 Res, 560 ohm, 5%, 1/16W, Metalized Glas 3198 021 35610
3455 Res, 390 ohm, 5%, 1/16W, Metalized Glas 3198 021 33910
3456 Res, Zero ohm, "Chip" Jumper 3198 021 90030
3457 Wire Jumper. 3198 036 90010
3458 Res, 390 ohm, 5%, 1/16W, Metalized Glas 3198 021 33910
4401 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4402 Res, Zero ohm, "Chip" Jumper 3198 021 90030
4403 Res, Zero ohm, "Chip" Jumper 3198 021 90030
5401 Coil, 10u, 10% 3198 018 31090
5407 Coil, 33u, 5%. 3198 018 13390
5408 Coil, 33u, 20% 3198 018 33390
5421 Inductor, 100 MHz, 120 ohm 3198 018 90070
5425 Coil, 10u, 10% 3198 018 31090
5428 Coil, 10u, 5%. 3198 018 11090
5429 Coil, 10u, 10% 3198 018 31090
5430 Coil, 10u, 10% 3198 018 31090
5440 Coil, 10u, 10% 3198 018 31090
5442 Coil, 22u, 5%. 3198 018 12290
5450 Coil, 10u, 10% 3198 018 31090
5452 Coil, 33u, 5%. 3198 018 13390
7401 Transistor, PNP, BC857B(COL) 3198 010 42150
7402 Transistor, NPN, BC847B(COL) 3198 010 42030
7403 Transistor, NPN, BC847B(COL) 3198 010 42030
7421 IC, TC90A53N 9322 182 18682
7440 Transistor, NPN, BC847B(COL) 3198 010 42030
7444 Transistor, NPN, BC847B(COL) 3198 010 42030
7450 Transistor, NPN, BC847B(COL) 3198 010 42030
7454 Transistor, NPN, BC847B(COL) 3198 010 42030
9401 Wire Jumper. 3198 036 90010
9402 Wire Jumper. 3198 036 90010
9403 Wire Jumper. 3198 036 90010
CBA 2D 3 Line Comb Filter Assembly 3139 177 26561

DAF Panel Parts
DAF Panel Parts

DVD Eject Panel Parts
DVD Eject Panel Parts

DVD Interface Panel Parts
DVD Interface Panel Parts

Front Interface Panel Parts
Front Interface Panel Parts

ITV Front Jack Panel Parts
ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)
Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)
Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts
Side Jack Panel Parts
0232 Headphone Jack 2422 026 04747
0250 A/V Jack 2422 026 04815
0251 6 Pin Connector. 2422 025 12482

27PT563S37A (continued)

```
0254   5 Pin Connector. . . . . . . . . . . .  2422 025 12481
0255   4 Pin Connector. . . . . . . . . . . .  2422 025 12479
2171   Cap, 330p, 10%, 50v, Ceramic . . . . .  3198 017 33310
2172   Cap, 330p, 10%, 50v, Ceramic . . . . .  3198 017 33310
2173   Cap, 330p, 10%, 50v, Ceramic . . . . .  3198 017 33310
2174   Cap, 330p, 10%, 50v, Ceramic . . . . .  3198 017 33310
2176   Cap, 470p, 5%, 50v, Ceramic. . . . . .  3198 016 34710
2177   Cap, 10u, 20%, 50v, Electrolytic . . .  3198 025 51090
2178   Cap, 470p, 5%, 50v, Ceramic. . . . . .  3198 016 34710
2179   Cap, 10u, 20%, 50v, Electrolytic . . .  3198 025 51090
3150   Res, 47K, 5%, 1/16W, Metalized Glass .  3198 021 34730
3151   Res, 150 ohm, 5%, 1/6W, Carbon . . . .  3198 011 01510
3152   Res, 47K, 5%, 1/16W, Metalized Glass .  3198 021 34730
3153   Res, 150 ohm, 5%, 1/6W, Carbon . . . .  3198 011 01510
3156   Res, 120 ohm, 5%, 1/16W, Metalized Glas 3198 021 31210
3157   Res, 120 ohm, 5%, 1/16W, Metalized Glas 3198 021 31210
4817   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90030
4819   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90030
4821   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90020
4822   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90020
6161   Zener Diode, 6.8 volt. . . . . . . . .  3198 010 26880
9151   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
9152   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
9153   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
9170   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
CBA    Side Jack Panel Assembly . . . . . . .  3139 187 15141
```

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

```
         Cabinet & Accessory Parts
S AC01   AC Cord. . . . . . . . . . . . . . . .  3135 010 03831
  AC03   Anode Lead Spacer (3 Used) . . . . . .  3135 014 04471
  AC04   Batteries for Remote Control Transmitte 9299 000 65263
  AC05   Cabinet Back . . . . . . . . . . . . .  3121 237 53661
S AC09   CRT, A68AJB82X11 . . . . . . . . . . .  9301 891 90631
S AC12   Degaussing Coil. . . . . . . . . . . .  2422 549 43967
  AC15   Holder, Degaussing Coil (4 Used) . . .  3135 013 01641
  AC17   Owner's Manual . . . . . . . . . . . .  3121 235 20651
  AC18   Quick Use Guide. . . . . . . . . . . .  3121 233 43471
  AC19   Side Jack Panel Bracket. . . . . . . .  3139 124 37061
  AC20   Cabinet Front Assembly . . . . . . . .  3121 237 53081
  AC20A  Cabinet Front. . . . . . . . . . . . .  3139 177 55961
  AC20B  Chassis Guide (2 Used) . . . . . . . .  3139 124 31381
  AC20C  Light Guide. . . . . . . . . . . . . .  3139 124 43141
  AC20D  Nameplate. . . . . . . . . . . . . . .  3141 050 00161
  AC20E  Power Button . . . . . . . . . . . . .  3121 237 53341
  AC20H  Speaker, 16 ohm, 5W (2 Used) . . . . .  2422 264 00411
  AC29   Plastic Facade . . . . . . . . . . . .  3139 177 60071
  REMOTE Remote Control Transmitter, RC19036001/
         01. . . . . . . . . . . . . . . . . . . 3139 228 86493
```

27PT633R37C - Manual no. 7638

Main Chassis Parts

S	Ref	Description	Part No.
		Main Chassis Parts	
	0211	2 Pin Connector	2422 025 16374
	0212	2 Pin Connector	2422 025 16375
	0214	5 Pin Connector	2422 025 12481
	0219	6 Pin Connector	2422 025 12482
	0220	5 Pin Connector	2422 025 04853
	0221	2 Pin Connector	2422 025 15503
	0222	2 Pin Connector	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack	2422 026 04926
	0229	3 Pin Connector	2412 020 00725
	0239	3 Pin Connector	2422 025 16382
	0243	6 Pin Connector	2422 025 04854
	0244	5 Pin Connector	2422 025 04853
	0245	6 Pin Connector	2422 025 04854
	0246	5 Pin Connector	2422 025 12481
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U PLL	2422 542 90098
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC	2422 086 10914
S	1515	Relay, 5 Amp, 12V	2422 132 07444
	1660	Crystal, 12MHz000	2422 543 01203
	1811	3 Pin Connector	2412 020 00725
	1861	Ceramic Resonator, 514KHz5, CSB503F58	2422 540 98344
	2004	Cap, 47n, 10%, 50v, Ceramic	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2226	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2241	Cap, 1n5, 10%, 50v, Ceramic	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
	2402	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2441	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic	2020 021 91139
	2451	Cap, 22n, 10%, 50v, Polyester	3198 014 02230
	2452	Cap, 180p, 5%, 50v, Ceramic	3198 016 01810
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 360n, 5%, 250v, Metalized Polypropylene	2022 333 00163
	2458	Cap, 2u2, 20%, 100v, Electrolytic	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
S	2463	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene	2222 479 90042
S	2465	Cap, 15n, 5%, 1600v, Polypropylene	2020 301 90255
	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
	2468	Cap, 22n, 10%, 400v, Polyester	2222 347 90223
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2482	Cap, 120n, 5%, 250v, Metalized Polypropylene	2222 479 90051
	2485	Cap, 4u7, 20%, 250v, Electrolytic	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic	3198 017 21050
	2802	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2803	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2816	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740

S = Safety Part   Be sure to use exact replacement part.

27PT633R37C (continued)

	Ref	Description	Part No.
	2862	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
	2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
	2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
	2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
	2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
	2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
	2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240
	2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
	2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
	2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
	2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
	2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
	3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
	3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
	3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202
	3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
	3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
	3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
	3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
	3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
	3401	Res, 220K, 5%, 1/6W, Carbon Film . . .	3198 011 02240
	3403	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
	3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102
	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
S	3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S	3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
	3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
	3470	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
	3472	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
	3473	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208
	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
	3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S	3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 32290
	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
S	3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020

S = Safety Part   Be sure to use exact replacement part.

27PT633R37C (continued)

S	Ref	Description	Part No.
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3814	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3861	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3862	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
	3863	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
	3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3865	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3866	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3867	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3901	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4122	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4123	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4127	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%	3198 018 18270
	5201	Coil, 6u8, 5%	3198 018 16880
	5202	Wire Jumper	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5241	Wire Jumper	3198 036 90010
	5242	Coil, 10u, 5%	3198 018 11090
	5341	Coil, 22u	2422 535 97333
	5342	Coil, 22u	2422 535 97333
	5401	Coil, 1mH, 10%	3198 018 71020
S	5445	Transformer, LOT	2422 531 02574
	5451	Coil, 22u, 10%	3198 018 72290
	5452	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
S	5457	Coil, 25u	2422 535 91028
	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
	5463	Coil, Choke	3128 138 37021
	5471	Coil, 6u8, 20%	3198 018 76880
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 47u, 10%	2422 535 97337
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5561	Coil, 27u, 5%	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5602	Coil, 5u6, 5%	3198 018 15680
	5603	Coil, 5u6, 5%	3198 018 15680
	5604	Coil, 5u6, 5%	3198 018 15680
	5861	Coil, 10u, 5%	3198 018 11090
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316	3198 010 10630
	6201	Diode, Signal, BAS316	3198 010 10630
	6202	Diode, Signal, BAS316	3198 010 10630
	6206	Zener Diode, 6.8 volt	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6400	Res, 1K, 1%, 3/5W, Metal Film	2312 915 11002
	6401	Zener Diode, 47 volt	3198 010 24790
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148	3198 010 10010
	6448	Zener Diode, 6.2 volt	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620

S = Safety Part   Be sure to use exact replacement part.

27PT633R37C (continued)

	6460	Diode, Rect, BY228/24	9340 559 50112
	6461	Diode, Rect, RGP30J-L7004	9338 617 60682
	6462	Zener Diode, 9.1 volt	9331 177 80133
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316	3198 010 10630
	6468	Diode, Signal, BAS316	3198 010 10630
	6469	Diode, Rect, BYD33J	9337 234 20133
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt	3198 010 25680
	6482	Zener Diode, 9.1 volt	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYD33J	9337 234 20133
	6486	Diode, Rect, EGP20DL-5100	9322 164 42682
	6487	Diode, Rect, BYD33D	9337 234 00133
	6488	Diode, Rect, EGP20DL-5100	9322 164 42682
	6500	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
	6520	Diode, Rect, BYD33D	9337 234 00133
	6523	Diode, Signal, 1N4148	3198 010 10010
	6524	Diode, Rect, 1N5062	3198 010 10120
	6525	Diode, Rect, 1N5062	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500	9340 555 59127
	6562	Diode, Rect, EGP20DL-5100	9322 164 42682
	6563	Diode, Signal, BAS316	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148	3198 010 10010
	6569	Diode, Signal, BAS316	3198 010 10630
	6570	Zener Diode, 6.8 volt	3198 020 56880
	6580	Diode, Signal, BAS316	3198 010 10630
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7102	Transistor, PNP, BC857B(COL)	3198 010 42150
	7103	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9588H/N1/3I/1053	9352 728 40557
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7400	Power FET, STP3NC60FP	9322 157 37687
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7460	Transistor, NPN, BU4508DX	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1	9352 673 56112
	7521	Power FET, FQPF9N50	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, L78L33ACZ	9322 134 92676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C08-WBN6	9322 154 38682
	7606	Transistor, NPN, PDTC143ZT	9340 547 00215
	7802	IC, HEF4053BT	9333 729 60653
	7861	IC, TDA9853H/V1	9352 671 19557
	7891	Transistor, NPN, BC847B(COL)	3198 010 42030
	7892	Transistor, NPN, BC847B(COL)	3198 010 42030
	7901	IC, AN7522N PH	9322 181 41682
	9001	Wire Jumper	3198 036 90010
	9101	Wire Jumper	3198 036 90010
	9102	Wire Jumper	3198 036 90010
	9103	Wire Jumper	3198 036 90010
	9104	Wire Jumper	3198 036 90010
	9123	Wire Jumper	3198 036 90010
	9171	Wire Jumper	3198 036 90010
	9173	Wire Jumper	3198 036 90010
	9175	Wire Jumper	3198 036 90010
	9176	Wire Jumper	3198 036 90010
	9178	Wire Jumper	3198 036 90010
	9179	Wire Jumper	3198 036 90010
	9181	Wire Jumper	3198 036 90010
	9182	Wire Jumper	3198 036 90010
	9183	Wire Jumper	3198 036 90010
	9192	Wire Jumper	3198 036 90010
	9193	Wire Jumper	3198 036 90010
	9311	Wire Jumper	3198 036 90010
	9312	Wire Jumper	3198 036 90010
	9406	Wire Jumper	3198 036 90010
	9407	Wire Jumper	3198 036 90010
	9408	Wire Jumper	3198 036 90010
	9409	Wire Jumper	3198 036 90010
	9410	Wire Jumper	3198 036 90010
	9411	Wire Jumper	3198 036 90010
	9412	Wire Jumper	3198 036 90010
	9413	Wire Jumper	3198 036 90010
	9414	Wire Jumper	3198 036 90010
	9415	Wire Jumper	3198 036 90010
	9416	Wire Jumper	3198 036 90010
	9417	Wire Jumper	3198 036 90010
	9418	Wire Jumper	3198 036 90010
	9419	Wire Jumper	3198 036 90010
	9421	Wire Jumper	3198 036 90010
	9422	Wire Jumper	3198 036 90010
	9423	Wire Jumper	3198 036 90010
	9424	Wire Jumper	3198 036 90010
	9425	Wire Jumper	3198 036 90010
	9426	Wire Jumper	3198 036 90010
	9427	Wire Jumper	3198 036 90010
	9453	Wire Jumper	3198 036 90010
	9460	Wire Jumper	3198 036 90010
	9463	Wire Jumper	3198 036 90010
	9500	Wire Jumper	3198 036 90010
	9501	Wire Jumper	3198 036 90010
	9503	Wire Jumper	3198 036 90010
	9506	Wire Jumper	3198 036 90010
	9507	Wire Jumper	3198 036 90010
	9510	Wire Jumper	3198 036 90010
	9511	Wire Jumper	3198 036 90010
	9512	Wire Jumper	3198 036 90010
	9513	Wire Jumper	3198 036 90010
	9514	Wire Jumper	3198 036 90010
	9515	Wire Jumper	3198 036 90010
	9516	Wire Jumper	3198 036 90010
	9518	Wire Jumper	3198 036 90010
	9520	Wire Jumper	3198 036 90010
	9521	Wire Jumper	3198 036 90010
	9522	Wire Jumper	3198 036 90010
	9524	Wire Jumper	3198 036 90010
	9528	Wire Jumper	3198 036 90010
	9530	Wire Jumper	3198 036 90010
	9611	Coil, 27u, 10%	3198 018 22790
	9612	Wire Jumper	3198 036 90010
	9613	Wire Jumper	3198 036 90010
	9614	Wire Jumper	3198 036 90010
	9615	Wire Jumper	3198 036 90010
	9617	Wire Jumper	3198 036 90010
	9618	Wire Jumper	3198 036 90010
	9619	Wire Jumper	3198 036 90010
	9620	Wire Jumper	3198 036 90010
	9621	Wire Jumper	3198 036 90010
	9622	Wire Jumper	3198 036 90010
	9623	Wire Jumper	3198 036 90010
	9624	Wire Jumper	3198 036 90010
	9626	Wire Jumper	3198 036 90010
	9627	Wire Jumper	3198 036 90010
	9628	Wire Jumper	3198 036 90010
	9629	Wire Jumper	3198 036 90010
	9631	Wire Jumper	3198 036 90010
	9632	Wire Jumper	3198 036 90010
	9633	Wire Jumper	3198 036 90010
	9637	Wire Jumper	3198 036 90010
	9638	Wire Jumper	3198 036 90010
	9639	Wire Jumper	3198 036 90010
	9640	Wire Jumper	3198 036 90010
	9641	Wire Jumper	3198 036 90010
	9642	Wire Jumper	3198 036 90010
	9643	Wire Jumper	3198 036 90010
	9648	Wire Jumper	3198 036 90010
	9650	Wire Jumper	3198 036 90010
	9651	Wire Jumper	3198 036 90010
	9652	Wire Jumper	3198 036 90010
	9654	Wire Jumper	3198 036 90010
	9655	Wire Jumper	3198 036 90010
	9656	Wire Jumper	3198 036 90010
	9657	Wire Jumper	3198 036 90010
	9658	Wire Jumper	3198 036 90010
	9659	Wire Jumper	3198 036 90010
	9660	Wire Jumper	3198 036 90010
	9661	Wire Jumper	3198 036 90010
	9662	Wire Jumper	3198 036 90010
	9663	Wire Jumper	3198 036 90010
	9664	Wire Jumper	3198 036 90010
	9665	Wire Jumper	3198 036 90010
	9666	Wire Jumper	3198 036 90010
	9667	Wire Jumper	3198 036 90010
	9668	Wire Jumper	3198 036 90010
	9669	Wire Jumper	3198 036 90010
	9670	Wire Jumper	3198 036 90010
	9671	Wire Jumper	3198 036 90010
	9672	Coil, 22u, 10%	3198 018 22290
	9674	Wire Jumper	3198 036 90010
	9675	Wire Jumper	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

Ref	Description	Part No.
9676	Wire Jumper.	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper.	3198 036 90010
9680	Wire Jumper.	3198 036 90010
9681	Wire Jumper.	3198 036 90010
9685	Wire Jumper.	3198 036 90010
9686	Wire Jumper.	3198 036 90010
9687	Wire Jumper.	3198 036 90010
9688	Wire Jumper.	3198 036 90010
9689	Wire Jumper.	3198 036 90010
9690	Wire Jumper.	3198 036 90010
9691	Wire Jumper.	3198 036 90010
9694	Wire Jumper.	3198 036 90010
9695	Wire Jumper.	3198 036 90010
9697	Wire Jumper.	3198 036 90010
9698	Wire Jumper.	3198 036 90010
9699	Wire Jumper.	3198 036 90010
9821	Wire Jumper.	3198 036 90010
9822	Wire Jumper.	3198 036 90010
9825	Wire Jumper.	3198 036 90010
9828	Wire Jumper.	3198 036 90010
9829	Wire Jumper.	3198 036 90010
9831	Wire Jumper.	3198 036 90010
9832	Wire Jumper.	3198 036 90010
9837	Wire Jumper.	3198 036 90010
9838	Wire Jumper.	3198 036 90010
9839	Wire Jumper.	3198 036 90010
9846	Wire Jumper.	3198 036 90010
9847	Wire Jumper.	3198 036 90010
9849	Wire Jumper.	3198 036 90010
9850	Wire Jumper.	3198 036 90010
9851	Wire Jumper.	3198 036 90010
9852	Wire Jumper.	3198 036 90010
9853	Wire Jumper.	3198 036 90010
9856	Wire Jumper.	3198 036 90010
9860	Wire Jumper.	3198 036 90010
9861	Wire Jumper.	3198 036 90010
9862	Wire Jumper.	3198 036 90010
9864	Wire Jumper.	3198 036 90010
9865	Wire Jumper.	3198 036 90010
9868	Wire Jumper.	3198 036 90010
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9891	Wire Jumper.	3198 036 90010
9892	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010
9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9905	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9918	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9993	Wire Jumper.	3198 036 90010
9994	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9997	Wire Jumper.	3198 036 90010
9998	Wire Jumper.	3198 036 90010
CBA	Main Chassis Assembly.	3139 187 23231

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

Ref	Description	Part No.
S 0211	2 Pin Connector.	2422 025 16268
S 0212	2 Pin Connector.	2422 025 16559
0214	5 Pin Connector.	2422 025 06353
1606	Tact Switch.	2422 128 02742
2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2698	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322 242 13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322 242 13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
6691	LED, LTL-10234WHCR	9322 185 69682
6692	IR Receiver, TSOP1836UH3V.	9322 127 54667
9001	Wire Jumper.	3198 036 90010
9002	Wire Jumper.	3198 036 90010
CBA	Front Interface Panel Assembly	3139 177 26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts

Side Jack Panel Parts

Ref	Description	Part No.
0232	Headphone Jack	2422 026 04747
0250	A/V Jack	2422 026 04815
0251	6 Pin Connector.	2422 025 12482
0254	5 Pin Connector.	2422 025 12481
0255	4 Pin Connector.	2422 025 12479
1810	3 Pin Connector.	2412 020 00725
1811	3 Pin Connector.	2412 020 00725
2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
6161	Zener Diode, 6.8 volt.	3198 010 26880
7802	IC, HEF4053BT.	9333 729 60653
9150	Wire Jumper.	3198 036 90010
9151	Wire Jumper.	3198 036 90010
9152	Wire Jumper.	3198 036 90010
9153	Wire Jumper.	3198 036 90010
9154	Wire Jumper.	3198 036 90010
9170	Wire Jumper.	3198 036 90010
CBA	Side Jack Panel Assembly	3139 177 26231

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Ref	Description	Part No.
0215	3 Pin Connector.	2422 025 09191
1091	Tact Switch.	2422 128 02742
1092	Tact Switch.	2422 128 02742
1093	Tact Switch.	2422 128 02742
1094	Tact Switch.	2422 128 02742
3088	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3089	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3091	Res, 560 ohm, 5%, Metalized Glass.	3198 021 35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3093	Res, 560 ohm, 5%, Metalized Glass.	3198 021 35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
4092	Res, Zero ohm, "Chip" Jumper	3198 021 90030
6092	Diode, Signal.	9340 453 90115
CBA	Top Control Panel.	3139 187 10251

Cabinet & Accessory Parts

Cabinet & Accessory Parts

Ref	Description	Part No.
S AC01	AC Cord.	3135 010 03831

27PT633R37C (continued)

	AC03	Anode Lead Spacer (3 Used)	3135 014 04471
	AC04	Batteries for Remote Control Transmitte	9299 000 65263
	AC05	Cabinet Back	3139 124 36763
	AC08	Chassis Tray	3139 124 31324
S	AC09	CRT, A68QCP893X001	9322 173 75682
S	AC12	Degaussing Coil.	2422 549 43967
	AC13	Front Interface Panel Bracket.	3139 124 32891
	AC15	Holder, Degaussing Coil (4 Used) . . .	3139 124 31122
	AC17	Owner's Manual	3121 235 20661
	AC18	Quick Use Guide.	3121 233 43481
	AC19	Side Jack Panel Bracket.	3139 124 37061
	AC20	Cabinet Front Assembly	3121 237 53091
	AC20A	Cabinet Front.	3139 177 60011
	AC20C	Light Guide.	3139 124 33811
	AC20D	Nameplate.	3141 050 00161
	AC20F	Power Button Cover	3139 124 32921
	AC20G	Power Button Shaft	3139 124 32791
	AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00371
	AC20J1	Top Control Bracket.	3139 124 33941
	AC20J3	Top Control Cover.	3139 124 31131
	AC20J4	Top Control Rubber	3139 124 30391
	REMOTE	Remote Control Transmitter, RC19036002/ 01.	3139 228 88003

27PT643F35A - Manual no. 7638

Main Chassis Parts

Safety	Ref	Description	Part No.
		Main Chassis Parts	
	0211	2 Pin Connector.	2422 025 16374
	0212	2 Pin Connector.	2422 025 16375
	0214	5 Pin Connector.	2422 025 12481
	0219	6 Pin Connector.	2422 025 12482
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0222	2 Pin Connector.	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0229	3 Pin Connector.	2412 020 00725
	0239	3 Pin Connector.	2422 025 16382
	0243	6 Pin Connector.	2422 025 04854
	0244	5 Pin Connector.	2422 025 04853
	0245	6 Pin Connector.	2422 025 04854
	0246	5 Pin Connector.	2422 025 12481
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector.	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U, PLL	2422 542 90108
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1660	Crystal, 12MHz000	2422 543 01203
	1811	3 Pin Connector.	2412 020 00725
	1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
	2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
	2451	Cap, 22n, 10%, 50v, Polyester.	3198 014 02230
	2452	Cap, 180p, 5%, 50v, Ceramic.	3198 016 01810
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 360n, 5%, 250v, Metalized Polypropylene.	2022 333 00163
	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
S	2463	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene	2222 479 90042
S	2465	Cap, 15n, 5%, 1600v, Polypropylene	2020 301 90255
	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
	2468	Cap, 27n, 10%, 400v, Polyester	2222 347 90232
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 120n, 5%, 250v, Metalized Polypropylene.	2222 479 90051
	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2803	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2816	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740

S = Safety Part   Be sure to use exact replacement part.

27PT643F35A (continued)

Ref	Description	Part No.
2862	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230

Ref	Description	Part No.
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
3403	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102
3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3470	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3471	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3472	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3473	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2120 101 74158
3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S 3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 32290
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3507	Surge Protector.	2422 549 43073
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070

S = Safety Part   Be sure to use exact replacement part.

27PT643F35A (continued)

S	Ref	Description	Part No.
S	3527	Res, 0R33, 5%, 3/5W, Metal Film.	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass.	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3862	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
	3863	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
	3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3865	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3866	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3867	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3901	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4122	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4123	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4127	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5202	Wire Jumper.	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5241	Wire Jumper.	3198 036 90010
	5242	Coil, 10u, 5%.	3198 018 11090
	5341	Coil, 22u.	2422 535 97333
	5342	Coil, 3u9, 10%	2422 535 97323
	5401	Coil, 1mH, 10%	3198 018 71020
S	5445	Transformer, LOT	2422 531 02574
	5451	Coil, 22u, 10%	3198 018 72290
	5452	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
S	5457	Coil, 25u.	2422 535 91028
	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
	5463	Coil, Choke.	3128 138 37021
	5471	Coil, 6u8, 20%	3198 018 76880
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 47u, 10%	2422 535 97337
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04.	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5861	Coil, 10u, 5%.	3198 018 11090
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316.	3198 010 10630
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630
	6206	Zener Diode, 6.8 volt.	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316.	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002
	6401	Zener Diode, 47 volt	3198 010 24790
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148.	3198 010 10010
	6448	Zener Diode, 6.2 volt.	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6460	Diode, Rect, BY228/24.	9340 559 50112

S = Safety Part   Be sure to use exact replacement part.

27PT643F35A (continued)

	6461	Diode, Rect, RGP30J-L7004	9338 617 60682
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316	3198 010 10630
	6468	Diode, Signal, BAS316	3198 010 10630
	6469	Diode, Rect, BYV95C	9335 001 80133
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt	3198 010 25680
	6482	Zener Diode, 9.1 volt	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYV95C	9335 001 80133
	6486	Diode, Rect, EGP20DL-5100	9322 164 42682
	6487	Diode, Rect, BYV95A	9335 000 90133
	6488	Diode, Rect, EGP20DL-5100	9322 164 42682
	6500	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
	6520	Diode, Rect, BYV95A	9335 000 90133
	6523	Diode, Signal, 1N4148	3198 010 10010
	6524	Diode, Rect, 1N5062	3198 010 10120
	6525	Diode, Rect, 1N5062	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500	9340 555 59127
	6562	Diode, Rect, EGP20DL-5100	9322 164 42682
	6563	Diode, Signal, BAS316	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148	3198 010 10010
	6569	Diode, Signal, BAS316	3198 010 10630
	6570	Zener Diode, 6.8 volt	3198 020 56880
	6580	Diode, Signal, BAS316	3198 010 10630
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7102	Transistor, PNP, BC857B(COL)	3198 010 42150
	7103	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9588H/N1/3I	9352 728 40557
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7400	Power FET, IR.	9322 053 35687
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7460	Transistor, NPN, BU4508DX	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1	9352 673 56112
	7521	Power FET, FQPF9N50	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, L78L33ACZ	9322 134 92676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C08-WBN6	9322 154 38682
	7606	Transistor, NPN, PDTC143ZT	9340 547 00215
	7802	IC, HEF4053BT	9333 729 60653
	7861	IC, TDA9853H/V1	9352 671 19557
	7891	Transistor, NPN, BC847B(COL)	3198 010 42030
	7892	Transistor, NPN, BC847B(COL)	3198 010 42030
	7901	IC, AN7522N PH	9322 181 41682
	9001	Wire Jumper	3198 036 90010
	9101	Wire Jumper	3198 036 90010
	9102	Wire Jumper	3198 036 90010
	9103	Wire Jumper	3198 036 90010
	9104	Wire Jumper	3198 036 90010
	9123	Wire Jumper	3198 036 90010
	9171	Wire Jumper	3198 036 90010
	9173	Wire Jumper	3198 036 90010
	9175	Wire Jumper	3198 036 90010
	9176	Wire Jumper	3198 036 90010
	9178	Wire Jumper	3198 036 90010
	9179	Wire Jumper	3198 036 90010
	9181	Wire Jumper	3198 036 90010
	9182	Wire Jumper	3198 036 90010
	9183	Wire Jumper	3198 036 90010
	9192	Wire Jumper	3198 036 90010
	9193	Wire Jumper	3198 036 90010
	9311	Wire Jumper	3198 036 90010
	9312	Wire Jumper	3198 036 90010
	9406	Wire Jumper	3198 036 90010
	9407	Wire Jumper	3198 036 90010
	9408	Wire Jumper	3198 036 90010
	9409	Wire Jumper	3198 036 90010
	9410	Wire Jumper	3198 036 90010
	9411	Wire Jumper	3198 036 90010
	9412	Wire Jumper	3198 036 90010
	9413	Wire Jumper	3198 036 90010
	9414	Wire Jumper	3198 036 90010
	9415	Wire Jumper	3198 036 90010
	9416	Wire Jumper	3198 036 90010
	9417	Wire Jumper	3198 036 90010
	9418	Wire Jumper	3198 036 90010
	9419	Wire Jumper	3198 036 90010
	9421	Wire Jumper	3198 036 90010
	9422	Wire Jumper	3198 036 90010
	9423	Wire Jumper	3198 036 90010
	9424	Wire Jumper	3198 036 90010
	9425	Wire Jumper	3198 036 90010
	9426	Wire Jumper	3198 036 90010
	9427	Wire Jumper	3198 036 90010
	9453	Wire Jumper	3198 036 90010
	9460	Wire Jumper	3198 036 90010
	9463	Wire Jumper	3198 036 90010
	9500	Wire Jumper	3198 036 90010
	9501	Wire Jumper	3198 036 90010
	9503	Wire Jumper	3198 036 90010
	9506	Wire Jumper	3198 036 90010
	9507	Wire Jumper	3198 036 90010
	9510	Wire Jumper	3198 036 90010
	9511	Wire Jumper	3198 036 90010
	9512	Wire Jumper	3198 036 90010
	9513	Wire Jumper	3198 036 90010
	9514	Wire Jumper	3198 036 90010
	9515	Wire Jumper	3198 036 90010
	9516	Wire Jumper	3198 036 90010
	9518	Wire Jumper	3198 036 90010
	9520	Wire Jumper	3198 036 90010
	9521	Wire Jumper	3198 036 90010
	9522	Wire Jumper	3198 036 90010
	9524	Wire Jumper	3198 036 90010
	9528	Wire Jumper	3198 036 90010
	9530	Wire Jumper	3198 036 90010
	9611	Coil, 27u, 10%	3198 018 22790
	9612	Wire Jumper	3198 036 90010
	9613	Wire Jumper	3198 036 90010
	9614	Wire Jumper	3198 036 90010
	9615	Wire Jumper	3198 036 90010
	9617	Wire Jumper	3198 036 90010
	9618	Wire Jumper	3198 036 90010
	9619	Wire Jumper	3198 036 90010
	9620	Wire Jumper	3198 036 90010
	9621	Wire Jumper	3198 036 90010
	9622	Wire Jumper	3198 036 90010
	9623	Wire Jumper	3198 036 90010
	9624	Wire Jumper	3198 036 90010
	9626	Wire Jumper	3198 036 90010
	9627	Wire Jumper	3198 036 90010
	9628	Wire Jumper	3198 036 90010
	9629	Wire Jumper	3198 036 90010
	9631	Wire Jumper	3198 036 90010
	9632	Wire Jumper	3198 036 90010
	9633	Wire Jumper	3198 036 90010
	9637	Wire Jumper	3198 036 90010
	9638	Wire Jumper	3198 036 90010
	9640	Wire Jumper	3198 036 90010
	9641	Wire Jumper	3198 036 90010
	9642	Wire Jumper	3198 036 90010
	9643	Wire Jumper	3198 036 90010
	9648	Wire Jumper	3198 036 90010
	9650	Wire Jumper	3198 036 90010
	9651	Wire Jumper	3198 036 90010
	9652	Wire Jumper	3198 036 90010
	9654	Wire Jumper	3198 036 90010
	9655	Wire Jumper	3198 036 90010
	9656	Wire Jumper	3198 036 90010
	9657	Wire Jumper	3198 036 90010
	9658	Wire Jumper	3198 036 90010
	9659	Wire Jumper	3198 036 90010
	9660	Wire Jumper	3198 036 90010
	9661	Wire Jumper	3198 036 90010
	9662	Wire Jumper	3198 036 90010
	9663	Wire Jumper	3198 036 90010
	9664	Wire Jumper	3198 036 90010
	9665	Wire Jumper	3198 036 90010
	9666	Wire Jumper	3198 036 90010
	9667	Wire Jumper	3198 036 90010
	9668	Wire Jumper	3198 036 90010
	9669	Wire Jumper	3198 036 90010
	9670	Wire Jumper	3198 036 90010
	9671	Wire Jumper	3198 036 90010
	9672	Coil, 22u, 10%	3198 018 22290
	9674	Wire Jumper	3198 036 90010
	9675	Wire Jumper	3198 036 90010
	9676	Wire Jumper	3198 036 90010
	9678	Coil, 22u, 10%	3198 018 22290
	9679	Wire Jumper	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

Ref	Description	Part No.
9680	Wire Jumper	3198 036 90010
9681	Wire Jumper	3198 036 90010
9685	Wire Jumper	3198 036 90010
9686	Wire Jumper	3198 036 90010
9687	Wire Jumper	3198 036 90010
9688	Wire Jumper	3198 036 90010
9689	Wire Jumper	3198 036 90010
9690	Wire Jumper	3198 036 90010
9691	Wire Jumper	3198 036 90010
9694	Wire Jumper	3198 036 90010
9695	Wire Jumper	3198 036 90010
9697	Wire Jumper	3198 036 90010
9698	Wire Jumper	3198 036 90010
9699	Wire Jumper	3198 036 90010
9821	Wire Jumper	3198 036 90010
9822	Wire Jumper	3198 036 90010
9825	Wire Jumper	3198 036 90010
9828	Wire Jumper	3198 036 90010
9829	Wire Jumper	3198 036 90010
9831	Wire Jumper	3198 036 90010
9832	Wire Jumper	3198 036 90010
9837	Wire Jumper	3198 036 90010
9838	Wire Jumper	3198 036 90010
9839	Wire Jumper	3198 036 90010
9846	Wire Jumper	3198 036 90010
9847	Wire Jumper	3198 036 90010
9849	Wire Jumper	3198 036 90010
9850	Wire Jumper	3198 036 90010
9851	Wire Jumper	3198 036 90010
9852	Wire Jumper	3198 036 90010
9853	Wire Jumper	3198 036 90010
9856	Wire Jumper	3198 036 90010
9860	Wire Jumper	3198 036 90010
9861	Wire Jumper	3198 036 90010
9862	Wire Jumper	3198 036 90010
9864	Wire Jumper	3198 036 90010
9865	Wire Jumper	3198 036 90010
9868	Wire Jumper	3198 036 90010
9873	Wire Jumper	3198 036 90010
9874	Wire Jumper	3198 036 90010
9875	Wire Jumper	3198 036 90010
9877	Wire Jumper	3198 036 90010
9891	Wire Jumper	3198 036 90010
9892	Wire Jumper	3198 036 90010
9901	Wire Jumper	3198 036 90010
9902	Wire Jumper	3198 036 90010
9903	Wire Jumper	3198 036 90010
9904	Wire Jumper	3198 036 90010
9905	Wire Jumper	3198 036 90010
9911	Wire Jumper	3198 036 90010
9913	Wire Jumper	3198 036 90010
9914	Wire Jumper	3198 036 90010
9915	Wire Jumper	3198 036 90010
9918	Wire Jumper	3198 036 90010
9991	Wire Jumper	3198 036 90010
9996	Wire Jumper	3198 036 90010
9998	Wire Jumper	3198 036 90010
CBA	Main Chassis Assembly	3141 058 59201

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

Ref	Description	Part No.
S 0211	2 Pin Connector	2422 025 16268
S 0212	2 Pin Connector	2422 025 16559
0214	5 Pin Connector	2422 025 06353
1606	Tact Switch	2422 128 02742
2691	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
2692	Cap, 47n, 10%, 25v, Ceramic	3198 023 04730
2693	Cap, 47n, 10%, 25v, Ceramic	3198 023 04730
2694	Cap, 47n, 10%, 25v, Ceramic	3198 023 04730
2695	Cap, 47n, 10%, 25v, Ceramic	3198 023 04730
2698	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass	2322 242 13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass	2322 242 13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film	3198 011 05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film	3198 011 03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film	3198 011 02210
6691	LED, LTL-10234WHCR	9322 185 69682
6692	IR Receiver, TSOP1836UH3V	9322 127 54667
9001	Wire Jumper	3198 036 90010
9002	Wire Jumper	3198 036 90010
CBA	Front Interface Panel Assembly	3139 177 26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts

Side Jack Panel Parts

Ref	Description	Part No.
0232	Headphone Jack	2422 026 04747
0250	A/V Jack	2422 026 04815
0251	6 Pin Connector	2422 025 12482
0254	5 Pin Connector	2422 025 12481
0255	4 Pin Connector	2422 025 12479
1810	3 Pin Connector	2412 020 00725
1811	3 Pin Connector	2412 020 00725
2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2176	Cap, 470p, 5%, 50v, Ceramic	3198 016 34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2178	Cap, 470p, 5%, 50v, Ceramic	3198 016 34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
6161	Zener Diode, 6.8 volt	3198 010 26880
7802	IC, HEF4053BT	9333 729 60653
9150	Wire Jumper	3198 036 90010
9151	Wire Jumper	3198 036 90010
9152	Wire Jumper	3198 036 90010
9153	Wire Jumper	3198 036 90010
9154	Wire Jumper	3198 036 90010
9170	Wire Jumper	3198 036 90010
CBA	Side Jack Panel Assembly	3139 177 26231

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Ref	Description	Part No.
0215	3 Pin Connector	2422 025 16601
1091	Tact Switch	2422 128 02742
1092	Tact Switch	2422 128 02742
1093	Tact Switch	2422 128 02742
1094	Tact Switch	2422 128 02742
3091	Res, 560 ohm, 5%, Metalized Glass	3198 021 35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3093	Res, 560 ohm, 5%, Metalized Glass	3198 021 35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
4085	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4089	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4090	Res, Zero ohm, "Chip" Jumper	3198 021 90030
6091	Diode, Signal	9340 453 90115
CBA	Top Control Panel Assembly	3139 187 15841

Cabinet & Accessory Parts

Cabinet & Accessory Parts

Ref	Description	Part No.
S AC01	AC Cord	3135 010 03831
AC03	Anode Lead Spacer (3 Used)	3135 014 04471
AC04	Batteries for Remote Control Transmitte	9299 000 65263
AC05	Cabinet Back	3139 124 44711
AC06	Cabinet Back Screw Cover (2 Used)	3139 124 39301
AC08	Chassis Tray	3139 124 31325
S AC09	CRT, A68QCU754X73(N)	9301 925 60527

27PT643F35A (continued)

	Ref	Description	Part No.
S	AC12	Degaussing Coil.	2422 549 43967
	AC13	Front Interface Panel Bracket.	3139 124 32891
	AC15	Holder, Degaussing Coil (4 Used) . . .	3139 124 31122
	AC17	Owner's Manual, English.	3121 235 21091
	AC17	Owner's Manual, French	3121 235 21281
	AC18	Quick Use Guide.	3121 233 43491
	AC18	Quick Use Guide, French.	3121 233 44841
	AC19	Side Jack Panel Bracket.	3139 124 37061
	AC20	Cabinet Front Assembly	3121 237 53303
	AC20A	Cabinet Front.	3139 177 58401
	AC20C	Light Guide.	3139 124 39701
	AC20D	Nameplate.	3141 050 00161
	AC20E	Power Button	3139 138 10881
	AC20H	Speaker, 8 ohm, 5W (2 Used).	2422 264 00409
	AC20J	Top Control Assembly	3139 138 11451
	REMOTE	Remote Control Transmitter, RC19036002/ 01A.	3139 238 04312

S = Safety Part   Be sure to use exact replacement part.

27PT643R/37C - Manual no. 7638

Main Chassis Parts

S	Ref	Description	Part No.
		Main Chassis Parts	
	0127	Socket Fuse.	2422 088 00271
	0129	NTC Holder	3139 120 10151
	0136	IC-Spring.	3104 301 22081
	0137	Spring	3139 121 24583
	0138	IC-Spring.	3104 301 22081
	0139	Spring for Bracket	3122 121 24786
	0140	Spring	3139 121 24583
	0141	IC-Spring.	3104 301 22081
	0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421
	0153	Cable, DIPMate, 5 Pin, 480mm	3139 121 07951
	0211	2 Pin Connector.	2422 025 16374
	0212	2 Pin Connector.	2422 025 16375
	0214	5 Pin Connector.	2422 025 12481
	0219	6 Pin Connector.	2422 025 12482
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0222	2 Pin Connector.	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0229	3 Pin Connector.	2412 020 00725
	0239	3 Pin Connector.	2422 025 16382
	0243	6 Pin Connector.	2422 025 04854
	0244	5 Pin Connector.	2422 025 04853
	0245	6 Pin Connector.	2422 025 04854
	0246	5 Pin Connector.	2422 025 12481
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector.	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U PLL	2422 542 90141
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1660	Crystal, 12MHz000	2422 543 01203
	1811	3 Pin Connector.	2412 020 00725
	1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic. . .	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyest er.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic. . .	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic. . .	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic . .	2020 558 90445
	2401	Cap, 2u2, 20%, 50v, Electrolytic . . .	2020 021 90552
	2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic . . .	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2441	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic . . .	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic. . .	2020 021 91139
	2451	Cap, 22n, 10%, 50v, Polyester.	3198 014 02230
	2452	Cap, 180p, 5%, 50v, Ceramic.	3198 016 01810
	2455	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
	2457	Cap, 360n, 5%, 250v, Metalized Polyprop ylene.	2022 333 00163
	2458	Cap, 2u2, 20%, 100v, Electrolytic. . .	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
S	2463	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2464	Cap, 2u2, 5%, 160v, Metalized Polypropy lene	2222 479 90042
S	2465	Cap, 15n, 5%, 1600v, Polypropylene . .	2020 301 90255
	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
	2468	Cap, 22n, 10%, 400v, Polyester	2222 347 90223
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic . . .	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 120n, 5%, 250v, Metalized Polyprop ylene.	2222 479 90051
	2485	Cap, 4u7, 20%, 250v, Electrolytic. . .	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic. . .	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic . . .	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic . .	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic. . .	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypro pylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic . .	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic . . .	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic . .	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic . . .	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic . . .	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic . . .	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic. . .	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic. . .	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390

S = Safety Part   Be sure to use exact replacement part.

27PT643R/37C (continued)

2611 Cap, 1u, +80/-20%, 10v, Ceramic. . . . 3198 017 41050
2612 Cap, 68p, 5%, 50v, Ceramic 3198 016 36890
2613 Cap, 68p, 5%, 50v, Ceramic 3198 016 36890
2615 Cap, 1n, 10%, 50v, Ceramic 3198 017 31020
2618 Cap, 1u, +80/-20%, 10v, Ceramic. . . . 3198 017 41050
2619 Cap, 1u, +80/-20%, 16v, Ceramic. . . . 3198 017 21050
2802 Cap, 220n, +80/-20%, 16v, Ceramic. . . 3198 017 42240
2803 Cap, 220n, +80/-20%, 16v, Ceramic. . . 3198 017 42240
2810 Cap, 2u2, +80/-20%, 10v, Ceramic . . . 3198 017 22250
2813 Cap, 2u2, +80/-20%, 10v, Ceramic . . . 3198 017 22250
2816 Cap, 470n, +80/-20%, 10v, Ceramic. . . 3198 017 44740
2862 Cap, 2u2, +80/-20%, 10v, Ceramic . . . 3198 017 22250
2864 Cap, 2u2, 20%, 50v, Electrolytic . . . 3198 025 52280
2865 Cap, 2u2, 20%, 50v, Electrolytic . . . 3198 025 52280
2866 Cap, 2u2, +80/-20%, 10v, Ceramic . . . 3198 017 22250
2867 Cap, 1n8, 10%, 50v, Ceramic. 2238 586 15626
2868 Cap, 150p, 5%, 50v, Ceramic. 3198 016 31510
2869 Cap, 68n, 10%, 50v, Polyester. 3198 014 06830
2870 Cap, 68n, 10%, 50v, Polyester. 3198 014 06830
2871 Cap, 150p, 5%, 50v, Ceramic. 3198 016 31510
2872 Cap, 1n8, 10%, 50v, Ceramic. 2238 586 15626
2873 Cap, 2u2, +80/-20%, 10v, Ceramic . . . 3198 017 22250
2874 Cap, 100u, 20%, 25v, Electrolytic. . . 3198 025 31010
2875 Cap, 100u, 20%, 25v, Electrolytic. . . 3198 025 31010
2876 Cap, 4u7, 20%, 50v, Electrolytic . . . 3198 025 54780
2877 Cap, 10u, 20%, 50v, Electrolytic . . . 3198 025 51090
2878 Cap, 1u, 20%, 50v, Electrolytic. . . . 3198 025 51080
2879 Cap, 4n7, 10%, 50v, Ceramic. 3198 017 34720
2880 Cap, 22n, 10%, 25v, Ceramic. 3198 017 32230
2883 Cap, 470u, 20%, 16v, Electrolytic. . . 3198 025 24710
2884 Cap, 2u2, 20%, 50v, Electrolytic . . . 3198 025 52280
2885 Cap, 220n, 10%, 50v, Polyester 3198 014 02240
2886 Cap, 220n, +80/-20%, 16v, Ceramic. . . 3198 017 42240
2892 Cap, 100n, +80/-20%, 25v, Ceramic. . . 3198 023 41040
2893 Cap, 100n, +80/-20%, 25v, Ceramic. . . 3198 023 41040
2902 Cap, 1000u, 20%, 16v, Electrolytic . . 3198 026 21020
2903 Cap, 1u, 20%, 50v, Electrolytic. . . . 3198 025 51080
2904 Cap, 27n, 10%, 50v, Ceramic. 2238 580 15642
2905 Cap, 1n2, 10%, 50v, Ceramic. 2238 586 15624
2906 Cap, 27n, 10%, 50v, Ceramic. 2238 580 15642
2907 Cap, 1n2, 10%, 50v, Ceramic. 2238 586 15624
2908 Cap, 10u, 20%, 50v, Electrolytic . . . 3198 025 51090
2910 Cap, 10n, 10%, 50v, Ceramic. 3198 017 31030
2911 Cap, 10n, 10%, 50v, Ceramic. 3198 017 31030
2950 Cap, 330p, 5%, 50v, Ceramic. 3198 016 33310
3000 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3001 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3002 Res, Zero ohm, "Chip" Jumper 3198 021 90030
3003 Res, 1K5, 5%, 1/16W, Metalized Glass . 3198 021 31520
3004 Res, 8K2, 5%, 1/16W, Metalized Glass . 3198 021 38220
3005 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3101 Res, 68 ohm, 5%, 1/6W, Carbon Film . . 3198 011 06890
3102 Res, 1K, 5%, 1/16W, Metalized Glass. . 3198 021 31020
3103 Res, 150 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01510
3104 Res, 220K, 5%, 1/16W, Metalized Glass. 3198 021 32240
3105 Res, 150 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01510
3106 Res, 220K, 5%, 1/16W, Metalized Glass. 3198 021 32240
3111 Res, 75 ohm, 5%, 1/6W, Carbon Film . . 3198 011 07590
3112 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3113 Res, 75 ohm, 5%, 1/6W, Carbon Film . . 3198 011 07590
3114 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3115 Res, 75 ohm, 5%, 1/6W, Carbon Film . . 3198 011 07590
3116 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3123 Res, 150 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01510
3124 Res, 47K, 5%, 1/16W, Metalized Glass . 3198 021 34730
3125 Res, 150 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01510
3126 Res, 47K, 5%, 1/16W, Metalized Glass . 3198 021 34730
3131 Res, 150 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01510
3132 Res, 47K, 5%, 1/16W, Metalized Glass . 3198 021 34730
3133 Res, 150 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01510
3134 Res, 47K, 5%, 1/16W, Metalized Glass . 3198 021 34730
3135 Res, 75 ohm, 5%, 1/6W, Carbon Film . . 3198 011 07590
3136 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3141 Res, 1K, 5%, 1/6W, Carbon Film 3198 011 01020
3149 Res, 100K, 5%, 1/16W, Metalized Glass. 3198 021 31040
3150 Res, 150K, 5%, 1/16W, Metalized Glass. 3198 021 31540
3154 Res, 5K6, 5%, 1/6W, Carbon Film. . . . 3198 011 05620
3156 Res, 10K, 5%, 1/6W, Carbon Film. . . . 3198 011 01030
3157 Res, 1K5, 5%, 1/16W, Metalized Glass . 3198 021 31520
3158 Res, 10K, 5%, 1/16W, Metalized Glass . 3198 021 31030
3159 Res, 1K2, 1%, 1/8W, Metalized Glass. . 2322 734 61202
3200 Res, 390 ohm, 5%, 1/6W, Carbon Film. . 3198 011 03910
3201 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3202 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3203 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3204 Res, 22K, 5%, 1/6W, Carbon Film. . . . 3198 011 02230
3205 Res, 1K, 5%, 1/16W, Metalized Glass. . 3198 021 31020
3206 Res, 33K, 5%, 1/16W, Metalized Glass . 3198 021 33330
3207 Res, 1K, 5%, 1/6W, Carbon Film 3198 011 01020
3208 Res, 220 ohm, 5%, 1/16W, Metalized Glas 3198 021 32210
3209 Res, 68 ohm, 5%, 1/16W, Metalized Glass 3198 021 36890
3212 Res, 470 ohm, 5%, 1/16W, Metalized Glas 3198 021 34710
3213 Res, 560 ohm, 5%, 1/6W, Carbon Film. . 3198 011 05610
3217 Res, 330K, 5%, 1/16W, Metalized Glass. 3198 021 33340
3218 Res, 82K, 5%, 1/16W, Metalized Glass . 3198 021 38230
3219 Res, 2K2, 5%, 1/16W, Metalized Glass . 3198 021 32220
3220 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3221 Res, 560 ohm, 5%, 1/6W, Carbon Film. . 3198 011 05610
3222 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3226 Res, 560 ohm, 5%, 1/16W, Metalized Glas 3198 021 35610
3232 Res, 2K2, 5%, 1/16W, Metalized Glass . 3198 021 32220
3235 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3241 Res, 22K, 5%, 1/16W, Metalized Glass . 3198 021 32230
3242 Res, 27K, 5%, 1/16W, Metalized Glass . 3198 021 32730
3244 Res, 820 ohm, 5%, 1/6W, Carbon Film. . 3198 011 08210
3245 Res, 39K, 1%, 1/16W, Metalized Glass . 2322 704 63903
3246 Res, 10K, 5%, 1/16W, Metalized Glass . 3198 021 31030
3247 Res, 470K, 5%, 1/16W, Metalized Glass. 3198 021 34740
3248 Res, 33K, 5%, 1/16W, Metalized Glass . 3198 021 33330
3249 Res, 820 ohm, 5%, 1/6W, Carbon Film. . 3198 011 08210
3250 Res, 8K2, 5%, 1/6W, Carbon Film. . . . 3198 011 08220
3251 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3256 Res, 1K, 5%, 1/16W, Metalized Glass. . 3198 021 31020
3257 Res, 10M, 5%, 1/16W, Metalized Glass . 3198 021 31060
3258 Res, 100K, 5%, 1/16W, Metalized Glass. 3198 021 31040
3259 Res, 470K, 5%, 1/16W, Metalized Glass. 3198 021 34740
3331 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3332 Res, 1K, 20%, 1/2W, Carbon Film. . . . 3198 013 01020
3333 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3334 Res, 1K, 20%, 1/2W, Carbon Film. . . . 3198 013 01020
3335 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3336 Res, 1K, 20%, 1/2W, Carbon Film. . . . 3198 013 01020
3340 Res, 10 ohm, 5%, 1/2W, Metal Film. . . 2306 207 03109
S 3341 Res, 1 ohm, 5%, 1/3W, Metal Film . . . 2306 204 03108
S 3342 Res, 1 ohm, 5%, 1/3W, Metal Film . . . 2306 204 03108
3343 Res, 1K5, 20%, 1/2W, Carbon Film . . . 3198 013 01520
3344 Res, 33 ohm, 5%, 1/6W, Carbon Film . . 3198 011 03390
S 3345 Varactor, 1MA/50V, Max 115V. 2322 593 13507
3346 Res, 33 ohm, 5%, 1/6W, Carbon Film . . 3198 011 03390
3400 Res, 330 ohm, 5%, 1/6W, Carbon Film. . 3198 011 03310
3401 Res, 220K, 5%, 1/6W, Carbon Film . . . 3198 011 02240
3403 Res, 82K, 1%, 3/5W, Metal Film 2312 915 18203
3404 Res, 1K, 5%, 1/6W, Carbon Film 3198 011 01020
3405 Res, 4R7, 5%, 1/6W, Carbon Film. . . . 3198 011 04780
3406 Res, 4R7, 5%, 1/6W, Carbon Film. . . . 3198 011 04780
3408 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3410 Res, 10K, 5%, 1/6W, Carbon Film. . . . 3198 011 01030
3411 Res, 4R7, 5%, 1/3W, Metal Film 2306 204 03478
3441 Res, 100 ohm, 5%, 1/10W, Metalized Glas 3198 021 51010
3442 Res, Zero ohm, "Chip" Jumper 3198 021 90030
3443 Res, 1M, 5%, 1/16W, Metalized Glass. . 3198 021 31050
3445 Res, 15K, 5%, 1/6W, Carbon Film. . . . 3198 011 01530
3446 Res, 5K6, 5%, 1/6W, Carbon Film. . . . 3198 011 05620
3447 Res, 180 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01810
3448 Res, 820 ohm, 5%, 1/6W, Carbon Film. . 3198 011 08210
3449 Res, 68 ohm, 5%, 1/6W, Carbon Film . . 3198 011 06890
3450 Res, 33 ohm, 5%, 1/6W, Carbon Film . . 3198 011 03390
S 3451 Res, 10 ohm, 5%, 1/3W, Metal Film. . . 2306 204 03109
3452 Res, 5K1, 1%, 3/5W, Metal Film 2312 915 15102
3453 Res, 1K, 5%, 1/6W, Carbon Film 3198 011 01020
3454 Res, 2K, 1%, 3/5W, Metal Film. 2312 915 12002
S 3455 Res, 6R8, 5%, 1 1/3W, Metal Film . . . 3198 012 26880
3458 Res, 1K, 5%, 1/6W, Carbon Film 3198 011 01020
S 3459 Res, 15K, 5%, 1 1/3W, Metal Film . . . 3198 012 21530
3460 Res, 3K9, 5%, 1/6W, Carbon Film. . . . 3198 011 03920
3463 Res, 33 ohm, 5%, 1/6W, Carbon Film . . 3198 011 03390
3465 Res, 27K, 1%, 3/5W, Metal Film 2312 915 12703
3469 Res, 3K3, 5%, 1/6W, Carbon Film. . . . 3198 011 03320
3470 Res, 470K, 5%, 1/16W, Metalized Glass. 3198 021 34740
3471 Res, 3R9, 1%, 3/5W, Metal Film 2312 915 13908
3472 Res, 3R9, 1%, 3/5W, Metal Film 2312 915 13908
3473 Res, 2R2, 1%, 3/5W, Metal Film 2312 915 12208
3474 Res, 2K2, 1%, 3/5W, Metal Film 2312 915 12202
3475 Res, 2K2, 1%, 3/5W, Metal Film 2312 915 12202
3477 Res, 150 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01510
3478 Res, 150 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01510
3479 Res, 2K7, 5%, 1/10W, Metalized Glass . 3198 021 52720
3480 Res, 1R5, 5%, 1/4W, Carbon Film. . . . 2122 101 02083
3481 Res, 12K, 1%, 3/5W, Metal Film 2312 915 11203
3482 Res, 10K, 1%, 3/5W, Metal Film 2312 915 11003
3484 Res, 3K9, 5%, 1/6W, Carbon Film. . . . 3198 011 03920
S 3486 Res, 22 ohm, 5%, 2 1/2W, Metal Film. . 3198 012 32290
3488 Res, 4R7, 5%, 1/2W, Metal Film 2306 207 03478
3490 Res, 8K2, 5%, 1/6W, Carbon Film. . . . 3198 011 08220
3492 Res, 1K, 5%, 1/10W, Metalized Glass. . 3198 021 51020
3493 Res, 6R8, 5%, 1/3W, Metal Film 2306 204 03688
3494 Res, 4R7, 5%, 1/2W, Metal Film 2306 207 03478
3495 Res, 22K, 5%, 1/16W, Metalized Glass . 3198 021 32230
3496 Res, 100K, 5%, 1/16W, Metalized Glass. 3198 021 31040
3497 Res, 100K, 5%, 1/16W, Metalized Glass. 3198 021 31040
3498 Res, 12K, 5%, 1/16W, Metalized Glass . 3198 021 31230
3499 Res, 10K, 5%, 1/10W, Metalized Glass . 3198 021 51030
S 3504 Res, PTC, 3 ohm, 144V. 2122 663 00019
3506 Res, 1M5, 5%, 1/2W, Metalized Glass. . 2322 242 13155

S = Safety Part   Be sure to use exact replacement part.

27PT643R/37C (continued)

	Ref	Description	Part No.
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198 021 31530
	3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198 021 31220
	3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4122	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4123	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4127	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5202	Wire Jumper.	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5241	Wire Jumper.	3198 036 90010
	5242	Coil, 10u, 5%.	3198 018 11090
	5341	Coil, 22u.	2422 535 97333
	5342	Coil, 3u9, 10%	2422 535 97323
	5401	Coil, 1mH, 10%	3198 018 71020
S	5445	Transformer, LOT	2422 531 02574
	5451	Coil, 22u, 10%	3198 018 72290
	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
S	5457	Coil, 25u.	2422 535 91028
	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
	5463	Coil, Choke.	3128 138 37021
	5471	Coil, 6u8, 20%	3198 018 76880
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 47u, 10%	2422 535 97337
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04.	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5861	Coil, 10u, 5%.	3198 018 11090
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316.	3198 010 10630
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630
	6206	Zener Diode, 6.8 volt.	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070

S = Safety Part   Be sure to use exact replacement part.

27PT643R/37C (continued)

	Ref	Description	Part No.
	6332	Diode, Signal, BAS316	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6400	Res, 1K, 1%, 3/5W, Metal Film	2312 915 11002
	6401	Zener Diode, 47 volt	3198 010 24790
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148	3198 010 10010
	6448	Zener Diode, 6.2 volt	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6460	Diode, Rect, BY228/24	9340 559 50112
	6461	Diode, Rect, RGP30J-L7004	9338 617 60682
	6464	Diode, Signal, BAS316	3198 010 10630
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316	3198 010 10630
	6468	Diode, Signal, BAS316	3198 010 10630
	6469	Diode, Rect, BYV95C	9335 001 80133
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt	3198 010 25680
	6482	Zener Diode, 9.1 volt	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYV95C	9335 001 80133
	6486	Diode, Rect, EGP20DL-5100	9322 164 42682
	6487	Diode, Rect, BYV95A	9335 000 90133
	6488	Diode, Rect, EGP20DL-5100	9322 164 42682
	6500	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
	6520	Diode, Rect, BYV95A	9335 000 90133
	6523	Diode, Signal, 1N4148	3198 010 10010
	6524	Diode, Rect, 1N5062	3198 010 10120
	6525	Diode, Rect, 1N5062	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500	9340 555 59127
	6562	Diode, Rect, EGP20DL-5100	9322 164 42682
	6563	Diode, Signal, BAS316	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148	3198 010 10010
	6569	Diode, Signal, BAS316	3198 010 10630
	6570	Zener Diode, 6.8 volt	3198 020 56880
	6580	Diode, Signal, BAS316	3198 010 10630
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7102	Transistor, PNP, BC857B(COL)	3198 010 42150
	7103	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9588H/N1/3I/1053	9352 728 40557
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7400	Power FET, STP3NC60FP	9322 157 37687
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7460	Transistor, NPN, BU4508DX	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1	9352 673 56112
	7521	Power FET, FQPF9N50	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, L78L33ACZ	9322 134 92676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C08-WBN6	9322 154 38682
	7606	Transistor, NPN, PDTC143ZT	9340 547 00215
	7802	IC, HEF4053BT	9333 729 60653
	7861	IC, TDA9853H/V1	9352 671 19557
	7891	Transistor, NPN, BC847B(COL)	3198 010 42030
	7892	Transistor, NPN, BC847B(COL)	3198 010 42030
	7901	IC, AN7522N PH	9322 181 41682
	9001	Wire Jumper	3198 036 90010
	9101	Wire Jumper	3198 036 90010
	9102	Wire Jumper	3198 036 90010
	9103	Wire Jumper	3198 036 90010
	9104	Wire Jumper	3198 036 90010
	9123	Wire Jumper	3198 036 90010
	9171	Wire Jumper	3198 036 90010
	9173	Wire Jumper	3198 036 90010
	9175	Wire Jumper	3198 036 90010
	9176	Wire Jumper	3198 036 90010
	9178	Wire Jumper	3198 036 90010
	9179	Wire Jumper	3198 036 90010
	9181	Wire Jumper	3198 036 90010
	9182	Wire Jumper	3198 036 90010
	9183	Wire Jumper	3198 036 90010
	9192	Wire Jumper	3198 036 90010
	9193	Wire Jumper	3198 036 90010
	9311	Wire Jumper	3198 036 90010
	9312	Wire Jumper	3198 036 90010
	9406	Wire Jumper	3198 036 90010
	9407	Wire Jumper	3198 036 90010
	9408	Wire Jumper	3198 036 90010
	9409	Wire Jumper	3198 036 90010
	9410	Wire Jumper	3198 036 90010
	9411	Wire Jumper	3198 036 90010
	9412	Wire Jumper	3198 036 90010
	9413	Wire Jumper	3198 036 90010
	9414	Wire Jumper	3198 036 90010
	9415	Wire Jumper	3198 036 90010
	9416	Wire Jumper	3198 036 90010
	9417	Wire Jumper	3198 036 90010
	9418	Wire Jumper	3198 036 90010
	9419	Wire Jumper	3198 036 90010
	9421	Wire Jumper	3198 036 90010
	9422	Wire Jumper	3198 036 90010
	9423	Wire Jumper	3198 036 90010
	9424	Wire Jumper	3198 036 90010
	9425	Wire Jumper	3198 036 90010
	9426	Wire Jumper	3198 036 90010
	9427	Wire Jumper	3198 036 90010
	9453	Wire Jumper	3198 036 90010
	9460	Wire Jumper	3198 036 90010
	9463	Wire Jumper	3198 036 90010
	9500	Wire Jumper	3198 036 90010
	9501	Wire Jumper	3198 036 90010
	9503	Wire Jumper	3198 036 90010
	9506	Wire Jumper	3198 036 90010
	9507	Wire Jumper	3198 036 90010
	9510	Wire Jumper	3198 036 90010
	9511	Wire Jumper	3198 036 90010
	9512	Wire Jumper	3198 036 90010
	9513	Wire Jumper	3198 036 90010
	9514	Wire Jumper	3198 036 90010
	9515	Wire Jumper	3198 036 90010
	9516	Wire Jumper	3198 036 90010
	9518	Wire Jumper	3198 036 90010
	9520	Wire Jumper	3198 036 90010
	9521	Wire Jumper	3198 036 90010
	9522	Wire Jumper	3198 036 90010
	9524	Wire Jumper	3198 036 90010
	9528	Wire Jumper	3198 036 90010
	9530	Wire Jumper	3198 036 90010
	9611	Coil, 27u, 10%	3198 018 22790
	9612	Wire Jumper	3198 036 90010
	9613	Wire Jumper	3198 036 90010
	9614	Wire Jumper	3198 036 90010
	9615	Wire Jumper	3198 036 90010
	9617	Wire Jumper	3198 036 90010
	9618	Wire Jumper	3198 036 90010
	9619	Wire Jumper	3198 036 90010
	9620	Wire Jumper	3198 036 90010
	9621	Wire Jumper	3198 036 90010
	9622	Wire Jumper	3198 036 90010
	9623	Wire Jumper	3198 036 90010
	9624	Wire Jumper	3198 036 90010
	9626	Wire Jumper	3198 036 90010
	9627	Wire Jumper	3198 036 90010
	9628	Wire Jumper	3198 036 90010
	9629	Wire Jumper	3198 036 90010
	9631	Wire Jumper	3198 036 90010
	9632	Wire Jumper	3198 036 90010
	9633	Wire Jumper	3198 036 90010
	9637	Wire Jumper	3198 036 90010
	9638	Wire Jumper	3198 036 90010
	9640	Wire Jumper	3198 036 90010
	9641	Wire Jumper	3198 036 90010
	9642	Wire Jumper	3198 036 90010
	9643	Wire Jumper	3198 036 90010
	9648	Wire Jumper	3198 036 90010
	9650	Wire Jumper	3198 036 90010
	9651	Wire Jumper	3198 036 90010
	9652	Wire Jumper	3198 036 90010
	9654	Wire Jumper	3198 036 90010
	9655	Wire Jumper	3198 036 90010
	9656	Wire Jumper	3198 036 90010
	9657	Wire Jumper	3198 036 90010
	9658	Wire Jumper	3198 036 90010
	9659	Wire Jumper	3198 036 90010
	9660	Wire Jumper	3198 036 90010
	9661	Wire Jumper	3198 036 90010
	9662	Wire Jumper	3198 036 90010
	9663	Wire Jumper	3198 036 90010
	9664	Wire Jumper	3198 036 90010
	9665	Wire Jumper	3198 036 90010
	9666	Wire Jumper	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

	Ref	Description	Part No.
	9667	Wire Jumper	3198 036 90010
	9668	Wire Jumper	3198 036 90010
	9669	Wire Jumper	3198 036 90010
	9670	Wire Jumper	3198 036 90010
	9671	Wire Jumper	3198 036 90010
	9672	Coil, 22u, 10%	3198 018 22290
	9674	Wire Jumper	3198 036 90010
	9675	Wire Jumper	3198 036 90010
	9676	Wire Jumper	3198 036 90010
	9678	Coil, 22u, 10%	3198 018 22290
	9679	Wire Jumper	3198 036 90010
	9680	Wire Jumper	3198 036 90010
	9681	Wire Jumper	3198 036 90010
	9685	Wire Jumper	3198 036 90010
	9686	Wire Jumper	3198 036 90010
	9687	Wire Jumper	3198 036 90010
	9688	Wire Jumper	3198 036 90010
	9689	Wire Jumper	3198 036 90010
	9690	Wire Jumper	3198 036 90010
	9691	Wire Jumper	3198 036 90010
	9694	Wire Jumper	3198 036 90010
	9695	Wire Jumper	3198 036 90010
	9697	Wire Jumper	3198 036 90010
	9698	Wire Jumper	3198 036 90010
	9699	Wire Jumper	3198 036 90010
	9821	Wire Jumper	3198 036 90010
	9822	Wire Jumper	3198 036 90010
	9825	Wire Jumper	3198 036 90010
	9828	Wire Jumper	3198 036 90010
	9829	Wire Jumper	3198 036 90010
	9831	Wire Jumper	3198 036 90010
	9832	Wire Jumper	3198 036 90010
	9837	Wire Jumper	3198 036 90010
	9838	Wire Jumper	3198 036 90010
	9839	Wire Jumper	3198 036 90010
	9846	Wire Jumper	3198 036 90010
	9847	Wire Jumper	3198 036 90010
	9849	Wire Jumper	3198 036 90010
	9850	Wire Jumper	3198 036 90010
	9851	Wire Jumper	3198 036 90010
	9852	Wire Jumper	3198 036 90010
	9853	Wire Jumper	3198 036 90010
	9856	Wire Jumper	3198 036 90010
	9860	Wire Jumper	3198 036 90010
	9861	Wire Jumper	3198 036 90010
	9862	Wire Jumper	3198 036 90010
	9864	Wire Jumper	3198 036 90010
	9865	Wire Jumper	3198 036 90010
	9868	Wire Jumper	3198 036 90010
	9873	Wire Jumper	3198 036 90010
	9874	Wire Jumper	3198 036 90010
	9875	Wire Jumper	3198 036 90010
	9877	Wire Jumper	3198 036 90010
	9891	Wire Jumper	3198 036 90010
	9892	Wire Jumper	3198 036 90010
	9901	Wire Jumper	3198 036 90010
	9902	Wire Jumper	3198 036 90010
	9903	Wire Jumper	3198 036 90010
	9904	Wire Jumper	3198 036 90010
	9905	Wire Jumper	3198 036 90010
	9911	Wire Jumper	3198 036 90010
	9913	Wire Jumper	3198 036 90010
	9914	Wire Jumper	3198 036 90010
	9915	Wire Jumper	3198 036 90010
	9918	Wire Jumper	3198 036 90010
	9991	Wire Jumper	3198 036 90010
	9996	Wire Jumper	3198 036 90010
	9998	Wire Jumper	3198 036 90010
	CBA	Main Chassis Assembly	3139 187 23231

Channel One Card Parts
Channel One Card Parts

2D 3 Line Comb Filter Parts
2D 3 Line Comb Filter Parts

DAF Panel Parts
DAF Panel Parts

DVD Eject Panel Parts
DVD Eject Panel Parts

DVD Interface Panel Parts
DVD Interface Panel Parts

Front Interface Panel Parts
Front Interface Panel Parts

	Ref	Description	Part No.
S	0211	2 Pin Connector	2422 025 16268
S	0212	2 Pin Connector	2422 025 16559
	0214	5 Pin Connector	2422 025 06353
	1606	Tact Switch	2422 128 02742
	2691	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2692	Cap, 47n, 10%, 25v, Ceramic	3198 023 04730
	2693	Cap, 47n, 10%, 25v, Ceramic	3198 023 04730
	2694	Cap, 47n, 10%, 25v, Ceramic	3198 023 04730
	2695	Cap, 47n, 10%, 25v, Ceramic	3198 023 04730
	2698	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
S	3500	Res, 3M3, 5%, 1/2W, Metalized Glass	2322 242 13335
S	3501	Res, 3M3, 5%, 1/2W, Metalized Glass	2322 242 13335
	3685	Res, 560 ohm, 5%, 1/6W, Carbon Film	3198 011 05610
	3691	Res, 330 ohm, 5%, 1/6W, Carbon Film	3198 011 03310
	3693	Res, 220 ohm, 5%, 1/6W, Carbon Film	3198 011 02210
	6691	LED, LTL-10234WHCR	9322 185 69682
	6692	IR Receiver, TSOP1836UH3V	9322 127 54667
	9001	Wire Jumper	3198 036 90010
	9002	Wire Jumper	3198 036 90010
	CBA	Front Interface Panel Assembly	3139 177 26211

ITV Front Jack Panel Parts
ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)
Net 1 Panel (part of Scan 4 Card Assemb ly)

Scan 4 Card (part of Scan 4 Card Assembly)
Scan 4 Card (part of Scan 4 Card Assemb ly)

Side Jack Panel Parts
Side Jack Panel Parts

	Ref	Description	Part No.
	0232	Headphone Jack	2422 026 04747
	0250	A/V Jack	2422 026 04815
	0251	6 Pin Connector	2422 025 12482
	0254	5 Pin Connector	2422 025 12481
	0255	4 Pin Connector	2422 025 12479
	1810	3 Pin Connector	2412 020 00725
	1811	3 Pin Connector	2412 020 00725
	2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2176	Cap, 470p, 5%, 50v, Ceramic	3198 016 34710
	2177	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2178	Cap, 470p, 5%, 50v, Ceramic	3198 016 34710
	2179	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2180	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2181	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2802	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
	3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
	3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
	3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	6161	Zener Diode, 6.8 volt	3198 010 26880
	7802	IC, HEF4053BT	9333 729 60653
	9150	Wire Jumper	3198 036 90010
	9151	Wire Jumper	3198 036 90010
	9152	Wire Jumper	3198 036 90010
	9153	Wire Jumper	3198 036 90010
	9154	Wire Jumper	3198 036 90010
	9170	Wire Jumper	3198 036 90010
	CBA	Side Jack Panel Assembly	3139 177 26231

Subwoofer Panel Parts
Subwoofer Panel Parts

Top Control Panel Parts
Top Control Panel Parts

	Ref	Description	Part No.
	0215	3 Pin Connector	2422 025 16601
	1091	Tact Switch	2422 128 02742
	1092	Tact Switch	2422 128 02742
	1093	Tact Switch	2422 128 02742
	1094	Tact Switch	2422 128 02742
	3091	Res, 560 ohm, 5%, Metalized Glass	3198 021 35610
	3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
	3093	Res, 560 ohm, 5%, Metalized Glass	3198 021 35610
	3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
	3095	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3096	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
	4085	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4089	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4090	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	6091	Diode, Signal	9340 453 90115

S = Safety Part   Be sure to use exact replacement part.

27PT643R/37C (continued)

	Ref	Description	Part Number
	CBA	Top Control Panel Assembly	3139 187 15841

Cabinet & Accessory Parts

	Ref	Description	Part Number
		Cabinet & Accessory Parts	
S	AC01	AC Cord.	3135 010 03831
	AC03	Anode Lead Spacer (3 Used)	3135 014 04471
	AC04	Batteries for Remote Control Transmitte	9299 000 65263
	AC05	Cabinet Back	3139 124 44711
	AC06	Cabinet Back Screw Cover (2 Used). . .	3139 124 39301
	AC08	Chassis Tray	3139 124 31325
S	AC09	CRT, A68QCP893X001	9322 173 75682
S	AC12	Degaussing Coil.	2422 549 43967
	AC13	Front Interface Panel Bracket.	3139 124 32891
	AC15	Holder, Degaussing Coil (4 Used) . . .	3139 124 31122
	AC17	Owner's Manual, English.	3121 235 21091
	AC18	Quick Use Guide.	3121 233 43491
	AC19	Side Jack Panel Bracket.	3139 124 37061
	AC20	Cabinet Front Assembly	3121 237 53303
	AC20A	Cabinet Front.	3139 177 58401
	AC20C	Light Guide.	3139 124 39701
	AC20D	Nameplate.	3141 050 00161
	AC20E	Power Button	3139 138 10881
	AC20H	Speaker, 8 ohm, 5W (2 Used).	2422 264 00409
	AC20J	Top Control Assembly	3139 177 56381
	REMOTE	Remote Control Transmitter, RC19036002/ 01A.	3139 238 04313

27PT643R/97A - Manual no. 7638

Main Chassis Parts

Main Chassis Parts

Safety	Ref.	Description	Part No.
	0127	Socket Fuse	2422 088 00271
	0129	NTC Holder	3139 120 10151
	0136	IC-Spring	3104 301 22081
	0137	Spring	3139 121 24583
	0138	IC-Spring	3104 301 22081
	0139	Spring for Bracket	3122 121 24786
	0140	Spring	3139 121 24583
	0141	IC-Spring	3104 301 22081
	0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421
	0153	Cable, DIPMate, 5 Pin, 480mm	3139 121 07951
	0211	2 Pin Connector	2422 025 16374
	0212	2 Pin Connector	2422 025 16375
	0214	5 Pin Connector	2422 025 12481
	0219	6 Pin Connector	2422 025 12482
	0220	5 Pin Connector	2422 025 04853
	0221	2 Pin Connector	2422 025 15503
	0222	2 Pin Connector	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack	2422 026 04926
	0229	3 Pin Connector	2412 020 00725
	0239	3 Pin Connector	2422 025 16382
	0243	6 Pin Connector	2422 025 04854
	0244	5 Pin Connector	2422 025 04853
	0245	6 Pin Connector	2422 025 04854
	0246	5 Pin Connector	2422 025 12481
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U PLL	2422 542 90141
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC	2422 086 10914
S	1515	Relay, 5 Amp, 12V	2422 132 07444
	1660	Crystal, 12MHz000	2422 543 01203
	1811	3 Pin Connector	2412 020 00725
	1861	Ceramic Resonator, 514KHz5, CSB503F58	2422 540 98344
	2004	Cap, 47n, 10%, 50v, Ceramic	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2226	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2241	Cap, 1n5, 10%, 50v, Ceramic	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
	2402	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2415	Cap, 1n, 5%, 50v, Ceramic	3198 016 01020
	2441	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic	2020 021 91139
	2451	Cap, 22n, 10%, 50v, Polyester	3198 014 02230
	2452	Cap, 180p, 5%, 50v, Ceramic	3198 016 01810
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 360n, 5%, 250v, Metalized Polypropylene	2022 333 00163
	2458	Cap, 2u2, 20%, 100v, Electrolytic	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
S	2463	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene	2222 479 90042
S	2465	Cap, 15n, 5%, 1600v, Polypropylene	2020 301 90255
	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
	2468	Cap, 27n, 10%, 400v, Polyester	2222 347 90232
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2482	Cap, 120n, 5%, 250v, Metalized Polypropylene	2222 479 90051
	2485	Cap, 4u7, 20%, 250v, Electrolytic	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390

S = Safety Part   Be sure to use exact replacement part.

27PT643R/97A (continued)

S	Ref	Description	Part No.
	2611	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050
	2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2803	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
	2862	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
	2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
	2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
	2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
	2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
	2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
	2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240
	2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
	2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
	2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
	2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
	2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
	3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
	3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
	3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202
	3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
	3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
	3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
	3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
	3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
	3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
	3403	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
	3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102
	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
S	3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S	3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
	3470	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3471	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
	3472	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
	3473	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208
	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2120 101 74158
	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
	3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S	3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 32290
	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
S	3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155

S = Safety Part   Be sure to use exact replacement part.

27PT643R/97A (continued)

3507	Surge Protector	2422 549 43073
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film	3198 013 02210
S 3510	Res, NTC, 4R7, 20%, 3W1	2122 612 00056
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film	3198 011 02710
3520	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3521	Res, 4R7, 5%, 1/6W, Carbon Film	3198 011 04780
3522	Res, 330K, 5%, 1/10W, Metalized Glass	3198 021 53340
3523	Res, 100 ohm, 5%, 1/3W, Metal Film	2306 204 03101
3524	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3525	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S 3527	Res, 0R33, 5%, 3/5W, Metal Film	3198 012 13370
3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3529	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3530	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
3542	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
3544	Res, 4K7, 1%, 1/8W, Metalized Glass	2322 734 64702
3545	Res, 270K, 5%, 1/8W, Metalized Glass	2322 730 61274
3548	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3552	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3557	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3562	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
3563	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S 3565	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310
3566	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3569	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3580	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
3595	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
3596	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
3601	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3605	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3606	Res, 2K2, 5%, 1/6W, Carbon Film	3198 011 02220
3607	Res, 2K2, 5%, 1/6W, Carbon Film	3198 011 02220
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film	3198 011 04710
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3610	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3618	Res, 6K8, 5%, 1/6W, Carbon Film	3198 011 06820
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3623	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3626	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3627	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3628	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3630	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3636	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3640	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
3694	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3802	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3814	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3816	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3817	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3861	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3862	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3863	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3867	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
3901	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
3902	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3903	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3904	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3905	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3906	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3907	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4122	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4123	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4127	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4876	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4879	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
5001	Coil, 27u, 10%	3198 018 22790
5002	Coil, 820n, 10%	3198 018 18270
5201	Coil, 6u8, 5%	3198 018 16880
5202	Wire Jumper	3198 036 90010
5204	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
5205	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
5206	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
5241	Wire Jumper	3198 036 90010
5242	Coil, 10u, 5%	3198 018 11090
5341	Coil, 22u	2422 535 97333
5342	Coil, 3u9, 10%	2422 535 97323
5401	Coil, 1mH, 10%	3198 018 71020
S 5445	Transformer, LOT	2422 531 02574
5451	Coil, 22u, 10%	3198 018 72290
5452	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
S 5457	Coil, 25u	2422 535 91028
5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
5463	Coil, Choke	3128 138 37021
5471	Coil, 6u8, 20%	3198 018 76880
5472	Coil, 3u3, 10%	3198 018 23380
5480	Coil, 47u, 10%	2422 535 97337
S 5501	Mains Filter	2422 549 43432
S 5520	Transformer, SS39009-04	2422 531 02459
5521	Fixed, Inductor, 100MHz, 50R	3198 018 90010
5560	Fixed, Inductor, 100MHz, 50R	3198 018 90010
5561	Coil, 27u, 5%	2422 535 95366
5562	Fixed, Inductor, 100MHz, 50R	3198 018 90010
5564	Fixed, Inductor, 100MHz, 50R	3198 018 90010
5602	Coil, 5u6, 5%	3198 018 15680
5603	Coil, 5u6, 5%	3198 018 15680
5604	Coil, 5u6, 5%	3198 018 15680
5861	Coil, 10u, 5%	3198 018 11090
6001	Zener Diode, 33 volt	3198 010 23390
6150	Diode, Signal, BAS316	3198 010 10630
6201	Diode, Signal, BAS316	3198 010 10630
6202	Diode, Signal, BAS316	3198 010 10630
6206	Zener Diode, 6.8 volt	3198 020 56880
6331	Diode, Signal, BAV21	3198 010 10070

S = Safety Part   Be sure to use exact replacement part.

27PT643R/97A (continued)

Ref	Description	Part No.
6332	Diode, Signal, BAS316.	3198 010 10630
6333	Diode, Signal, BAV21	3198 010 10070
6335	Diode, Signal, BAV21	3198 010 10070
6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002
6401	Zener Diode, 47 volt	3198 010 24790
6445	Zener Diode, 10 volt	3198 020 51090
6447	Diode, Signal, 1N4148.	3198 010 10010
6448	Zener Diode, 6.2 volt.	9331 668 30133
6449	Diode, Signal, BAV99	3198 010 10620
6460	Diode, Rect, BY228/24.	9340 559 50112
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
6464	Diode, Signal, BAS316.	3198 010 10630
6465	Diode, Signal, BAV21	3198 010 10070
6466	Diode, Signal, BAV21	3198 010 10070
6467	Diode, Signal, BAS316.	3198 010 10630
6468	Diode, Signal, BAS316.	3198 010 10630
6469	Diode, Rect, BYV95C.	9335 001 80133
6470	Diode, Signal, BAV99	3198 010 10620
6476	Zener Diode, 15 volt	3198 010 21590
6481	Zener Diode, 5.6 volt.	3198 010 25680
6482	Zener Diode, 9.1 volt.	9331 177 80133
6483	Zener Diode, 33 volt	3198 010 23390
6485	Diode, Rect, BYV95C.	9335 001 80133
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
6487	Diode, Rect, BYV95A.	9335 000 90133
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
6500	Diode, Bridge Rect, GBU6JL-7002. . . .	9322 138 08667
6520	Diode, Rect, BYV95A.	9335 000 90133
6523	Diode, Signal, 1N4148.	3198 010 10010
6524	Diode, Rect, 1N5062.	3198 010 10120
6525	Diode, Rect, 1N5062.	3198 010 10120
6526	Zener Diode, 22 volt	3198 020 52290
6540	Zener Diode, 6.2 volt.	9331 668 30133
6541	Zener Diode, 10 volt	3198 020 51090
6560	Diode, Rect, BYV29X-500.	9340 555 59127
6562	Diode, Rect, EGP20DL-5100.	9322 164 42682
6563	Diode, Signal, BAS316.	3198 010 10630
6565	Diode, Signal, BAV70	9331 849 10215
6566	Diode, Signal, 1N4148.	3198 010 10010
6569	Diode, Signal, BAS316.	3198 010 10630
6570	Zener Diode, 6.8 volt.	3198 020 56880
6580	Diode, Signal, BAS316.	3198 010 10630
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
7101	Transistor, NPN, BC847B(COL)	3198 010 42030
7102	Transistor, PNP, BC857B(COL)	3198 010 42150
7103	Transistor, NPN, BC847B(COL)	3198 010 42030
7200	IC, TDA9588H/N1/3I/1053.	9352 728 40557
7201	Transistor, NPN, BC847B(COL)	3198 010 42030
7204	Transistor, PNP, BC857B(COL)	3198 010 42150
7205	Transistor, PNP, BC857B(COL)	3198 010 42150
7330	IC, TDA6107JF/N3	9352 713 37112
7400	Power FET, STP3NC60FP.	9322 157 37687
7441	Transistor, PNP, BC857B(COL)	3198 010 42150
7443	Transistor, PNP, BC557B(COL)	3198 020 40110
7460	Transistor, NPN, BU4508DX.	9340 550 92127
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
7462	Transistor, NPN, PDTC143ZT	9340 547 00215
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
7471	IC, TDA8359J/N2.	9352 701 64112
7480	Transistor, NPN, BD135	3198 020 41010
7482	Transistor, NPN, BD135	3198 020 41010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667
7520	IC, TEA1507P/N1.	9352 673 56112
7521	Power FET, FQPF9N50.	9322 187 16687
7522	Transistor, NPN, BC847B(COL)	3198 010 42030
7540	Transistor, NPN, BC547B(COL)	3198 020 40030
7541	Transistor, NPN, PDTC114ET	9340 310 10215
7542	Transistor, PNP, BC857B(COL)	3198 010 42150
7560	IC, L78L33ACZ.	9322 134 92676
7561	Transistor, NPN, PDTC143ZT	9340 547 00215
7580	Transistor, PNP, BC857B(COL)	3198 010 42150
7602	IC, M24C08-WBN6.	9322 154 38682
7606	Transistor, NPN, PDTC143ZT	9340 547 00215
7802	IC, HEF4053BT.	9333 729 60653
7861	IC, TDA9853H/V1.	9352 671 19557
7891	Transistor, NPN, BC847B(COL)	3198 010 42030
7892	Transistor, NPN, BC847B(COL)	3198 010 42030
7901	IC, AN7522N PH	9322 181 41682
9001	Wire Jumper.	3198 036 90010
9101	Wire Jumper.	3198 036 90010
9102	Wire Jumper.	3198 036 90010
9103	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010
9175	Wire Jumper.	3198 036 90010
9176	Wire Jumper.	3198 036 90010
9178	Wire Jumper.	3198 036 90010
9179	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010
9182	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010
9192	Wire Jumper.	3198 036 90010
9193	Wire Jumper.	3198 036 90010
9311	Wire Jumper.	3198 036 90010
9312	Wire Jumper.	3198 036 90010
9406	Wire Jumper.	3198 036 90010
9407	Wire Jumper.	3198 036 90010
9408	Wire Jumper.	3198 036 90010
9409	Wire Jumper.	3198 036 90010
9410	Wire Jumper.	3198 036 90010
9411	Wire Jumper.	3198 036 90010
9412	Wire Jumper.	3198 036 90010
9413	Wire Jumper.	3198 036 90010
9414	Wire Jumper.	3198 036 90010
9415	Wire Jumper.	3198 036 90010
9416	Wire Jumper.	3198 036 90010
9417	Wire Jumper.	3198 036 90010
9418	Wire Jumper.	3198 036 90010
9419	Wire Jumper.	3198 036 90010
9421	Wire Jumper.	3198 036 90010
9422	Wire Jumper.	3198 036 90010
9423	Wire Jumper.	3198 036 90010
9424	Wire Jumper.	3198 036 90010
9425	Wire Jumper.	3198 036 90010
9426	Wire Jumper.	3198 036 90010
9427	Wire Jumper.	3198 036 90010
9453	Wire Jumper.	3198 036 90010
9460	Wire Jumper.	3198 036 90010
9463	Wire Jumper.	3198 036 90010
9500	Wire Jumper.	3198 036 90010
9501	Wire Jumper.	3198 036 90010
9503	Wire Jumper.	3198 036 90010
9506	Wire Jumper.	3198 036 90010
9507	Wire Jumper.	3198 036 90010
9510	Wire Jumper.	3198 036 90010
9511	Wire Jumper.	3198 036 90010
9512	Wire Jumper.	3198 036 90010
9513	Wire Jumper.	3198 036 90010
9514	Wire Jumper.	3198 036 90010
9515	Wire Jumper.	3198 036 90010
9516	Wire Jumper.	3198 036 90010
9518	Wire Jumper.	3198 036 90010
9520	Wire Jumper.	3198 036 90010
9521	Wire Jumper.	3198 036 90010
9522	Wire Jumper.	3198 036 90010
9524	Wire Jumper.	3198 036 90010
9528	Wire Jumper.	3198 036 90010
9530	Wire Jumper.	3198 036 90010
9611	Coil, 27u, 10%	3198 018 22790
9612	Wire Jumper.	3198 036 90010
9613	Wire Jumper.	3198 036 90010
9614	Wire Jumper.	3198 036 90010
9615	Wire Jumper.	3198 036 90010
9617	Wire Jumper.	3198 036 90010
9618	Wire Jumper.	3198 036 90010
9619	Wire Jumper.	3198 036 90010
9620	Wire Jumper.	3198 036 90010
9621	Wire Jumper.	3198 036 90010
9622	Wire Jumper.	3198 036 90010
9623	Wire Jumper.	3198 036 90010
9624	Wire Jumper.	3198 036 90010
9626	Wire Jumper.	3198 036 90010
9627	Wire Jumper.	3198 036 90010
9628	Wire Jumper.	3198 036 90010
9629	Wire Jumper.	3198 036 90010
9631	Wire Jumper.	3198 036 90010
9632	Wire Jumper.	3198 036 90010
9633	Wire Jumper.	3198 036 90010
9637	Wire Jumper.	3198 036 90010
9638	Wire Jumper.	3198 036 90010
9640	Wire Jumper.	3198 036 90010
9641	Wire Jumper.	3198 036 90010
9642	Wire Jumper.	3198 036 90010
9643	Wire Jumper.	3198 036 90010
9648	Wire Jumper.	3198 036 90010
9650	Wire Jumper.	3198 036 90010
9651	Wire Jumper.	3198 036 90010
9652	Wire Jumper.	3198 036 90010
9654	Wire Jumper.	3198 036 90010
9655	Wire Jumper.	3198 036 90010
9656	Wire Jumper.	3198 036 90010
9657	Wire Jumper.	3198 036 90010
9658	Wire Jumper.	3198 036 90010
9659	Wire Jumper.	3198 036 90010
9660	Wire Jumper.	3198 036 90010
9661	Wire Jumper.	3198 036 90010
9662	Wire Jumper.	3198 036 90010
9663	Wire Jumper.	3198 036 90010
9664	Wire Jumper.	3198 036 90010
9665	Wire Jumper.	3198 036 90010
9666	Wire Jumper.	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

27PT643R/97A (continued)

	Ref	Description	Part No.
	9667	Wire Jumper	3198 036 90010
	9668	Wire Jumper	3198 036 90010
	9669	Wire Jumper	3198 036 90010
	9670	Wire Jumper	3198 036 90010
	9671	Wire Jumper	3198 036 90010
	9672	Coil, 22u, 10%	3198 018 22290
	9674	Wire Jumper	3198 036 90010
	9675	Wire Jumper	3198 036 90010
	9676	Wire Jumper	3198 036 90010
	9678	Coil, 22u, 10%	3198 018 22290
	9679	Wire Jumper	3198 036 90010
	9680	Wire Jumper	3198 036 90010
	9681	Wire Jumper	3198 036 90010
	9685	Wire Jumper	3198 036 90010
	9686	Wire Jumper	3198 036 90010
	9687	Wire Jumper	3198 036 90010
	9688	Wire Jumper	3198 036 90010
	9689	Wire Jumper	3198 036 90010
	9690	Wire Jumper	3198 036 90010
	9691	Wire Jumper	3198 036 90010
	9694	Wire Jumper	3198 036 90010
	9695	Wire Jumper	3198 036 90010
	9697	Wire Jumper	3198 036 90010
	9698	Wire Jumper	3198 036 90010
	9699	Wire Jumper	3198 036 90010
	9821	Wire Jumper	3198 036 90010
	9822	Wire Jumper	3198 036 90010
	9825	Wire Jumper	3198 036 90010
	9828	Wire Jumper	3198 036 90010
	9829	Wire Jumper	3198 036 90010
	9831	Wire Jumper	3198 036 90010
	9832	Wire Jumper	3198 036 90010
	9837	Wire Jumper	3198 036 90010
	9838	Wire Jumper	3198 036 90010
	9839	Wire Jumper	3198 036 90010
	9846	Wire Jumper	3198 036 90010
	9847	Wire Jumper	3198 036 90010
	9849	Wire Jumper	3198 036 90010
	9850	Wire Jumper	3198 036 90010
	9851	Wire Jumper	3198 036 90010
	9852	Wire Jumper	3198 036 90010
	9853	Wire Jumper	3198 036 90010
	9856	Wire Jumper	3198 036 90010
	9860	Wire Jumper	3198 036 90010
	9861	Wire Jumper	3198 036 90010
	9862	Wire Jumper	3198 036 90010
	9864	Wire Jumper	3198 036 90010
	9865	Wire Jumper	3198 036 90010
	9868	Wire Jumper	3198 036 90010
	9873	Wire Jumper	3198 036 90010
	9874	Wire Jumper	3198 036 90010
	9875	Wire Jumper	3198 036 90010
	9877	Wire Jumper	3198 036 90010
	9891	Wire Jumper	3198 036 90010
	9892	Wire Jumper	3198 036 90010
	9901	Wire Jumper	3198 036 90010
	9902	Wire Jumper	3198 036 90010
	9903	Wire Jumper	3198 036 90010
	9904	Wire Jumper	3198 036 90010
	9905	Wire Jumper	3198 036 90010
	9911	Wire Jumper	3198 036 90010
	9913	Wire Jumper	3198 036 90010
	9914	Wire Jumper	3198 036 90010
	9915	Wire Jumper	3198 036 90010
	9918	Wire Jumper	3198 036 90010
	9991	Wire Jumper	3198 036 90010
	9996	Wire Jumper	3198 036 90010
	9998	Wire Jumper	3198 036 90010
	CBA	Main Chassis	3141 058 58471

Channel One Card Parts
Channel One Card Parts

2D 3 Line Comb Filter Parts
2D 3 Line Comb Filter Parts

DAF Panel Parts
DAF Panel Parts

DVD Eject Panel Parts
DVD Eject Panel Parts

DVD Interface Panel Parts
DVD Interface Panel Parts

Front Interface Panel Parts
Front Interface Panel Parts

	Ref	Description	Part No.
S	0211	2 Pin Connector	2422 025 16268
S	0212	2 Pin Connector	2422 025 16559
	0214	5 Pin Connector	2422 025 06353
	1606	Tact Switch	2422 128 02742
	2691	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2692	Cap, 47n, 10%, 25v, Ceramic	3198 023 04730
	2693	Cap, 47n, 10%, 25v, Ceramic	3198 023 04730
	2694	Cap, 47n, 10%, 25v, Ceramic	3198 023 04730
	2695	Cap, 47n, 10%, 25v, Ceramic	3198 023 04730
	2698	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
S	3500	Res, 3M3, 5%, 1/2W, Metalized Glass	2322 242 13335
S	3501	Res, 3M3, 5%, 1/2W, Metalized Glass	2322 242 13335
	3685	Res, 560 ohm, 5%, 1/6W, Carbon Film	3198 011 05610
	3691	Res, 330 ohm, 5%, 1/6W, Carbon Film	3198 011 03310
	3693	Res, 220 ohm, 5%, 1/6W, Carbon Film	3198 011 02210
	6691	LED, LTL-10234WHCR	9322 185 69682
	6692	IR Receiver, TSOP1836UH3V	9322 127 54667
	9001	Wire Jumper	3198 036 90010
	9002	Wire Jumper	3198 036 90010
	CBA	Front Interface Panel Assembly	3139 177 26211

ITV Front Jack Panel Parts
ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)
Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)
Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts
Side Jack Panel Parts

	Ref	Description	Part No.
	0232	Headphone Jack	2422 026 04747
	0250	A/V Jack	2422 026 04815
	0251	6 Pin Connector	2422 025 12482
	0254	5 Pin Connector	2422 025 12481
	0255	4 Pin Connector	2422 025 12479
	1810	3 Pin Connector	2412 020 00725
	1811	3 Pin Connector	2412 020 00725
	2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2176	Cap, 470p, 5%, 50v, Ceramic	3198 016 34710
	2177	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2178	Cap, 470p, 5%, 50v, Ceramic	3198 016 34710
	2179	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2180	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2181	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2802	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
	3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
	3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
	3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	6161	Zener Diode, 6.8 volt	3198 010 26880
	7802	IC, HEF4053BT	9333 729 60653
	9150	Wire Jumper	3198 036 90010
	9151	Wire Jumper	3198 036 90010
	9152	Wire Jumper	3198 036 90010
	9153	Wire Jumper	3198 036 90010
	9154	Wire Jumper	3198 036 90010
	9170	Wire Jumper	3198 036 90010
	CBA	Side Jack Panel Assembly	3139 177 26231

Subwoofer Panel Parts
Subwoofer Panel Parts

Top Control Panel Parts
Top Control Panel Parts

	Ref	Description	Part No.
	0215	3 Pin Connector	2422 025 16601
	1091	Tact Switch	2422 128 02742
	1092	Tact Switch	2422 128 02742
	1093	Tact Switch	2422 128 02742
	1094	Tact Switch	2422 128 02742
	3091	Res, 560 ohm, 5%, Metalized Glass	3198 021 35610
	3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
	3093	Res, 560 ohm, 5%, Metalized Glass	3198 021 35610
	3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
	3095	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3096	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
	4085	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4089	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4090	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	6091	Diode, Signal	9340 453 90115

S = Safety Part   Be sure to use exact replacement part.

27PT643R/97A (continued)

	CBA	Top Control Panel Assembly	3139 187 15841

Cabinet & Accessory Parts

		Cabinet & Accessory Parts	
S	AC01	AC Cord.	3135 010 03831
	AC03	Anode Lead Spacer (3 Used)	3135 014 04471
	AC04	Batteries for Remote Control Transmitte	9299 000 65263
	AC05	Cabinet Back	3139 124 44711
	AC06	Cabinet Back Screw Cover (2 Used). . .	3139 124 39301
	AC08	Chassis Tray	3139 124 31325
S	AC09	CRT, A68QCU754X73(N)	9301 925 60527
S	AC12	Degaussing Coil.	2422 549 43967
	AC13	Front Interface Panel Bracket.	3139 124 32891
	AC15	Holder, Degaussing Coil (4 Used) . . .	3139 124 31122
	AC17	Owner's Manual, English.	3121 235 21091
	AC18	Quick Use Guide.	3121 233 43491
	AC19	Side Jack Panel Bracket.	3139 124 37061
	AC20	Cabinet Front Assembly	3121 237 53303
	AC20A	Cabinet Front.	3139 177 58401
	AC20C	Light Guide.	3139 124 39701
	AC20D	Nameplate.	3141 050 00161
	AC20E	Power Button	3139 138 10881
	AC20H	Speaker, 8 ohm, 5W (2 Used).	2422 264 00409
	AC20J	Top Control Assembly	3139 177 56381
	REMOTE	Remote Control Transmitter, RC19036002/ 01A.	3139 238 04313

27PT643R37A - Manual no. 7638

Main Chassis Parts

S	Ref	Description	Part No.
		Main Chassis Parts	
	0211	2 Pin Connector	2422 025 16374
	0212	2 Pin Connector	2422 025 16375
	0214	5 Pin Connector	2422 025 12481
	0219	6 Pin Connector	2422 025 12482
	0220	5 Pin Connector	2422 025 04853
	0221	2 Pin Connector	2422 025 15503
	0222	2 Pin Connector	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack	2422 026 04926
	0229	3 Pin Connector	2412 020 00725
	0239	3 Pin Connector	2422 025 16382
	0243	6 Pin Connector	2422 025 04854
	0244	5 Pin Connector	2422 025 04853
	0245	6 Pin Connector	2422 025 04854
	0246	5 Pin Connector	2422 025 12481
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U PLL	2422 542 90098
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC	2422 086 10914
S	1515	Relay, 5 Amp, 12V	2422 132 07444
	1660	Crystal, 12MHz000	2422 543 01203
	1811	3 Pin Connector	2412 020 00725
	1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344
	2004	Cap, 47n, 10%, 50v, Ceramic	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2226	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2241	Cap, 1n5, 10%, 50v, Ceramic	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
	2402	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic	3198 016 03310
	2441	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic	2020 021 91139
	2451	Cap, 22n, 10%, 50v, Polyester	3198 014 02230
	2452	Cap, 180p, 5%, 50v, Ceramic	3198 016 01810
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 360n, 5%, 250v, Metalized Polypropylene	2022 333 00163
	2458	Cap, 2u2, 20%, 100v, Electrolytic	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
S	2463	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene	2222 479 90042
S	2465	Cap, 15n, 5%, 1600v, Polypropylene	2020 301 90255
	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
	2468	Cap, 27n, 10%, 400v, Polyester	2222 347 90232
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2482	Cap, 120n, 5%, 250v, Metalized Polypropylene	2222 479 90051
	2485	Cap, 4u7, 20%, 250v, Electrolytic	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic	3198 017 21050
	2802	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2803	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250

S = Safety Part   Be sure to use exact replacement part.

27PT643R37A (continued)

Ref	Description	Part No.
2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
2862	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010

S	Ref	Description	Part No.
	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
	3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
	3403	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
	3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102
	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
S	3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S	3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
	3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
	3470	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3471	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
	3472	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
	3473	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208
	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2120 101 74158
	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
	3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S	3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 32290
	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
S	3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630

S = Safety Part   Be sure to use exact replacement part.

27PT643R37A (continued)

S	Ref	Description	Part No.
	3525	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3814	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3861	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3862	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
	3863	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
	3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3865	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3866	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3867	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3901	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4122	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4123	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4127	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%	3198 018 18270
	5201	Coil, 6u8, 5%	3198 018 16880
	5202	Wire Jumper	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5241	Wire Jumper	3198 036 90010
	5242	Coil, 10u, 5%	3198 018 11090
	5341	Coil, 22u	2422 535 97333
	5342	Coil, 22u	2422 535 97333
	5401	Coil, 1mH, 10%	3198 018 71020
S	5445	Transformer, LOT	2422 531 02574
	5451	Coil, 22u, 10%	3198 018 72290
	5452	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
S	5457	Coil, 25u	2422 535 91028
	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
	5463	Coil, Choke	3128 138 37021
	5471	Coil, 6u8, 20%	3198 018 76880
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 27u, 10%	3198 018 22790
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5561	Coil, 27u, 5%	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5602	Coil, 5u6, 5%	3198 018 15680
	5603	Coil, 5u6, 5%	3198 018 15680
	5604	Coil, 5u6, 5%	3198 018 15680
	5861	Coil, 10u, 5%	3198 018 11090
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316	3198 010 10630
	6201	Diode, Signal, BAS316	3198 010 10630
	6202	Diode, Signal, BAS316	3198 010 10630
	6206	Zener Diode, 6.8 volt	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6400	Res, 1K, 1%, 3/5W, Metal Film	2312 915 11002
	6401	Zener Diode, 47 volt	3198 010 24790
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148	3198 010 10010
	6448	Zener Diode, 6.2 volt	9331 668 30133

S = Safety Part   Be sure to use exact replacement part.

27PT643R37A (continued)

Ref	Description	Part No.
6449	Diode, Signal, BAV99	3198 010 10620
6460	Diode, Rect, BY228/24.	9340 559 50112
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
6462	Zener Diode, 9.1 volt.	9331 177 80133
6465	Diode, Signal, BAV21	3198 010 10070
6466	Diode, Signal, BAV21	3198 010 10070
6467	Diode, Signal, BAS316.	3198 010 10630
6468	Diode, Signal, BAS316.	3198 010 10630
6469	Diode, Rect, BYD33J.	9337 234 20133
6470	Diode, Signal, BAV99	3198 010 10620
6476	Zener Diode, 15 volt	3198 010 21590
6481	Zener Diode, 5.6 volt.	3198 010 25680
6482	Zener Diode, 9.1 volt.	9331 177 80133
6483	Zener Diode, 33 volt	3198 010 23390
6485	Diode, Rect, BYD33J.	9337 234 20133
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
6487	Diode, Rect, BYD33D.	9337 234 00133
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667
6520	Diode, Rect, BYD33D.	9337 234 00133
6523	Diode, Signal, 1N4148.	3198 010 10010
6524	Diode, Rect, 1N5062.	3198 010 10120
6525	Diode, Rect, 1N5062.	3198 010 10120
6526	Zener Diode, 22 volt	3198 020 52290
6540	Zener Diode, 6.2 volt.	9331 668 30133
6541	Zener Diode, 10 volt	3198 020 51090
6560	Diode, Rect, BYV29X-500.	9340 555 59127
6562	Diode, Rect, EGP20DL-5100.	9322 164 42682
6563	Diode, Signal, BAS316.	3198 010 10630
6565	Diode, Signal, BAV70	9331 849 10215
6566	Diode, Signal, 1N4148.	3198 010 10010
6569	Diode, Signal, BAS316.	3198 010 10630
6570	Zener Diode, 6.8 volt.	3198 020 56880
6580	Diode, Signal, BAS316.	3198 010 10630
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
7101	Transistor, NPN, BC847B(COL)	3198 010 42030
7102	Transistor, PNP, BC857B(COL)	3198 010 42150
7103	Transistor, NPN, BC847B(COL)	3198 010 42030
7200	IC, TDA9588H/N1/3I/1053.	9352 728 40557
7201	Transistor, NPN, BC847B(COL)	3198 010 42030
7204	Transistor, PNP, BC857B(COL)	3198 010 42150
7205	Transistor, PNP, BC857B(COL)	3198 010 42150
7330	IC, TDA6107JF/N3	9352 713 37112
7400	Power FET, IR.	9322 053 35687
7441	Transistor, PNP, BC857B(COL)	3198 010 42150
7443	Transistor, PNP, BC557B(COL)	3198 020 40110
7460	Transistor, NPN, BU4508DX.	9340 550 92127
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
7462	Transistor, NPN, PDTC143ZT	9340 547 00215
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
7471	IC, TDA8359J/N2.	9352 701 64112
7480	Transistor, NPN, BD135	3198 020 41010
7482	Transistor, NPN, BD135	3198 020 41010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667
7520	IC, TEA1507P/N1.	9352 673 56112
7521	Power FET, FQPF9N50.	9322 187 16687
7522	Transistor, NPN, BC847B(COL)	3198 010 42030
7540	Transistor, NPN, BC547B(COL)	3198 020 40030
7541	Transistor, NPN, PDTC114ET	9340 310 10215
7542	Transistor, PNP, BC857B(COL)	3198 010 42150
7560	IC, L78L33ACZ.	9322 134 92676
7561	Transistor, NPN, PDTC143ZT	9340 547 00215
7580	Transistor, PNP, BC857B(COL)	3198 010 42150
7602	IC, M24C08-WBN6.	9322 154 38682
7606	Transistor, NPN, PDTC143ZT	9340 547 00215
7802	IC, HEF4053BT.	9333 729 60653
7861	IC, TDA9853H/V1.	9352 671 19557
7891	Transistor, NPN, BC847B(COL)	3198 010 42030
7892	Transistor, NPN, BC847B(COL)	3198 010 42030
7901	IC, AN7522N PH	9322 181 41682
9001	Wire Jumper.	3198 036 90010
9101	Wire Jumper.	3198 036 90010
9102	Wire Jumper.	3198 036 90010
9103	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010
9175	Wire Jumper.	3198 036 90010
9176	Wire Jumper.	3198 036 90010
9178	Wire Jumper.	3198 036 90010
9179	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010
9182	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010
9192	Wire Jumper.	3198 036 90010
9193	Wire Jumper.	3198 036 90010
9311	Wire Jumper.	3198 036 90010
9312	Wire Jumper.	3198 036 90010
9406	Wire Jumper.	3198 036 90010
9407	Wire Jumper.	3198 036 90010
9408	Wire Jumper.	3198 036 90010
9409	Wire Jumper.	3198 036 90010
9410	Wire Jumper.	3198 036 90010
9411	Wire Jumper.	3198 036 90010
9412	Wire Jumper.	3198 036 90010
9413	Wire Jumper.	3198 036 90010
9414	Wire Jumper.	3198 036 90010
9415	Wire Jumper.	3198 036 90010
9416	Wire Jumper.	3198 036 90010
9417	Wire Jumper.	3198 036 90010
9418	Wire Jumper.	3198 036 90010
9419	Wire Jumper.	3198 036 90010
9421	Wire Jumper.	3198 036 90010
9422	Wire Jumper.	3198 036 90010
9423	Wire Jumper.	3198 036 90010
9424	Wire Jumper.	3198 036 90010
9425	Wire Jumper.	3198 036 90010
9426	Wire Jumper.	3198 036 90010
9427	Wire Jumper.	3198 036 90010
9453	Wire Jumper.	3198 036 90010
9460	Wire Jumper.	3198 036 90010
9463	Wire Jumper.	3198 036 90010
9500	Wire Jumper.	3198 036 90010
9501	Wire Jumper.	3198 036 90010
9503	Wire Jumper.	3198 036 90010
9506	Wire Jumper.	3198 036 90010
9507	Wire Jumper.	3198 036 90010
9510	Wire Jumper.	3198 036 90010
9511	Wire Jumper.	3198 036 90010
9512	Wire Jumper.	3198 036 90010
9513	Wire Jumper.	3198 036 90010
9514	Wire Jumper.	3198 036 90010
9515	Wire Jumper.	3198 036 90010
9516	Wire Jumper.	3198 036 90010
9518	Wire Jumper.	3198 036 90010
9520	Wire Jumper.	3198 036 90010
9521	Wire Jumper.	3198 036 90010
9522	Wire Jumper.	3198 036 90010
9524	Wire Jumper.	3198 036 90010
9528	Wire Jumper.	3198 036 90010
9530	Wire Jumper.	3198 036 90010
9611	Coil, 27u, 10%	3198 018 22790
9612	Wire Jumper.	3198 036 90010
9613	Wire Jumper.	3198 036 90010
9614	Wire Jumper.	3198 036 90010
9615	Wire Jumper.	3198 036 90010
9617	Wire Jumper.	3198 036 90010
9618	Wire Jumper.	3198 036 90010
9619	Wire Jumper.	3198 036 90010
9620	Wire Jumper.	3198 036 90010
9621	Wire Jumper.	3198 036 90010
9622	Wire Jumper.	3198 036 90010
9623	Wire Jumper.	3198 036 90010
9624	Wire Jumper.	3198 036 90010
9626	Wire Jumper.	3198 036 90010
9627	Wire Jumper.	3198 036 90010
9628	Wire Jumper.	3198 036 90010
9629	Wire Jumper.	3198 036 90010
9631	Wire Jumper.	3198 036 90010
9632	Wire Jumper.	3198 036 90010
9633	Wire Jumper.	3198 036 90010
9637	Wire Jumper.	3198 036 90010
9638	Wire Jumper.	3198 036 90010
9639	Wire Jumper.	3198 036 90010
9640	Wire Jumper.	3198 036 90010
9641	Wire Jumper.	3198 036 90010
9642	Wire Jumper.	3198 036 90010
9643	Wire Jumper.	3198 036 90010
9648	Wire Jumper.	3198 036 90010
9650	Wire Jumper.	3198 036 90010
9651	Wire Jumper.	3198 036 90010
9652	Wire Jumper.	3198 036 90010
9654	Wire Jumper.	3198 036 90010
9655	Wire Jumper.	3198 036 90010
9656	Wire Jumper.	3198 036 90010
9657	Wire Jumper.	3198 036 90010
9658	Wire Jumper.	3198 036 90010
9659	Wire Jumper.	3198 036 90010
9660	Wire Jumper.	3198 036 90010
9661	Wire Jumper.	3198 036 90010
9662	Wire Jumper.	3198 036 90010
9663	Wire Jumper.	3198 036 90010
9664	Wire Jumper.	3198 036 90010
9665	Wire Jumper.	3198 036 90010
9666	Wire Jumper.	3198 036 90010
9667	Wire Jumper.	3198 036 90010
9668	Wire Jumper.	3198 036 90010
9669	Wire Jumper.	3198 036 90010
9670	Wire Jumper.	3198 036 90010
9671	Wire Jumper.	3198 036 90010
9672	Coil, 22u, 10%	3198 018 22290
9674	Wire Jumper.	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

27PT643R37A (continued)

```
  9675   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9676   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9678   Coil, 22u, 10% . . . . . . . . . . . .  3198 018 22290
  9679   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9680   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9681   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9685   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9686   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9687   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9688   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9689   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9690   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9691   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9694   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9695   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9697   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9698   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9699   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9821   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9822   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9825   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9828   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9829   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9831   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9832   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9837   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9838   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9839   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9846   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9847   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9849   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9850   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9851   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9852   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9853   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9856   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9860   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9861   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9862   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9864   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9865   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9868   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9873   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9874   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9875   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9877   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9891   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9892   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9901   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9902   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9903   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9904   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9905   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9911   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9913   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9914   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9915   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9918   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9991   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9993   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9994   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9996   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9997   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9998   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  CBA    Main Chassis . . . . . . . . . . . . .  3141 058 58471
```

Channel One Card Parts
Channel One Card Parts

2D 3 Line Comb Filter Parts
2D 3 Line Comb Filter Parts

DAF Panel Parts
DAF Panel Parts

DVD Eject Panel Parts
DVD Eject Panel Parts

DVD Interface Panel Parts
DVD Interface Panel Parts

Front Interface Panel Parts
Front Interface Panel Parts

```
S 0211   2 Pin Connector. . . . . . . . . . . .  2422 025 16268
S 0212   2 Pin Connector. . . . . . . . . . . .  2422 025 16559
  0214   5 Pin Connector. . . . . . . . . . . .  2422 025 06353
  1606   Tact Switch. . . . . . . . . . . . . .  2422 128 02742
  2691   Cap, 220u, 20%, 25v, Electrolytic. . .  3198 025 32210
  2692   Cap, 47n, 10%, 25v, Ceramic. . . . . .  3198 023 04730
  2693   Cap, 47n, 10%, 25v, Ceramic. . . . . .  3198 023 04730
  2694   Cap, 47n, 10%, 25v, Ceramic. . . . . .  3198 023 04730
  2695   Cap, 47n, 10%, 25v, Ceramic. . . . . .  3198 023 04730
  2698   Cap, 100n, 10%, 50v, Polyester . . . .  3198 014 01040
S 3500   Res, 3M3, 5%, 1/2W, Metalized Glass. .  2322 242 13335
S 3501   Res, 3M3, 5%, 1/2W, Metalized Glass. .  2322 242 13335
  3685   Res, 560 ohm, 5%, 1/6W, Carbon Film. .  3198 011 05610
  3691   Res, 330 ohm, 5%, 1/6W, Carbon Film. .  3198 011 03310
  3693   Res, 220 ohm, 5%, 1/6W, Carbon Film. .  3198 011 02210
  6691   LED, LTL-10234WHCR . . . . . . . . . .  9322 185 69682
  6692   IR Receiver, TSOP1836UH3V. . . . . . .  9322 127 54667
  9001   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9002   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  CBA    Front Interface Panel Assembly . . . .  3139 177 26211
```

ITV Front Jack Panel Parts
ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)
Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)
Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts
Side Jack Panel Parts

```
  0232   Headphone Jack . . . . . . . . . . . .  2422 026 04747
  0250   A/V Jack . . . . . . . . . . . . . . .  2422 026 04815
  0251   6 Pin Connector. . . . . . . . . . . .  2422 025 12482
  0254   5 Pin Connector. . . . . . . . . . . .  2422 025 12481
  0255   4 Pin Connector. . . . . . . . . . . .  2422 025 12479
  1810   3 Pin Connector. . . . . . . . . . . .  2412 020 00725
  1811   3 Pin Connector. . . . . . . . . . . .  2412 020 00725
  2171   Cap, 330p, 10%, 50v, Ceramic . . . . .  3198 017 33310
  2172   Cap, 330p, 10%, 50v, Ceramic . . . . .  3198 017 33310
  2173   Cap, 330p, 10%, 50v, Ceramic . . . . .  3198 017 33310
  2174   Cap, 330p, 10%, 50v, Ceramic . . . . .  3198 017 33310
  2176   Cap, 470p, 5%, 50v, Ceramic. . . . . .  3198 016 34710
  2177   Cap, 10u, 20%, 50v, Electrolytic . . .  3198 025 51090
  2178   Cap, 470p, 5%, 50v, Ceramic. . . . . .  3198 016 34710
  2179   Cap, 10u, 20%, 50v, Electrolytic . . .  3198 025 51090
  2180   Cap, 2u2, +80/-20%, 10v, Ceramic . . .  3198 017 22250
  2181   Cap, 2u2, +80/-20%, 10v, Ceramic . . .  3198 017 22250
  2802   Cap, 220n, +80/-20%, 16v, Ceramic. . .  3198 017 42240
  3150   Res, 47K, 5%, 1/16W, Metalized Glass .  3198 021 34730
  3151   Res, 150 ohm, 5%, 1/6W, Carbon . . . .  3198 011 01510
  3152   Res, 47K, 5%, 1/16W, Metalized Glass .  3198 021 34730
  3153   Res, 150 ohm, 5%, 1/6W, Carbon . . . .  3198 011 01510
  3156   Res, 120 ohm, 5%, 1/16W, Metalized Glas 3198 021 31210
  3157   Res, 120 ohm, 5%, 1/16W, Metalized Glas 3198 021 31210
  3814   Res, 100K, 5%, 1/16W, Metalized Glass.  3198 021 31040
  3815   Res, 100K, 5%, 1/16W, Metalized Glass.  3198 021 31040
  3816   Res, 100K, 5%, 1/10W, Metalized Glass.  3198 021 51040
  3817   Res, 100K, 5%, 1/16W, Metalized Glass.  3198 021 31040
  3818   Res, 100K, 5%, 1/16W, Metalized Glass.  3198 021 31040
  3819   Res, 100K, 5%, 1/16W, Metalized Glass.  3198 021 31040
  3820   Res, 100K, 5%, 1/16W, Metalized Glass.  3198 021 31040
  3821   Res, 100K, 5%, 1/16W, Metalized Glass.  3198 021 31040
  4820   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90030
  6161   Zener Diode, 6.8 volt. . . . . . . . .  3198 010 26880
  7802   IC, HEF4053BT. . . . . . . . . . . . .  9333 729 60653
  9150   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9151   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9152   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9153   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9154   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9170   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  CBA    Side Jack Panel Assembly . . . . . . .  3139 177 26231
```

Subwoofer Panel Parts
Subwoofer Panel Parts

Top Control Panel Parts
Top Control Panel Parts

```
  0215   3 Pin Connector. . . . . . . . . . . .  2422 025 16601
  1091   Tact Switch. . . . . . . . . . . . . .  2422 128 02742
  1092   Tact Switch. . . . . . . . . . . . . .  2422 128 02742
  1093   Tact Switch. . . . . . . . . . . . . .  2422 128 02742
  1094   Tact Switch. . . . . . . . . . . . . .  2422 128 02742
  3091   Res, 560 ohm, 5%, Metalized Glass. . .  3198 021 35610
  3092   Res, 390 ohm, 5%, 1/16W, Metalized Glas 3198 021 33910
  3093   Res, 560 ohm, 5%, Metalized Glass. . .  3198 021 35610
  3094   Res, 390 ohm, 5%, 1/16W, Metalized Glas 3198 021 33910
  3095   Res, 3K3, 5%, 1/16W, Metalized Glass .  3198 021 33320
  3096   Res, 1K5, 5%, 1/16W, Metalized Glass .  3198 021 31520
  4085   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90020
  4089   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90030
  4090   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90030
  6091   Diode, Signal. . . . . . . . . . . . .  9340 453 90115
  CBA    Top Control Panel Assembly . . . . . .  3139 187 15841
```

Cabinet & Accessory Parts
Cabinet & Accessory Parts

S = Safety Part   Be sure to use exact replacement part.

27PT643R37A (continued)

	Ref	Description	Part No.
S	AC01	AC Cord.	3135 010 03831
	AC03	Anode Lead Spacer (3 Used)	3135 014 04471
	AC04	Batteries for Remote Control Transmitte	9299 000 65263
	AC05	Cabinet Back	3139 124 44711
	AC06	Cabinet Back Screw Cover (2 Used). . .	3139 124 39301
	AC08	Chassis Tray	3139 124 31324
S	AC09	CRT, A68QCU754X73(N)	9301 925 60527
S	AC12	Degaussing Coil.	2422 549 43967
	AC13	Front Interface Panel Bracket.	3139 124 32891
	AC15	Holder, Degaussing Coil (4 Used) . . .	3139 124 31122
	AC17	Owner's Manual, English.	3121 235 21091
	AC19	Side Jack Panel Bracket.	3139 124 37061
	AC20	Cabinet Front Assembly	3121 237 53301
	AC20A	Cabinet Front.	3139 177 58401
	AC20C	Light Guide.	3139 124 39701
	AC20D	Nameplate.	3141 050 00161
	AC20E	Power Button	3139 138 10881
	AC20H	Speaker, 8 ohm, 5W (2 Used).	2422 264 00409
	AC20J	Top Control Assembly	3139 138 11451
	AC20J1	Top Control Bracket.	3139 124 39802
	AC20J2	Top Control Buttons.	3139 124 39812
	REMOTE	Remote Control Transmitter, RC19036002/ 01.	3139 228 88003

S = Safety Part   Be sure to use exact replacement part.

27PT663R37A - Manual no. 7638

Main Chassis Parts

Main Chassis Parts

S	Ref	Description	Part No.
	0211	2 Pin Connector.	2422 025 16374
	0212	2 Pin Connector.	2422 025 16375
	0214	5 Pin Connector.	2422 025 12481
	0219	6 Pin Connector.	2422 025 12482
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0222	2 Pin Connector.	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0239	3 Pin Connector.	2422 025 16382
	0243	6 Pin Connector.	2422 025 04854
	0244	5 Pin Connector.	2422 025 04853
	0245	6 Pin Connector.	2422 025 04854
	0246	5 Pin Connector.	2422 025 12481
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector.	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U PLL	2422 542 90141
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1660	Crystal, 12MHz000	2422 543 01203
	1810	6 Pin Connector.	2422 025 16607
	1831	Crystal, Resonator, 18MHz432, 12 Pin, H C49/U A.	2422 543 00842
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
	2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
	2451	Cap, 22n, 10%, 50v, Polyester.	3198 014 02230
	2452	Cap, 180p, 5%, 50v, Ceramic.	3198 016 01810
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 360n, 5%, 250v, Metalized Polypropylene.	2022 333 00163
	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
S	2463	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene	2222 479 90042
S	2465	Cap, 15n, 5%, 1600v, Polypropylene	2020 301 90255
	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
	2468	Cap, 27n, 10%, 400v, Polyester	2222 347 90232
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 120n, 5%, 250v, Metalized Polypropylene.	2222 479 90051
	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91374
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2604	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2807	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2816	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
	2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080

S = Safety Part   Be sure to use exact replacement part.

27PT663R37A (continued)

Ref	Description	Part No.
2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
2837	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
2840	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2841	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2843	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2844	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2846	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2902	Cap, 1000u, 20%, 25v, Electrolytic . .	3198 026 31020
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
3403	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102
3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3470	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3471	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3472	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3473	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2120 101 74158
3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S 3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 32290
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3507	Surge Protector.	2422 549 43073
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S 3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030

S = Safety Part   Be sure to use exact replacement part.

27PT663R37A (continued)

	Ref	Description	Part No.
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass.	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
	3552	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3557	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
	3565	Res, 220 ohm, 5%, 1W, Metal Film	3198 012 12210
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
S	3591	Res, 10 ohm, 5%, 1/3W, Metal Film.	2306 204 03109
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3811	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3812	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3813	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3831	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3832	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3843	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
	3901	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
	3903	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3905	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3909	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
	3910	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
	3912	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4824	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4837	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4838	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4884	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5202	Wire Jumper.	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5241	Wire Jumper.	3198 036 90010
	5242	Coil, 10u, 5%.	3198 018 11090
	5341	Coil, 22u.	2422 535 97333
	5342	Coil, 22u.	2422 535 97333
	5401	Coil, 1mH, 10%	3198 018 71020
S	5445	Transformer, LOT	2422 531 02574
	5451	Coil, 22u, 10%	3198 018 72290
	5452	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
S	5457	Coil, 25u.	2422 535 91028
	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
	5463	Coil, Choke.	3128 138 37021
	5471	Coil, 6u8, 20%	3198 018 76880
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 27u, 10%	3198 018 22790
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS42202-00 B.	2422 531 02562
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5810	Coil, 10u, 10%	3198 018 51090
	5831	Coil, 6u8, 5%.	3198 018 16880
	5832	Coil, 6u8, 5%.	3198 018 16880
	5833	Coil, 6u8, 5%.	3198 018 16880
	5835	Coil, 12u, 10%	3198 018 31290
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316.	3198 010 10630
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630
	6206	Zener Diode, 6.8 volt.	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316.	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002
	6401	Zener Diode, 47 volt	3198 010 24790
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148.	3198 010 10010
	6448	Zener Diode, 6.2 volt.	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6460	Diode, Rect, BY228/24.	9340 559 50112
	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070

S = Safety Part   Be sure to use exact replacement part.

27PT663R37A (continued)

	Ref	Description	Part No.
	6467	Diode, Signal, BAS316.	3198 010 10630
	6468	Diode, Signal, BAS316.	3198 010 10630
	6469	Diode, Rect, BYD33J.	9337 234 20133
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt.	3198 010 25680
	6482	Zener Diode, 9.1 volt.	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYD33J.	9337 234 20133
	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6487	Diode, Rect, BYD33D.	9337 234 00133
	6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6490	Diode, Rect, BYD33J.	9337 234 20133
	6500	Diode, Bridge Rect, GBU4JL-7002. . . .	9322 132 55667
	6520	Diode, Rect, BYD33D.	9337 234 00133
	6523	Diode, Signal, 1N4148.	3198 010 10010
	6524	Diode, Rect, 1N5062.	3198 010 10120
	6525	Diode, Rect, 1N5062.	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt.	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500.	9340 555 59127
	6563	Diode, Signal, BAS316.	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148.	3198 010 10010
	6569	Diode, Signal, BAS316.	3198 010 10630
	6570	Zener Diode, 6.8 volt.	3198 020 56880
	6580	Diode, Signal, BAS316.	3198 010 10630
	6582	Diode, Rect, STPS10L60D.	9322 175 70667
	6831	Diode, Signal, 1N4148.	3198 010 10010
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7102	Transistor, PNP, BC857B(COL)	3198 010 42150
	7103	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9588H/N1/3I/1298.	9352 742 85557
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7400	Power FET, STP3NC60FP.	9322 157 37687
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7460	Transistor, NPN, BU4508DX.	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2.	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1.	9352 673 56112
	7521	Power FET, FQPF9N50.	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, L78L33ACZ.	9322 134 92676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C08-WBN6.	9322 154 38682
	7606	Transistor, NPN, PDTC143ZT	9340 547 00215
	7802	IC, HEF4053BT.	9333 729 60653
	7803	IC, HEF4053BT.	9333 729 60653
	7804	Transistor, NPN, BC847B(COL)	3198 010 42030
	7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682
	7901	IC, AN7580	9322 166 29682
	7903	Transistor, NPN, BC847B(COL)	3198 010 42030
	9001	Wire Jumper.	3198 036 90010
	9101	Wire Jumper.	3198 036 90010
	9102	Wire Jumper.	3198 036 90010
	9103	Wire Jumper.	3198 036 90010
	9104	Wire Jumper.	3198 036 90010
	9123	Wire Jumper.	3198 036 90010
	9171	Wire Jumper.	3198 036 90010
	9173	Wire Jumper.	3198 036 90010
	9175	Wire Jumper.	3198 036 90010
	9176	Wire Jumper.	3198 036 90010
	9178	Wire Jumper.	3198 036 90010
	9179	Wire Jumper.	3198 036 90010
	9181	Wire Jumper.	3198 036 90010
	9182	Wire Jumper.	3198 036 90010
	9183	Wire Jumper.	3198 036 90010
	9192	Wire Jumper.	3198 036 90010
	9193	Wire Jumper.	3198 036 90010
	9311	Wire Jumper.	3198 036 90010
	9312	Wire Jumper.	3198 036 90010
	9406	Wire Jumper.	3198 036 90010
	9407	Wire Jumper.	3198 036 90010
	9408	Wire Jumper.	3198 036 90010
	9409	Wire Jumper.	3198 036 90010
	9410	Wire Jumper.	3198 036 90010
	9411	Wire Jumper.	3198 036 90010
	9412	Wire Jumper.	3198 036 90010
	9413	Wire Jumper.	3198 036 90010
	9414	Wire Jumper.	3198 036 90010
	9415	Wire Jumper.	3198 036 90010
	9416	Wire Jumper.	3198 036 90010
	9417	Wire Jumper.	3198 036 90010
	9418	Wire Jumper.	3198 036 90010
	9419	Wire Jumper.	3198 036 90010
	9421	Wire Jumper.	3198 036 90010
	9422	Wire Jumper.	3198 036 90010
	9424	Wire Jumper.	3198 036 90010
	9425	Wire Jumper.	3198 036 90010
	9426	Wire Jumper.	3198 036 90010
	9427	Wire Jumper.	3198 036 90010
	9453	Wire Jumper.	3198 036 90010
	9460	Wire Jumper.	3198 036 90010
	9463	Wire Jumper.	3198 036 90010
	9500	Wire Jumper.	3198 036 90010
	9501	Wire Jumper.	3198 036 90010
	9503	Wire Jumper.	3198 036 90010
	9506	Wire Jumper.	3198 036 90010
	9507	Wire Jumper.	3198 036 90010
	9511	Wire Jumper.	3198 036 90010
	9512	Wire Jumper.	3198 036 90010
	9513	Wire Jumper.	3198 036 90010
	9514	Wire Jumper.	3198 036 90010
	9515	Wire Jumper.	3198 036 90010
	9516	Wire Jumper.	3198 036 90010
	9518	Wire Jumper.	3198 036 90010
	9520	Wire Jumper.	3198 036 90010
	9521	Wire Jumper.	3198 036 90010
	9522	Wire Jumper.	3198 036 90010
	9524	Wire Jumper.	3198 036 90010
	9528	Wire Jumper.	3198 036 90010
	9530	Wire Jumper.	3198 036 90010
	9611	Coil, 27u, 10%	3198 018 22790
	9612	Wire Jumper.	3198 036 90010
	9613	Wire Jumper.	3198 036 90010
	9614	Wire Jumper.	3198 036 90010
	9615	Wire Jumper.	3198 036 90010
	9618	Wire Jumper.	3198 036 90010
	9619	Wire Jumper.	3198 036 90010
	9620	Wire Jumper.	3198 036 90010
	9621	Wire Jumper.	3198 036 90010
	9622	Wire Jumper.	3198 036 90010
	9623	Wire Jumper.	3198 036 90010
	9624	Wire Jumper.	3198 036 90010
	9626	Wire Jumper.	3198 036 90010
	9627	Wire Jumper.	3198 036 90010
	9628	Wire Jumper.	3198 036 90010
	9629	Wire Jumper.	3198 036 90010
	9631	Wire Jumper.	3198 036 90010
	9632	Wire Jumper.	3198 036 90010
	9633	Wire Jumper.	3198 036 90010
	9637	Wire Jumper.	3198 036 90010
	9638	Wire Jumper.	3198 036 90010
	9639	Wire Jumper.	3198 036 90010
	9640	Wire Jumper.	3198 036 90010
	9641	Wire Jumper.	3198 036 90010
	9642	Wire Jumper.	3198 036 90010
	9643	Wire Jumper.	3198 036 90010
	9648	Wire Jumper.	3198 036 90010
	9650	Wire Jumper.	3198 036 90010
	9651	Wire Jumper.	3198 036 90010
	9652	Wire Jumper.	3198 036 90010
	9654	Wire Jumper.	3198 036 90010
	9655	Wire Jumper.	3198 036 90010
	9656	Wire Jumper.	3198 036 90010
	9657	Wire Jumper.	3198 036 90010
	9658	Wire Jumper.	3198 036 90010
	9659	Wire Jumper.	3198 036 90010
	9660	Wire Jumper.	3198 036 90010
	9661	Wire Jumper.	3198 036 90010
	9662	Wire Jumper.	3198 036 90010
	9663	Wire Jumper.	3198 036 90010
	9664	Wire Jumper.	3198 036 90010
	9665	Wire Jumper.	3198 036 90010
	9666	Wire Jumper.	3198 036 90010
	9667	Wire Jumper.	3198 036 90010
	9668	Wire Jumper.	3198 036 90010
	9669	Wire Jumper.	3198 036 90010
	9670	Wire Jumper.	3198 036 90010
	9671	Wire Jumper.	3198 036 90010
	9672	Coil, 22u, 10%	3198 018 22290
	9674	Wire Jumper.	3198 036 90010
	9675	Wire Jumper.	3198 036 90010
	9676	Wire Jumper.	3198 036 90010
	9678	Coil, 22u, 10%	3198 018 22290
	9679	Wire Jumper.	3198 036 90010
	9680	Wire Jumper.	3198 036 90010
	9681	Wire Jumper.	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

Ref	Description	Part No.
9682	Wire Jumper	3198 036 90010
9685	Wire Jumper	3198 036 90010
9686	Wire Jumper	3198 036 90010
9687	Wire Jumper	3198 036 90010
9688	Wire Jumper	3198 036 90010
9689	Wire Jumper	3198 036 90010
9690	Wire Jumper	3198 036 90010
9691	Wire Jumper	3198 036 90010
9694	Wire Jumper	3198 036 90010
9695	Wire Jumper	3198 036 90010
9697	Wire Jumper	3198 036 90010
9698	Wire Jumper	3198 036 90010
9699	Wire Jumper	3198 036 90010
9821	Wire Jumper	3198 036 90010
9822	Wire Jumper	3198 036 90010
9825	Wire Jumper	3198 036 90010
9828	Wire Jumper	3198 036 90010
9829	Wire Jumper	3198 036 90010
9831	Wire Jumper	3198 036 90010
9832	Wire Jumper	3198 036 90010
9837	Wire Jumper	3198 036 90010
9838	Wire Jumper	3198 036 90010
9839	Wire Jumper	3198 036 90010
9846	Wire Jumper	3198 036 90010
9847	Wire Jumper	3198 036 90010
9849	Wire Jumper	3198 036 90010
9851	Wire Jumper	3198 036 90010
9856	Wire Jumper	3198 036 90010
9858	Wire Jumper	3198 036 90010
9859	Wire Jumper	3198 036 90010
9860	Wire Jumper	3198 036 90010
9862	Wire Jumper	3198 036 90010
9863	Wire Jumper	3198 036 90010
9864	Wire Jumper	3198 036 90010
9865	Wire Jumper	3198 036 90010
9867	Wire Jumper	3198 036 90010
9868	Wire Jumper	3198 036 90010
9869	Wire Jumper	3198 036 90010
9870	Wire Jumper	3198 036 90010
9871	Wire Jumper	3198 036 90010
9873	Wire Jumper	3198 036 90010
9874	Wire Jumper	3198 036 90010
9875	Wire Jumper	3198 036 90010
9876	Wire Jumper	3198 036 90010
9877	Wire Jumper	3198 036 90010
9878	Wire Jumper	3198 036 90010
9901	Wire Jumper	3198 036 90010
9902	Wire Jumper	3198 036 90010
9903	Wire Jumper	3198 036 90010
9904	Wire Jumper	3198 036 90010
9911	Wire Jumper	3198 036 90010
9913	Wire Jumper	3198 036 90010
9914	Wire Jumper	3198 036 90010
9915	Wire Jumper	3198 036 90010
9923	Wire Jumper	3198 036 90010
9991	Wire Jumper	3198 036 90010
9993	Wire Jumper	3198 036 90010
9996	Wire Jumper	3198 036 90010
9997	Wire Jumper	3198 036 90010
9998	Wire Jumper	3198 036 90010
CBA	Main Chassis Assembly	3141 058 58611

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

Ref	Description	Part No.
0266	6 Pin Connector	2422 025 16609
2401	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2402	Cap, 4u7, 20%, 35v, Electrolytic	3198 028 44780
2403	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2407	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2408	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2409	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2411	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
2412	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2413	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2414	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2415	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2416	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2419	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2420	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
2425	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2426	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2427	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2428	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2429	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2430	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2431	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2432	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2433	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2434	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2435	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2436	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2440	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
2442	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2443	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2450	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
2452	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2453	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
3401	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3402	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3403	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3404	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3405	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3406	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3407	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3408	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3412	Res, 510K, 5%, 1/10W, Metalized Glass.	2122 118 05951
3419	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3425	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3427	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3431	Res, 8K2, 1%, 1/16W, Metalized Glass	2322 704 68202
3432	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3440	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3441	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3442	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3443	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3444	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3450	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3451	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3452	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3453	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3454	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3455	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3456	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3457	Wire Jumper	3198 036 90010
3458	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4403	Res, Zero ohm, "Chip" Jumper	3198 021 90030
5401	Coil, 10u, 10%	3198 018 31090
5407	Coil, 33u, 5%.	3198 018 13390
5408	Coil, 33u, 20%	3198 018 33390
5421	Inductor, 100 MHz, 120 ohm	3198 018 90070
5425	Coil, 10u, 10%	3198 018 31090
5428	Coil, 10u, 5%.	3198 018 11090
5429	Coil, 10u, 10%	3198 018 31090
5430	Coil, 10u, 10%	3198 018 31090
5440	Coil, 10u, 10%	3198 018 31090
5442	Coil, 22u, 5%.	3198 018 12290
5450	Coil, 10u, 10%	3198 018 31090
5452	Coil, 33u, 5%.	3198 018 13390
7401	Transistor, PNP, BC857B(COL)	3198 010 42150
7402	Transistor, NPN, BC847B(COL)	3198 010 42030
7403	Transistor, NPN, BC847B(COL)	3198 010 42030
7421	IC, TC90A53N	9322 182 18682
7440	Transistor, NPN, BC847B(COL)	3198 010 42030
7444	Transistor, NPN, BC847B(COL)	3198 010 42030
7450	Transistor, NPN, BC847B(COL)	3198 010 42030
7454	Transistor, NPN, BC847B(COL)	3198 010 42030
9401	Wire Jumper	3198 036 90010
9402	Wire Jumper	3198 036 90010
9403	Wire Jumper	3198 036 90010
CBA	2D 3 Line Comb Filter Assembly	3139 177 26561

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

Ref	Description	Part No.
S 0211	2 Pin Connector	2422 025 16268
S 0212	2 Pin Connector	2422 025 16559
0214	5 Pin Connector	2422 025 06353
1606	Tact Switch	2422 128 02742
2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2698	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322 242 13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322 242 13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
6691	LED, LTL-10234WHCR	9322 185 69682
6692	IR Receiver, TSOP1836UH3V.	9322 127 54667

27PT663R37A (continued)

9001	Wire Jumper.	3198 036 90010
9002	Wire Jumper.	3198 036 90010
CBA	Front Interface Panel Assembly	3139 177 26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422 026 04747
0250	A/V Jack	2422 026 04815
0251	6 Pin Connector.	2422 025 12482
0254	5 Pin Connector.	2422 025 12481
0255	4 Pin Connector.	2422 025 12479
2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2177	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2179	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
3150	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
4817	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4819	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4821	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4822	Res, Zero ohm, "Chip" Jumper	3198 021 90020
6161	Zener Diode, 6.8 volt.	3198 010 26880
9151	Wire Jumper.	3198 036 90010
9152	Wire Jumper.	3198 036 90010
9153	Wire Jumper.	3198 036 90010
9170	Wire Jumper.	3198 036 90010
CBA	Side Jack Panel Assembly	3139 187 15141

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

0215	3 Pin Connector.	2422 025 16601
1091	Tact Switch.	2422 128 02742
1092	Tact Switch.	2422 128 02742
1093	Tact Switch.	2422 128 02742
1094	Tact Switch.	2422 128 02742
3091	Res, 560 ohm, 5%, Metalized Glass. . .	3198 021 35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3093	Res, 560 ohm, 5%, Metalized Glass. . .	3198 021 35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
4085	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4089	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4090	Res, Zero ohm, "Chip" Jumper	3198 021 90030
6091	Diode, Signal.	9340 453 90115
CBA	Top Control Panel Assembly	3139 187 15841

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S	AC01	AC Cord.	3135 010 03831
	AC03	Anode Lead Spacer (3 Used)	3135 014 04471
	AC04	Batteries for Remote Control Transmitte	9299 000 65263
	AC05	Cabinet Back	3139 124 44711
	AC06	Cabinet Back Screw Cover (2 Used). . .	3139 124 39301
	AC08	Chassis Tray	3139 124 31324
S	AC09	CRT, A68QCU754X73(N)	9301 925 60527
S	AC12	Degaussing Coil.	2422 549 43967
	AC13	Front Interface Panel Bracket.	3139 124 32891
	AC15	Holder, Degaussing Coil (4 Used) . . .	3139 124 31122
	AC17	Owner's Manual	3121 235 20671
	AC18	Quick Use Guide.	3121 233 43491
	AC19	Side Jack Panel Bracket.	3139 124 37061
	AC20	Cabinet Front Assembly	3121 237 53101
	AC20A	Cabinet Front.	3139 177 58401
	AC20C	Light Guide.	3139 124 39701
	AC20D	Nameplate.	3141 050 00161
	AC20E	Power Button	3139 138 10881
	AC20H	Speaker, 8 ohm, 10W (2 Used)	3139 128 76521
	AC20J	Top Control Assembly	3139 138 11451
	AC20J1	Top Control Bracket.	3139 124 39802
	AC20J2	Top Control Buttons.	3139 124 39812
	REMOTE	Remote Control Transmitter, RC19036002/ 01.	3139 228 88003

S = Safety Part   Be sure to use exact replacement part.

27PT663R37C - Manual no. 7638

Main Chassis Parts

Main Chassis Parts

	0211	2 Pin Connector.	2422 025 16374
	0212	2 Pin Connector.	2422 025 16375
	0214	5 Pin Connector.	2422 025 12481
	0219	6 Pin Connector.	2422 025 12482
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0222	2 Pin Connector.	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0239	3 Pin Connector.	2422 025 16382
	0243	6 Pin Connector.	2422 025 04854
	0244	5 Pin Connector.	2422 025 04853
	0245	6 Pin Connector.	2422 025 04854
	0246	5 Pin Connector.	2422 025 12481
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector.	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U PLL	2422 542 90098
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1660	Crystal, 12MHz000	2422 543 01203
	1810	6 Pin Connector.	2422 025 16607
	1831	Crystal, Resonator, 18MHz432, 12 Pin, HC49/U A.	2422 543 00842
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic. . .	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic. . .	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic. . .	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic . .	2020 558 90445
	2401	Cap, 2u2, 20%, 50v, Electrolytic . . .	2020 021 90552
	2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic . . .	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2441	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic . . .	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic. . .	2020 021 91139
	2451	Cap, 22n, 10%, 50v, Polyester.	3198 014 02230
	2452	Cap, 180p, 5%, 50v, Ceramic.	3198 016 01810
	2455	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
	2457	Cap, 360n, 5%, 250v, Metalized Polypropylene.	2022 333 00163
	2458	Cap, 2u2, 20%, 100v, Electrolytic. . .	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
S	2463	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene	2222 479 90042
S	2465	Cap, 15n, 5%, 1600v, Polypropylene . .	2020 301 90255
	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
	2468	Cap, 22n, 10%, 400v, Polyester	2222 347 90223
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic . . .	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 120n, 5%, 250v, Metalized Polypropylene.	2222 479 90051
	2485	Cap, 4u7, 20%, 250v, Electrolytic. . .	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic. . .	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic . . .	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic . .	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic. . .	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic . .	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic . . .	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic . .	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic . . .	2020 021 91374
	2567	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic . . .	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic . . .	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic. . .	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic. . .	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2604	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050
	2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2807	Cap, 220n, +80/-20%, 25v, Ceramic. . .	3198 023 22240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
	2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
	2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080

S = Safety Part   Be sure to use exact replacement part.

27PT663R37C (continued)

Ref	Description	Part No.
2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
2837	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
2840	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
2841	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2842	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
2843	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2844	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2845	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
2846	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2902	Cap, 1000u, 20%, 25v, Electrolytic	3198 026 31020
2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2904	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2906	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2908	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3124	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3126	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3134	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
3154	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620
3156	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3157	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3158	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3159	Res, 1K2, 1%, 1/8W, Metalized Glass.	2322 734 61202
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
3205	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3206	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
3218	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3241	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3242	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
3245	Res, 39K, 1%, 1/16W, Metalized Glass	2322 704 63903
3246	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3248	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
3250	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3257	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020
3340	Res, 10 ohm, 5%, 1/2W, Metal Film.	2306 207 03109
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
3343	Res, 1K5, 20%, 1/2W, Carbon Film	3198 013 01520
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3400	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
3401	Res, 220K, 5%, 1/6W, Carbon Film	3198 011 02240
3403	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3405	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
3406	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
3408	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3410	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3443	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3445	Res, 15K, 5%, 1/6W, Carbon Film.	3198 011 01530
3446	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620
3447	Res, 180 ohm, 5%, 1/6W, Carbon Film.	3198 011 01810
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
3449	Res, 68 ohm, 5%, 1/6W, Carbon Film	3198 011 06890
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film.	2306 204 03109
3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102
3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film	3198 012 26880
3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S 3459	Res, 15K, 5%, 1 1/3W, Metal Film	3198 012 21530
3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320
3470	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
3472	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
3473	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3479	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2122 101 02083
3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
S 3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	3198 012 32290
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3492	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3495	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3498	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3499	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3506	Res, 1M5, 5%, 1/2W, Metalized Glass.	2322 242 13155
3507	Surge Protector.	2422 549 43073
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film	3198 013 02210
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3520	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3521	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3523	Res, 100 ohm, 5%, 1/3W, Metal Film	2306 204 03101
3524	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3525	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S 3527	Res, 0R33, 5%, 3/5W, Metal Film.	3198 012 13370
3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3529	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3530	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030

S = Safety Part   Be sure to use exact replacement part.

27PT663R37C (continued)

	Ref	Description	Part No.
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3565	Res, 220 ohm, 5%, 1W, Metal Film . . .	3198 012 12210
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
S	3591	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3811	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3812	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3813	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3831	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3843	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3901	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198 021 36820
	3903	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3905	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3909	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3910	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3912	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4824	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4837	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4838	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4884	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5202	Wire Jumper.	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5241	Wire Jumper.	3198 036 90010
	5242	Coil, 10u, 5%.	3198 018 11090
	5341	Coil, 22u.	2422 535 97333
	5342	Coil, 22u.	2422 535 97333
	5401	Coil, 1mH, 10%	3198 018 71020
S	5445	Transformer, LOT	2422 531 02574
	5451	Coil, 22u, 10%	3198 018 72290
	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
S	5457	Coil, 25u.	2422 535 91028
	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
	5463	Coil, Choke.	3128 138 37021
	5471	Coil, 6u8, 20%	3198 018 76880
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 47u, 10%	2422 535 97337
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS42202-00 B.	2422 531 02562
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5810	Coil, 10u, 10%	3198 018 51090
	5831	Coil, 6u8, 5%.	3198 018 16880
	5832	Coil, 6u8, 5%.	3198 018 16880
	5833	Coil, 6u8, 5%.	3198 018 16880
	5835	Coil, 12u, 10%	3198 018 31290
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316.	3198 010 10630
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630
	6206	Zener Diode, 6.8 volt.	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316.	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002
	6401	Zener Diode, 47 volt	3198 010 24790
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148.	3198 010 10010
	6448	Zener Diode, 6.2 volt.	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6460	Diode, Rect, BY228/24.	9340 559 50112
	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
	6465	Diode, Signal, BAV21	3198 010 10070

S = Safety Part   Be sure to use exact replacement part.

27PT663R37C (continued)

Ref	Description	Part No.
6466	Diode, Signal, BAV21	3198 010 10070
6467	Diode, Signal, BAS316	3198 010 10630
6468	Diode, Signal, BAS316	3198 010 10630
6469	Diode, Rect, BYD33J	9337 234 20133
6470	Diode, Signal, BAV99	3198 010 10620
6476	Zener Diode, 15 volt	3198 010 21590
6481	Zener Diode, 5.6 volt	3198 010 25680
6482	Zener Diode, 9.1 volt	9331 177 80133
6483	Zener Diode, 33 volt	3198 010 23390
6485	Diode, Rect, BYD33J	9337 234 20133
6486	Diode, Rect, EGP20DL-5100	9322 164 42682
6487	Diode, Rect, BYD33D	9337 234 00133
6488	Diode, Rect, EGP20DL-5100	9322 164 42682
6490	Diode, Rect, BYD33J	9337 234 20133
6500	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6520	Diode, Rect, BYD33D	9337 234 00133
6523	Diode, Signal, 1N4148	3198 010 10010
6524	Diode, Rect, 1N5062	3198 010 10120
6525	Diode, Rect, 1N5062	3198 010 10120
6526	Zener Diode, 22 volt	3198 020 52290
6540	Zener Diode, 6.2 volt	9331 668 30133
6541	Zener Diode, 10 volt	3198 020 51090
6560	Diode, Rect, BYV29X-500	9340 555 59127
6563	Diode, Signal, BAS316	3198 010 10630
6565	Diode, Signal, BAV70	9331 849 10215
6566	Diode, Signal, 1N4148	3198 010 10010
6569	Diode, Signal, BAS316	3198 010 10630
6570	Zener Diode, 6.8 volt	3198 020 56880
6580	Diode, Signal, BAS316	3198 010 10630
6582	Diode, Rect, STPS10L60D	9322 175 70667
6831	Diode, Signal, 1N4148	3198 010 10010
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
7101	Transistor, NPN, BC847B(COL)	3198 010 42030
7102	Transistor, PNP, BC857B(COL)	3198 010 42150
7103	Transistor, NPN, BC847B(COL)	3198 010 42030
7200	IC, TDA9588H/N1/3I/1298	9352 742 85557
7201	Transistor, NPN, BC847B(COL)	3198 010 42030
7204	Transistor, PNP, BC857B(COL)	3198 010 42150
7205	Transistor, PNP, BC857B(COL)	3198 010 42150
7330	IC, TDA6107JF/N3	9352 713 37112
7400	Power FET, STP3NC60FP	9322 157 37687
7441	Transistor, PNP, BC857B(COL)	3198 010 42150
7443	Transistor, PNP, BC557B(COL)	3198 020 40110
7460	Transistor, NPN, BU4508DX	9340 550 92127
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
7462	Transistor, NPN, PDTC143ZT	9340 547 00215
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
7471	IC, TDA8359J/N2	9352 701 64112
7480	Transistor, NPN, BD135	3198 020 41010
7482	Transistor, NPN, BD135	3198 020 41010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667
7520	IC, TEA1507P/N1	9352 673 56112
7521	Power FET, FQPF9N50	9322 187 16687
7522	Transistor, NPN, BC847B(COL)	3198 010 42030
7540	Transistor, NPN, BC547B(COL)	3198 020 40030
7541	Transistor, NPN, PDTC114ET	9340 310 10215
7542	Transistor, PNP, BC857B(COL)	3198 010 42150
7560	IC, L78L33ACZ	9322 134 92676
7561	Transistor, NPN, PDTC143ZT	9340 547 00215
7580	Transistor, PNP, BC857B(COL)	3198 010 42150
7602	IC, M24C08-WBN6	9322 154 38682
7606	Transistor, NPN, PDTC143ZT	9340 547 00215
7802	IC, HEF4053BT	9333 729 60653
7803	IC, HEF4053BT	9333 729 60653
7804	Transistor, NPN, BC847B(COL)	3198 010 42030
7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682
7901	IC, AN7580	9322 166 29682
7903	Transistor, NPN, BC847B(COL)	3198 010 42030
9001	Wire Jumper	3198 036 90010
9101	Wire Jumper	3198 036 90010
9102	Wire Jumper	3198 036 90010
9103	Wire Jumper	3198 036 90010
9104	Wire Jumper	3198 036 90010
9123	Wire Jumper	3198 036 90010
9171	Wire Jumper	3198 036 90010
9173	Wire Jumper	3198 036 90010
9175	Wire Jumper	3198 036 90010
9176	Wire Jumper	3198 036 90010
9178	Wire Jumper	3198 036 90010
9179	Wire Jumper	3198 036 90010
9181	Wire Jumper	3198 036 90010
9182	Wire Jumper	3198 036 90010
9183	Wire Jumper	3198 036 90010
9192	Wire Jumper	3198 036 90010
9193	Wire Jumper	3198 036 90010
9311	Wire Jumper	3198 036 90010
9312	Wire Jumper	3198 036 90010
9406	Wire Jumper	3198 036 90010
9407	Wire Jumper	3198 036 90010
9408	Wire Jumper	3198 036 90010
9409	Wire Jumper	3198 036 90010
9410	Wire Jumper	3198 036 90010
9411	Wire Jumper	3198 036 90010
9412	Wire Jumper	3198 036 90010
9413	Wire Jumper	3198 036 90010
9414	Wire Jumper	3198 036 90010
9415	Wire Jumper	3198 036 90010
9416	Wire Jumper	3198 036 90010
9417	Wire Jumper	3198 036 90010
9418	Wire Jumper	3198 036 90010
9419	Wire Jumper	3198 036 90010
9421	Wire Jumper	3198 036 90010
9422	Wire Jumper	3198 036 90010
9424	Wire Jumper	3198 036 90010
9425	Wire Jumper	3198 036 90010
9426	Wire Jumper	3198 036 90010
9427	Wire Jumper	3198 036 90010
9453	Wire Jumper	3198 036 90010
9460	Wire Jumper	3198 036 90010
9463	Wire Jumper	3198 036 90010
9500	Wire Jumper	3198 036 90010
9501	Wire Jumper	3198 036 90010
9503	Wire Jumper	3198 036 90010
9506	Wire Jumper	3198 036 90010
9507	Wire Jumper	3198 036 90010
9511	Wire Jumper	3198 036 90010
9512	Wire Jumper	3198 036 90010
9513	Wire Jumper	3198 036 90010
9514	Wire Jumper	3198 036 90010
9515	Wire Jumper	3198 036 90010
9516	Wire Jumper	3198 036 90010
9518	Wire Jumper	3198 036 90010
9520	Wire Jumper	3198 036 90010
9521	Wire Jumper	3198 036 90010
9522	Wire Jumper	3198 036 90010
9524	Wire Jumper	3198 036 90010
9528	Wire Jumper	3198 036 90010
9530	Wire Jumper	3198 036 90010
9611	Coil, 27u, 10%	3198 018 22790
9612	Wire Jumper	3198 036 90010
9613	Wire Jumper	3198 036 90010
9614	Wire Jumper	3198 036 90010
9615	Wire Jumper	3198 036 90010
9618	Wire Jumper	3198 036 90010
9619	Wire Jumper	3198 036 90010
9620	Wire Jumper	3198 036 90010
9621	Wire Jumper	3198 036 90010
9622	Wire Jumper	3198 036 90010
9623	Wire Jumper	3198 036 90010
9624	Wire Jumper	3198 036 90010
9626	Wire Jumper	3198 036 90010
9627	Wire Jumper	3198 036 90010
9628	Wire Jumper	3198 036 90010
9629	Wire Jumper	3198 036 90010
9631	Wire Jumper	3198 036 90010
9632	Wire Jumper	3198 036 90010
9633	Wire Jumper	3198 036 90010
9637	Wire Jumper	3198 036 90010
9638	Wire Jumper	3198 036 90010
9639	Wire Jumper	3198 036 90010
9640	Wire Jumper	3198 036 90010
9641	Wire Jumper	3198 036 90010
9642	Wire Jumper	3198 036 90010
9643	Wire Jumper	3198 036 90010
9648	Wire Jumper	3198 036 90010
9650	Wire Jumper	3198 036 90010
9651	Wire Jumper	3198 036 90010
9652	Wire Jumper	3198 036 90010
9654	Wire Jumper	3198 036 90010
9655	Wire Jumper	3198 036 90010
9656	Wire Jumper	3198 036 90010
9657	Wire Jumper	3198 036 90010
9658	Wire Jumper	3198 036 90010
9659	Wire Jumper	3198 036 90010
9660	Wire Jumper	3198 036 90010
9661	Wire Jumper	3198 036 90010
9662	Wire Jumper	3198 036 90010
9663	Wire Jumper	3198 036 90010
9664	Wire Jumper	3198 036 90010
9665	Wire Jumper	3198 036 90010
9666	Wire Jumper	3198 036 90010
9667	Wire Jumper	3198 036 90010
9668	Wire Jumper	3198 036 90010
9669	Wire Jumper	3198 036 90010
9670	Wire Jumper	3198 036 90010
9671	Wire Jumper	3198 036 90010
9672	Coil, 22u, 10%	3198 018 22290
9674	Wire Jumper	3198 036 90010
9675	Wire Jumper	3198 036 90010
9676	Wire Jumper	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper	3198 036 90010
9680	Wire Jumper	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

27PT663R37C (continued)

Ref	Description	Part No.
9681	Wire Jumper	3198 036 90010
9682	Wire Jumper	3198 036 90010
9685	Wire Jumper	3198 036 90010
9686	Wire Jumper	3198 036 90010
9687	Wire Jumper	3198 036 90010
9688	Wire Jumper	3198 036 90010
9689	Wire Jumper	3198 036 90010
9690	Wire Jumper	3198 036 90010
9691	Wire Jumper	3198 036 90010
9694	Wire Jumper	3198 036 90010
9695	Wire Jumper	3198 036 90010
9697	Wire Jumper	3198 036 90010
9698	Wire Jumper	3198 036 90010
9699	Wire Jumper	3198 036 90010
9821	Wire Jumper	3198 036 90010
9822	Wire Jumper	3198 036 90010
9825	Wire Jumper	3198 036 90010
9828	Wire Jumper	3198 036 90010
9829	Wire Jumper	3198 036 90010
9831	Wire Jumper	3198 036 90010
9832	Wire Jumper	3198 036 90010
9837	Wire Jumper	3198 036 90010
9838	Wire Jumper	3198 036 90010
9839	Wire Jumper	3198 036 90010
9846	Wire Jumper	3198 036 90010
9847	Wire Jumper	3198 036 90010
9849	Wire Jumper	3198 036 90010
9851	Wire Jumper	3198 036 90010
9856	Wire Jumper	3198 036 90010
9858	Wire Jumper	3198 036 90010
9859	Wire Jumper	3198 036 90010
9860	Wire Jumper	3198 036 90010
9862	Wire Jumper	3198 036 90010
9863	Wire Jumper	3198 036 90010
9864	Wire Jumper	3198 036 90010
9865	Wire Jumper	3198 036 90010
9867	Wire Jumper	3198 036 90010
9868	Wire Jumper	3198 036 90010
9869	Wire Jumper	3198 036 90010
9870	Wire Jumper	3198 036 90010
9871	Wire Jumper	3198 036 90010
9873	Wire Jumper	3198 036 90010
9874	Wire Jumper	3198 036 90010
9875	Wire Jumper	3198 036 90010
9876	Wire Jumper	3198 036 90010
9877	Wire Jumper	3198 036 90010
9878	Wire Jumper	3198 036 90010
9901	Wire Jumper	3198 036 90010
9902	Wire Jumper	3198 036 90010
9903	Wire Jumper	3198 036 90010
9904	Wire Jumper	3198 036 90010
9911	Wire Jumper	3198 036 90010
9913	Wire Jumper	3198 036 90010
9914	Wire Jumper	3198 036 90010
9915	Wire Jumper	3198 036 90010
9923	Wire Jumper	3198 036 90010
9991	Wire Jumper	3198 036 90010
9993	Wire Jumper	3198 036 90010
9996	Wire Jumper	3198 036 90010
9997	Wire Jumper	3198 036 90010
9998	Wire Jumper	3198 036 90010
CBA	Main Chassis Assembly	3139 177 26271

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

Ref	Description	Part No.
0266	6 Pin Connector	2422 025 16609
2401	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2402	Cap, 4u7, 20%, 35v, Electrolytic	3198 028 44780
2403	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2407	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2408	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2409	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2411	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
2412	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
2413	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2414	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2415	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2416	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2419	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2420	Cap, 180p, 5%, 50v, Ceramic	3198 016 31810
2425	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2426	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2427	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2428	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
2429	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
2430	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2431	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
2432	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2433	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2434	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2435	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2436	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2440	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
2442	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2443	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2450	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
2452	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2453	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
3401	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3402	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3403	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3404	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3405	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3406	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3407	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
3408	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3412	Res, 510K, 5%, 1/10W, Metalized Glass	2122 118 05951
3419	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3425	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3427	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3431	Res, 8K2, 1%, 1/16W, Metalized Glass	2322 704 68202
3432	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3440	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3441	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3442	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3443	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3444	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3450	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3451	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3452	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3453	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3454	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3455	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3456	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3457	Wire Jumper	3198 036 90010
3458	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4403	Res, Zero ohm, "Chip" Jumper	3198 021 90030
5401	Coil, 10u, 10%	3198 018 31090
5407	Coil, 33u, 5%	3198 018 13390
5408	Coil, 33u, 20%	3198 018 33390
5421	Inductor, 100 MHz, 120 ohm	3198 018 90070
5425	Coil, 10u, 10%	3198 018 31090
5428	Coil, 10u, 5%	3198 018 11090
5429	Coil, 10u, 10%	3198 018 31090
5430	Coil, 10u, 10%	3198 018 31090
5440	Coil, 10u, 10%	3198 018 31090
5442	Coil, 22u, 5%	3198 018 12290
5450	Coil, 10u, 10%	3198 018 31090
5452	Coil, 33u, 5%	3198 018 13390
7401	Transistor, PNP, BC857B(COL)	3198 010 42150
7402	Transistor, NPN, BC847B(COL)	3198 010 42030
7403	Transistor, NPN, BC847B(COL)	3198 010 42030
7421	IC, TC90A53N	9322 182 18682
7440	Transistor, NPN, BC847B(COL)	3198 010 42030
7444	Transistor, NPN, BC847B(COL)	3198 010 42030
7450	Transistor, NPN, BC847B(COL)	3198 010 42030
7454	Transistor, NPN, BC847B(COL)	3198 010 42030
9401	Wire Jumper	3198 036 90010
9402	Wire Jumper	3198 036 90010
9403	Wire Jumper	3198 036 90010
CBA	2D 3 Line Comb Filter Assembly	3139 177 26561

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

Ref	Description	Part No.
S 0211	2 Pin Connector	2422 025 16268
S 0212	2 Pin Connector	2422 025 16559
0214	5 Pin Connector	2422 025 06353
1606	Tact Switch	2422 128 02742
2691	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
2692	Cap, 47n, 10%, 25v, Ceramic	3198 023 04730
2693	Cap, 47n, 10%, 25v, Ceramic	3198 023 04730
2694	Cap, 47n, 10%, 25v, Ceramic	3198 023 04730
2695	Cap, 47n, 10%, 25v, Ceramic	3198 023 04730
2698	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass	2322 242 13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass	2322 242 13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film	3198 011 05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film	3198 011 03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film	3198 011 02210
6691	LED, LTL-10234WHCR	9322 185 69682

S = Safety Part   Be sure to use exact replacement part.

Ref	Description	Part No.
6692	IR Receiver, TSOP1836UH3V	9322 127 54667
9001	Wire Jumper	3198 036 90010
9002	Wire Jumper	3198 036 90010
CBA	Front Interface Panel Assembly	3139 177 26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb ly)

Side Jack Panel Parts

Side Jack Panel Parts

Ref	Description	Part No.
0232	Headphone Jack	2422 026 04747
0250	A/V Jack	2422 026 04815
0251	6 Pin Connector	2422 025 12482
0254	5 Pin Connector	2422 025 12481
0255	4 Pin Connector	2422 025 12479
2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2176	Cap, 470p, 5%, 50v, Ceramic	3198 016 34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2178	Cap, 470p, 5%, 50v, Ceramic	3198 016 34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
4817	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4819	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4821	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4822	Res, Zero ohm, "Chip" Jumper	3198 021 90020
6161	Zener Diode, 6.8 volt	3198 010 26880
9151	Wire Jumper	3198 036 90010
9152	Wire Jumper	3198 036 90010
9153	Wire Jumper	3198 036 90010
9170	Wire Jumper	3198 036 90010
CBA	Side Jack Panel Assembly	3139 187 15141

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Ref	Description	Part No.
0215	3 Pin Connector	2422 025 16601
1091	Tact Switch	2422 128 02742
1092	Tact Switch	2422 128 02742
1093	Tact Switch	2422 128 02742
1094	Tact Switch	2422 128 02742
3091	Res, 560 ohm, 5%, Metalized Glass	3198 021 35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3093	Res, 560 ohm, 5%, Metalized Glass	3198 021 35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
4085	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4089	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4090	Res, Zero ohm, "Chip" Jumper	3198 021 90030
6091	Diode, Signal	9340 453 90115
CBA	Top Control Panel Assembly	3139 187 15841

Cabinet & Accessory Parts

Cabinet & Accessory Parts

	Ref	Description	Part No.
S	AC01	AC Cord	3135 010 03831
	AC03	Anode Lead Spacer (3 Used)	3135 014 04471
	AC04	Batteries for Remote Control Transmitte	9299 000 65263
	AC05	Cabinet Back	3139 124 44711
	AC06	Cabinet Back Screw Cover (2 Used)	3139 124 39301
	AC08	Chassis Tray	3139 124 31324
S	AC09	CRT, A68QCP893X001	9322 173 75682
S	AC12	Degaussing Coil	2422 549 43967
	AC13	Front Interface Panel Bracket	3139 124 32891
	AC15	Holder, Degaussing Coil (4 Used)	3139 124 31122
	AC17	Owner's Manual	3121 235 20671
	AC18	Quick Use Guide	3121 233 43491
	AC19	Side Jack Panel Bracket	3139 124 37061
	AC20	Cabinet Front Assembly	3121 237 53101
	AC20A	Cabinet Front	3139 177 58401
	AC20C	Light Guide	3139 124 39701
	AC20D	Nameplate	3141 050 00161
	AC20E	Power Button	3139 138 10881
	AC20H	Speaker, 8 ohm, 10W (2 Used)	3139 128 76521
	AC20J	Top Control Assembly	3139 138 11451
	AC20J1	Top Control Bracket	3139 124 39802
	AC20J2	Top Control Buttons	3139 124 39812
	REMOTE	Remote Control Transmitter, RC19036002/01	3139 228 88003

S = Safety Part   Be sure to use exact replacement part.

27ST110P/35 - Manual no. 7638

Main Chassis Parts

		Main Chassis Parts	
	0211	2 Pin Connector	2422 025 16269
	0212	2 Pin Connector	2422 025 16375
	0213	2 Pin Connector	2422 025 16374
	0217	6 Pin Connector	2422 025 12482
	0218	A/V Jack	2422 026 04742
	0220	5 Pin Connector	2422 025 04853
	0221	2 Pin Connector	2422 025 15503
	0222	2 Pin Connector	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack	2422 026 04926
	0227	6 Pin Connector	2422 025 15849
	0229	3 Pin Connector	2412 020 00725
	0240	7 Pin Connector	2422 025 11244
	0242	7 Pin Connector	2422 025 17042
	0243	6 Pin Connector	2422 025 04854
	0244	5 Pin Connector	2422 025 04853
	0245	6 Pin Connector	2422 025 04854
S	0254	9 Pin CRT Socket	2422 500 80076
	0259	5 Pin Connector	2422 025 15848
	0262	3 Pin Connector	2422 025 16937
	0267	3 Pin Connector	2412 020 00725
	0280	4 Pin Connector	2422 025 12479
S	1000	Tuner, V+U, PLL	2422 542 90108
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC	2422 086 10914
S	1515	Relay, 5 Amp, 12V	2422 132 07444
	1600	Tact Switch	2422 128 02742
	1601	Tact Switch	2422 128 02742
	1602	Tact Switch	2422 128 02742
	1603	Tact Switch	2422 128 02742
	1606	Tact Switch	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344
	2004	Cap, 47n, 10%, 50v, Ceramic	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2123	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2125	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	2127	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
	2128	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2181	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2182	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2183	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2226	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2241	Cap, 1n5, 10%, 50v, Ceramic	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2405	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic	3198 016 03310
	2441	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic	2020 021 91139
	2451	Cap, 15n, 10%, 50v, Polyester	3198 014 01530
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 470n, 5%, 250v, Metalized Polypropylene	2022 333 00086
	2458	Cap, 2u2, 20%, 100v, Electrolytic	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
	2462	Cap, 330n, 10%, 250v, MPP	2022 333 00084
S	2463	Cap, 680p, 10%, 2000v, Ceramic	2252 712 95024
S	2465	Cap, 11n, 5%, 1600v, Polypropylene	2020 301 90251
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2601	Cap, 220n, +80/-20%, 25v, Ceramic	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2616	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2618	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic	3198 017 21050
	2691	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2802	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2803	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250

S = Safety Part   Be sure to use exact replacement part.

27ST110P/35 (continued)

Ref	Description	Part No.
2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
2862	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3121	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3122	Res, 680 ohm, 5%, 1/6W, Carbon Film. .	3198 011 06810
3123	Res, 680 ohm, 5%, 1/6W, Carbon Film. .	3198 011 06810
3125	Res, 680 ohm, 5%, 1/6W, Carbon Film. .	3198 011 06810
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3182	Wire Jumper.	3198 036 90010
3184	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3185	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3186	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3187	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3223	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840
3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
3452	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3454	Res, 3K9, 1%, 3/5W, Metal Film	2312 915 13902
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3470	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 33390
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3507	Surge Protector.	2422 549 43073
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S 3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530

S = Safety Part   Be sure to use exact replacement part.

27ST110P/35 (continued)

	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
S	3558	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198 021 53320
	3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198 021 31530
	3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198 021 31220
	3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4101	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4102	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4104	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4126	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4128	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4181	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4604	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5202	Wire Jumper.	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5241	Wire Jumper.	3198 036 90010
	5242	Coil, 10u, 5%.	3198 018 11090
	5342	Coil, 22u.	2422 535 97333
S	5445	Transformer, LOT (1342.0043B).	2422 531 02506
	5451	Coil, 33u, 10%	3198 018 73390
	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
S	5457	Coil, 42u.	2422 535 94865
	5461	Transformer, Signal Driver, SC10027-00	2422 531 02478
	5471	Coil, 3u3, 20%	3198 018 73380
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 39u, 10%	2422 535 97336
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04.	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5861	Coil, 10u, 5%.	3198 018 11090
	6001	Zener Diode, 33 volt	3198 010 23390
	6181	Zener Diode, 6.8 volt.	3198 020 56880
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630
	6206	Zener Diode, 6.8 volt.	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316.	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148.	3198 010 10010
	6448	Zener Diode, 6.2 volt.	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6460	Diode, Rect, BY228/24.	9340 559 50112
	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
	6462	Zener Diode, 9.1 volt.	9331 177 80133
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316.	3198 010 10630
	6468	Diode, Signal, BAS316.	3198 010 10630
	6469	Diode, Rect, BYV95C.	9335 001 80133
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt.	3198 010 25680

S = Safety Part   Be sure to use exact replacement part.

27ST110P/35 (continued)

	Ref	Description	Part No.
	6482	Zener Diode, 9.1 volt	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYV95C	9335 001 80133
	6486	Diode, Rect, EGP20DL-5100	9322 164 42682
	6487	Diode, Rect, BYV95A	9335 000 90133
	6488	Diode, Rect, EGP20DL-5100	9322 164 42682
	6500	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
	6520	Diode, Rect, BYV95A	9335 000 90133
	6523	Diode, Signal, 1N4148	3198 010 10010
	6524	Diode, Rect, 1N5062	3198 010 10120
	6525	Diode, Rect, 1N5062	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500	9340 555 59127
	6561	Diode, Rect, SB340L-7010	9322 128 18682
	6563	Diode, Signal, BAS316	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148	3198 010 10010
	6569	Diode, Signal, BAS316	3198 010 10630
	6570	Zener Diode, 6.8 volt	3198 020 56880
	6580	Diode, Signal, BAS316	3198 010 10630
	6681	Diode, Signal, BAT85	9336 247 60133
	6691	LED, LTL-10234WHCR	9322 185 69682
	6692	IR Receiver	9322 127 54667
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9588H/N1/3I	4835 310 57622
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7460	Transistor, NPN, BU4508DX	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1	9352 673 56112
	7521	Power FET, FQPF9N50	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, LE33CZ	9322 106 11676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C16-WBN6	9322 147 25682
	7802	IC, HEF4053BT	9333 729 60653
	7861	IC, TDA9853H/V1	9352 671 19557
	7891	Transistor, NPN, BC847B(COL)	3198 010 42030
	7892	Transistor, NPN, BC847B(COL)	3198 010 42030
	7901	IC, AN7522N PH	9322 181 41682
	9001	Wire Jumper	3198 036 90010
	9104	Wire Jumper	3198 036 90010
	9171	Wire Jumper	3198 036 90010
	9173	Wire Jumper	3198 036 90010
	9175	Wire Jumper	3198 036 90010
	9181	Wire Jumper	3198 036 90010
	9182	Wire Jumper	3198 036 90010
	9183	Wire Jumper	3198 036 90010
	9192	Wire Jumper	3198 036 90010
	9193	Wire Jumper	3198 036 90010
	9311	Wire Jumper	3198 036 90010
	9312	Wire Jumper	3198 036 90010
	9406	Wire Jumper	3198 036 90010
	9407	Wire Jumper	3198 036 90010
	9408	Wire Jumper	3198 036 90010
	9409	Wire Jumper	3198 036 90010
	9410	Wire Jumper	3198 036 90010
	9411	Wire Jumper	3198 036 90010
	9412	Wire Jumper	3198 036 90010
	9413	Wire Jumper	3198 036 90010
	9415	Wire Jumper	3198 036 90010
	9416	Wire Jumper	3198 036 90010
	9417	Wire Jumper	3198 036 90010
	9418	Wire Jumper	3198 036 90010
	9419	Wire Jumper	3198 036 90010
	9421	Wire Jumper	3198 036 90010
	9422	Wire Jumper	3198 036 90010
	9423	Wire Jumper	3198 036 90010
	9425	Wire Jumper	3198 036 90010
	9427	Wire Jumper	3198 036 90010
	9453	Wire Jumper	3198 036 90010
	9460	Wire Jumper	3198 036 90010
	9500	Wire Jumper	3198 036 90010
	9501	Wire Jumper	3198 036 90010
	9503	Wire Jumper	3198 036 90010
	9506	Wire Jumper	3198 036 90010
	9507	Wire Jumper	3198 036 90010
	9510	Wire Jumper	3198 036 90010
	9511	Wire Jumper	3198 036 90010
	9512	Wire Jumper	3198 036 90010
	9513	Wire Jumper	3198 036 90010
	9514	Wire Jumper	3198 036 90010
	9515	Wire Jumper	3198 036 90010
	9516	Wire Jumper	3198 036 90010
	9518	Wire Jumper	3198 036 90010
	9520	Wire Jumper	3198 036 90010
	9521	Wire Jumper	3198 036 90010
	9522	Wire Jumper	3198 036 90010
	9524	Wire Jumper	3198 036 90010
	9528	Wire Jumper	3198 036 90010
	9530	Wire Jumper	3198 036 90010
	9611	Coil, 27u, 10%	3198 018 22790
	9612	Wire Jumper	3198 036 90010
	9613	Wire Jumper	3198 036 90010
	9614	Wire Jumper	3198 036 90010
	9615	Wire Jumper	3198 036 90010
	9616	Wire Jumper	3198 036 90010
	9617	Wire Jumper	3198 036 90010
	9618	Wire Jumper	3198 036 90010
	9619	Wire Jumper	3198 036 90010
	9622	Wire Jumper	3198 036 90010
	9623	Wire Jumper	3198 036 90010
	9626	Wire Jumper	3198 036 90010
	9627	Wire Jumper	3198 036 90010
	9628	Wire Jumper	3198 036 90010
	9629	Wire Jumper	3198 036 90010
	9631	Wire Jumper	3198 036 90010
	9632	Wire Jumper	3198 036 90010
	9634	Wire Jumper	3198 036 90010
	9637	Wire Jumper	3198 036 90010
	9638	Wire Jumper	3198 036 90010
	9640	Wire Jumper	3198 036 90010
	9641	Wire Jumper	3198 036 90010
	9642	Wire Jumper	3198 036 90010
	9643	Wire Jumper	3198 036 90010
	9647	Wire Jumper	3198 036 90010
	9648	Wire Jumper	3198 036 90010
	9650	Wire Jumper	3198 036 90010
	9652	Wire Jumper	3198 036 90010
	9654	Wire Jumper	3198 036 90010
	9655	Wire Jumper	3198 036 90010
	9657	Wire Jumper	3198 036 90010
	9658	Wire Jumper	3198 036 90010
	9659	Wire Jumper	3198 036 90010
	9660	Wire Jumper	3198 036 90010
	9661	Wire Jumper	3198 036 90010
	9662	Wire Jumper	3198 036 90010
	9663	Wire Jumper	3198 036 90010
	9664	Wire Jumper	3198 036 90010
	9665	Wire Jumper	3198 036 90010
	9666	Wire Jumper	3198 036 90010
	9667	Wire Jumper	3198 036 90010
	9668	Wire Jumper	3198 036 90010
	9669	Wire Jumper	3198 036 90010
	9670	Wire Jumper	3198 036 90010
	9671	Wire Jumper	3198 036 90010
	9672	Coil, 22u, 10%	3198 018 22290
	9674	Wire Jumper	3198 036 90010
	9675	Wire Jumper	3198 036 90010
	9676	Wire Jumper	3198 036 90010
	9678	Coil, 22u, 10%	3198 018 22290
	9679	Wire Jumper	3198 036 90010
	9680	Wire Jumper	3198 036 90010
	9681	Wire Jumper	3198 036 90010
	9685	Wire Jumper	3198 036 90010
	9686	Wire Jumper	3198 036 90010
	9687	Wire Jumper	3198 036 90010
	9688	Wire Jumper	3198 036 90010
	9689	Wire Jumper	3198 036 90010
	9690	Wire Jumper	3198 036 90010
	9691	Wire Jumper	3198 036 90010
	9694	Wire Jumper	3198 036 90010
	9695	Wire Jumper	3198 036 90010
	9697	Wire Jumper	3198 036 90010
	9698	Wire Jumper	3198 036 90010
	9699	Wire Jumper	3198 036 90010
	9821	Wire Jumper	3198 036 90010
	9822	Wire Jumper	3198 036 90010
	9825	Wire Jumper	3198 036 90010
	9828	Wire Jumper	3198 036 90010
	9829	Wire Jumper	3198 036 90010
	9831	Wire Jumper	3198 036 90010
	9832	Wire Jumper	3198 036 90010
	9837	Wire Jumper	3198 036 90010
	9838	Wire Jumper	3198 036 90010
	9839	Wire Jumper	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

Ref	Description	Part No.
9846	Wire Jumper	3198 036 90010
9847	Wire Jumper	3198 036 90010
9849	Wire Jumper	3198 036 90010
9850	Wire Jumper	3198 036 90010
9851	Wire Jumper	3198 036 90010
9852	Wire Jumper	3198 036 90010
9853	Wire Jumper	3198 036 90010
9856	Wire Jumper	3198 036 90010
9860	Wire Jumper	3198 036 90010
9861	Wire Jumper	3198 036 90010
9862	Wire Jumper	3198 036 90010
9864	Wire Jumper	3198 036 90010
9865	Wire Jumper	3198 036 90010
9868	Wire Jumper	3198 036 90010
9873	Wire Jumper	3198 036 90010
9874	Wire Jumper	3198 036 90010
9875	Wire Jumper	3198 036 90010
9877	Wire Jumper	3198 036 90010
9891	Wire Jumper	3198 036 90010
9892	Wire Jumper	3198 036 90010
9901	Wire Jumper	3198 036 90010
9902	Wire Jumper	3198 036 90010
9903	Wire Jumper	3198 036 90010
9904	Wire Jumper	3198 036 90010
9905	Wire Jumper	3198 036 90010
9911	Wire Jumper	3198 036 90010
9913	Wire Jumper	3198 036 90010
9914	Wire Jumper	3198 036 90010
9915	Wire Jumper	3198 036 90010
9918	Wire Jumper	3198 036 90010
9919	Wire Jumper	3198 036 90010
9920	Wire Jumper	3198 036 90010
9991	Wire Jumper	3198 036 90010
9996	Wire Jumper	3198 036 90010
9998	Wire Jumper	3198 036 90010
CBA	SP/LS Module (Vertical) (ITV)	3139 127 27372
CBA	EPS Module (ITV)	3139 137 22961
CBA	Main Chassis Assembly	3139 187 26831
CBA	Interface Panel (ITV)	3139 188 04541

Channel One Card Parts

Channel One Card Parts

Ref	Description	Part No.
0010	4.7k, 5%, Metal Film,	2322 187 53472
0010	Transistor, Signal, BC547B	3198 020 40030
0020	4.7k, 5%, Metal Film,	2322 187 53472
0020	0.1uF., 10%, 50 Volt, Polyester	3198 014 01040
0030	4.7k, 5%, Metal Film,	2322 187 53472
0030	100pF., 50 Volt, NP0, Ceramic	3198 019 01010
0040	4.7k, 5%, Metal Film,	2322 187 53472
0040	Shield	3135 011 01471
0040	1000 pF, 10%, 50 Volt, Polyester	3198 014 01020
0050	3.3k, 5%, Metal Film	2322 187 53332
0060	47k, 5%, Metal Film	2322 187 53473
0060	IC, P87C52EBPN IC4	3135 019 01011
0060	1000 pF, 10%, 50 Volt, Polyester	3198 014 01020
0070	10k, 5%, Metal Film	2322 187 53103
0070	1000 pF, 10%, 50 Volt, Polyester	3198 014 01020
0080	47k, 5%, Metal Film	2322 187 53473
0080	0.1uF., 10%, 50 Volt, Polyester	3198 014 01040
0080	IC, 74HC08N	9336 687 80652
0090	10k, 5%, Metal Film	2322 187 53103
0090	Transistor, Signal, BC547B	3198 020 40030
0090	IC, SA614AD	9339 954 10118
0100	10k, 5%, Metal Film	2322 187 53103
0100	Variable Inductor, 7MM, 24M576B, L3.	2422 549 43232
0100	Transistor, Signal, BC547B	3198 020 40030
0110	220 ohm, 5%, Metal Film	2322 187 53221
0110	Transistor, Signal, BC547B	3198 020 40030
0110	IC, MC7805CT	9334 536 00682
0120	47k, 5%, Metal Film	2322 187 53473
0120	Transistor, Signal, BC547B	3198 020 40030
0130	47k, 5%, Metal Film	2322 187 53473
0130	32 Pin Connector	3135 010 03541
0130	Transistor, Signal, BC547B	3198 020 40030
0140	4.7pF, 0.25%, 50 Volt, NP0, Ceramic	2020 552 90585
0140	47k, 5%, Metal Film	2322 187 53473
0150	47k, 5%, Metal Film	2322 187 53473
0150	Transistor, Signal, BC547B	3198 020 40030
0160	0.01uF, 10%, 50 Volt, Polyester	2020 300 90573
0160	Fixed Inductor, 1uH, 20%	2422 535 97315
0170	12pF, 5%, 50 Volt, NP0, Ceramic	2020 552 90591
0170	6 Pin Modular Jack Socket	2422 025 14552
0170	Zener Diode, BZX79-C16, 16 Volt	3198 010 21690
0180	47pF, 5%, 50 Volt, NP0, Ceramic	2020 552 90598
0180	1 Pin Cinch Socket	2422 026 04366
0180	Diode, Regulator, BZX79-C8V2, 8.2 Volt	3198 010 28280
0190	4.7uF, 20%, 50 Volt, Electrolytic	2020 012 92651
0190	F-Connector	2422 031 10792
0190	Diode, Regulator, BZX79-C8V2, 8.2 Volt	3198 010 28280
0200	0.01uF, 10%, 50 Volt, Polyester	2020 300 90573
0200	Ceramic Resonator, 12MHz	2422 540 98187
0200	Diode, Regulator, BZX79-C8V2, 8.2 Volt	3198 010 28280
0210	0.01uF, 10%, 50 Volt, Polyester	2020 300 90573
0210	40 Pin Socket	2422 549 13629
0220	0.01uF, 10%, 50 Volt, Polyester	2020 300 90573
0220	10k, 5%, Metal Film	2322 187 53103
0220	Variable Inductor, 7MM, 24M576B, L3.	2422 549 43232
0230	0.1uF, 10%, 50 Volt, Polyester	2020 300 90586
0230	47k, 5%, Metal Film	2322 187 53473
0240	1pF, 0.25%, 50 Volt, NP0, Ceramic	2020 552 90576
0240	Wire Jumper	3198 036 90010
0250	0.1uF, 10%, 50 Volt, Polyester	2020 300 90586
0250	16K, 5%, Carbon	2120 101 74163
0250	IC, LM393N	9337 591 30682
0260	0.1uF, 10%, 50 Volt, Polyester	2020 300 90586
0260	Wire Jumper	3198 036 90010
0270	0.1uF, 10%, 50 Volt, Polyester	2020 300 90586
0270	10k, 5%, Metal Film	2322 187 53103
0280	0.1uF, 10%, 50 Volt, Polyester	2020 300 90586
0280	Wire Jumper	3198 036 90010
0290	0.1uF, 10%, 50 Volt, Polyester	2020 300 90586
0290	Wire Jumper	3198 036 90010
0300	0.1uF, 10%, 50 Volt, Polyester	2020 300 90586
0300	Wire Jumper	3198 036 90010
0310	100uF, 20%, 25 Volt, Electrolytic	2020 012 92639
0310	Wire Jumper	3198 036 90010
0320	Wire Jumper	3198 036 90010
0320	Transistor, Signal, BC557B	9332 026 20126
0330	Wire Jumper	3198 036 90010
0340	Wire Jumper	3198 036 90010
0360	1k, 5%, Metal Film	2322 187 53102
0370	1k, 5%, Metal Film	2322 187 53102
0380	1k, 5%, Metal Film	2322 187 53102
0390	100 ohm, 5%, Metal Film	2322 187 53101
0400	100 ohm, 5%, Metal Film	2322 187 53101
0410	100 ohm, 5%, Metal Film	2322 187 53101
0420	270K, 5%, Carbon	2120 101 74274
0430	24K, 5%, Carbon	2120 101 74243
0440	100 ohm, 5%, Metal Film	2322 187 53101
0450	10k, 5%, Metal Film	2322 187 53103
CBA	Channel One Card Assembly	3135 127 10131

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

	Ref	Description	Part No.
S	AC01	AC Cord	3135 128 70011
	AC03	Anode Lead Spacer (3 Used)	3135 014 04471
	AC05	Cabinet Back	3139 124 45261
S	AC09	CRT, A68AJB82X11	9301 891 90631
	AC10	Customer Control Buttons	3139 124 30901
S	AC12	Degaussing Coil	2422 549 43967
	AC15	Holder, Degaussing Coil (4 Used)	3135 013 01641
	AC20	Cabinet Front Assembly	3121 237 52392
	AC20A	Cabinet Front	3135 127 50011
	AC20B	Chassis Guide (2 Used)	3139 124 31381
	AC20B	Chassis Guide	3139 124 41711
	AC20C	Light Guide	3139 124 26461
	AC20D	Nameplate	3135 015 03571
	AC20E	Power Button	3139 124 26444
	AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00401

27ST110P/35 (continued)

AC21 Card Door. 3135 014 05191
AC22 Cinch Cover. 3139 124 25551
AC26 EPS Bracket. 3119 107 17241
AC27 ITV Card Bracket 3139 124 37933

S = Safety Part Be sure to use exact replacement part.

27ST220L/17 - Manual no. 7638

Main Chassis Parts

Main Chassis Parts

S	Ref	Description	Part No.
	0211	2 Pin Connector.	2422 025 16269
	0212	2 Pin Connector.	2422 025 16375
	0213	2 Pin Connector.	2422 025 16374
	0217	6 Pin Connector.	2422 025 12482
	0218	A/V Jack	2422 026 04742
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0222	2 Pin Connector.	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0227	6 Pin Connector.	2422 025 15849
	0229	3 Pin Connector.	2412 020 00725
	0240	7 Pin Connector.	2422 025 11244
	0242	7 Pin Connector.	2422 025 17042
	0243	6 Pin Connector.	2422 025 04854
	0244	5 Pin Connector.	2422 025 04853
	0245	6 Pin Connector.	2422 025 04854
S	0254	9 Pin CRT Socket	2422 500 80076
	0259	5 Pin Connector.	2422 025 15848
	0262	3 Pin Connector.	2422 025 16937
	0267	3 Pin Connector.	2412 020 00725
	0280	4 Pin Connector.	2422 025 12479
S	1000	Tuner, V+U, PLL	2422 542 90108
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1600	Tact Switch.	2422 128 02742
	1601	Tact Switch.	2422 128 02742
	1602	Tact Switch.	2422 128 02742
	1603	Tact Switch.	2422 128 02742
	1606	Tact Switch.	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2123	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2125	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	2127	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
	2128	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2181	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2182	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2183	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
	2451	Cap, 15n, 10%, 50v, Polyester.	3198 014 01530
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 470n, 5%, 250v, Metalized Polypropylene.	2022 333 00086
	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
	2462	Cap, 330n, 10%, 250v, MPP.	2022 333 00084
	2463	Cap, 1nf, 10%, 2000v, Ceramic Only with 5445 (JF0501-21835) Layer Wound.	2020 558 90487
S	2463	Cap, 680p, 10%, 2000v, Ceramic	2252 712 95024
S	2465	Cap, 11n, 5%, 1600v, Polypropylene	2020 301 90251
S	2465	Cap, 12n, 5%, 1600v, Polypropylene Only with 5445 (JF0501-21835) Layer Wound	2222 375 90156
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2616	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210

27ST220L/17 (continued)

2802 Cap, 220n, +80/-20%, 16v, Ceramic. . . 3198 017 42240
2803 Cap, 220n, +80/-20%, 16v, Ceramic. . . 3198 017 42240
2810 Cap, 2u2, +80/-20%, 10v, Ceramic . . . 3198 017 22250
2813 Cap, 2u2, +80/-20%, 10v, Ceramic . . . 3198 017 22250
2816 Cap, 470n, +80/-20%, 10v, Ceramic. . . 3198 017 44740
2862 Cap, 2u2, +80/-20%, 10v, Ceramic . . . 3198 017 22250
2864 Cap, 2u2, 20%, 50v, Electrolytic . . . 3198 025 52280
2865 Cap, 2u2, 20%, 50v, Electrolytic . . . 3198 025 52280
2866 Cap, 2u2, +80/-20%, 10v, Ceramic . . . 3198 017 22250
2867 Cap, 1n8, 10%, 50v, Ceramic. 2238 586 15626
2868 Cap, 150p, 5%, 50v, Ceramic. 3198 016 31510
2869 Cap, 68n, 10%, 50v, Polyester. 3198 014 06830
2870 Cap, 68n, 10%, 50v, Polyester. 3198 014 06830
2871 Cap, 150p, 5%, 50v, Ceramic. 3198 016 31510
2872 Cap, 1n8, 10%, 50v, Ceramic. 2238 586 15626
2873 Cap, 2u2, +80/-20%, 10v, Ceramic . . . 3198 017 22250
2874 Cap, 100u, 20%, 25v, Electrolytic. . . 3198 025 31010
2875 Cap, 100u, 20%, 25v, Electrolytic. . . 3198 025 31010
2876 Cap, 4u7, 20%, 50v, Electrolytic . . . 3198 025 54780
2877 Cap, 10u, 20%, 50v, Electrolytic . . . 3198 025 51090
2878 Cap, 1u, 20%, 50v, Electrolytic. . . . 3198 025 51080
2879 Cap, 4n7, 10%, 50v, Ceramic. 3198 017 34720
2880 Cap, 22n, 10%, 25v, Ceramic. 3198 017 32230
2883 Cap, 470u, 20%, 16v, Electrolytic. . . 3198 025 24710
2884 Cap, 2u2, 20%, 50v, Electrolytic . . . 3198 025 52280
2885 Cap, 220n, 10%, 50v, Polyester 3198 014 02240
2886 Cap, 220n, +80/-20%, 16v, Ceramic. . . 3198 017 42240
2892 Cap, 100n, +80/-20%, 25v, Ceramic. . . 3198 023 41040
2893 Cap, 100n, +80/-20%, 25v, Ceramic. . . 3198 023 41040
2902 Cap, 1000u, 20%, 16v, Electrolytic . . 3198 026 21020
2903 Cap, 1u, 20%, 50v, Electrolytic. . . . 3198 025 51080
2904 Cap, 27n, 10%, 50v, Ceramic. 2238 580 15642
2905 Cap, 1n2, 10%, 50v, Ceramic. 2238 586 15624
2906 Cap, 27n, 10%, 50v, Ceramic. 2238 580 15642
2907 Cap, 1n2, 10%, 50v, Ceramic. 2238 586 15624
2908 Cap, 10u, 20%, 50v, Electrolytic . . . 3198 025 51090
2910 Cap, 10n, 10%, 50v, Ceramic. 3198 017 31030
2911 Cap, 10n, 10%, 50v, Ceramic. 3198 017 31030
2950 Cap, 330p, 5%, 50v, Ceramic. 3198 016 33310
3000 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3001 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3002 Res, Zero ohm, "Chip" Jumper 3198 021 90030
3003 Res, 1K5, 5%, 1/16W, Metalized Glass . 3198 021 31520
3004 Res, 8K2, 5%, 1/16W, Metalized Glass . 3198 021 38220
3005 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3101 Res, 68 ohm, 5%, 1/6W, Carbon Film . . 3198 011 06890
3102 Res, 1K, 5%, 1/16W, Metalized Glass. . 3198 021 31020
3103 Res, 150 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01510
3104 Res, 220K, 5%, 1/16W, Metalized Glass. 3198 021 32240
3105 Res, 150 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01510
3106 Res, 220K, 5%, 1/16W, Metalized Glass. 3198 021 32240
3112 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3114 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3116 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3121 Res, 75 ohm, 5%, 1/6W, Carbon Film . . 3198 011 07590
3122 Res, 680 ohm, 5%, 1/6W, Carbon Film. . 3198 011 06810
3123 Res, 680 ohm, 5%, 1/6W, Carbon Film. . 3198 011 06810
3125 Res, 680 ohm, 5%, 1/6W, Carbon Film. . 3198 011 06810
3131 Res, 150 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01510
3132 Res, 47K, 5%, 1/16W, Metalized Glass . 3198 021 34730
3133 Res, 150 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01510
3134 Res, 47K, 5%, 1/16W, Metalized Glass . 3198 021 34730
3135 Res, 75 ohm, 5%, 1/6W, Carbon Film . . 3198 011 07590
3136 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3182 Wire Jumper. 3198 036 90010
3184 Res, 47K, 5%, 1/16W, Metalized Glass . 3198 021 34730
3185 Res, 150 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01510
3186 Res, 47K, 5%, 1/16W, Metalized Glass . 3198 021 34730
3187 Res, 150 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01510
3200 Res, 390 ohm, 5%, 1/6W, Carbon Film. . 3198 011 03910
3201 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3202 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3203 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3204 Res, 22K, 5%, 1/6W, Carbon Film. . . . 3198 011 02230
3206 Res, 33K, 5%, 1/16W, Metalized Glass . 3198 021 33330
3207 Res, 1K, 5%, 1/6W, Carbon Film 3198 011 01020
3208 Res, 220 ohm, 5%, 1/16W, Metalized Glas 3198 021 32210
3209 Res, 68 ohm, 5%, 1/16W, Metalized Glass 3198 021 36890
3212 Res, 470 ohm, 5%, 1/16W, Metalized Glas 3198 021 34710
3213 Res, 560 ohm, 5%, 1/6W, Carbon Film. . 3198 011 05610
3217 Res, 330K, 5%, 1/16W, Metalized Glass. 3198 021 33340
3218 Res, 82K, 5%, 1/16W, Metalized Glass . 3198 021 38230
3219 Res, 2K2, 5%, 1/16W, Metalized Glass . 3198 021 32220
3220 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3221 Res, 560 ohm, 5%, 1/6W, Carbon Film. . 3198 011 05610
3222 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3223 Res, Zero ohm, "Chip" Jumper 3198 021 90030
3226 Res, 560 ohm, 5%, 1/16W, Metalized Glas 3198 021 35610
3232 Res, 2K2, 5%, 1/16W, Metalized Glass . 3198 021 32220
3235 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3241 Res, 22K, 5%, 1/16W, Metalized Glass . 3198 021 32230
3242 Res, 27K, 5%, 1/16W, Metalized Glass . 3198 021 32730

3244 Res, 820 ohm, 5%, 1/6W, Carbon Film. . 3198 011 08210
3245 Res, 39K, 1%, 1/16W, Metalized Glass . 2322 704 63903
3246 Res, 10K, 5%, 1/16W, Metalized Glass . 3198 021 31030
3247 Res, 680K, 5%, 1/16W, Metalized Glass. 3198 021 36840
3248 Res, 33K, 5%, 1/16W, Metalized Glass . 3198 021 33330
3249 Res, 820 ohm, 5%, 1/6W, Carbon Film. . 3198 011 08210
3251 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3256 Res, 1K, 5%, 1/16W, Metalized Glass. . 3198 021 31020
3257 Res, 10M, 5%, 1/16W, Metalized Glass . 3198 021 31060
3258 Res, 100K, 5%, 1/16W, Metalized Glass. 3198 021 31040
3259 Res, 470K, 5%, 1/16W, Metalized Glass. 3198 021 34740
3331 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3332 Res, 1K, 20%, 1/2W, Carbon Film. . . . 3198 013 01020
3333 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3334 Res, 1K, 20%, 1/2W, Carbon Film. . . . 3198 013 01020
3335 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3336 Res, 1K, 20%, 1/2W, Carbon Film. . . . 3198 013 01020
3340 Res, 10 ohm, 5%, 1/2W, Metal Film. . . 2306 207 03109
S 3341 Res, 1 ohm, 5%, 1/3W, Metal Film . . . 2306 204 03108
S 3342 Res, 1 ohm, 5%, 1/3W, Metal Film . . . 2306 204 03108
3343 Res, 1K5, 20%, 1/2W, Carbon Film . . . 3198 013 01520
3344 Res, 33 ohm, 5%, 1/6W, Carbon Film . . 3198 011 03390
S 3345 Varactor, 1MA/50V, Max 115V. 2322 593 13507
3346 Res, 33 ohm, 5%, 1/6W, Carbon Film . . 3198 011 03390
3441 Res, 100 ohm, 5%, 1/10W, Metalized Glas 3198 021 51010
3442 Res, Zero ohm, "Chip" Jumper 3198 021 90030
3443 Res, 1M, 5%, 1/16W, Metalized Glass. . 3198 021 31050
3445 Res, 15K, 5%, 1/6W, Carbon Film. . . . 3198 011 01530
3446 Res, 5K6, 5%, 1/6W, Carbon Film. . . . 3198 011 05620
3447 Res, 180 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01810
3448 Res, 820 ohm, 5%, 1/6W, Carbon Film. . 3198 011 08210
3449 Res, 68 ohm, 5%, 1/6W, Carbon Film . . 3198 011 06890
3450 Res, 33 ohm, 5%, 1/6W, Carbon Film . . 3198 011 03390
S 3451 Res, 10 ohm, 5%, 1/3W, Metal Film. . . 2306 204 03109
3452 Res, 5K6, 1%, 3/5W, Metal Film Only wit
h 5445 (JF0501-21835) Layer Wound. . . 2312 915 15602
3452 Res, 10K, 1%, 3/5W, Metal Film 2312 915 11003
3453 Res, 1K, 5%, 1/6W, Carbon Film 3198 011 01020
3454 Res, 2K, 1%, 3/5W, Metal Film Only with
5445 (JF0501-21835) Layer Wound. . . . 2312 915 12002
3454 Res, 3K9, 1%, 3/5W, Metal Film 2312 915 13902
S 3455 Res, 6R8, 5%, 1 1/3W, Metal Film . . . 3198 012 26880
3458 Res, 1K, 5%, 1/6W, Carbon Film 3198 011 01020
S 3459 Res, 15K, 5%, 1 1/3W, Metal Film . . . 3198 012 21530
3460 Res, 3K9, 5%, 1/6W, Carbon Film. . . . 3198 011 03920
3463 Res, 33 ohm, 5%, 1/6W, Carbon Film . . 3198 011 03390
3465 Res, 27K, 1%, 3/5W, Metal Film 2312 915 12703
3468 Res, 220 ohm, 5%, 1/6W, Carbon Film. . 3198 011 02210
3469 Res, 3K3, 5%, 1/6W, Carbon Film. . . . 3198 011 03320
3470 Res, 330K, 5%, 1/10W, Metalized Glass. 3198 021 53340
3471 Res, 3R3, 1%, 3/5W, Metal Film 2312 915 13308
3472 Res, 3R3, 1%, 3/5W, Metal Film 2312 915 13308
3473 Res, 3R3, 1%, 3/5W, Metal Film 2312 915 13308
3474 Res, 2K2, 1%, 3/5W, Metal Film 2312 915 12202
3475 Res, 2K2, 1%, 3/5W, Metal Film 2312 915 12202
3477 Res, 150 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01510
3478 Res, 150 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01510
3479 Res, 2K7, 5%, 1/10W, Metalized Glass . 3198 021 52720
3480 Res, 1R5, 5%, 1/4W, Carbon Film. . . . 2122 101 02083
3481 Res, 12K, 1%, 3/5W, Metal Film 2312 915 11203
3482 Res, 12K, 1%, 3/5W, Metal Film 2312 915 11203
3484 Res, 3K9, 5%, 1/6W, Carbon Film. . . . 3198 011 03920
S 3486 Res, 33 ohm, 5%, 2 1/2W, Metal Film. . 3198 012 33390
3488 Res, 4R7, 5%, 1/2W, Metal Film 2306 207 03478
3490 Res, 8K2, 5%, 1/6W, Carbon Film. . . . 3198 011 08220
3492 Res, 1K, 5%, 1/10W, Metalized Glass. . 3198 021 51020
3493 Res, 6R8, 5%, 1/3W, Metal Film 2306 204 03688
3494 Res, 4R7, 5%, 1/2W, Metal Film 2306 207 03478
3495 Res, 22K, 5%, 1/16W, Metalized Glass . 3198 021 32230
3496 Res, 100K, 5%, 1/16W, Metalized Glass. 3198 021 31040
3497 Res, 100K, 5%, 1/16W, Metalized Glass. 3198 021 31040
3498 Res, 12K, 5%, 1/16W, Metalized Glass . 3198 021 31230
3499 Res, 10K, 5%, 1/10W, Metalized Glass . 3198 021 51030
3500 Res, 3M3, 5%, 1/2W, Metalized Glass. . 2322 242 13335
3501 Res, 3M3, 5%, 1/2W, Metalized Glass. . 2322 242 13335
S 3504 Res, PTC, 3 ohm, 144V. 2122 663 00019
3506 Res, 1M5, 5%, 1/2W, Metalized Glass. . 2322 242 13155
3507 Surge Protector. 2422 549 43073
3508 Res, 220 ohm, 20%, 1/2W, Carbon Film . 3198 013 02210
S 3510 Res, NTC, 4R7, 20%, 3W1. . . . . 2122 612 00056
3519 Res, 270 ohm, 5%, 1/6W, Carbon Film. . 3198 011 02710
3520 Res, 1K2, 5%, 1/10W, Metalized Glass . 3198 021 51220
3521 Res, 4R7, 5%, 1/6W, Carbon Film. . . . 3198 011 04780
3522 Res, 330K, 5%, 1/10W, Metalized Glass. 3198 021 53340
3523 Res, 100 ohm, 5%, 1/3W, Metal Film . . 2306 204 03101
3524 Res, 56K, 5%, 1/10W, Metalized Glass . 3198 021 55630
3525 Res, 1K, 5%, 1/10W, Metalized Glass. . 3198 021 51020
3526 Res, 0R1, 5%, 3/5W, Metal Film 3198 012 11070
S 3527 Res, 0R33, 5%, 3/5W, Metal Film. . . . 3198 012 13370
3528 Res, Zero ohm, "Chip" Jumper 3198 021 90020
3529 Res, 47K, 5%, 1/10W, Metalized Glass . 3198 021 54730
3530 Res, 10K, 5%, 1/10W, Metalized Glass . 3198 021 51030

S = Safety Part   Be sure to use exact replacement part.

27ST220L/17 (continued)

	Ref	Description	Part No.
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
S	3558	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198 021 53320
	3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198 021 31530
	3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198 021 31220
	3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4101	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4102	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4104	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4126	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4128	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4181	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020

	Ref	Description	Part No.
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4604	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5202	Wire Jumper.	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5241	Wire Jumper.	3198 036 90010
	5242	Coil, 10u, 5%.	3198 018 11090
	5342	Coil, 22u.	2422 535 97333
S	5445	Transformer, LOT (JF0501-21835) Layer Wound	2422 531 02611
S	5445	Transformer, LOT (1342.0043B).	2422 531 02506
	5451	Coil, 33u, 10%	3198 018 73390
	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
S	5457	Coil, 42u.	2422 535 94865
	5461	Transformer, Signal Driver, SC10027-00	2422 531 02478
	5471	Coil, 3u3, 20%	3198 018 73380
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 39u, 10%	2422 535 97336
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04.	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5861	Coil, 10u, 5%.	3198 018 11090
	6001	Zener Diode, 33 volt	3198 010 23390
	6181	Zener Diode, 6.8 volt.	3198 020 56880
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630
	6206	Zener Diode, 6.8 volt.	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316.	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148.	3198 010 10010
	6448	Zener Diode, 6.2 volt.	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6460	Diode, Rect, BY228/24.	9340 559 50112

S = Safety Part   Be sure to use exact replacement part.

27ST220L/17 (continued)

	Ref	Description	Part No.
	6461	Diode, Rect, RGP30J-L7004	9338 617 60682
	6462	Zener Diode, 9.1 volt	9331 177 80133
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316	3198 010 10630
	6468	Diode, Signal, BAS316	3198 010 10630
	6469	Diode, Rect, BYV95C	9335 001 80133
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt	3198 010 25680
	6482	Zener Diode, 9.1 volt	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYV95C	9335 001 80133
	6486	Diode, Rect, EGP20DL-5100	9322 164 42682
	6487	Diode, Rect, BYV95A	9335 000 90133
	6488	Diode, Rect, EGP20DL-5100	9322 164 42682
	6500	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
	6520	Diode, Rect, BYV95A	9335 000 90133
	6523	Diode, Signal, 1N4148	3198 010 10010
	6524	Diode, Rect, 1N5062	3198 010 10120
	6525	Diode, Rect, 1N5062	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500	9340 555 59127
	6561	Diode, Rect, SB340L-7010	9322 128 18682
	6563	Diode, Signal, BAS316	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148	3198 010 10010
	6569	Diode, Signal, BAS316	3198 010 10630
	6570	Zener Diode, 6.8 volt	3198 020 56880
	6580	Diode, Signal, BAS316	3198 010 10630
	6681	Diode, Signal, BAT85	9336 247 60133
	6691	LED, LTL-10234WHCR	9322 185 69682
	6692	IR Receiver	9322 127 54667
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9588H/N1/3I	4835 310 57622
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7460	Transistor, NPN, BU4508DX	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1	9352 673 56112
	7521	Power FET, FQPF9N50	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, LE33CZ	9322 106 11676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C16-WBN6	9322 147 25682
	7802	IC, HEF4053BT	9333 729 60653
	7861	IC, TDA9853H/V1	9352 671 19557
	7891	Transistor, NPN, BC847B(COL)	3198 010 42030
	7892	Transistor, NPN, BC847B(COL)	3198 010 42030
	7901	IC, AN7522N PH	9322 181 41682
	9001	Wire Jumper	3198 036 90010
	9104	Wire Jumper	3198 036 90010
	9171	Wire Jumper	3198 036 90010
	9173	Wire Jumper	3198 036 90010
	9175	Wire Jumper	3198 036 90010
	9181	Wire Jumper	3198 036 90010
	9182	Wire Jumper	3198 036 90010
	9183	Wire Jumper	3198 036 90010
	9192	Wire Jumper	3198 036 90010
	9193	Wire Jumper	3198 036 90010
	9311	Wire Jumper	3198 036 90010
	9312	Wire Jumper	3198 036 90010
	9406	Wire Jumper	3198 036 90010
	9407	Wire Jumper	3198 036 90010
	9408	Wire Jumper	3198 036 90010
	9409	Wire Jumper	3198 036 90010
	9410	Wire Jumper	3198 036 90010
	9411	Wire Jumper	3198 036 90010
	9412	Wire Jumper	3198 036 90010
	9413	Wire Jumper	3198 036 90010
	9415	Wire Jumper	3198 036 90010
	9416	Wire Jumper	3198 036 90010
	9417	Wire Jumper	3198 036 90010
	9418	Wire Jumper	3198 036 90010
	9419	Wire Jumper	3198 036 90010
	9421	Wire Jumper	3198 036 90010
	9422	Wire Jumper	3198 036 90010
	9423	Wire Jumper	3198 036 90010
	9425	Wire Jumper	3198 036 90010
	9427	Wire Jumper	3198 036 90010
	9453	Wire Jumper	3198 036 90010
	9460	Wire Jumper	3198 036 90010
	9500	Wire Jumper	3198 036 90010
	9501	Wire Jumper	3198 036 90010
	9503	Wire Jumper	3198 036 90010
	9506	Wire Jumper	3198 036 90010
	9507	Wire Jumper	3198 036 90010
	9510	Wire Jumper	3198 036 90010
	9511	Wire Jumper	3198 036 90010
	9512	Wire Jumper	3198 036 90010
	9513	Wire Jumper	3198 036 90010
	9514	Wire Jumper	3198 036 90010
	9515	Wire Jumper	3198 036 90010
	9516	Wire Jumper	3198 036 90010
	9518	Wire Jumper	3198 036 90010
	9520	Wire Jumper	3198 036 90010
	9521	Wire Jumper	3198 036 90010
	9522	Wire Jumper	3198 036 90010
	9524	Wire Jumper	3198 036 90010
	9528	Wire Jumper	3198 036 90010
	9530	Wire Jumper	3198 036 90010
	9611	Coil, 27u, 10%	3198 018 22790
	9612	Wire Jumper	3198 036 90010
	9613	Wire Jumper	3198 036 90010
	9614	Wire Jumper	3198 036 90010
	9615	Wire Jumper	3198 036 90010
	9616	Wire Jumper	3198 036 90010
	9617	Wire Jumper	3198 036 90010
	9618	Wire Jumper	3198 036 90010
	9619	Wire Jumper	3198 036 90010
	9622	Wire Jumper	3198 036 90010
	9623	Wire Jumper	3198 036 90010
	9626	Wire Jumper	3198 036 90010
	9627	Wire Jumper	3198 036 90010
	9628	Wire Jumper	3198 036 90010
	9629	Wire Jumper	3198 036 90010
	9631	Wire Jumper	3198 036 90010
	9632	Wire Jumper	3198 036 90010
	9634	Wire Jumper	3198 036 90010
	9637	Wire Jumper	3198 036 90010
	9638	Wire Jumper	3198 036 90010
	9640	Wire Jumper	3198 036 90010
	9641	Wire Jumper	3198 036 90010
	9642	Wire Jumper	3198 036 90010
	9643	Wire Jumper	3198 036 90010
	9647	Wire Jumper	3198 036 90010
	9648	Wire Jumper	3198 036 90010
	9650	Wire Jumper	3198 036 90010
	9652	Wire Jumper	3198 036 90010
	9654	Wire Jumper	3198 036 90010
	9655	Wire Jumper	3198 036 90010
	9657	Wire Jumper	3198 036 90010
	9658	Wire Jumper	3198 036 90010
	9659	Wire Jumper	3198 036 90010
	9660	Wire Jumper	3198 036 90010
	9661	Wire Jumper	3198 036 90010
	9662	Wire Jumper	3198 036 90010
	9663	Wire Jumper	3198 036 90010
	9664	Wire Jumper	3198 036 90010
	9665	Wire Jumper	3198 036 90010
	9666	Wire Jumper	3198 036 90010
	9667	Wire Jumper	3198 036 90010
	9668	Wire Jumper	3198 036 90010
	9669	Wire Jumper	3198 036 90010
	9670	Wire Jumper	3198 036 90010
	9671	Wire Jumper	3198 036 90010
	9672	Coil, 22u, 10%	3198 018 22290
	9674	Wire Jumper	3198 036 90010
	9675	Wire Jumper	3198 036 90010
	9676	Wire Jumper	3198 036 90010
	9678	Coil, 22u, 10%	3198 018 22290
	9679	Wire Jumper	3198 036 90010
	9680	Wire Jumper	3198 036 90010
	9681	Wire Jumper	3198 036 90010
	9685	Wire Jumper	3198 036 90010
	9686	Wire Jumper	3198 036 90010
	9687	Wire Jumper	3198 036 90010
	9688	Wire Jumper	3198 036 90010
	9689	Wire Jumper	3198 036 90010
	9690	Wire Jumper	3198 036 90010
	9691	Wire Jumper	3198 036 90010
	9694	Wire Jumper	3198 036 90010
	9695	Wire Jumper	3198 036 90010
	9697	Wire Jumper	3198 036 90010
	9698	Wire Jumper	3198 036 90010
	9699	Wire Jumper	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

9821	Wire Jumper.	3198 036 90010
9822	Wire Jumper.	3198 036 90010
9825	Wire Jumper.	3198 036 90010
9828	Wire Jumper.	3198 036 90010
9829	Wire Jumper.	3198 036 90010
9831	Wire Jumper.	3198 036 90010
9832	Wire Jumper.	3198 036 90010
9837	Wire Jumper.	3198 036 90010
9838	Wire Jumper.	3198 036 90010
9839	Wire Jumper.	3198 036 90010
9846	Wire Jumper.	3198 036 90010
9847	Wire Jumper.	3198 036 90010
9849	Wire Jumper.	3198 036 90010
9850	Wire Jumper.	3198 036 90010
9851	Wire Jumper.	3198 036 90010
9852	Wire Jumper.	3198 036 90010
9853	Wire Jumper.	3198 036 90010
9856	Wire Jumper.	3198 036 90010
9860	Wire Jumper.	3198 036 90010
9861	Wire Jumper.	3198 036 90010
9862	Wire Jumper.	3198 036 90010
9864	Wire Jumper.	3198 036 90010
9865	Wire Jumper.	3198 036 90010
9868	Wire Jumper.	3198 036 90010
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9891	Wire Jumper.	3198 036 90010
9892	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010
9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9905	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9918	Wire Jumper.	3198 036 90010
9919	Wire Jumper.	3198 036 90010
9920	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9998	Wire Jumper.	3198 036 90010
CBA	SP/LS Module (Vertical) (ITV).	3139 127 27372
CBA	EPS Module (ITV)	3139 137 22961
CBA	Main Chassis Assembly.	3139 187 26831
CBA	Interface Panel (ITV).	3139 188 04541

Channel One Card Parts
Channel One Card Parts

2D 3 Line Comb Filter Parts
2D 3 Line Comb Filter Parts

DAF Panel Parts
DAF Panel Parts

DVD Eject Panel Parts
DVD Eject Panel Parts

DVD Interface Panel Parts
DVD Interface Panel Parts

Front Interface Panel Parts
Front Interface Panel Parts

ITV Front Jack Panel Parts
ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)
Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)
Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts
Side Jack Panel Parts

Subwoofer Panel Parts
Subwoofer Panel Parts

Top Control Panel Parts
Top Control Panel Parts

ITV	Institutional Interconnect Device (For ITV Models Only)	0Net 1DE VX/35

Cabinet & Accessory Parts
Cabinet & Accessory Parts

S = Safety Part   Be sure to use exact replacement part.

S	AC01	AC Cord.	3135 128 70011
	AC03	Anode Lead Spacer (3 Used)	3135 014 04471
	AC05	Cabinet Back	3139 124 45261
S	AC09	CRT, A68AJB82X11	9301 891 90631
	AC10	Customer Control Buttons	3139 124 30901
S	AC12	Degaussing Coil.	2422 549 43967
	AC15	Holder, Degaussing Coil (4 Used) . . .	3135 013 01641
	AC20	Cabinet Front Assembly	3121 237 52392
	AC20A	Cabinet Front.	3135 127 50011
	AC20B	Chassis Guide (2 Used)	3139 124 31381
	AC20B	Chassis Guide.	3139 124 41711
	AC20C	Light Guide.	3139 124 26461
	AC20D	Nameplate.	3135 015 03571
	AC20E	Power Button	3139 124 26444
	AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00401
	AC22	Cinch Cover.	3139 124 25551
	AC26	EPS Bracket.	3119 107 17241
	AC27	ITV Card Bracket	3139 124 37933
	AC28	ITV Card Slot Cover.	3139 124 30571
	ITV	Institutional Interconnect Device (Mode l 27ST240P/35 Only).	0Net 1DE VX/35

Main Chassis Parts

S	Ref	Description	Part No.
		Main Chassis Parts	
	0211	2 Pin Connector	2422 025 16269
	0212	2 Pin Connector	2422 025 16375
	0213	2 Pin Connector	2422 025 16374
	0217	6 Pin Connector	2422 025 12482
	0218	A/V Jack	2422 026 04742
	0220	5 Pin Connector	2422 025 04853
	0221	2 Pin Connector	2422 025 15503
	0222	2 Pin Connector	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack	2422 026 04926
	0227	6 Pin Connector	2422 025 15849
	0229	3 Pin Connector	2412 020 00725
	0240	7 Pin Connector	2422 025 11244
	0242	7 Pin Connector	2422 025 17042
	0243	6 Pin Connector	2422 025 04854
	0244	5 Pin Connector	2422 025 04853
	0245	6 Pin Connector	2422 025 04854
S	0254	9 Pin CRT Socket	2422 500 80076
	0259	5 Pin Connector	2422 025 15848
	0262	3 Pin Connector	2422 025 16937
	0267	3 Pin Connector	2412 020 00725
	0280	4 Pin Connector	2422 025 12479
S	1000	Tuner, V+U, PLL	2422 542 90108
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC	2422 086 10914
S	1515	Relay, 5 Amp, 12V	2422 132 07444
	1600	Tact Switch	2422 128 02742
	1601	Tact Switch	2422 128 02742
	1602	Tact Switch	2422 128 02742
	1603	Tact Switch	2422 128 02742
	1606	Tact Switch	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1861	Ceramic Resonator, 514KHz5, CSB503F58	2422 540 98344
	2004	Cap, 47n, 10%, 50v, Ceramic	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2123	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2125	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	2127	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
	2128	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2181	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2182	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2183	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2226	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2241	Cap, 1n5, 10%, 50v, Ceramic	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2405	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic	3198 016 03310
	2441	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic	2020 021 91139
	2451	Cap, 15n, 10%, 50v, Polyester	3198 014 01530
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 470n, 5%, 250v, Metalized Polypropylene	2022 333 00086
	2458	Cap, 2u2, 20%, 100v, Electrolytic	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
	2462	Cap, 330n, 10%, 250v, MPP	2022 333 00084
	2463	Cap, 1nf, 10%, 2000v, Ceramic Only with 5445 (JF0501-21835) Layer Wound	2020 558 90487
S	2463	Cap, 680p, 10%, 2000v, Ceramic	2252 712 95024
S	2465	Cap, 11n, 5%, 1600v, Polypropylene	2020 301 90251
S	2465	Cap, 12n, 5%, 1600v, Polypropylene Only with 5445 (JF0501-21835) Layer Wound	2222 375 90156
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2601	Cap, 220n, +80/-20%, 25v, Ceramic	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2616	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2618	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic	3198 017 21050
	2691	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210

S = Safety Part   Be sure to use exact replacement part.

27ST220L17 (continued)

S	Ref	Description	Part No.
	2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2803	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
	2862	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
	2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
	2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
	2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
	2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
	2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
	2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240
	2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
	2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
	2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
	2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
	2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
	3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3121	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3122	Res, 680 ohm, 5%, 1/6W, Carbon Film. .	3198 011 06810
	3123	Res, 680 ohm, 5%, 1/6W, Carbon Film. .	3198 011 06810
	3125	Res, 680 ohm, 5%, 1/6W, Carbon Film. .	3198 011 06810
	3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3182	Wire Jumper.	3198 036 90010
	3184	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3185	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3186	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3187	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
	3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
	3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
	3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3223	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
	3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840
	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
	3452	Res, 5K6, 1%, 3/5W, Metal Film Only wit h 5445 (JF0501-21835) Layer Wound. . .	2312 915 15602
	3452	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3454	Res, 2K, 1%, 3/5W, Metal Film Only with 5445 (JF0501-21835) Layer Wound. . . .	2312 915 12002
	3454	Res, 3K9, 1%, 3/5W, Metal Film	2312 915 13902
S	3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S	3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
	3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
	3470	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
	3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S	3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 33390
	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S	3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030

27ST220L17 (continued)

S	Ref	Description	Part No.
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
S	3558	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198 021 53320
	3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198 021 31530
	3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198 021 31220
	3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4101	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4102	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4104	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4126	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4128	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4181	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4604	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5202	Wire Jumper.	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5241	Wire Jumper.	3198 036 90010
	5242	Coil, 10u, 5%.	3198 018 11090
	5342	Coil, 22u.	2422 535 97333
S	5445	Transformer, LOT (JF0501-21835) Layer Wound	2422 531 02611
S	5445	Transformer, LOT (1342.0043B).	2422 531 02506
	5451	Coil, 33u, 10%	3198 018 73390
	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
S	5457	Coil, 42u.	2422 535 94865
	5461	Transformer, Signal Driver, SC10027-00	2422 531 02478
	5471	Coil, 3u3, 20%	3198 018 73380
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 39u, 10%	2422 535 97336
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04.	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5861	Coil, 10u, 5%.	3198 018 11090
	6001	Zener Diode, 33 volt	3198 010 23390
	6181	Zener Diode, 6.8 volt.	3198 020 56880
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630
	6206	Zener Diode, 6.8 volt.	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316.	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148.	3198 010 10010
	6448	Zener Diode, 6.2 volt.	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6460	Diode, Rect, BY228/24.	9340 559 50112

S = Safety Part   Be sure to use exact replacement part.

27ST220L17 (continued)

Ref	Description	Part No.
6461	Diode, Rect, RGP30J-L7004	9338 617 60682
6462	Zener Diode, 9.1 volt	9331 177 80133
6465	Diode, Signal, BAV21	3198 010 10070
6466	Diode, Signal, BAV21	3198 010 10070
6467	Diode, Signal, BAS316	3198 010 10630
6468	Diode, Signal, BAS316	3198 010 10630
6469	Diode, Rect, BYV95C	9335 001 80133
6470	Diode, Signal, BAV99	3198 010 10620
6476	Zener Diode, 15 volt	3198 010 21590
6481	Zener Diode, 5.6 volt	3198 010 25680
6482	Zener Diode, 9.1 volt	9331 177 80133
6483	Zener Diode, 33 volt	3198 010 23390
6485	Diode, Rect, BYV95C	9335 001 80133
6486	Diode, Rect, EGP20DL-5100	9322 164 42682
6487	Diode, Rect, BYV95A	9335 000 90133
6488	Diode, Rect, EGP20DL-5100	9322 164 42682
6500	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
6520	Diode, Rect, BYV95A	9335 000 90133
6523	Diode, Signal, 1N4148	3198 010 10010
6524	Diode, Rect, 1N5062	3198 010 10120
6525	Diode, Rect, 1N5062	3198 010 10120
6526	Zener Diode, 22 volt	3198 020 52290
6540	Zener Diode, 6.2 volt	9331 668 30133
6541	Zener Diode, 10 volt	3198 020 51090
6560	Diode, Rect, BYV29X-500	9340 555 59127
6561	Diode, Rect, SB340L-7010	9322 128 18682
6563	Diode, Signal, BAS316	3198 010 10630
6565	Diode, Signal, BAV70	9331 849 10215
6566	Diode, Signal, 1N4148	3198 010 10010
6569	Diode, Signal, BAS316	3198 010 10630
6570	Zener Diode, 6.8 volt	3198 020 56880
6580	Diode, Signal, BAS316	3198 010 10630
6681	Diode, Signal, BAT85	9336 247 60133
6691	LED, LTL-10234WHCR	9322 185 69682
6692	IR Receiver	9322 127 54667
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
7101	Transistor, NPN, BC847B(COL)	3198 010 42030
7200	IC, TDA9588H/N1/3I	4835 310 57622
7201	Transistor, NPN, BC847B(COL)	3198 010 42030
7204	Transistor, PNP, BC857B(COL)	3198 010 42150
7205	Transistor, PNP, BC857B(COL)	3198 010 42150
7330	IC, TDA6107JF/N3	9352 713 37112
7441	Transistor, PNP, BC857B(COL)	3198 010 42150
7443	Transistor, PNP, BC557B(COL)	3198 020 40110
7460	Transistor, NPN, BU4508DX	9340 550 92127
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
7462	Transistor, NPN, PDTC143ZT	9340 547 00215
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
7471	IC, TDA8359J/N2	9352 701 64112
7480	Transistor, NPN, BD135	3198 020 41010
7482	Transistor, NPN, BD135	3198 020 41010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667
7520	IC, TEA1507P/N1	9352 673 56112
7521	Power FET, FQPF9N50	9322 187 16687
7522	Transistor, NPN, BC847B(COL)	3198 010 42030
7540	Transistor, NPN, BC547B(COL)	3198 020 40030
7541	Transistor, NPN, PDTC114ET	9340 310 10215
7542	Transistor, PNP, BC857B(COL)	3198 010 42150
7560	IC, LE33CZ	9322 106 11676
7561	Transistor, NPN, PDTC143ZT	9340 547 00215
7580	Transistor, PNP, BC857B(COL)	3198 010 42150
7602	IC, M24C16-WBN6	9322 147 25682
7802	IC, HEF4053BT	9333 729 60653
7861	IC, TDA9853H/V1	9352 671 19557
7891	Transistor, NPN, BC847B(COL)	3198 010 42030
7892	Transistor, NPN, BC847B(COL)	3198 010 42030
7901	IC, AN7522N PH	9322 181 41682
9001	Wire Jumper	3198 036 90010
9104	Wire Jumper	3198 036 90010
9171	Wire Jumper	3198 036 90010
9173	Wire Jumper	3198 036 90010
9175	Wire Jumper	3198 036 90010
9181	Wire Jumper	3198 036 90010
9182	Wire Jumper	3198 036 90010
9183	Wire Jumper	3198 036 90010
9192	Wire Jumper	3198 036 90010
9193	Wire Jumper	3198 036 90010
9311	Wire Jumper	3198 036 90010
9312	Wire Jumper	3198 036 90010
9406	Wire Jumper	3198 036 90010
9407	Wire Jumper	3198 036 90010
9408	Wire Jumper	3198 036 90010
9409	Wire Jumper	3198 036 90010
9410	Wire Jumper	3198 036 90010
9411	Wire Jumper	3198 036 90010
9412	Wire Jumper	3198 036 90010
9413	Wire Jumper	3198 036 90010
9415	Wire Jumper	3198 036 90010
9416	Wire Jumper	3198 036 90010
9417	Wire Jumper	3198 036 90010
9418	Wire Jumper	3198 036 90010
9419	Wire Jumper	3198 036 90010
9421	Wire Jumper	3198 036 90010
9422	Wire Jumper	3198 036 90010
9423	Wire Jumper	3198 036 90010
9425	Wire Jumper	3198 036 90010
9427	Wire Jumper	3198 036 90010
9453	Wire Jumper	3198 036 90010
9460	Wire Jumper	3198 036 90010
9500	Wire Jumper	3198 036 90010
9501	Wire Jumper	3198 036 90010
9503	Wire Jumper	3198 036 90010
9506	Wire Jumper	3198 036 90010
9507	Wire Jumper	3198 036 90010
9510	Wire Jumper	3198 036 90010
9511	Wire Jumper	3198 036 90010
9512	Wire Jumper	3198 036 90010
9513	Wire Jumper	3198 036 90010
9514	Wire Jumper	3198 036 90010
9515	Wire Jumper	3198 036 90010
9516	Wire Jumper	3198 036 90010
9518	Wire Jumper	3198 036 90010
9520	Wire Jumper	3198 036 90010
9521	Wire Jumper	3198 036 90010
9522	Wire Jumper	3198 036 90010
9524	Wire Jumper	3198 036 90010
9528	Wire Jumper	3198 036 90010
9530	Wire Jumper	3198 036 90010
9611	Coil, 27u, 10%	3198 018 22790
9612	Wire Jumper	3198 036 90010
9613	Wire Jumper	3198 036 90010
9614	Wire Jumper	3198 036 90010
9615	Wire Jumper	3198 036 90010
9616	Wire Jumper	3198 036 90010
9617	Wire Jumper	3198 036 90010
9618	Wire Jumper	3198 036 90010
9619	Wire Jumper	3198 036 90010
9622	Wire Jumper	3198 036 90010
9623	Wire Jumper	3198 036 90010
9626	Wire Jumper	3198 036 90010
9627	Wire Jumper	3198 036 90010
9628	Wire Jumper	3198 036 90010
9629	Wire Jumper	3198 036 90010
9631	Wire Jumper	3198 036 90010
9632	Wire Jumper	3198 036 90010
9634	Wire Jumper	3198 036 90010
9637	Wire Jumper	3198 036 90010
9638	Wire Jumper	3198 036 90010
9640	Wire Jumper	3198 036 90010
9641	Wire Jumper	3198 036 90010
9642	Wire Jumper	3198 036 90010
9643	Wire Jumper	3198 036 90010
9647	Wire Jumper	3198 036 90010
9648	Wire Jumper	3198 036 90010
9650	Wire Jumper	3198 036 90010
9652	Wire Jumper	3198 036 90010
9654	Wire Jumper	3198 036 90010
9655	Wire Jumper	3198 036 90010
9657	Wire Jumper	3198 036 90010
9658	Wire Jumper	3198 036 90010
9659	Wire Jumper	3198 036 90010
9660	Wire Jumper	3198 036 90010
9661	Wire Jumper	3198 036 90010
9662	Wire Jumper	3198 036 90010
9663	Wire Jumper	3198 036 90010
9664	Wire Jumper	3198 036 90010
9665	Wire Jumper	3198 036 90010
9666	Wire Jumper	3198 036 90010
9667	Wire Jumper	3198 036 90010
9668	Wire Jumper	3198 036 90010
9669	Wire Jumper	3198 036 90010
9670	Wire Jumper	3198 036 90010
9671	Wire Jumper	3198 036 90010
9672	Coil, 22u, 10%	3198 018 22290
9674	Wire Jumper	3198 036 90010
9675	Wire Jumper	3198 036 90010
9676	Wire Jumper	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper	3198 036 90010
9680	Wire Jumper	3198 036 90010
9681	Wire Jumper	3198 036 90010
9685	Wire Jumper	3198 036 90010
9686	Wire Jumper	3198 036 90010
9687	Wire Jumper	3198 036 90010
9688	Wire Jumper	3198 036 90010
9689	Wire Jumper	3198 036 90010
9690	Wire Jumper	3198 036 90010
9691	Wire Jumper	3198 036 90010
9694	Wire Jumper	3198 036 90010
9695	Wire Jumper	3198 036 90010
9697	Wire Jumper	3198 036 90010
9698	Wire Jumper	3198 036 90010
9699	Wire Jumper	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

27ST220L17 (continued)

Ref	Description	Part No.
9821	Wire Jumper.	3198 036 90010
9822	Wire Jumper.	3198 036 90010
9825	Wire Jumper.	3198 036 90010
9828	Wire Jumper.	3198 036 90010
9829	Wire Jumper.	3198 036 90010
9831	Wire Jumper.	3198 036 90010
9832	Wire Jumper.	3198 036 90010
9837	Wire Jumper.	3198 036 90010
9838	Wire Jumper.	3198 036 90010
9839	Wire Jumper.	3198 036 90010
9846	Wire Jumper.	3198 036 90010
9847	Wire Jumper.	3198 036 90010
9849	Wire Jumper.	3198 036 90010
9850	Wire Jumper.	3198 036 90010
9851	Wire Jumper.	3198 036 90010
9852	Wire Jumper.	3198 036 90010
9853	Wire Jumper.	3198 036 90010
9856	Wire Jumper.	3198 036 90010
9860	Wire Jumper.	3198 036 90010
9861	Wire Jumper.	3198 036 90010
9862	Wire Jumper.	3198 036 90010
9864	Wire Jumper.	3198 036 90010
9865	Wire Jumper.	3198 036 90010
9868	Wire Jumper.	3198 036 90010
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9891	Wire Jumper.	3198 036 90010
9892	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010
9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9905	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9918	Wire Jumper.	3198 036 90010
9919	Wire Jumper.	3198 036 90010
9920	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9998	Wire Jumper.	3198 036 90010
CBA	SP/LS Module (Vertical) (ITV).	3139 127 27372
CBA	EPS Module (ITV)	3139 137 22961
CBA	Main Chassis Assembly.	3139 187 26831
CBA	Interface Panel (ITV).	3139 188 04541

Channel One Card Parts
Channel One Card Parts

2D 3 Line Comb Filter Parts
2D 3 Line Comb Filter Parts

DAF Panel Parts
DAF Panel Parts

DVD Eject Panel Parts
DVD Eject Panel Parts

DVD Interface Panel Parts
DVD Interface Panel Parts

Front Interface Panel Parts
Front Interface Panel Parts

ITV Front Jack Panel Parts
ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)
Net 1 Panel (part of Scan 4 Card Assemb ly)

Scan 4 Card (part of Scan 4 Card Assembly)
Scan 4 Card (part of Scan 4 Card Assemb ly)

Side Jack Panel Parts
Side Jack Panel Parts

Subwoofer Panel Parts
Subwoofer Panel Parts

Top Control Panel Parts
Top Control Panel Parts

Ref	Description	Part No.
ITV	Institutional Interconnect Device (For ITV Models Only)	0Net 1DE VX/35

Cabinet & Accessory Parts
Cabinet & Accessory Parts

S = Safety Part   Be sure to use exact replacement part.

	Ref	Description	Part No.
S	AC01	AC Cord.	3135 128 70011
	AC03	Anode Lead Spacer (3 Used)	3135 014 04471
	AC05	Cabinet Back	3139 124 45261
S	AC09	CRT, A68AJB82X11	9301 891 90631
	AC10	Customer Control Buttons	3139 124 30901
S	AC12	Degaussing Coil.	2422 549 43967
	AC15	Holder, Degaussing Coil (4 Used) . . .	3135 013 01641
	AC20	Cabinet Front Assembly	3121 237 52392
	AC20A	Cabinet Front.	3135 127 50011
	AC20B	Chassis Guide (2 Used)	3139 124 31381
	AC20B	Chassis Guide.	3139 124 41711
	AC20C	Light Guide.	3139 124 26461
	AC20D	Nameplate.	3135 015 03571
	AC20E	Power Button	3139 124 26444
	AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00401
	AC22	Cinch Cover.	3139 124 25551
	AC26	EPS Bracket.	3119 107 17241
	AC27	ITV Card Bracket	3139 124 37933
	AC28	ITV Card Slot Cover.	3139 124 30571
	ITV	Institutional Interconnect Device (Mode l 27ST240P/35 Only).	0Net 1DE VX/35

Main Chassis Parts

S	Ref	Description	Part No.
		Main Chassis Parts	
	0211	2 Pin Connector.	2422 025 16269
	0212	2 Pin Connector.	2422 025 16375
	0213	2 Pin Connector.	2422 025 16374
	0217	6 Pin Connector.	2422 025 12482
	0218	A/V Jack	2422 026 04742
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0222	2 Pin Connector.	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0227	6 Pin Connector.	2422 025 15849
	0229	3 Pin Connector.	2412 020 00725
	0240	7 Pin Connector.	2422 025 11244
	0242	7 Pin Connector.	2422 025 17042
	0243	6 Pin Connector.	2422 025 04854
	0244	5 Pin Connector.	2422 025 04853
	0245	6 Pin Connector.	2422 025 04854
S	0254	9 Pin CRT Socket	2422 500 80076
	0259	5 Pin Connector.	2422 025 15848
	0262	3 Pin Connector.	2422 025 16937
	0267	3 Pin Connector.	2412 020 00725
	0280	4 Pin Connector.	2422 025 12479
S	1000	Tuner, V+U, PLL	2422 542 90108
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1600	Tact Switch.	2422 128 02742
	1601	Tact Switch.	2422 128 02742
	1602	Tact Switch.	2422 128 02742
	1603	Tact Switch.	2422 128 02742
	1606	Tact Switch.	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2123	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2125	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	2127	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
	2128	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2181	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2182	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2183	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
	2451	Cap, 15n, 10%, 50v, Polyester.	3198 014 01530
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 470n, 5%, 250v, Metalized Polypropylene.	2022 333 00086
	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
	2462	Cap, 330n, 10%, 250v, MPP.	2022 333 00084
S	2463	Cap, 680p, 10%, 2000v, Ceramic	2252 712 95024
S	2465	Cap, 11n, 5%, 1600v, Polypropylene	2020 301 90251
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2616	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2803	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250

S = Safety Part   Be sure to use exact replacement part.

27ST230P/35 (continued)

Ref	Description	Part No.
2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
2862	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3121	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3122	Res, 680 ohm, 5%, 1/6W, Carbon Film. .	3198 011 06810
3123	Res, 680 ohm, 5%, 1/6W, Carbon Film. .	3198 011 06810
3125	Res, 680 ohm, 5%, 1/6W, Carbon Film. .	3198 011 06810
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3182	Wire Jumper.	3198 036 90010
3184	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3185	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3186	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3187	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3223	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840
3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
3452	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3454	Res, 3K9, 1%, 3/5W, Metal Film	2312 915 13902
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3470	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 33390
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3507	Surge Protector.	2422 549 43073
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S 3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530

S = Safety Part   Be sure to use exact replacement part.

27ST230P/35 (continued)

S	Ref	Description	Part No.
	3552	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
S	3558	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3636	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3682	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
	3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3686	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
	3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3862	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
	3863	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
	3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3865	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3866	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3867	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3901	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4101	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4102	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4104	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4126	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4128	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4181	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4604	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5202	Wire Jumper.	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5241	Wire Jumper.	3198 036 90010
	5242	Coil, 10u, 5%.	3198 018 11090
	5342	Coil, 22u.	2422 535 97333
S	5445	Transformer, LOT (1342.0043B).	2422 531 02506
	5451	Coil, 33u, 10%	3198 018 73390
	5452	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
S	5457	Coil, 42u.	2422 535 94865
	5461	Transformer, Signal Driver, SC10027-00	2422 531 02478
	5471	Coil, 3u3, 20%	3198 018 73380
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 39u, 10%	2422 535 97336
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04.	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5861	Coil, 10u, 5%.	3198 018 11090
	6001	Zener Diode, 33 volt	3198 010 23390
	6181	Zener Diode, 6.8 volt.	3198 020 56880
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630
	6206	Zener Diode, 6.8 volt.	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316.	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148.	3198 010 10010
	6448	Zener Diode, 6.2 volt.	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6460	Diode, Rect, BY228/24.	9340 559 50112
	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
	6462	Zener Diode, 9.1 volt.	9331 177 80133
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316.	3198 010 10630
	6468	Diode, Signal, BAS316.	3198 010 10630
	6469	Diode, Rect, BYV95C.	9335 001 80133
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt.	3198 010 25680

S = Safety Part   Be sure to use exact replacement part.

27ST230P/35 (continued)

	Ref	Description	Part No.
	6482	Zener Diode, 9.1 volt	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYV95C	9335 001 80133
	6486	Diode, Rect, EGP20DL-5100	9322 164 42682
	6487	Diode, Rect, BYV95A	9335 000 90133
	6488	Diode, Rect, EGP20DL-5100	9322 164 42682
	6500	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
	6520	Diode, Rect, BYV95A	9335 000 90133
	6523	Diode, Signal, 1N4148	3198 010 10010
	6524	Diode, Rect, 1N5062	3198 010 10120
	6525	Diode, Rect, 1N5062	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500	9340 555 59127
	6561	Diode, Rect, SB340L-7010	9322 128 18682
	6563	Diode, Signal, BAS316	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148	3198 010 10010
	6569	Diode, Signal, BAS316	3198 010 10630
	6570	Zener Diode, 6.8 volt	3198 020 56880
	6580	Diode, Signal, BAS316	3198 010 10630
	6681	Diode, Signal, BAT85	9336 247 60133
	6691	LED, LTL-10234WHCR	9322 185 69682
	6692	IR Receiver	9322 127 54667
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9588H/N1/3I	4835 310 57622
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7460	Transistor, NPN, BU4508DX	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1	9352 673 56112
	7521	Power FET, FQPF9N50	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, LE33CZ	9322 106 11676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C16-WBN6	9322 147 25682
	7802	IC, HEF4053BT	9333 729 60653
	7861	IC, TDA9853H/V1	9352 671 19557
	7891	Transistor, NPN, BC847B(COL)	3198 010 42030
	7892	Transistor, NPN, BC847B(COL)	3198 010 42030
	7901	IC, AN7522N PH	9322 181 41682
	9001	Wire Jumper	3198 036 90010
	9104	Wire Jumper	3198 036 90010
	9171	Wire Jumper	3198 036 90010
	9173	Wire Jumper	3198 036 90010
	9175	Wire Jumper	3198 036 90010
	9181	Wire Jumper	3198 036 90010
	9182	Wire Jumper	3198 036 90010
	9183	Wire Jumper	3198 036 90010
	9192	Wire Jumper	3198 036 90010
	9193	Wire Jumper	3198 036 90010
	9311	Wire Jumper	3198 036 90010
	9312	Wire Jumper	3198 036 90010
	9406	Wire Jumper	3198 036 90010
	9407	Wire Jumper	3198 036 90010
	9408	Wire Jumper	3198 036 90010
	9409	Wire Jumper	3198 036 90010
	9410	Wire Jumper	3198 036 90010
	9411	Wire Jumper	3198 036 90010
	9412	Wire Jumper	3198 036 90010
	9413	Wire Jumper	3198 036 90010
	9415	Wire Jumper	3198 036 90010
	9416	Wire Jumper	3198 036 90010
	9417	Wire Jumper	3198 036 90010
	9418	Wire Jumper	3198 036 90010
	9419	Wire Jumper	3198 036 90010
	9421	Wire Jumper	3198 036 90010
	9422	Wire Jumper	3198 036 90010
	9423	Wire Jumper	3198 036 90010
	9425	Wire Jumper	3198 036 90010
	9427	Wire Jumper	3198 036 90010
	9453	Wire Jumper	3198 036 90010
	9460	Wire Jumper	3198 036 90010
	9500	Wire Jumper	3198 036 90010
	9501	Wire Jumper	3198 036 90010
	9503	Wire Jumper	3198 036 90010
	9506	Wire Jumper	3198 036 90010
	9507	Wire Jumper	3198 036 90010
	9510	Wire Jumper	3198 036 90010
	9511	Wire Jumper	3198 036 90010
	9512	Wire Jumper	3198 036 90010
	9513	Wire Jumper	3198 036 90010
	9514	Wire Jumper	3198 036 90010
	9515	Wire Jumper	3198 036 90010
	9516	Wire Jumper	3198 036 90010
	9518	Wire Jumper	3198 036 90010
	9520	Wire Jumper	3198 036 90010
	9521	Wire Jumper	3198 036 90010
	9522	Wire Jumper	3198 036 90010
	9524	Wire Jumper	3198 036 90010
	9528	Wire Jumper	3198 036 90010
	9530	Wire Jumper	3198 036 90010
	9611	Coil, 27u, 10%	3198 018 22790
	9612	Wire Jumper	3198 036 90010
	9613	Wire Jumper	3198 036 90010
	9614	Wire Jumper	3198 036 90010
	9615	Wire Jumper	3198 036 90010
	9616	Wire Jumper	3198 036 90010
	9617	Wire Jumper	3198 036 90010
	9618	Wire Jumper	3198 036 90010
	9619	Wire Jumper	3198 036 90010
	9622	Wire Jumper	3198 036 90010
	9623	Wire Jumper	3198 036 90010
	9626	Wire Jumper	3198 036 90010
	9627	Wire Jumper	3198 036 90010
	9628	Wire Jumper	3198 036 90010
	9629	Wire Jumper	3198 036 90010
	9631	Wire Jumper	3198 036 90010
	9632	Wire Jumper	3198 036 90010
	9634	Wire Jumper	3198 036 90010
	9637	Wire Jumper	3198 036 90010
	9638	Wire Jumper	3198 036 90010
	9640	Wire Jumper	3198 036 90010
	9641	Wire Jumper	3198 036 90010
	9642	Wire Jumper	3198 036 90010
	9643	Wire Jumper	3198 036 90010
	9647	Wire Jumper	3198 036 90010
	9648	Wire Jumper	3198 036 90010
	9650	Wire Jumper	3198 036 90010
	9652	Wire Jumper	3198 036 90010
	9654	Wire Jumper	3198 036 90010
	9655	Wire Jumper	3198 036 90010
	9657	Wire Jumper	3198 036 90010
	9658	Wire Jumper	3198 036 90010
	9659	Wire Jumper	3198 036 90010
	9660	Wire Jumper	3198 036 90010
	9661	Wire Jumper	3198 036 90010
	9662	Wire Jumper	3198 036 90010
	9663	Wire Jumper	3198 036 90010
	9664	Wire Jumper	3198 036 90010
	9665	Wire Jumper	3198 036 90010
	9666	Wire Jumper	3198 036 90010
	9667	Wire Jumper	3198 036 90010
	9668	Wire Jumper	3198 036 90010
	9669	Wire Jumper	3198 036 90010
	9670	Wire Jumper	3198 036 90010
	9671	Wire Jumper	3198 036 90010
	9672	Coil, 22u, 10%	3198 018 22290
	9674	Wire Jumper	3198 036 90010
	9675	Wire Jumper	3198 036 90010
	9676	Wire Jumper	3198 036 90010
	9678	Coil, 22u, 10%	3198 018 22290
	9679	Wire Jumper	3198 036 90010
	9680	Wire Jumper	3198 036 90010
	9681	Wire Jumper	3198 036 90010
	9685	Wire Jumper	3198 036 90010
	9686	Wire Jumper	3198 036 90010
	9687	Wire Jumper	3198 036 90010
	9688	Wire Jumper	3198 036 90010
	9689	Wire Jumper	3198 036 90010
	9690	Wire Jumper	3198 036 90010
	9691	Wire Jumper	3198 036 90010
	9694	Wire Jumper	3198 036 90010
	9695	Wire Jumper	3198 036 90010
	9697	Wire Jumper	3198 036 90010
	9698	Wire Jumper	3198 036 90010
	9699	Wire Jumper	3198 036 90010
	9821	Wire Jumper	3198 036 90010
	9822	Wire Jumper	3198 036 90010
	9825	Wire Jumper	3198 036 90010
	9828	Wire Jumper	3198 036 90010
	9829	Wire Jumper	3198 036 90010
	9831	Wire Jumper	3198 036 90010
	9832	Wire Jumper	3198 036 90010
	9837	Wire Jumper	3198 036 90010
	9838	Wire Jumper	3198 036 90010
	9839	Wire Jumper	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

27ST230P/35 (continued)

Ref	Description	Part No.
9846	Wire Jumper	3198 036 90010
9847	Wire Jumper	3198 036 90010
9849	Wire Jumper	3198 036 90010
9850	Wire Jumper	3198 036 90010
9851	Wire Jumper	3198 036 90010
9852	Wire Jumper	3198 036 90010
9853	Wire Jumper	3198 036 90010
9856	Wire Jumper	3198 036 90010
9860	Wire Jumper	3198 036 90010
9861	Wire Jumper	3198 036 90010
9862	Wire Jumper	3198 036 90010
9864	Wire Jumper	3198 036 90010
9865	Wire Jumper	3198 036 90010
9868	Wire Jumper	3198 036 90010
9873	Wire Jumper	3198 036 90010
9874	Wire Jumper	3198 036 90010
9875	Wire Jumper	3198 036 90010
9877	Wire Jumper	3198 036 90010
9891	Wire Jumper	3198 036 90010
9892	Wire Jumper	3198 036 90010
9901	Wire Jumper	3198 036 90010
9902	Wire Jumper	3198 036 90010
9903	Wire Jumper	3198 036 90010
9904	Wire Jumper	3198 036 90010
9905	Wire Jumper	3198 036 90010
9911	Wire Jumper	3198 036 90010
9913	Wire Jumper	3198 036 90010
9914	Wire Jumper	3198 036 90010
9915	Wire Jumper	3198 036 90010
9918	Wire Jumper	3198 036 90010
9919	Wire Jumper	3198 036 90010
9920	Wire Jumper	3198 036 90010
9991	Wire Jumper	3198 036 90010
9996	Wire Jumper	3198 036 90010
9998	Wire Jumper	3198 036 90010
CBA	Scan 4 Card Assembly	3121 237 53761
CBA	SP/LS Module (Vertical) (ITV)	3139 127 27372
CBA	EPS Module (ITV)	3139 137 22961
CBA	Main Chassis Assembly	3139 187 26831
CBA	Interface Panel (ITV)	3139 188 04541

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Ref	Description	Part No.
1000	F-Connector	2422 031 10792
1001	Socket, Cinch, 1 Pin	2422 026 05003
1002	5 Pin Connector	2422 025 12708
2000	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 21040
2001	Cap, 39p, 5%, 50v, Ceramic	3198 016 03990
2002	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
2003	Cap, 39p, 5%, 50v, Ceramic	3198 016 03990
2004	Cap, 100n, 10%, 25v, Ceramic	2238 910 15649
2005	Cap, 270p, 5%, 50v, Ceramic	3198 016 02710
2006	Cap, 390p, 5%, 50v, Ceramic	3198 016 03910
2007	Cap, 33p, 5%, 50v, Ceramic	3198 016 03390
2008	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
2009	Cap, 10p, 5%, 50v, Ceramic	3198 016 01090
2010	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 21040
2011	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
2012	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
2013	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 21040
2014	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 21040
2015	Cap, 47p, 5%, 50v, Ceramic	3198 016 04790
3000	Res, 10k, 5%	3198 021 51030
3001	Res, 10k, 5%	3198 021 51030
3002	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3003	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3004	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3005	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3006	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3007	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3008	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3009	Res, 47k, 5%	3198 021 54730
3011	Res, 10k, 5%	3198 021 51030
3012	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
5000	Fixed Inductor, 0.15uH, 10%	3198 018 31570
5001	Fixed Inductor, 0.15uH, 10%	3198 018 31570
5002	Fixed Inductor, 0.68uH, 10%	3198 018 36870
5003	Fixed Inductor, 2.2uH, 5%	2422 535 96509
5004	Fixed Inductor, 10uH, 10%	3198 018 31090
5005	Inductor, Fixed 22U, 20%	3198 018 32290
5006	Fixed Inductor, 4.7uH., 10%	3198 018 34780
6000	Diode, Signal, BAS216	9340 255 30115
6001	Diode, Signal, BAS216	9340 255 30115
6002	Diode, Signal, BAS216	9340 255 30115
7000	IC, NE592/N8	9337 334 80602
7001	Transistor, Signal, BC847B	9335 895 90215
CBA	Net 1 Panel (part of Scan 4 Card Assembly)	3135 127 10151

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Ref	Description	Part No.
1000	Connector, 15 Pin	2422 025 16857
1001	Crystal, Resonator, 20M140	2422 543 01196
1002	SOC MDIN H 4P F YKF51 B	2422 026 05133
1003	SOC CINCH H 4P F WHRD B	2422 026 04402
1005	Resonator Crystal, 14M31818, 20P	2422 543 00904
1010	Connector, 32 Pin	3135 010 03541
1011	Crystal, Resonator, 12MHz, 20 Pin	2422 543 00488
1012	Connector, 5 Pin	2422 025 12708
2000	Cap, 1u, 20%, 50v, Electrolytic	3198 030 81080
2001	Cap, 82p, 5%, 50v, Ceramic	3198 016 08290
2002	Cap, 47p, 5%, 50v, Ceramic	3198 016 04790
2003	Cap, 15p, 5%, 50v, Ceramic	3198 016 01590
2004	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 21040
2005	Cap, 1u, 20%, 50v, Electrolytic	3198 030 81080
2006	Cap, 82p, 5%, 50v, Ceramic	3198 016 08290
2007	Cap, 47p, 5%, 50v, Ceramic	3198 016 04790
2008	Cap, 47p, 5%, 50v, Ceramic	3198 016 04790
2009	Cap, 150p, 5%, 50v, Ceramic	3198 016 01510
2010	Cap, 1u, 20%, 50v, Electrolytic	3198 030 81080
2011	Cap, 270p, 5%, 50v, Ceramic	3198 016 02710
2012	Cap, 15p, 5%, 50v, Ceramic	3198 016 01590
2013	Cap, 47p, 5%, 50v, Ceramic	3198 016 04790
2014	Cap, 150p, 5%, 50v, Ceramic	3198 016 01510
2015	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
2016	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
2017	Cap, 10u, 20%, 25V, Electrolytic	2020 004 90288
2018	Cap, 270p, 5%, 50v, Ceramic	3198 016 02710
2019	Cap, 15p, 5%, 50v, Ceramic	3198 016 01590
2020	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 21040
2021	Cap, 47p, 5%, 50v, Ceramic	3198 016 04790
2022	Cap, 150p, 5%, 50v, Ceramic	3198 016 01510
2023	Cap, 270p, 5%, 50v, Ceramic	3198 016 02710
2024	Cap, 82p, 5%, 50v, Ceramic	3198 016 08290
2025	Cap, 47p, 5%, 50v, Ceramic	3198 016 04790
2026	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
2059	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
2060	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2061	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2062	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2063	Cap, 4u7, +80/-20%, 10v, Ceramic	2020 552 96305
2064	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2065	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2066	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2067	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2068	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
2071	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2072	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2073	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2074	Cap, 4u7, 20%, 35v, Electrolytic	3198 030 74780
2075	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2076	Cap, 4u7, 20%, 35v, Electrolytic	3198 030 74780
2077	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2078	Cap, 4u7, 20%, 35v, Electrolytic	3198 030 74780
2079	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
2080	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2081	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2082	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2083	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2084	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2085	Cap, 4u7, 20%, 35v, Electrolytic	3198 030 74780
2086	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
2087	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2088	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2089	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2090	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2091	Cap, 4u7, 20%, 35v, Electrolytic	3198 030 74780
2092	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
2093	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2094	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040

S = Safety Part   Be sure to use exact replacement part.

27ST230P/35 (continued)

Ref	Description	Part No.
2095	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2096	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2097	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2098	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2099	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
2100	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
2101	Cap, 1u, 20%, 35v, Electrolytic. . . .	2020 004 90282
2102	Cap, 1u, 20%, 35v, Electrolytic. . . .	2020 004 90282
2103	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 030 81080
2104	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 030 81080
2106	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 030 81080
2107	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 030 81080
2111	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 030 81080
2112	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 030 81080
2113	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 030 81080
2114	Cap, 470u, 20%, 25v, Electrolytic. . .	2020 012 93457
2115	Cap, 10u, 20%, 10v, Electrolytic . . .	3198 032 34130
2116	Cap, 10u, 20%, 10v, Electrolytic . . .	3198 032 34130
2118	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
2119	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
2120	Cap, 680p, 10%, 50v, Ceramic	3198 017 06810
2121	Cap, 680p, 10%, 50v, Ceramic	3198 017 06810
2122	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2123	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2124	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2125	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2126	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2127	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2129	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2130	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2131	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2132	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2134	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2135	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2136	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
2137	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
2139	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2140	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2141	Cap, 180p, 5%, 50v, Ceramic.	3198 016 01810
2142	Cap, 180p, 5%, 50v, Ceramic.	3198 016 01810
3001	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3002	Res, 220 ohm, 5%, 1/10W, Metalized Glas	3198 021 52210
3003	Res, 1M, 5%, 1/10W, Metalized Glass. .	3198 021 51050
3004	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3005	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3006	Res, 1K8, 5%, 1/10W, Metalized Glass .	3198 021 51820
3007	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
3008	Res, 150K, 5%, 1/10W, Metalized Glass.	3198 021 51540
3009	Res, 13K, 5%, 1/8W, Metalized Glass. .	2322 730 61133
3010	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3011	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3012	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
3013	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
3014	Res, 150K, 5%, 1/10W, Metalized Glass.	3198 021 51540
3015	Res, 13K, 5%, 1/8W, Metalized Glass. .	2322 730 61133
3016	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3017	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
3018	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3019	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
3020	Res, 150K, 5%, 1/10W, Metalized Glass.	3198 021 51540
3021	Res, 13K, 5%, 1/8W, Metalized Glass. .	2322 730 61133
3022	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3023	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
3024	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3025	Res, 22K, 5%, 1/10W, Metalized Glass .	3198 021 52230
3026	Res, 22K, 5%, 1/10W, Metalized Glass .	3198 021 52230
3027	Res, 22K, 5%, 1/10W, Metalized Glass .	3198 021 52230
3028	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3029	Res, 22K, 5%, 1/10W, Metalized Glass .	3198 021 52230
3030	Res, 22K, 5%, 1/10W, Metalized Glass .	3198 021 52230
3031	Res, 22K, 5%, 1/10W, Metalized Glass .	3198 021 52230
3033	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3049	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3052	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3053	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3056	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
3057	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3058	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
3059	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3060	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3061	Res, 1M, 5%, 1/10W, Metalized Glass. .	3198 021 51050
3062	Res, 220 ohm, 5%, 1/10W, Metalized Glas	3198 021 52210
3063	Res, 820 ohm, 5%, 1/10W, Metalized Glas	3198 021 58210
3064	Res, 220 ohm, 5%, 1/10W, Metalized Glas	3198 021 52210
3065	Res, Network, 33 ohm X 4, 5%, SM AVR24	2350 035 10339
3066	Res, Network, 33 ohm X 4, 5%, SM AVR24	2350 035 10339
3073	Res, Network, 33 ohm X 4, 5%, SM AVR24	2350 035 10339
3074	Res, Network, 33 ohm X 4, 5%, SM AVR24	2350 035 10339
3082	Res, Network, 33 ohm X 4, 5%, SM AVR24	2350 035 10339
3085	Res, Network, 33 ohm X 4, 5%, SM AVR24	2350 035 10339
3089	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3090	Res, Network, 33 ohm X 4, 5%, SM AVR24	2350 035 10339
3091	Res, Network, 33 ohm X 4, 5%, SM AVR24	2350 035 10339
3097	Res, 150 ohm, 5%, 1/10W, Metalized Glas	3198 021 51510
3099	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3100	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3101	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3102	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3103	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3104	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3105	Res, 150 ohm, 5%, 1/10W, Metalized Glas	3198 021 51510
3106	Res, 270 ohm, 5%, 1/10W, Metalized Glas	3198 021 52710
3108	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
3109	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
3110	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
3111	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
3112	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
3113	Res, 22K, 5%, 1/10W, Metalized Glass .	3198 021 52230
3114	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3116	Res, 1K8, 5%, 1/10W, Metalized Glass .	3198 021 51820
3117	Res, 22K, 5%, 1/10W, Metalized Glass .	3198 021 52230
3118	Res, 6K8, 5%, 1/10W, Metalized Glass .	3198 021 56820
3119	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3120	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3121	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3122	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3124	Res, 910 ohm, 1%, 1/8W, Metalized Glass	2322 734 69101
3129	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3130	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3132	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3133	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3135	Res, 22K, 5%, 1/10W, Metalized Glass .	3198 021 52230
3136	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3137	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3138	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3139	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3140	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
3141	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3142	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
3143	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
4004	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5001	Coil, 820n	3198 018 38270
5002	Coil, 1u2.	3198 018 31280
5003	Coil, 1u2.	3198 018 31280
5004	Coil, 1u2.	3198 018 31280
5010	Coil, 820n	3198 018 38270
5012	Coil, 820n	3198 018 38270
5014	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
5015	Inductor, Fixed, 100MHz, 30 ohm. . . .	3198 018 90060
5016	Inductor, Fixed, 100MHz, 30 ohm. . . .	3198 018 90060
5017	Inductor, Fixed, 100MHz, 30 ohm. . . .	3198 018 90060
5018	Inductor, Fixed, 100MHz, 30 ohm. . . .	3198 018 90060
5019	Inductor, Fixed, 100MHz, 30 ohm. . . .	3198 018 90060
5020	Inductor, Fixed, 100MHz, 30 ohm. . . .	3198 018 90060
5021	Coil, 82u.	2422 535 95408
5023	Inductor, Fixed, 100MHz, 30 ohm. . . .	3198 018 90060
5024	Coil, 1u8.	3198 018 31880
6001	Diode, Signal, BAV99	3198 010 10620
6002	Diode, Signal, BAV99	3198 010 10620
6003	Diode, Signal, BAV99	3198 010 10620
6004	Diode, Signal, BAV99	3198 010 10620
6005	Diode, Signal, BAV99	3198 010 10620
6006	Diode, Signal, BAV99	3198 010 10620
6009	Diode, Signal, BAV99	3198 010 10620
6010	Diode, Signal, BAV99	3198 010 10620
6011	Diode, Signal, BAS16WS	9322 031 99685
6012	Diode, Signal, BAS16WS	9322 031 99685
6013	Diode, Signal, BAS16WS	9322 031 99685
6014	Diode, Signal, BAS16WS	9322 031 99685
6015	Diode, Signal, BAS16WS	9322 031 99685
6016	Diode, Signal, BAS16WS	9322 031 99685
6017	Diode, Rect, MBRS140.	9322 070 26668
6018	Zener Diode, 6.8 volt.	9340 386 40115
6019	Diode, Signal, BAS316.	3198 010 10630
7000	F.E.T. Signal, BSN20	9340 125 00235
7001	IC, LM393D	9339 575 30668
7002	IC, LM393D	9339 575 30668
7003	Transistor, NPN, BC847B.	3198 010 42030
7004	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC847B.	3198 010 42030
7006	Transistor, PNP, BC857B.	3198 010 42150
7007	FET Signal, BSN20.	9340 125 00235
7010	FET Signal, BSN20.	9340 125 00235
7011	IC, FS401AC.	9322 107 99671
7012	IC, HY57V161610DTC-10.	9322 161 58668
7013	FET Signal, BSN20.	9340 125 00235
7014	IC SM P87C51RD+4A SCAN 4	3135 120 50111
7016	IC, 74HC4066D.	9337 144 20653
7018	IC, M24C04-WMN6.	9322 122 33668
7019	Wire Jumper.	3198 036 90010
7020	Transistor, PNP, BC857B.	3198 010 42150
7021	Transistor, NPN, BC847B.	3198 010 42030

S = Safety Part   Be sure to use exact replacement part.

27ST230P/35 (continued)

	Ref	Description	Part No.
	7022	IC, MC33269D-3.3	9322 106 88668
	7023	IC, MC33269D-3.3	9322 106 88668
	7024	IC, LM2596S-ADJ.	9322 130 86685
	7028	FET Signal, BSH103	9340 547 13215
	7036	FET Signal, BSH103	9340 547 13215
	7037	Transistor, NPN, BC847B.	3198 010 42030
	CBA	Scan 4 Card (part of Scan 4 Card Assembly).	3135 127 10281

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

	Ref	Description	Part No.
S	AC01	AC Cord.	3135 128 70011
	AC03	Anode Lead Spacer (3 Used)	3135 014 04471
	AC04	Batteries for Remote Control Transmitte	9299 000 65263
	AC05	Cabinet Back	3139 124 45261
S	AC09	CRT, A68AJB82X11	9301 891 90631
	AC10	Customer Control Buttons	3139 124 30901
S	AC12	Degaussing Coil.	2422 549 43967
	AC15	Holder, Degaussing Coil (4 Used) . . .	3135 013 01641
	AC17	Owner's Manual, Scan 4 Card.	3135 125 21341
	AC20	Cabinet Front Assembly	3121 237 52392
	AC20A	Cabinet Front.	3135 127 50011
	AC20B	Chassis Guide (2 Used)	3139 124 31381
	AC20B	Chassis Guide.	3139 124 41711
	AC20C	Light Guide.	3139 124 26461
	AC20D	Nameplate.	3135 015 03571
	AC20E	Power Button	3139 124 26444
	AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00401
	AC22	Cinch Cover.	3139 124 25551
	AC26	EPS Bracket.	3119 107 17241
	AC27	ITV Card Bracket	3139 124 37933
	AC30	Scan 3 VGA Adapter	3135 017 07401
	AC31	Scan 4 Card Cover.	3139 124 45551
	REMOTE	Remote Control Transmitter, RC2572/01.	3139 228 88691

S = Safety Part   Be sure to use exact replacement part.

Main Chassis Parts

Main Chassis Parts

Safety	Ref	Description	Part No.
	0211	2 Pin Connector.	2422 025 16269
	0212	2 Pin Connector.	2422 025 16375
	0213	2 Pin Connector.	2422 025 16374
	0217	6 Pin Connector.	2422 025 12482
	0218	A/V Jack	2422 026 04742
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0222	2 Pin Connector.	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0227	6 Pin Connector.	2422 025 15849
	0229	3 Pin Connector.	2412 020 00725
	0240	7 Pin Connector.	2422 025 11244
	0242	7 Pin Connector.	2422 025 17042
	0243	6 Pin Connector.	2422 025 04854
	0244	5 Pin Connector.	2422 025 04853
	0245	6 Pin Connector.	2422 025 04854
S	0254	9 Pin CRT Socket	2422 500 80076
	0259	5 Pin Connector.	2422 025 15848
	0262	3 Pin Connector.	2422 025 16937
	0267	3 Pin Connector.	2412 020 00725
	0280	4 Pin Connector.	2422 025 12479
S	1000	Tuner, V+U, PLL	2422 542 90108
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1600	Tact Switch.	2422 128 02742
	1601	Tact Switch.	2422 128 02742
	1602	Tact Switch.	2422 128 02742
	1603	Tact Switch.	2422 128 02742
	1606	Tact Switch.	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2123	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2125	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	2127	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
	2128	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2181	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2182	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2183	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic. . .	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic. . .	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic . .	2020 558 90445
	2405	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2441	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic . . .	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic. . .	2020 021 91139
	2451	Cap, 15n, 10%, 50v, Polyester.	3198 014 01530
	2455	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
	2457	Cap, 470n, 5%, 250v, Metalized Polypropylene.	2022 333 00086
	2458	Cap, 2u2, 20%, 100v, Electrolytic. . .	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
	2462	Cap, 330n, 10%, 250v, MPP.	2022 333 00084
	2463	Cap, 1nf, 10%, 2000v, Ceramic Only with 5445 (JF0501-21835) Layer Wound. . . .	2020 558 90487
S	2463	Cap, 680p, 10%, 2000v, Ceramic	2252 712 95024
S	2465	Cap, 11n, 5%, 1600v, Polypropylene . .	2020 301 90251
S	2465	Cap, 12n, 5%, 1600v, Polypropylene Only with 5445 (JF0501-21835) Layer Wound .	2222 375 90156
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic . . .	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic. . .	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic. . .	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic . . .	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic . .	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic. . .	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic . .	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic . . .	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic . .	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic . . .	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic . . .	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic . . .	3198 025 52290
	2601	Cap, 220n, +80/-20%, 25v, Ceramic. . .	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2616	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
	2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050
	2691	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210

S = Safety Part   Be sure to use exact replacement part.

27ST240P/35 (continued)

Ref.	Description	Part No.
2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2803	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2810	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
2862	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3121	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3122	Res, 680 ohm, 5%, 1/6W, Carbon Film. .	3198 011 06810
3123	Res, 680 ohm, 5%, 1/6W, Carbon Film. .	3198 011 06810
3125	Res, 680 ohm, 5%, 1/6W, Carbon Film. .	3198 011 06810
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3182	Wire Jumper.	3198 036 90010
3184	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3185	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3186	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3187	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3223	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840
3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
3452	Res, 5K6, 1%, 3/5W, Metal Film Only wit h 5445 (JF0501-21835) Layer Wound. . .	2312 915 15602
3452	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3454	Res, 2K, 1%, 3/5W, Metal Film Only with 5445 (JF0501-21835) Layer Wound. . . .	2312 915 12002
3454	Res, 3K9, 1%, 3/5W, Metal Film	2312 915 13902
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3470	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 33390
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3507	Surge Protector.	2422 549 43073
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S 3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030

S = Safety Part   Be sure to use exact replacement part.

27ST240P/35 (continued)

Ref	Description	Part No.
3531	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
3542	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
3544	Res, 4K7, 1%, 1/8W, Metalized Glass	2322 734 64702
3545	Res, 270K, 5%, 1/8W, Metalized Glass	2322 730 61274
3548	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3552	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
S 3558	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3562	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
3563	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3566	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3569	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3580	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3605	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3606	Res, 2K2, 5%, 1/6W, Carbon Film	3198 011 02220
3607	Res, 2K2, 5%, 1/6W, Carbon Film	3198 011 02220
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film	3198 011 04710
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3610	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3618	Res, 6K8, 5%, 1/6W, Carbon Film	3198 011 06820
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3623	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3626	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3627	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3628	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3630	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3636	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3640	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
3682	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
3686	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3802	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3862	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3863	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3867	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
3901	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
3902	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3903	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3904	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3905	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3906	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3907	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4101	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4102	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4104	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4126	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4128	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4181	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4604	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
5001	Coil, 27u, 10%	3198 018 22790
5002	Coil, 820n, 10%	3198 018 18270
5201	Coil, 6u8, 5%	3198 018 16880
5202	Wire Jumper	3198 036 90010
5204	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
5205	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
5206	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
5241	Wire Jumper	3198 036 90010
5242	Coil, 10u, 5%	3198 018 11090
5342	Coil, 22u	2422 535 97333
S 5445	Transformer, LOT (JF0501-21835) Layer Wound	2422 531 02611
S 5445	Transformer, LOT (1342.0043B)	2422 531 02506
5451	Coil, 33u, 10%	3198 018 73390
5452	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
S 5457	Coil, 42u	2422 535 94865
5461	Transformer, Signal Driver, SC10027-00	2422 531 02478
5471	Coil, 3u3, 20%	3198 018 73380
5472	Coil, 3u3, 10%	3198 018 23380
5480	Coil, 39u, 10%	2422 535 97336
S 5501	Mains Filter	2422 549 43432
S 5520	Transformer, SS39009-04	2422 531 02459
5521	Fixed, Inductor, 100MHz, 50R	3198 018 90010
5560	Fixed, Inductor, 100MHz, 50R	3198 018 90010
5561	Coil, 27u, 5%	2422 535 95366
5562	Fixed, Inductor, 100MHz, 50R	3198 018 90010
5564	Fixed, Inductor, 100MHz, 50R	3198 018 90010
5602	Coil, 5u6, 5%	3198 018 15680
5603	Coil, 5u6, 5%	3198 018 15680
5604	Coil, 5u6, 5%	3198 018 15680
5861	Coil, 10u, 5%	3198 018 11090
6001	Zener Diode, 33 volt	3198 010 23390
6181	Zener Diode, 6.8 volt	3198 020 56880
6201	Diode, Signal, BAS316	3198 010 10630
6202	Diode, Signal, BAS316	3198 010 10630
6206	Zener Diode, 6.8 volt	3198 020 56880
6331	Diode, Signal, BAV21	3198 010 10070
6332	Diode, Signal, BAS316	3198 010 10630
6333	Diode, Signal, BAV21	3198 010 10070
6335	Diode, Signal, BAV21	3198 010 10070
6445	Zener Diode, 10 volt	3198 020 51090
6447	Diode, Signal, 1N4148	3198 010 10010
6448	Zener Diode, 6.2 volt	9331 668 30133
6449	Diode, Signal, BAV99	3198 010 10620
6460	Diode, Rect, BY228/24	9340 559 50112

S = Safety Part   Be sure to use exact replacement part.

27ST240P/35 (continued)

	Ref	Description	Part No.
	6461	Diode, Rect, RGP30J-L7004	9338 617 60682
	6462	Zener Diode, 9.1 volt	9331 177 80133
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316	3198 010 10630
	6468	Diode, Signal, BAS316	3198 010 10630
	6469	Diode, Rect, BYV95C	9335 001 80133
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt	3198 010 25680
	6482	Zener Diode, 9.1 volt	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYV95C	9335 001 80133
	6486	Diode, Rect, EGP20DL-5100	9322 164 42682
	6487	Diode, Rect, BYV95A	9335 000 90133
	6488	Diode, Rect, EGP20DL-5100	9322 164 42682
	6500	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
	6520	Diode, Rect, BYV95A	9335 000 90133
	6523	Diode, Signal, 1N4148	3198 010 10010
	6524	Diode, Rect, 1N5062	3198 010 10120
	6525	Diode, Rect, 1N5062	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500	9340 555 59127
	6561	Diode, Rect, SB340L-7010	9322 128 18682
	6563	Diode, Signal, BAS316	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148	3198 010 10010
	6569	Diode, Signal, BAS316	3198 010 10630
	6570	Zener Diode, 6.8 volt	3198 020 56880
	6580	Diode, Signal, BAS316	3198 010 10630
	6681	Diode, Signal, BAT85	9336 247 60133
	6691	LED, LTL-10234WHCR	9322 185 69682
	6692	IR Receiver	9322 127 54667
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9588H/N1/3I	4835 310 57622
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7460	Transistor, NPN, BU4508DX	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1	9352 673 56112
	7521	Power FET, FQPF9N50	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, LE33CZ	9322 106 11676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C16-WBN6	9322 147 25682
	7802	IC, HEF4053BT	9333 729 60653
	7861	IC, TDA9853H/V1	9352 671 19557
	7891	Transistor, NPN, BC847B(COL)	3198 010 42030
	7892	Transistor, NPN, BC847B(COL)	3198 010 42030
	7901	IC, AN7522N PH	9322 181 41682
	9001	Wire Jumper	3198 036 90010
	9104	Wire Jumper	3198 036 90010
	9171	Wire Jumper	3198 036 90010
	9173	Wire Jumper	3198 036 90010
	9175	Wire Jumper	3198 036 90010
	9181	Wire Jumper	3198 036 90010
	9182	Wire Jumper	3198 036 90010
	9183	Wire Jumper	3198 036 90010
	9192	Wire Jumper	3198 036 90010
	9193	Wire Jumper	3198 036 90010
	9311	Wire Jumper	3198 036 90010
	9312	Wire Jumper	3198 036 90010
	9406	Wire Jumper	3198 036 90010
	9407	Wire Jumper	3198 036 90010
	9408	Wire Jumper	3198 036 90010
	9409	Wire Jumper	3198 036 90010
	9410	Wire Jumper	3198 036 90010
	9411	Wire Jumper	3198 036 90010
	9412	Wire Jumper	3198 036 90010
	9413	Wire Jumper	3198 036 90010
	9415	Wire Jumper	3198 036 90010
	9416	Wire Jumper	3198 036 90010
	9417	Wire Jumper	3198 036 90010
	9418	Wire Jumper	3198 036 90010
	9419	Wire Jumper	3198 036 90010
	9421	Wire Jumper	3198 036 90010
	9422	Wire Jumper	3198 036 90010
	9423	Wire Jumper	3198 036 90010
	9425	Wire Jumper	3198 036 90010
	9427	Wire Jumper	3198 036 90010
	9453	Wire Jumper	3198 036 90010
	9460	Wire Jumper	3198 036 90010
	9500	Wire Jumper	3198 036 90010
	9501	Wire Jumper	3198 036 90010
	9503	Wire Jumper	3198 036 90010
	9506	Wire Jumper	3198 036 90010
	9507	Wire Jumper	3198 036 90010
	9510	Wire Jumper	3198 036 90010
	9511	Wire Jumper	3198 036 90010
	9512	Wire Jumper	3198 036 90010
	9513	Wire Jumper	3198 036 90010
	9514	Wire Jumper	3198 036 90010
	9515	Wire Jumper	3198 036 90010
	9516	Wire Jumper	3198 036 90010
	9518	Wire Jumper	3198 036 90010
	9520	Wire Jumper	3198 036 90010
	9521	Wire Jumper	3198 036 90010
	9522	Wire Jumper	3198 036 90010
	9524	Wire Jumper	3198 036 90010
	9528	Wire Jumper	3198 036 90010
	9530	Wire Jumper	3198 036 90010
	9611	Coil, 27u, 10%	3198 018 22790
	9612	Wire Jumper	3198 036 90010
	9613	Wire Jumper	3198 036 90010
	9614	Wire Jumper	3198 036 90010
	9615	Wire Jumper	3198 036 90010
	9616	Wire Jumper	3198 036 90010
	9617	Wire Jumper	3198 036 90010
	9618	Wire Jumper	3198 036 90010
	9619	Wire Jumper	3198 036 90010
	9622	Wire Jumper	3198 036 90010
	9623	Wire Jumper	3198 036 90010
	9626	Wire Jumper	3198 036 90010
	9627	Wire Jumper	3198 036 90010
	9628	Wire Jumper	3198 036 90010
	9629	Wire Jumper	3198 036 90010
	9631	Wire Jumper	3198 036 90010
	9632	Wire Jumper	3198 036 90010
	9634	Wire Jumper	3198 036 90010
	9637	Wire Jumper	3198 036 90010
	9638	Wire Jumper	3198 036 90010
	9640	Wire Jumper	3198 036 90010
	9641	Wire Jumper	3198 036 90010
	9642	Wire Jumper	3198 036 90010
	9643	Wire Jumper	3198 036 90010
	9647	Wire Jumper	3198 036 90010
	9648	Wire Jumper	3198 036 90010
	9650	Wire Jumper	3198 036 90010
	9652	Wire Jumper	3198 036 90010
	9654	Wire Jumper	3198 036 90010
	9655	Wire Jumper	3198 036 90010
	9657	Wire Jumper	3198 036 90010
	9658	Wire Jumper	3198 036 90010
	9659	Wire Jumper	3198 036 90010
	9660	Wire Jumper	3198 036 90010
	9661	Wire Jumper	3198 036 90010
	9662	Wire Jumper	3198 036 90010
	9663	Wire Jumper	3198 036 90010
	9664	Wire Jumper	3198 036 90010
	9665	Wire Jumper	3198 036 90010
	9666	Wire Jumper	3198 036 90010
	9667	Wire Jumper	3198 036 90010
	9668	Wire Jumper	3198 036 90010
	9669	Wire Jumper	3198 036 90010
	9670	Wire Jumper	3198 036 90010
	9671	Wire Jumper	3198 036 90010
	9672	Coil, 22u, 10%	3198 018 22290
	9674	Wire Jumper	3198 036 90010
	9675	Wire Jumper	3198 036 90010
	9676	Wire Jumper	3198 036 90010
	9678	Coil, 22u, 10%	3198 018 22290
	9679	Wire Jumper	3198 036 90010
	9680	Wire Jumper	3198 036 90010
	9681	Wire Jumper	3198 036 90010
	9685	Wire Jumper	3198 036 90010
	9686	Wire Jumper	3198 036 90010
	9687	Wire Jumper	3198 036 90010
	9688	Wire Jumper	3198 036 90010
	9689	Wire Jumper	3198 036 90010
	9690	Wire Jumper	3198 036 90010
	9691	Wire Jumper	3198 036 90010
	9694	Wire Jumper	3198 036 90010
	9695	Wire Jumper	3198 036 90010
	9697	Wire Jumper	3198 036 90010
	9698	Wire Jumper	3198 036 90010
	9699	Wire Jumper	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

27ST240P/35 (continued)

	Ref	Description	Part No.
	9821	Wire Jumper.	3198 036 90010
	9822	Wire Jumper.	3198 036 90010
	9825	Wire Jumper.	3198 036 90010
	9828	Wire Jumper.	3198 036 90010
	9829	Wire Jumper.	3198 036 90010
	9831	Wire Jumper.	3198 036 90010
	9832	Wire Jumper.	3198 036 90010
	9837	Wire Jumper.	3198 036 90010
	9838	Wire Jumper.	3198 036 90010
	9839	Wire Jumper.	3198 036 90010
	9846	Wire Jumper.	3198 036 90010
	9847	Wire Jumper.	3198 036 90010
	9849	Wire Jumper.	3198 036 90010
	9850	Wire Jumper.	3198 036 90010
	9851	Wire Jumper.	3198 036 90010
	9852	Wire Jumper.	3198 036 90010
	9853	Wire Jumper.	3198 036 90010
	9856	Wire Jumper.	3198 036 90010
	9860	Wire Jumper.	3198 036 90010
	9861	Wire Jumper.	3198 036 90010
	9862	Wire Jumper.	3198 036 90010
	9864	Wire Jumper.	3198 036 90010
	9865	Wire Jumper.	3198 036 90010
	9868	Wire Jumper.	3198 036 90010
	9873	Wire Jumper.	3198 036 90010
	9874	Wire Jumper.	3198 036 90010
	9875	Wire Jumper.	3198 036 90010
	9877	Wire Jumper.	3198 036 90010
	9891	Wire Jumper.	3198 036 90010
	9892	Wire Jumper.	3198 036 90010
	9901	Wire Jumper.	3198 036 90010
	9902	Wire Jumper.	3198 036 90010
	9903	Wire Jumper.	3198 036 90010
	9904	Wire Jumper.	3198 036 90010
	9905	Wire Jumper.	3198 036 90010
	9911	Wire Jumper.	3198 036 90010
	9913	Wire Jumper.	3198 036 90010
	9914	Wire Jumper.	3198 036 90010
	9915	Wire Jumper.	3198 036 90010
	9918	Wire Jumper.	3198 036 90010
	9919	Wire Jumper.	3198 036 90010
	9920	Wire Jumper.	3198 036 90010
	9991	Wire Jumper.	3198 036 90010
	9996	Wire Jumper.	3198 036 90010
	9998	Wire Jumper.	3198 036 90010
	CBA	SP/LS Module (Vertical) (ITV).	3139 127 27372
	CBA	EPS Module (ITV)	3139 137 22961
	CBA	Main Chassis Assembly.	3139 187 26831
	CBA	Interface Panel (ITV).	3139 188 04541

Channel One Card Parts
Channel One Card Parts

2D 3 Line Comb Filter Parts
2D 3 Line Comb Filter Parts

DAF Panel Parts
DAF Panel Parts

DVD Eject Panel Parts
DVD Eject Panel Parts

DVD Interface Panel Parts
DVD Interface Panel Parts

Front Interface Panel Parts
Front Interface Panel Parts

ITV Front Jack Panel Parts
ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)
Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)
Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts
Side Jack Panel Parts

Subwoofer Panel Parts
Subwoofer Panel Parts

Top Control Panel Parts
Top Control Panel Parts

Ref	Description	Part No.
ITV	Institutional Interconnect Device (For ITV Models Only)	0Net 1DE VX/35

Cabinet & Accessory Parts
Cabinet & Accessory Parts

S = Safety Part   Be sure to use exact replacement part.

	Ref	Description	Part No.
S	AC01	AC Cord.	3135 128 70011
	AC03	Anode Lead Spacer (3 Used)	3135 014 04471
	AC05	Cabinet Back	3139 124 45261
S	AC09	CRT, A68AJB82X11	9301 891 90631
	AC10	Customer Control Buttons	3139 124 30901
S	AC12	Degaussing Coil.	2422 549 43967
	AC15	Holder, Degaussing Coil (4 Used) . . .	3135 013 01641
	AC20	Cabinet Front Assembly	3121 237 52392
	AC20A	Cabinet Front.	3135 127 50011
	AC20B	Chassis Guide (2 Used)	3139 124 31381
	AC20B	Chassis Guide.	3139 124 41711
	AC20C	Light Guide.	3139 124 26461
	AC20D	Nameplate.	3135 015 03571
	AC20E	Power Button	3139 124 26444
	AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00401
	AC22	Cinch Cover.	3139 124 25551
	AC26	EPS Bracket.	3119 107 17241
	AC27	ITV Card Bracket	3139 124 37933
	AC28	ITV Card Slot Cover.	3139 124 30571
	ITV	Institutional Interconnect Device (Model 27ST240P/35 Only).	0Net 1DE VX/35

27ST420L/17 - Manual no. 7638

Main Chassis Parts

	Ref	Description	Part No.
		Main Chassis Parts	
	0211	2 Pin Connector.	2422 025 16269
	0212	2 Pin Connector.	2422 025 16375
	0213	2 Pin Connector.	2422 025 16374
	0219	6 Pin Connector.	2422 025 12482
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0222	2 Pin Connector.	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0240	7 Pin Connector.	2422 025 11244
	0243	6 Pin Connector.	2422 025 04854
	0244	5 Pin Connector.	2422 025 04853
	0245	6 Pin Connector.	2422 025 04854
S	0254	9 Pin CRT Socket	2422 500 80076
	0259	5 Pin Connector.	2422 025 15848
	0262	3 Pin Connector.	2422 025 16937
	0267	3 Pin Connector.	2412 020 00725
	0280	4 Pin Connector.	2422 025 12479
S	1000	Tuner, V+U, PLL	2422 542 90108
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1600	Tact Switch.	2422 128 02742
	1601	Tact Switch.	2422 128 02742
	1602	Tact Switch.	2422 128 02742
	1603	Tact Switch.	2422 128 02742
	1606	Tact Switch.	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1831	Crystal, Resonator, 18MHz432, 12 Pin, H C49/U A.	2422 543 00842
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2123	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2125	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyest er.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic. . .	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic. . .	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic . .	2020 558 90445
	2405	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2441	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic . . .	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic. . .	2020 021 91139
	2451	Cap, 15n, 10%, 50v, Polyester.	3198 014 01530
	2455	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
	2457	Cap, 470n, 5%, 250v, Metalized Polyprop ylene.	2022 333 00086
	2458	Cap, 2u2, 20%, 100v, Electrolytic. . .	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
	2462	Cap, 330n, 10%, 250v, MPP.	2022 333 00084
	2463	Cap, 680p, 10%, 2000v, Ceramic	2020 558 90485
S	2465	Cap, 11n, 5%, 1600v, Polypropylene . .	2020 301 90251
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic . . .	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic. . .	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic. . .	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic . . .	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic . .	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic. . .	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypro pylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic . .	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic . . .	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic . .	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic . . .	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic . . .	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic . . .	3198 025 52290
	2601	Cap, 220n, +80/-20%, 25v, Ceramic. . .	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2616	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
	2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050
	2691	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
	2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
	2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
	2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
	2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
	2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
	2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2837	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
	2840	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2841	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2843	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2844	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040

S = Safety Part   Be sure to use exact replacement part.

27ST420L/17 (continued)

S	Ref	Description	Part No.
	2846	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
	2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
	2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
	2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610
	2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910
	2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
	2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
	2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2910	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320
	2911	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320
	2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
	3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3121	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3123	Wire Jumper.	3198 036 90010
	3124	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3125	Wire Jumper.	3198 036 90010
	3126	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
	3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
	3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
	3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840
	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
	3452	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3454	Res, 3K9, 1%, 3/5W, Metal Film	2312 915 13902
S	3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S	3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
	3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
	3470	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
	3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S	3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 33390
	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S	3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
S	3558	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710

S = Safety Part   Be sure to use exact replacement part.

27ST420L/17 (continued)

S	Ref	Description	Part No.
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3636	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3682	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
	3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3686	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
	3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3814	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3831	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3832	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3843	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
	3901	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4101	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4102	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4104	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4128	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4604	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%	3198 018 18270
	5201	Coil, 6u8, 5%	3198 018 16880
	5202	Wire Jumper	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5241	Wire Jumper	3198 036 90010
	5242	Coil, 10u, 5%	3198 018 11090
	5342	Coil, 22u	2422 535 97333
S	5445	Transformer, LOT (1342.0043B)	2422 531 02506
	5451	Coil, 33u, 10%	3198 018 73390
	5452	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
S	5457	Coil, 42u	2422 535 94865
	5461	Transformer, Signal Driver, SC10027-00	2422 531 02478
	5471	Coil, 3u3, 20%	3198 018 73380
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 39u, 10%	2422 535 97336
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5561	Coil, 27u, 5%	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5602	Coil, 5u6, 5%	3198 018 15680
	5603	Coil, 5u6, 5%	3198 018 15680
	5604	Coil, 5u6, 5%	3198 018 15680
	5831	Coil, 6u8, 5%	3198 018 16880
	5832	Coil, 6u8, 5%	3198 018 16880
	5833	Coil, 6u8, 5%	3198 018 16880
	5835	Coil, 12u, 10%	3198 018 31290
	6001	Zener Diode, 33 volt	3198 010 23390
	6201	Diode, Signal, BAS316	3198 010 10630
	6202	Diode, Signal, BAS316	3198 010 10630
	6206	Zener Diode, 6.8 volt	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148	3198 010 10010
	6448	Zener Diode, 6.2 volt	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6460	Diode, Rect, BY228/24	9340 559 50112
	6461	Diode, Rect, RGP30J-L7004	9338 617 60682
	6462	Zener Diode, 9.1 volt	9331 177 80133
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316	3198 010 10630
	6468	Diode, Signal, BAS316	3198 010 10630
	6469	Diode, Rect, BYV95C	9335 001 80133
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt	3198 010 25680
	6482	Zener Diode, 9.1 volt	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYV95C	9335 001 80133
	6486	Diode, Rect, EGP20DL-5100	9322 164 42682
	6487	Diode, Rect, BYV95A	9335 000 90133
	6488	Diode, Rect, EGP20DL-5100	9322 164 42682
	6500	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
	6520	Diode, Rect, BYV95A	9335 000 90133
	6523	Diode, Signal, 1N4148	3198 010 10010
	6524	Diode, Rect, 1N5062	3198 010 10120
	6525	Diode, Rect, 1N5062	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500	9340 555 59127
	6561	Diode, Rect, SB340L-7010	9322 128 18682
	6563	Diode, Signal, BAS316	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148	3198 010 10010
	6569	Diode, Signal, BAS316	3198 010 10630
	6570	Zener Diode, 6.8 volt	3198 020 56880
	6580	Diode, Signal, BAS316	3198 010 10630
	6681	Diode, Signal, BAT85	9336 247 60133
	6691	LED, LTL-10234WHCR	9322 185 69682

S = Safety Part   Be sure to use exact replacement part.

27ST420L/17 (continued)

Ref	Description	Part No.
6692	IR Receiver.	9322 127 54667
6831	Diode, Signal, 1N4148.	3198 010 10010
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
7101	Transistor, NPN, BC847B(COL)	3198 010 42030
7200	IC, TDA9588H/N1/3I	4835 310 57626
7201	Transistor, NPN, BC847B(COL)	3198 010 42030
7204	Transistor, PNP, BC857B(COL)	3198 010 42150
7205	Transistor, PNP, BC857B(COL)	3198 010 42150
7330	IC, TDA6107JF/N3	9352 713 37112
7441	Transistor, PNP, BC857B(COL)	3198 010 42150
7443	Transistor, PNP, BC557B(COL)	3198 020 40110
7460	Transistor, NPN, BU4508DX.	9340 550 92127
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
7462	Transistor, NPN, PDTC143ZT	9340 547 00215
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
7471	IC, TDA8359J/N2.	9352 701 64112
7480	Transistor, NPN, BD135	3198 020 41010
7482	Transistor, NPN, BD135	3198 020 41010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667
7520	IC, TEA1507P/N1.	9352 673 56112
7521	Power FET, FQPF9N50.	9322 187 16687
7522	Transistor, NPN, BC847B(COL)	3198 010 42030
7540	Transistor, NPN, BC547B(COL)	3198 020 40030
7541	Transistor, NPN, PDTC114ET	9340 310 10215
7542	Transistor, PNP, BC857B(COL)	3198 010 42150
7560	IC, LE33CZ	9322 106 11676
7561	Transistor, NPN, PDTC143ZT	9340 547 00215
7580	Transistor, PNP, BC857B(COL)	3198 010 42150
7602	IC, M24C16-WBN6.	9322 147 25682
7802	IC, HEF4053BT.	9333 729 60653
7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682
7901	IC, AN7522N PH	9322 181 41682
9001	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010
9182	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010
9192	Wire Jumper.	3198 036 90010
9193	Wire Jumper.	3198 036 90010
9311	Wire Jumper.	3198 036 90010
9312	Wire Jumper.	3198 036 90010
9406	Wire Jumper.	3198 036 90010
9407	Wire Jumper.	3198 036 90010
9408	Wire Jumper.	3198 036 90010
9409	Wire Jumper.	3198 036 90010
9410	Wire Jumper.	3198 036 90010
9411	Wire Jumper.	3198 036 90010
9412	Wire Jumper.	3198 036 90010
9413	Wire Jumper.	3198 036 90010
9415	Wire Jumper.	3198 036 90010
9416	Wire Jumper.	3198 036 90010
9417	Wire Jumper.	3198 036 90010
9418	Wire Jumper.	3198 036 90010
9419	Wire Jumper.	3198 036 90010
9421	Wire Jumper.	3198 036 90010
9422	Wire Jumper.	3198 036 90010
9423	Wire Jumper.	3198 036 90010
9425	Wire Jumper.	3198 036 90010
9427	Wire Jumper.	3198 036 90010
9453	Wire Jumper.	3198 036 90010
9460	Wire Jumper.	3198 036 90010
9500	Wire Jumper.	3198 036 90010
9501	Wire Jumper.	3198 036 90010
9503	Wire Jumper.	3198 036 90010
9506	Wire Jumper.	3198 036 90010
9507	Wire Jumper.	3198 036 90010
9510	Wire Jumper.	3198 036 90010
9511	Wire Jumper.	3198 036 90010
9512	Wire Jumper.	3198 036 90010
9513	Wire Jumper.	3198 036 90010
9514	Wire Jumper.	3198 036 90010
9515	Wire Jumper.	3198 036 90010
9516	Wire Jumper.	3198 036 90010
9518	Wire Jumper.	3198 036 90010
9520	Wire Jumper.	3198 036 90010
9521	Wire Jumper.	3198 036 90010
9522	Wire Jumper.	3198 036 90010
9524	Wire Jumper.	3198 036 90010
9528	Wire Jumper.	3198 036 90010
9530	Wire Jumper.	3198 036 90010
9611	Coil, 27u, 10%	3198 018 22790
9612	Wire Jumper.	3198 036 90010
9613	Wire Jumper.	3198 036 90010
9614	Wire Jumper.	3198 036 90010
9615	Wire Jumper.	3198 036 90010
9618	Wire Jumper.	3198 036 90010
9619	Wire Jumper.	3198 036 90010
9622	Wire Jumper.	3198 036 90010
9623	Wire Jumper.	3198 036 90010
9626	Wire Jumper.	3198 036 90010
9627	Wire Jumper.	3198 036 90010
9628	Wire Jumper.	3198 036 90010
9629	Wire Jumper.	3198 036 90010
9631	Wire Jumper.	3198 036 90010
9632	Wire Jumper.	3198 036 90010
9637	Wire Jumper.	3198 036 90010
9638	Wire Jumper.	3198 036 90010
9640	Wire Jumper.	3198 036 90010
9641	Wire Jumper.	3198 036 90010
9642	Wire Jumper.	3198 036 90010
9643	Wire Jumper.	3198 036 90010
9647	Wire Jumper.	3198 036 90010
9648	Wire Jumper.	3198 036 90010
9650	Wire Jumper.	3198 036 90010
9652	Wire Jumper.	3198 036 90010
9654	Wire Jumper.	3198 036 90010
9655	Wire Jumper.	3198 036 90010
9657	Wire Jumper.	3198 036 90010
9658	Wire Jumper.	3198 036 90010
9659	Wire Jumper.	3198 036 90010
9660	Wire Jumper.	3198 036 90010
9661	Wire Jumper.	3198 036 90010
9662	Wire Jumper.	3198 036 90010
9663	Wire Jumper.	3198 036 90010
9664	Wire Jumper.	3198 036 90010
9665	Wire Jumper.	3198 036 90010
9666	Wire Jumper.	3198 036 90010
9667	Wire Jumper.	3198 036 90010
9668	Wire Jumper.	3198 036 90010
9669	Wire Jumper.	3198 036 90010
9670	Wire Jumper.	3198 036 90010
9671	Wire Jumper.	3198 036 90010
9672	Coil, 22u, 10%	3198 018 22290
9674	Wire Jumper.	3198 036 90010
9675	Wire Jumper.	3198 036 90010
9676	Wire Jumper.	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper.	3198 036 90010
9680	Wire Jumper.	3198 036 90010
9685	Wire Jumper.	3198 036 90010
9686	Wire Jumper.	3198 036 90010
9687	Wire Jumper.	3198 036 90010
9688	Wire Jumper.	3198 036 90010
9689	Wire Jumper.	3198 036 90010
9690	Wire Jumper.	3198 036 90010
9691	Wire Jumper.	3198 036 90010
9694	Wire Jumper.	3198 036 90010
9695	Wire Jumper.	3198 036 90010
9697	Wire Jumper.	3198 036 90010
9698	Wire Jumper.	3198 036 90010
9699	Wire Jumper.	3198 036 90010
9821	Wire Jumper.	3198 036 90010
9822	Wire Jumper.	3198 036 90010
9825	Wire Jumper.	3198 036 90010
9828	Wire Jumper.	3198 036 90010
9829	Wire Jumper.	3198 036 90010
9831	Wire Jumper.	3198 036 90010
9832	Wire Jumper.	3198 036 90010
9837	Wire Jumper.	3198 036 90010
9838	Wire Jumper.	3198 036 90010
9839	Wire Jumper.	3198 036 90010
9846	Wire Jumper.	3198 036 90010
9847	Wire Jumper.	3198 036 90010
9849	Wire Jumper.	3198 036 90010
9851	Wire Jumper.	3198 036 90010
9856	Wire Jumper.	3198 036 90010
9858	Wire Jumper.	3198 036 90010
9859	Wire Jumper.	3198 036 90010
9860	Wire Jumper.	3198 036 90010
9862	Wire Jumper.	3198 036 90010
9864	Wire Jumper.	3198 036 90010
9865	Wire Jumper.	3198 036 90010
9867	Wire Jumper.	3198 036 90010
9868	Wire Jumper.	3198 036 90010
9869	Wire Jumper.	3198 036 90010
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010
9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9905	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9919	Wire Jumper.	3198 036 90010
9920	Wire Jumper.	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

27ST420L/17 (continued)

9991	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9998	Wire Jumper.	3198 036 90010
CBA	SP/LS Module (Vertical) (ITV).	3139 127 27372
CBA	EPS Module (ITV)	3139 137 22961
CBA	Main Chassis Assembly.	3139 187 26851
CBA	Interface Panel (ITV).	3139 188 04541

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

1002	3 Pin A/V Jack	2422 026 05208
1219	6 Pin Board Connector.	2422 025 10738
2002	Cap, 330p, 50v, Ceramic.	3198 017 03310
2004	Cap, 330p, 50v, Ceramic.	3198 017 03310
3001	Res, 75 ohm, 5%.	3198 021 57590
3002	Res, 150 ohm, 5%	3198 021 51510
3003	Res, 47k, 5%	3198 021 54730
3004	Res, 150 ohm, 5%	3198 021 51510
3005	Res, 47k, 5%	3198 021 54730
6001	Zener Diode, 6.8V.	3198 020 56880
CBA	ITV Front Jack Panel Assembly.	3139 187 26901

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	3135 010 07161
AC03	Anode Lead Spacer (3 Used)	3135 014 04471
AC05	Cabinet Back	3139 124 45241
S AC09	CRT, A68AJB82X11	9301 891 90631
AC10	Customer Control Buttons	3139 124 42141
S AC12	Degaussing Coil.	2422 549 43967
AC15	Holder, Degaussing Coil (4 Used) . . .	3135 013 01641
AC20	Cabinet Front Assembly	3121 237 53571
AC20A	Cabinet Front.	3135 017 07161
AC20B	Chassis Guide (2 Used)	3139 124 31381
AC20C	Light Guide.	3139 124 26461
AC20D	Nameplate.	3135 015 03571
AC20E	Power Button	3139 124 42151
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00401
AC26	EPS Bracket.	3119 107 17241
AC27	ITV Card Bracket	3139 124 37933
AC28	ITV Card Slot Cover.	3139 124 30571

27ST421L/17 - Manual no. 7638

Main Chassis Parts

	Ref	Description	Part No.
		Main Chassis Parts	
	0211	2 Pin Connector	2422 025 16269
	0212	2 Pin Connector	2422 025 16375
	0213	2 Pin Connector	2422 025 16374
	0219	6 Pin Connector	2422 025 12482
	0220	5 Pin Connector	2422 025 04853
	0221	2 Pin Connector	2422 025 15503
	0222	2 Pin Connector	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack	2422 026 04926
	0240	7 Pin Connector	2422 025 11244
	0243	6 Pin Connector	2422 025 04854
	0244	5 Pin Connector	2422 025 04853
	0245	6 Pin Connector	2422 025 04854
S	0254	9 Pin CRT Socket	2422 500 80076
	0259	5 Pin Connector	2422 025 15848
	0262	3 Pin Connector	2422 025 16937
	0267	3 Pin Connector	2412 020 00725
	0280	4 Pin Connector	2422 025 12479
S	1000	Tuner, V+U, PLL	2422 542 90108
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC	2422 086 10914
S	1515	Relay, 5 Amp, 12V	2422 132 07444
	1600	Tact Switch	2422 128 02742
	1601	Tact Switch	2422 128 02742
	1602	Tact Switch	2422 128 02742
	1603	Tact Switch	2422 128 02742
	1606	Tact Switch	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1831	Crystal, Resonator, 18MHz432, 12 Pin, HC49/U A.	2422 543 00842
	2004	Cap, 47n, 10%, 50v, Ceramic	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2123	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2125	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2241	Cap, 1n5, 10%, 50v, Ceramic	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2405	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic	3198 016 03310
	2441	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic	2020 021 91139
	2451	Cap, 15n, 10%, 50v, Polyester	3198 014 01530
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 470n, 5%, 250v, Metalized Polypropylene	2022 333 00086
	2458	Cap, 2u2, 20%, 100v, Electrolytic	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
	2462	Cap, 330n, 10%, 250v, MPP	2022 333 00084
	2463	Cap, 1nf, 10%, 2000v, Ceramic Only with 5445 (JF0501-21835) Layer Wound	2020 558 90487
	2463	Cap, 680p, 10%, 2000v, Ceramic	2020 558 90485
S	2465	Cap, 11n, 5%, 1600v, Polypropylene	2020 301 90251
S	2465	Cap, 12n, 5%, 1600v, Polypropylene Only with 5445 (JF0501-21835) Layer Wound	2222 375 90156
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2601	Cap, 220n, +80/-20%, 25v, Ceramic	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2616	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2618	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic	3198 017 21050
	2691	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2802	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
	2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
	2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
	2834	Cap, 470p, 5%, 50v, Ceramic	3198 016 34710
	2835	Cap, 220p, 5%, 50v, Ceramic	3198 016 32210
	2836	Cap, 1n5, 10%, 50v, Ceramic	3198 017 31520
	2837	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2840	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2841	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090

S = Safety Part   Be sure to use exact replacement part.

27ST421L/17 (continued)

S	Ref	Description	Part No.
	2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2843	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2844	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2846	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
	2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
	2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
	2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610
	2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910
	2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
	2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
	2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2910	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320
	2911	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320
	2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
	3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3121	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3123	Wire Jumper.	3198 036 90010
	3124	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3125	Wire Jumper.	3198 036 90010
	3126	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
	3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
	3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
	3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840
	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
	3452	Res, 5K6, 1%, 3/5W, Metal Film Only wit h 5445 (JF0501-21835) Layer Wound. . .	2312 915 15602
	3452	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3454	Res, 2K, 1%, 3/5W, Metal Film Only with 5445 (JF0501-21835) Layer Wound. . . .	2312 915 12002
	3454	Res, 3K9, 1%, 3/5W, Metal Film	2312 915 13902
S	3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S	3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
	3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
	3470	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
	3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S	3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 33390
	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S	3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
S	3558	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310

S = Safety Part   Be sure to use exact replacement part.

27ST421L/17 (continued)

Ref	Description	Part No.
3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198 021 53320
3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3831	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3843	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4101	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4102	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4104	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4128	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4604	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4876	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4879	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
5001	Coil, 27u, 10%	3198 018 22790
5002	Coil, 820n, 10%.	3198 018 18270
5201	Coil, 6u8, 5%.	3198 018 16880
5202	Wire Jumper.	3198 036 90010
5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
5241	Wire Jumper.	3198 036 90010
5242	Coil, 10u, 5%.	3198 018 11090
5342	Coil, 22u.	2422 535 97333
S 5445	Transformer, LOT (JF0501-21835) Layer Wound	2422 531 02611
S 5445	Transformer, LOT (1342.0043B).	2422 531 02506
5451	Coil, 33u, 10%	3198 018 73390
5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
S 5457	Coil, 42u.	2422 535 94865
5461	Transformer, Signal Driver, SC10027-00	2422 531 02478
5471	Coil, 3u3, 20%	3198 018 73380
5472	Coil, 3u3, 10%	3198 018 23380
5480	Coil, 39u, 10%	2422 535 97336
S 5501	Mains Filter	2422 549 43432
S 5520	Transformer, SS39009-04.	2422 531 02459
5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5561	Coil, 27u, 5%.	2422 535 95366
5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5602	Coil, 5u6, 5%.	3198 018 15680
5603	Coil, 5u6, 5%.	3198 018 15680
5604	Coil, 5u6, 5%.	3198 018 15680
5831	Coil, 6u8, 5%.	3198 018 16880
5832	Coil, 6u8, 5%.	3198 018 16880
5833	Coil, 6u8, 5%.	3198 018 16880
5835	Coil, 12u, 10%	3198 018 31290
6001	Zener Diode, 33 volt	3198 010 23390
6201	Diode, Signal, BAS316.	3198 010 10630
6202	Diode, Signal, BAS316.	3198 010 10630
6206	Zener Diode, 6.8 volt.	3198 020 56880
6331	Diode, Signal, BAV21	3198 010 10070
6332	Diode, Signal, BAS316.	3198 010 10630
6333	Diode, Signal, BAV21	3198 010 10070
6335	Diode, Signal, BAV21	3198 010 10070
6445	Zener Diode, 10 volt	3198 020 51090
6447	Diode, Signal, 1N4148.	3198 010 10010
6448	Zener Diode, 6.2 volt.	9331 668 30133
6449	Diode, Signal, BAV99	3198 010 10620
6460	Diode, Rect, BY228/24.	9340 559 50112
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
6462	Zener Diode, 9.1 volt.	9331 177 80133
6465	Diode, Signal, BAV21	3198 010 10070
6466	Diode, Signal, BAV21	3198 010 10070
6467	Diode, Signal, BAS316.	3198 010 10630
6468	Diode, Signal, BAS316.	3198 010 10630
6469	Diode, Rect, BYV95C.	9335 001 80133
6470	Diode, Signal, BAV99	3198 010 10620
6476	Zener Diode, 15 volt	3198 010 21590
6481	Zener Diode, 5.6 volt.	3198 010 25680
6482	Zener Diode, 9.1 volt.	9331 177 80133
6483	Zener Diode, 33 volt	3198 010 23390
6485	Diode, Rect, BYV95C.	9335 001 80133
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
6487	Diode, Rect, BYV95A.	9335 000 90133
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
6500	Diode, Bridge Rect, GBU6JL-7002. . . .	9322 138 08667
6520	Diode, Rect, BYV95A.	9335 000 90133
6523	Diode, Signal, 1N4148.	3198 010 10010
6524	Diode, Rect, 1N5062.	3198 010 10120
6525	Diode, Rect, 1N5062.	3198 010 10120
6526	Zener Diode, 22 volt	3198 020 52290
6540	Zener Diode, 6.2 volt.	9331 668 30133
6541	Zener Diode, 10 volt	3198 020 51090

S = Safety Part   Be sure to use exact replacement part.

27ST421L/17 (continued)

	Ref	Description	Part No.
	6560	Diode, Rect, BYV29X-500.	9340 555 59127
	6561	Diode, Rect, SB340L-7010	9322 128 18682
	6563	Diode, Signal, BAS316.	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148.	3198 010 10010
	6569	Diode, Signal, BAS316.	3198 010 10630
	6570	Zener Diode, 6.8 volt.	3198 020 56880
	6580	Diode, Signal, BAS316.	3198 010 10630
	6681	Diode, Signal, BAT85	9336 247 60133
	6691	LED, LTL-10234WHCR	9322 185 69682
	6692	IR Receiver.	9322 127 54667
	6831	Diode, Signal, 1N4148.	3198 010 10010
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9588H/N1/3I	4835 310 57626
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7460	Transistor, NPN, BU4508DX.	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2.	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1.	9352 673 56112
	7521	Power FET, FQPF9N50.	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, LE33CZ	9322 106 11676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C16-WBN6.	9322 147 25682
	7802	IC, HEF4053BT.	9333 729 60653
	7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682
	7901	IC, AN7522N PH	9322 181 41682
	9001	Wire Jumper.	3198 036 90010
	9104	Wire Jumper.	3198 036 90010
	9123	Wire Jumper.	3198 036 90010
	9171	Wire Jumper.	3198 036 90010
	9173	Wire Jumper.	3198 036 90010
	9181	Wire Jumper.	3198 036 90010
	9182	Wire Jumper.	3198 036 90010
	9183	Wire Jumper.	3198 036 90010
	9192	Wire Jumper.	3198 036 90010
	9193	Wire Jumper.	3198 036 90010
	9311	Wire Jumper.	3198 036 90010
	9312	Wire Jumper.	3198 036 90010
	9406	Wire Jumper.	3198 036 90010
	9407	Wire Jumper.	3198 036 90010
	9408	Wire Jumper.	3198 036 90010
	9409	Wire Jumper.	3198 036 90010
	9410	Wire Jumper.	3198 036 90010
	9411	Wire Jumper.	3198 036 90010
	9412	Wire Jumper.	3198 036 90010
	9413	Wire Jumper.	3198 036 90010
	9415	Wire Jumper.	3198 036 90010
	9416	Wire Jumper.	3198 036 90010
	9417	Wire Jumper.	3198 036 90010
	9418	Wire Jumper.	3198 036 90010
	9419	Wire Jumper.	3198 036 90010
	9421	Wire Jumper.	3198 036 90010
	9422	Wire Jumper.	3198 036 90010
	9423	Wire Jumper.	3198 036 90010
	9425	Wire Jumper.	3198 036 90010
	9427	Wire Jumper.	3198 036 90010
	9453	Wire Jumper.	3198 036 90010
	9460	Wire Jumper.	3198 036 90010
	9500	Wire Jumper.	3198 036 90010
	9501	Wire Jumper.	3198 036 90010
	9503	Wire Jumper.	3198 036 90010
	9506	Wire Jumper.	3198 036 90010
	9507	Wire Jumper.	3198 036 90010
	9510	Wire Jumper.	3198 036 90010
	9511	Wire Jumper.	3198 036 90010
	9512	Wire Jumper.	3198 036 90010
	9513	Wire Jumper.	3198 036 90010
	9514	Wire Jumper.	3198 036 90010
	9515	Wire Jumper.	3198 036 90010
	9516	Wire Jumper.	3198 036 90010
	9518	Wire Jumper.	3198 036 90010
	9520	Wire Jumper.	3198 036 90010
	9521	Wire Jumper.	3198 036 90010
	9522	Wire Jumper.	3198 036 90010
	9524	Wire Jumper.	3198 036 90010
	9528	Wire Jumper.	3198 036 90010
	9530	Wire Jumper.	3198 036 90010
	9611	Coil, 27u, 10%	3198 018 22790
	9612	Wire Jumper.	3198 036 90010
	9613	Wire Jumper.	3198 036 90010
	9614	Wire Jumper.	3198 036 90010
	9615	Wire Jumper.	3198 036 90010
	9618	Wire Jumper.	3198 036 90010
	9619	Wire Jumper.	3198 036 90010
	9622	Wire Jumper.	3198 036 90010
	9623	Wire Jumper.	3198 036 90010
	9626	Wire Jumper.	3198 036 90010
	9627	Wire Jumper.	3198 036 90010
	9628	Wire Jumper.	3198 036 90010
	9629	Wire Jumper.	3198 036 90010
	9631	Wire Jumper.	3198 036 90010
	9632	Wire Jumper.	3198 036 90010
	9637	Wire Jumper.	3198 036 90010
	9638	Wire Jumper.	3198 036 90010
	9640	Wire Jumper.	3198 036 90010
	9641	Wire Jumper.	3198 036 90010
	9642	Wire Jumper.	3198 036 90010
	9643	Wire Jumper.	3198 036 90010
	9647	Wire Jumper.	3198 036 90010
	9648	Wire Jumper.	3198 036 90010
	9650	Wire Jumper.	3198 036 90010
	9652	Wire Jumper.	3198 036 90010
	9654	Wire Jumper.	3198 036 90010
	9655	Wire Jumper.	3198 036 90010
	9657	Wire Jumper.	3198 036 90010
	9658	Wire Jumper.	3198 036 90010
	9659	Wire Jumper.	3198 036 90010
	9660	Wire Jumper.	3198 036 90010
	9661	Wire Jumper.	3198 036 90010
	9662	Wire Jumper.	3198 036 90010
	9663	Wire Jumper.	3198 036 90010
	9664	Wire Jumper.	3198 036 90010
	9665	Wire Jumper.	3198 036 90010
	9666	Wire Jumper.	3198 036 90010
	9667	Wire Jumper.	3198 036 90010
	9668	Wire Jumper.	3198 036 90010
	9669	Wire Jumper.	3198 036 90010
	9670	Wire Jumper.	3198 036 90010
	9671	Wire Jumper.	3198 036 90010
	9672	Coil, 22u, 10%	3198 018 22290
	9674	Wire Jumper.	3198 036 90010
	9675	Wire Jumper.	3198 036 90010
	9676	Wire Jumper.	3198 036 90010
	9678	Coil, 22u, 10%	3198 018 22290
	9679	Wire Jumper.	3198 036 90010
	9680	Wire Jumper.	3198 036 90010
	9685	Wire Jumper.	3198 036 90010
	9686	Wire Jumper.	3198 036 90010
	9687	Wire Jumper.	3198 036 90010
	9688	Wire Jumper.	3198 036 90010
	9689	Wire Jumper.	3198 036 90010
	9690	Wire Jumper.	3198 036 90010
	9691	Wire Jumper.	3198 036 90010
	9694	Wire Jumper.	3198 036 90010
	9695	Wire Jumper.	3198 036 90010
	9697	Wire Jumper.	3198 036 90010
	9698	Wire Jumper.	3198 036 90010
	9699	Wire Jumper.	3198 036 90010
	9821	Wire Jumper.	3198 036 90010
	9822	Wire Jumper.	3198 036 90010
	9825	Wire Jumper.	3198 036 90010
	9828	Wire Jumper.	3198 036 90010
	9829	Wire Jumper.	3198 036 90010
	9831	Wire Jumper.	3198 036 90010
	9832	Wire Jumper.	3198 036 90010
	9837	Wire Jumper.	3198 036 90010
	9838	Wire Jumper.	3198 036 90010
	9839	Wire Jumper.	3198 036 90010
	9846	Wire Jumper.	3198 036 90010
	9847	Wire Jumper.	3198 036 90010
	9849	Wire Jumper.	3198 036 90010
	9851	Wire Jumper.	3198 036 90010
	9856	Wire Jumper.	3198 036 90010
	9858	Wire Jumper.	3198 036 90010
	9859	Wire Jumper.	3198 036 90010
	9860	Wire Jumper.	3198 036 90010
	9862	Wire Jumper.	3198 036 90010
	9864	Wire Jumper.	3198 036 90010
	9865	Wire Jumper.	3198 036 90010
	9867	Wire Jumper.	3198 036 90010
	9868	Wire Jumper.	3198 036 90010
	9869	Wire Jumper.	3198 036 90010
	9873	Wire Jumper.	3198 036 90010
	9874	Wire Jumper.	3198 036 90010
	9875	Wire Jumper.	3198 036 90010
	9877	Wire Jumper.	3198 036 90010
	9901	Wire Jumper.	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

27ST421L/17 (continued)

```
9902   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
9903   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
9904   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
9905   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
9911   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
9913   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
9914   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
9915   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
9919   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
9920   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
9991   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
9996   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
9998   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
CBA    SP/LS Module (Vertical) (ITV). . . . .  3139 127 27372
CBA    EPS Module (ITV) . . . . . . . . . . .  3139 137 22961
CBA    Main Chassis Assembly. . . . . . . . .  3139 187 26851
CBA    Interface Panel (ITV). . . . . . . . .  3139 188 04541
```

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

```
1002   3 Pin A/V Jack . . . . . . . . . . . .  2422 026 05208
1219   6 Pin Board Connector. . . . . . . . .  2422 025 10738
2002   Cap, 330p, 50v, Ceramic. . . . . . . .  3198 017 03310
2004   Cap, 330p, 50v, Ceramic. . . . . . . .  3198 017 03310
3001   Res, 75 ohm, 5%. . . . . . . . . . . .  3198 021 57590
3002   Res, 150 ohm, 5% . . . . . . . . . . .  3198 021 51510
3003   Res, 47k, 5% . . . . . . . . . . . . .  3198 021 54730
3004   Res, 150 ohm, 5% . . . . . . . . . . .  3198 021 51510
3005   Res, 47k, 5% . . . . . . . . . . . . .  3198 021 54730
6001   Zener Diode, 6.8V. . . . . . . . . . .  3198 020 56880
CBA    ITV Front Jack Panel Assembly. . . . .  3139 187 26901
```

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

```
S AC01   AC Cord. . . . . . . . . . . . . . . .  3135 010 07161
  AC03   Anode Lead Spacer (3 Used) . . . . . .  3135 014 04471
  AC05   Cabinet Back . . . . . . . . . . . . .  3139 124 45241
S AC09   CRT, A68AJB82X11 . . . . . . . . . . .  9301 891 90631
  AC10   Customer Control Buttons . . . . . . .  3139 124 45731
S AC12   Degaussing Coil. . . . . . . . . . . .  2422 549 43967
  AC15   Holder, Degaussing Coil (4 Used) . . .  3135 013 01641
  AC20   Cabinet Front Assembly . . . . . . . .  3121 237 53581
  AC20A  Cabinet Front. . . . . . . . . . . . .  3139 177 62021
  AC20B  Chassis Guide (2 Used) . . . . . . . .  3139 124 31381
  AC20C  Light Guide. . . . . . . . . . . . . .  3139 124 26461
  AC20D  Nameplate. . . . . . . . . . . . . . .  3135 015 03571
  AC20E  Power Button . . . . . . . . . . . . .  3139 124 45741
  AC20H  Speaker, 16 ohm, 5W (2 Used) . . . . .  2422 264 00401
  AC26   EPS Bracket. . . . . . . . . . . . . .  3119 107 17241
  AC27   ITV Card Bracket . . . . . . . . . . .  3139 124 37933
  AC28   ITV Card Slot Cover. . . . . . . . . .  3139 124 30571
```

28PW6532/85R - Manual no. 7638

Main Chassis Parts

	Ref	Description	Part No.
		Main Chassis Parts	
	0127	Socket Fuse	2422 088 00271
	0136	IC-Spring	3104 301 22081
	0137	Spring	3139 121 24583
	0138	IC-Spring	3104 301 22081
	0139	Spring for Bracket	3122 121 24786
	0140	Spring	3139 121 24583
	0141	IC-Spring	3104 301 22081
	0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421
	0153	Cable, DIPMate	3104 301 08381
	0211	2 Pin Connector	2422 025 16374
	0212	2 Pin Connector	2422 025 16375
	0214	5 Pin Connector	2422 025 12481
	0219	6 Pin Connector	2422 025 12482
	0220	5 Pin Connector	2422 025 04853
	0221	2 Pin Connector	2422 025 15503
	0222	2 Pin Connector	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack	2422 026 04926
	0239	3 Pin Connector	2422 025 16382
	0243	6 Pin Connector	2422 025 04854
	0244	5 Pin Connector	2422 025 04853
	0245	6 Pin Connector	2422 025 04854
	0246	5 Pin Connector	2422 025 12481
	0267	3 Pin Connector	2412 020 00725
	0268	3 Pin Connector	2412 020 00725
	0269	Jack	2422 026 05182
	0278	3 Pin Connector	2412 020 00725
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC	2422 086 10914
	1660	Crystal, 12MHz000	2422 543 01203
	1831	Crystal, Resonator, 18MHz432, 12 Pin, HC49/U A	2422 543 00842
	1851	3 Pin Connector	2412 020 00725
	2004	Cap, 47n, 10%, 50v, Ceramic	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic	2238 786 19852
	2172	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2173	Cap, 220p, 5%, 50v, Ceramic	3198 016 32210
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2209	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2216	Cap, 2u2, 20%, 10v, Electrolytic	2020 012 93728
	2217	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2241	Cap, 1n5, 10%, 50v, Ceramic	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2243	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2246	Cap, 10n, 10%, 100v, Metalized Polyeste	2222 365 85103
	2247	Cap, 2u2, 20%, 10v, Electrolytic	2020 012 93728
	2248	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2360	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
	2362	Cap, 220p, 5%, 50v, Ceramic	3198 016 32210
	2364	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2365	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2366	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2367	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
	2368	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2369	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
	2372	Cap, 10u, 20%, 160v, Electrolytic	2020 012 93318
	2373	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
	2375	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720
	2378	Cap, 220p, 5%, 50v, Ceramic	3198 019 02210
	2379	Cap, 10u, 20%, 100v, Electrolytic	3198 025 71090
	2380	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720
	2381	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
	2401	Cap, 2u2, 20%, 100v, Electrolytic	2022 031 00138
	2402	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic	3198 016 03310
	2420	Cap, 1u, +80/-20%, 16v, Ceramic	3198 017 21050
	2421	Cap, 470p, 5%, 50v, Ceramic	3198 016 04710
	2441	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2448	Cap, 100p, 10%, 1000v, Ceramic	3198 019 51010
	2450	Cap, 47u, 20%, 160v, Electrolytic	2022 031 00103
	2451	Cap, 22n, 10%, 50v, Polyester	3198 014 02230
	2454	Cap, 68n, 5%, 250v, Metalized Polypropylene	2222 479 90133
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 470n, 5%, 250v, Metalized Polypropylene	2222 479 90023
	2460	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
	2463	Cap, 680p, 10%, 2000v, Ceramic	2020 558 90485
	2465	Cap, 12n, 5%, 1600v, Polypropylene	2222 375 90156
	2467	Cap, 9n1, 5%, 1000v, Polypropylene	2222 375 90424
	2468	Cap, 9n1, 5%, 1000v, Polypropylene	2222 375 90424
	2469	Cap, 470n, 5%, 250v, Metalized Polypropylene	2222 479 90023
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2038 035 13301
	2481	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic	2022 031 00137
	2486	Cap, 470u, 20%, 16v, Electrolytic	2022 031 00139
	2487	Cap, 47u, 20%, 50v, Electrolytic	2038 035 13508
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2022 031 00144
	2489	Cap, 470u, 20%, 16v, Electrolytic	2022 031 00139
	2490	Cap, 2u2, 20%, 100v, Electrolytic	2022 031 00138
	2491	Cap, 1n, 10%, 500v, Ceramic	3198 019 41020
	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2222 336 29148
	2501	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2503	Cap, 330u, 20%, 400v, Electrolytic	2020 024 90592
	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
	2509	Cap, 100n, 20%, 275v, Metalized Polypropylene	2222 336 29144
S	2515	Cap, 1n5, 20%, 50v, Ceramic	2020 554 90128
	2520	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030

S = Safety Part   Be sure to use exact replacement part.

28PW6532/85R (continued)

Ref	Description	Part No.
2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
2561	Cap, 100u, 20%, 160v, Electrolytic . .	2020 021 91654
2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2564	Cap, 2u2, 20%, 25v, Electrolytic . . .	2020 021 91374
2567	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
2568	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2580	Cap, 47u, 20%, 16v, Electrolytic . . .	3198 028 24790
2581	Cap, 22u, 20%, 50v, Electrolytic . . .	3198 025 52290
2590	Cap, 330n, +80/-20%, 25v, Ceramic. . .	2222 910 19856
2601	Cap, 220n, +80/-20%, 25v, Ceramic. . .	3198 023 22240
2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
2604	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2608	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2611	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050
2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2810	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
2837	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
2840	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2841	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2843	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2844	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2846	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2851	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2853	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
2861	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2902	Cap, 1000u, 20%, 25v, Electrolytic . .	3198 026 31020
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202
3172	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
3180	Res, 68K, 5%, 1/16W, Metalized Glass .	3198 021 36830
3181	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
3190	Res, 68K, 5%, 1/16W, Metalized Glass .	3198 021 36830
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3206	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3250	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3360	Res, 39K, 5%, 1/16W, Metalized Glass .	3198 021 33930
3361	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3362	Res, 39K, 5%, 1/16W, Metalized Glass .	3198 021 33930
3363	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3367	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3368	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
3369	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3373	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3374	Res, 2R2, 5%, 1/6W, Carbon Film. . . .	3198 011 02280
3375	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3376	Res, 68K, 5%, 1/6W, Carbon Film. . . .	3198 011 06830
3378	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3380	Res, 68K, 5%, 1/16W, Metalized Glass .	3198 021 36830
3381	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3383	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3384	Res, 2R2, 5%, 1/6W, Carbon Film. . . .	3198 011 02280
3385	Res, 10K, 5%, 5W, Metal Film	2322 257 41103
S 3386	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
3403	Res, 100K, 5%, 1/6W, Carbon Film . . .	3198 011 01040
3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3407	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3408	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3442	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3443	Res, 1M, 5%, 1/10W, Metalized Glass. .	3198 021 51050
3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210

S = Safety Part   Be sure to use exact replacement part.

28PW6532/85R (continued)

	Ref.	Description	Part No.
	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film	3198 011 06890
	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
S	3451	Res, 10 ohm, 5%, 1/3W, Metal Film.	2306 204 03109
	3452	Res, 47K, 1%, 3/5W, Metal Film	2312 915 14703
	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3454	Res, 15K, 1%, 3/5W, Metal Film	2312 915 11503
S	3455	Res, 6R8, 5%, 1 1/3W, Metal Film	3198 012 26880
	3456	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3457	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S	3459	Res, 15K, 5%, 1 1/3W, Metal Film	3198 012 21530
	3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
	3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320
	3470	Res, 470K, 5%, 1/10W, Metalized Glass.	3198 021 54740
	3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3473	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
	3479	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
	3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2122 101 02083
	3481	Res, 18K, 1%, 3/5W, Metal Film	2312 915 11803
	3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
S	3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	3198 012 32290
	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3489	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
	3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3491	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
	3492	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
	3496	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
	3497	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
	3498	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
S	3504	Res, PTC, 9R 220V.	2120 661 00024
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass.	2322 242 13155
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
	3521	Res, 22 ohm, 5%, 1/6W, Carbon Film	3198 011 02290
	3522	Res, 330K, 1%, 1/8W, Metalized Glass	2322 734 63304
S	3523	Res, 47 ohm, 5%, 1/3W, Metal Film.	2306 204 03479
	3524	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3526	Res, 0R15, 5%, 3/5W, Metal Film.	3198 012 11570
	3527	Res, 0R22, 5%, 3/5W, Metal Film.	3198 012 12270
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass.	2322 734 64702
	3545	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
	3548	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3561	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
	3562	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
	3563	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
S	3565	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
S	3591	Res, 10 ohm, 5%, 1/3W, Metal Film.	2306 204 03109
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3614	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720
	3615	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3617	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720
	3618	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820
	3619	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3831	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3832	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3843	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
	3851	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
	3852	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3901	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
	3903	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3905	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3909	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
	3910	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
	3912	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4311	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4312	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4313	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4837	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4838	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020

S = Safety Part   Be sure to use exact replacement part.

28PW6532/85R (continued)

```
  4925   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90020
  4982   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90020
  5001   Coil, 5u6. . . . . . . . . . . . . . .  3198 018 25680
  5002   Coil, 820n, 10%. . . . . . . . . . . .  3198 018 18270
  5201   Coil, 6u8, 5%. . . . . . . . . . . . .  3198 018 16880
  5204   Fixed, Inductor, 100MHz, 80 ohm. . . .  3198 018 90020
  5205   Fixed, Inductor, 100MHz, 80 ohm. . . .  3198 018 90020
  5206   Fixed, Inductor, 100MHz, 80 ohm. . . .  3198 018 90020
  5242   Coil, 10u, 5%. . . . . . . . . . . . .  3198 018 11090
  5341   Coil, 22u. . . . . . . . . . . . . . .  2422 535 97333
  5342   Coil, 27u. . . . . . . . . . . . . . .  2422 535 97334
  5376   Fixed, Inductor, 100MHz,  50R. . . . .  3198 018 90010
  5400   Coil, 11u7 . . . . . . . . . . . . . .  2422 535 91027
  5451   Coil, 22u, 10% . . . . . . . . . . . .  3198 018 72290
  5452   Fixed, Inductor, 100MHz, 80 ohm. . . .  3198 018 90020
  5461   Transformer, Signal Driver, SC10015-00  2422 531 02477
  5464   Coil, Bridge, C946-01 Y. . . . . . . .  2422 531 02419
  5471   Coil, 6u8, 20% . . . . . . . . . . . .  3198 018 76880
  5472   Coil, 3u3, 10% . . . . . . . . . . . .  3198 018 23380
  5480   Coil, 39u, 10% . . . . . . . . . . . .  2422 535 97336
S 5500   Mains Filter . . . . . . . . . . . . .  2422 549 43567
S 5501   Mains Filter . . . . . . . . . . . . .  2422 549 43432
  5521   Fixed, Inductor, 100MHz,  50R. . . . .  3198 018 90010
  5560   Fixed, Inductor, 100MHz,  50R. . . . .  3198 018 90010
  5561   Coil, 27u, 5%. . . . . . . . . . . . .  2422 535 95366
  5562   Fixed, Inductor, 100MHz,  50R. . . . .  3198 018 90010
  5564   Fixed, Inductor, 100MHz,  50R. . . . .  3198 018 90010
  5602   Coil, 5u6, 5%. . . . . . . . . . . . .  3198 018 15680
  5603   Coil, 5u6, 5%. . . . . . . . . . . . .  3198 018 15680
  5604   Coil, 5u6, 5%. . . . . . . . . . . . .  3198 018 15680
  5831   Coil, 6u8, 5%. . . . . . . . . . . . .  3198 018 16880
  5832   Coil, 6u8, 5%. . . . . . . . . . . . .  3198 018 16880
  5833   Coil, 6u8, 5%. . . . . . . . . . . . .  3198 018 16880
  5835   Coil, 12u, 10% . . . . . . . . . . . .  3198 018 31290
  6001   Zener Diode, 33 volt . . . . . . . . .  3198 010 23390
  6150   Diode, Signal, BAS316. . . . . . . . .  3198 010 10630
  6201   Diode, Signal, BAS316. . . . . . . . .  3198 010 10630
  6202   Diode, Signal, BAS316. . . . . . . . .  3198 010 10630
  6206   Zener Diode, 6.8 volt. . . . . . . . .  3198 020 56880
  6331   Diode, Signal, BAV21 . . . . . . . . .  3198 010 10070
  6332   Diode, Signal, BAS316. . . . . . . . .  3198 010 10630
  6333   Diode, Signal, BAV21 . . . . . . . . .  3198 010 10070
  6335   Diode, Signal, BAV21 . . . . . . . . .  3198 010 10070
  6365   Diode, Signal, BAT85 . . . . . . . . .  9336 247 60133
  6366   Diode, Signal, BAT85 . . . . . . . . .  9336 247 60133
  6367   Diode, Signal, BAV99 . . . . . . . . .  3198 010 10620
  6400   Res, 1K, 1%, 3/5W, Metal Film. . . . .  2312 915 11002
  6401   Zener Diode, 68 volt . . . . . . . . .  3198 010 26890
  6445   Zener Diode, 10 volt . . . . . . . . .  3198 020 51090
  6447   Diode, Signal, 1N4148. . . . . . . . .  3198 010 10010
  6449   Diode, Signal, BAV99 . . . . . . . . .  3198 010 10620
  6452   Diode, Signal, BAS316. . . . . . . . .  3198 010 10630
  6453   Zener Diode, 5.6 volt. . . . . . . . .  3198 020 55680
  6460   Diode, Rect, DG3-7005L . . . . . . . .  9336 436 10682
  6461   Diode, Rect, RGP30J-L7004. . . . . . .  9338 617 60682
  6463   Zener Diode, 12 volt . . . . . . . . .  3198 020 51290
  6465   Diode, Signal, BAV21 . . . . . . . . .  3198 010 10070
  6466   Diode, Signal, BAV21 . . . . . . . . .  3198 010 10070
  6467   Diode, Signal, BAS316. . . . . . . . .  3198 010 10630
  6468   Diode, Signal, BAS316. . . . . . . . .  3198 010 10630
  6469   Diode, Rect, BYV95C. . . . . . . . . .  9335 001 80133
  6470   Diode, Signal, BAV99 . . . . . . . . .  3198 010 10620
  6476   Zener Diode, 15 volt . . . . . . . . .  3198 010 21590
  6481   Zener Diode, 5.6 volt. . . . . . . . .  3198 010 25680
  6482   Zener Diode, 9.1 volt. . . . . . . . .  9331 177 80133
  6483   Zener Diode, 33 volt . . . . . . . . .  3198 010 23390
  6485   Diode, Rect, BYV95C. . . . . . . . . .  9335 001 80133
  6486   Diode, Rect, EGP20DL-5100. . . . . . .  9322 164 42682
  6487   Diode, Rect, BYV95A. . . . . . . . . .  9335 000 90133
  6488   Diode, Rect, EGP20DL-5100. . . . . . .  9322 164 42682
  6490   Diode, Rect, BYV95C. . . . . . . . . .  9335 001 80133
  6500   Diode, Bridge Rect, GBU4JL-7002. . . .  9322 132 55667
  6520   Diode, Rect, BYV95A. . . . . . . . . .  9335 000 90133
  6523   Diode, Signal, 1N4148. . . . . . . . .  3198 010 10010
  6524   Diode, Rect, 1N5062. . . . . . . . . .  3198 010 10120
  6525   Diode, Rect, 1N5062. . . . . . . . . .  3198 010 10120
  6526   Zener Diode, 22 volt . . . . . . . . .  3198 020 52290
  6540   Zener Diode, 6.2 volt. . . . . . . . .  9331 668 30133
  6541   Zener Diode, 9.1 volt. . . . . . . . .  9322 150 08685
  6560   Diode, Rect,  BYV29X-500 . . . . . . .  3139 120 52021
  6563   Diode, Signal, BAS316. . . . . . . . .  3198 010 10630
  6565   Diode, Signal, BAV70 . . . . . . . . .  9331 849 10215
  6566   Diode, Signal, 1N4148. . . . . . . . .  3198 010 10010
  6567   Zener Diode, 4.7 volt. . . . . . . . .  3198 020 54780
  6569   Diode, Signal, BAS316. . . . . . . . .  3198 010 10630
  6570   Zener Diode, 6.2 volt. . . . . . . . .  9322 163 91685
  6580   Diode, Signal, BAS316. . . . . . . . .  3198 010 10630
  6582   Diode, Rect, STPS10L60D. . . . . . . .  9322 175 70667
  6831   Diode, Signal, 1N4148. . . . . . . . .  3198 010 10010
  6901   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90020
  6904   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90020
  7000   IC, TDA8941P/N1. . . . . . . . . . . .  9352 628 51112
  7101   Transistor, NPN, BC847B(COL) . . . . .  3198 010 42030
  7102   Transistor, PNP, BC857B(COL) . . . . .  3198 010 42150
  7103   Transistor, NPN, BC847B(COL) . . . . .  3198 010 42030
  7201   Transistor, NPN, BC847B(COL) . . . . .  3198 010 42030
  7204   Transistor, PNP, BC857B(COL) . . . . .  3198 010 42150
  7205   Transistor, PNP, BC857B(COL) . . . . .  3198 010 42150
  7360   Transistor, NPN, BC847B(COL) . . . . .  3198 010 42030
  7366   Transistor, PNP, 2SA965. . . . . . . .  9322 167 18676
  7369   Transistor, PNP, BC857B(COL) . . . . .  3198 010 42150
  7373   Transistor, PNP, BC327-25(COL) . . . .  3198 020 43430
  7380   Transistor, NPN, 2SC2235 . . . . . . .  9322 167 19676
  7382   Transistor, NPN, BC337-25(COL) . . . .  3198 020 43530
  7400   Power FET, STP3NC60FP. . . . . . . . .  9322 157 37687
  7441   Transistor, PNP, BC857B(COL) . . . . .  3198 010 42150
  7443   Transistor, PNP, BC557B(COL) . . . . .  3198 020 40110
  7444   Transistor, NPN, BC547B(COL) . . . . .  3198 020 40030
  7450   Transistor, PNP, PDTA114ET . . . . . .  3198 010 44010
  7460   Transistor, NPN, BU4508DX. . . . . . .  9340 550 92127
  7461   Transistor, NPN, BC337-25(COL) . . . .  3198 020 43530
  7462   Transistor, NPN, PDTC143ZT . . . . . .  9340 547 00215
  7463   Transistor, PNP, BC327-25(COL) . . . .  3198 020 43430
  7471   IC, TDA8359J/N2. . . . . . . . . . . .  9352 701 64112
  7480   Transistor, NPN, BD135 . . . . . . . .  3198 020 41010
  7482   Transistor, NPN, BD135 . . . . . . . .  3198 020 41010
  7520   IC, TEA1507P/N1. . . . . . . . . . . .  9352 673 56112
  7522   Transistor, NPN, BC847B(COL) . . . . .  3198 010 42030
  7540   Transistor, NPN, BC547B(COL) . . . . .  3198 020 40030
  7541   Transistor, NPN, PDTC114ET . . . . . .  9340 310 10215
  7542   Transistor, PNP, BC857B(COL) . . . . .  3198 010 42150
  7560   IC, L78L33ACZ. . . . . . . . . . . . .  9322 134 92676
  7561   Transistor, NPN, PDTC143ZT . . . . . .  9340 547 00215
  7580   Transistor, PNP, BC857B(COL) . . . . .  3198 010 42150
  7602   IC, M24C08-WBN6. . . . . . . . . . . .  9322 154 38682
  7606   Transistor, NPN, PDTC143ZT . . . . . .  9340 547 00215
  7802   IC, HEF4053BT. . . . . . . . . . . . .  9333 729 60653
  7851   Transistor, NPN, BC847B(COL) . . . . .  3198 010 42030
  7901   IC, AN7580 . . . . . . . . . . . . . .  9322 166 29682
  7903   Transistor, NPN, BC847B(COL) . . . . .  3198 010 42030
  9611   Coil, 27u, 10% . . . . . . . . . . . .  3198 018 22790
  9672   Coil, 22u, 10% . . . . . . . . . . . .  3198 018 22290
  9678   Coil, 22u, 10% . . . . . . . . . . . .  3198 018 22290
  CBA    Main Chassis Assembly. . . . . . . . .  3141 058 58011
```

Channel One Card Parts
Channel One Card Parts

2D 3 Line Comb Filter Parts
2D 3 Line Comb Filter Parts

DAF Panel Parts
DAF Panel Parts

DVD Eject Panel Parts
DVD Eject Panel Parts

DVD Interface Panel Parts
DVD Interface Panel Parts

Front Interface Panel Parts
Front Interface Panel Parts

```
S 0211   2 Pin Connector. . . . . . . . . . . .  2422 025 16268
S 0212   2 Pin Connector. . . . . . . . . . . .  2422 025 16559
  0214   5 Pin Connector. . . . . . . . . . . .  2422 025 06353
  0231   Switch, Mains, (Power) 2 Pole,  8/128A  2422 128 02972
  2691   Cap, 220u, 20%, 25v, Electrolytic. . .  3198 025 32210
  2692   Cap, 47n, 10%, 25v, Ceramic. . . . . .  3198 023 04730
  2693   Cap, 47n, 10%, 25v, Ceramic. . . . . .  3198 023 04730
  2694   Cap, 47n, 10%, 25v, Ceramic. . . . . .  3198 023 04730
  2695   Cap, 47n, 10%, 25v, Ceramic. . . . . .  3198 023 04730
  2698   Cap, 100n, 10%, 50v, Polyester . . . .  3198 014 01040
S 3500   Res, 3M3, 5%, 1/2W, Metalized Glass. .  2322 242 13335
S 3501   Res, 3M3, 5%, 1/2W, Metalized Glass. .  2322 242 13335
  3691   Res, 330 ohm, 5%, 1/6W, Carbon Film. .  3198 011 03310
  3693   Res, 220 ohm, 5%, 1/6W, Carbon Film. .  3198 011 02210
  6692   IR Receiver, TSOP1836UH3V. . . . . . .  9322 127 54667
  CBA    Front Interface Panel Assembly . . . .  3139 187 25551
```

ITV Front Jack Panel Parts
ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)
Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)
Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts
Side Jack Panel Parts

```
  0232   Headphone Jack . . . . . . . . . . . .  2422 026 04747
  0250   A/V Jack . . . . . . . . . . . . . . .  2422 026 04815
```

S = Safety Part   Be sure to use exact replacement part.

28PW6532/85R (continued)

```
  0251   6 Pin Connector. . . . . . . . . . . .  2422 025 12482
  0254   5 Pin Connector. . . . . . . . . . . .  2422 025 12481
  0255   4 Pin Connector. . . . . . . . . . . .  2422 025 12479
  2171   Cap, 470p, 5%, 50v, Ceramic. . . . . .  3198 019 14710
  2172   Cap, 470p, 5%, 50v, Ceramic. . . . . .  3198 019 14710
  2173   Cap, 470p, 5%, 50v, Ceramic. . . . . .  3198 019 14710
  2174   Cap, 470p, 5%, 50v, Ceramic. . . . . .  3198 019 14710
  2176   Cap, 470p, 5%, 50v, Ceramic. . . . . .  3198 019 14710
  2177   Cap, 10u, 20%, 50v, Electrolytic . . .  3198 025 51090
  2178   Cap, 470p, 5%, 50v, Ceramic. . . . . .  3198 019 14710
  2179   Cap, 10u, 20%, 50v, Electrolytic . . .  3198 025 51090
  3150   Res, 47k, 5%, 1/6W, Carbon . . . . . .  3198 011 04730
  3151   Res, 150 ohm, 5%, 1/6W, Carbon . . . .  3198 011 01510
  3152   Res, 47k, 5%, 1/6W, Carbon . . . . . .  3198 011 04730
  3153   Res, 150 ohm, 5%, 1/6W, Carbon . . . .  3198 011 01510
  3156   Res, 120 ohm, 5%, 1/6W, Carbon Film. .  3198 011 01210
  3157   Res, 120 ohm, 5%, 1/6W, Carbon Film. .  3198 011 01210
  6161   Zener Diode, 6.8 volt. . . . . . . . .  3198 010 26880
  CBA    Side Jack Panel Assembly . . . . . . .  3139 187 16211
```

Subwoofer Panel Parts

```
         Subwoofer Panel Parts
  1901   Connector, 3 Pin . . . . . . . . . . .  2422 025 09191
  1902   Cinch Socket . . . . . . . . . . . . .  2422 026 05156
  2901   Cap, 100u, 20%, 25v, Electrolytic. . .  3198 029 31010
  2902   Cap, 100p, 10%, 50v, Ceramic . . . . .  3198 019 11010
  3901   Res, 150 ohm, 5%, 1/6W, Carbon Film. .  3198 011 01510
  CBA    Subwoofer Panel Assembly . . . . . . .  3139 187 11641
```

Top Control Panel Parts

```
         Top Control Panel Parts
  0215   3 Pin Connector. . . . . . . . . . . .  2422 025 16601
  1091   Tact Switch. . . . . . . . . . . . . .  2422 128 02742
  1092   Tact Switch. . . . . . . . . . . . . .  2422 128 02742
  1093   Tact Switch. . . . . . . . . . . . . .  2422 128 02742
  1094   Tact Switch. . . . . . . . . . . . . .  2422 128 02742
  3091   Res, 560 ohm, 5%, Metalized Glass. . .  3198 021 35610
  3092   Res, 390 ohm, 5%, 1/16W, Metalized Glas 3198 021 33910
  3093   Res, 560 ohm, 5%, Metalized Glass. . .  3198 021 35610
  3094   Res, 390 ohm, 5%, 1/16W, Metalized Glas 3198 021 33910
  3095   Res, 3K3, 5%, 1/16W, Metalized Glass .  3198 021 33320
  3096   Res, 1K5, 5%, 1/16W, Metalized Glass .  3198 021 31520
  4085   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90020
  4089   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90030
  4090   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90030
  6091   Diode, Signal. . . . . . . . . . . . .  9340 453 90115
  CBA    Top Control Panel Assembly . . . . . .  3139 187 15841
```

Cabinet & Accessory Parts

```
         Cabinet & Accessory Parts
S AC01   AC Cord. . . . . . . . . . . . . . . .  3139 128 75281
  AC03   Anode Lead Spacer (3 Used) . . . . . .  3135 014 04471
  AC04   Batteries for Remote Control Transmitte 9299 000 65263
  AC05   Cabinet Back . . . . . . . . . . . . .  3139 124 44061
  AC06   Cabinet Back Screw Cover (2 Used). . .  3139 124 43031
  AC07   Canceller Coil . . . . . . . . . . . .  3128 138 60581
  AC08   Chassis Tray . . . . . . . . . . . . .  3139 124 31325
S AC09   CRT, W66ERF022X013 . . . . . . . . . .  9301 888 10314
S AC12   Degaussing Coil. . . . . . . . . . . .  3106 101 02381
  AC13   Front Interface Panel Bracket. . . . .  3139 124 32523
  AC15   Holder, Degaussing Coil (4 Used) . . .  3135 013 01641
  AC17   Owner's Manual . . . . . . . . . . . .  3121 235 21141
  AC18   Quick Use Guide. . . . . . . . . . . .  3121 233 44521
  AC19   Side Jack Panel Bracket. . . . . . . .  3139 124 37662
  AC20   Cabinet Front Assembly . . . . . . . .  3121 237 53381
  AC20A  Cabinet Front. . . . . . . . . . . . .  3139 124 44141
  AC20C  Light Guide. . . . . . . . . . . . . .  3139 124 39701
  AC20D  Nameplate. . . . . . . . . . . . . . .  3141 050 00161
  AC20E  Power Button . . . . . . . . . . . . .  3139 138 10681
  AC20H  Speaker, 8 ohm, 10W (2 Used) . . . . .  3139 128 76081
  AC20J  Top Control Assembly . . . . . . . . .  3139 177 56381
  REMOTE Remote Control Transmitter, RC19335010/
         01. . . . . . . . . . . . . . . . . . . 3139 238 02791
```

29DV6931/85R - Manual no. 7638

Main Chassis Parts

Main Chassis Parts

S	Ref	Description	Part No.
	0130	Bead, Ferrite, 100MHz	2422 549 45808
	0211	2 Pin Connector.	2422 025 16374
	0212	2 Pin Connector.	2422 025 16375
	0214	5 Pin Connector.	2422 025 12481
	0217	3 Pin Connector.	2412 020 00725
	0219	6 Pin Connector.	2422 025 12482
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0222	2 Pin Connector.	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0229	7 Pin Connector.	2422 025 11244
	0239	3 Pin Connector.	2422 025 16382
	0240	4 Pin Connector.	2422 025 12479
	0243	6 Pin Connector.	2422 025 04854
	0244	5 Pin Connector.	2422 025 04853
	0245	6 Pin Connector.	2422 025 04854
	0246	5 Pin Connector.	2422 025 12481
	0251	4 Pin Connector.	2422 025 15847
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector.	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U, PLL	2422 542 90108
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1660	Crystal, 12MHz000	2422 543 01203
	1810	6 Pin Connector.	2422 025 15849
	1831	Crystal, Resonator, 18MHz432, 12 Pin, HC49/U A.	2422 543 00842
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
	2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
	2451	Cap, 22n, 10%, 50v, Polyester.	3198 014 02230
	2452	Cap, 180p, 5%, 50v, Ceramic.	3198 016 01810
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 360n, 5%, 250v, Metalized Polypropylene.	2022 333 00163
	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
S	2463	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene	2222 479 90042
S	2465	Cap, 15n, 5%, 1600v, Polypropylene	2020 301 90255
	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
	2468	Cap, 27n, 10%, 400v, Polyester	2222 347 90232
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 120n, 5%, 250v, Metalized Polypropylene.	2222 479 90051
	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91374
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2604	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250

S = Safety Part   Be sure to use exact replacement part.

29DV6931/85R (continued)

Ref	Description	Part No.
2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
2837	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
2840	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2841	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2843	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2844	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2846	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2902	Cap, 1000u, 20%, 25v, Electrolytic . .	3198 026 31020
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
3403	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102
3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3470	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3471	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3472	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3473	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2120 101 74158
3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S 3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 32290
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3507	Surge Protector.	2422 549 43073
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S 3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370

S = Safety Part   Be sure to use exact replacement part.

29DV6931/85R (continued)

S	Ref	Description	Part No.
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
S	3591	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3831	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3843	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3901	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198 021 36820
	3903	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3905	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3909	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3910	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3912	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4837	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4838	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5202	Wire Jumper.	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5241	Wire Jumper.	3198 036 90010
	5242	Coil, 10u, 5%.	3198 018 11090
	5341	Coil, 22u.	2422 535 97333
	5342	Coil, 3u9, 10%	2422 535 97323
	5401	Coil, 1mH, 10%	3198 018 71020
S	5445	Transformer, LOT	2422 531 02574
	5451	Coil, 22u, 10%	3198 018 72290
	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
S	5457	Coil, 25u.	2422 535 91028
	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
	5463	Coil, Choke.	3128 138 37021
	5471	Coil, 6u8, 20%	3198 018 76880
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 47u, 10%	2422 535 97337
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS42202-00 B.	2422 531 02562
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5831	Coil, 6u8, 5%.	3198 018 16880
	5832	Coil, 6u8, 5%.	3198 018 16880
	5833	Coil, 6u8, 5%.	3198 018 16880
	5835	Coil, 12u, 10%	3198 018 31290
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316.	3198 010 10630
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630
	6206	Zener Diode, 6.8 volt.	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316.	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002
	6401	Zener Diode, 47 volt	3198 010 24790
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148.	3198 010 10010
	6448	Zener Diode, 6.2 volt.	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6460	Diode, Rect, BY228/24.	9340 559 50112
	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316.	3198 010 10630
	6468	Diode, Signal, BAS316.	3198 010 10630
	6469	Diode, Rect, BYV95C.	9335 001 80133

S = Safety Part   Be sure to use exact replacement part.

29DV6931/85R (continued)

Ref	Description	Part No.
6470	Diode, Signal, BAV99	3198 010 10620
6476	Zener Diode, 15 volt	3198 010 21590
6481	Zener Diode, 5.6 volt.	3198 010 25680
6482	Zener Diode, 9.1 volt.	9331 177 80133
6483	Zener Diode, 33 volt	3198 010 23390
6485	Diode, Rect, BYV95C.	9335 001 80133
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
6487	Diode, Rect, BYV95A.	9335 000 90133
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
6490	Diode, Rect, BYV95C.	9335 001 80133
6500	Diode, Bridge Rect, GBU4JL-7002.	9322 132 55667
6520	Diode, Rect, BYV95A.	9335 000 90133
6523	Diode, Signal, 1N4148.	3198 010 10010
6524	Diode, Rect, 1N5062.	3198 010 10120
6525	Diode, Rect, 1N5062.	3198 010 10120
6526	Zener Diode, 22 volt	3198 020 52290
6540	Zener Diode, 6.2 volt.	9331 668 30133
6541	Zener Diode, 10 volt	3198 020 51090
6560	Diode, Rect, BYV29X-500.	9340 555 59127
6563	Diode, Signal, BAS316.	3198 010 10630
6565	Diode, Signal, BAV70	9331 849 10215
6566	Diode, Signal, 1N4148.	3198 010 10010
6569	Diode, Signal, BAS316.	3198 010 10630
6570	Zener Diode, 6.8 volt.	3198 020 56880
6580	Diode, Signal, BAS316.	3198 010 10630
6582	Diode, Rect, STPS10L60D.	9322 175 70667
6831	Diode, Signal, 1N4148.	3198 010 10010
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
7101	Transistor, NPN, BC847B(COL)	3198 010 42030
7102	Transistor, PNP, BC857B(COL)	3198 010 42150
7103	Transistor, NPN, BC847B(COL)	3198 010 42030
7200	IC, TDA9569H/N1/4I/1313.	9352 743 94557
7201	Transistor, NPN, BC847B(COL)	3198 010 42030
7204	Transistor, PNP, BC857B(COL)	3198 010 42150
7205	Transistor, PNP, BC857B(COL)	3198 010 42150
7330	IC, TDA6107JF/N3	9352 713 37112
7400	Power FET, STP3NC60FP.	9322 157 37687
7441	Transistor, PNP, BC857B(COL)	3198 010 42150
7443	Transistor, PNP, BC557B(COL)	3198 020 40110
7460	Transistor, NPN, BU4508DX.	9340 550 92127
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
7462	Transistor, NPN, PDTC143ZT	9340 547 00215
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
7471	IC, TDA8359J/N2.	9352 701 64112
7480	Transistor, NPN, BD135	3198 020 41010
7482	Transistor, NPN, BD135	3198 020 41010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667
7520	IC, TEA1507P/N1.	9352 673 56112
7521	Power FET, FQPF9N50.	9322 187 16687
7522	Transistor, NPN, BC847B(COL)	3198 010 42030
7540	Transistor, NPN, BC547B(COL)	3198 020 40030
7541	Transistor, NPN, PDTC114ET	9340 310 10215
7542	Transistor, PNP, BC857B(COL)	3198 010 42150
7560	IC, L78L33ACZ.	9322 134 92676
7561	Transistor, NPN, PDTC143ZT	9340 547 00215
7580	Transistor, PNP, BC857B(COL)	3198 010 42150
7602	IC, M24C08-WBN6.	9322 154 38682
7606	Transistor, NPN, PDTC143ZT	9340 547 00215
7802	IC, HEF4053BT.	9333 729 60653
7803	IC, HEF4053BT.	9333 729 60653
7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682
7901	IC, AN7580	9322 166 29682
7903	Transistor, NPN, BC847B(COL)	3198 010 42030
9001	Wire Jumper.	3198 036 90010
9101	Wire Jumper.	3198 036 90010
9102	Wire Jumper.	3198 036 90010
9103	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010
9175	Wire Jumper.	3198 036 90010
9176	Wire Jumper.	3198 036 90010
9178	Wire Jumper.	3198 036 90010
9179	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010
9182	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010
9192	Wire Jumper.	3198 036 90010
9193	Wire Jumper.	3198 036 90010
9311	Wire Jumper.	3198 036 90010
9312	Wire Jumper.	3198 036 90010
9406	Wire Jumper.	3198 036 90010
9407	Wire Jumper.	3198 036 90010
9408	Wire Jumper.	3198 036 90010
9409	Wire Jumper.	3198 036 90010
9410	Wire Jumper.	3198 036 90010
9411	Wire Jumper.	3198 036 90010
9412	Wire Jumper.	3198 036 90010
9413	Wire Jumper.	3198 036 90010
9414	Wire Jumper.	3198 036 90010
9415	Wire Jumper.	3198 036 90010
9416	Wire Jumper.	3198 036 90010
9417	Wire Jumper.	3198 036 90010
9418	Wire Jumper.	3198 036 90010
9419	Wire Jumper.	3198 036 90010
9421	Wire Jumper.	3198 036 90010
9422	Wire Jumper.	3198 036 90010
9424	Wire Jumper.	3198 036 90010
9425	Wire Jumper.	3198 036 90010
9426	Wire Jumper.	3198 036 90010
9427	Wire Jumper.	3198 036 90010
9453	Wire Jumper.	3198 036 90010
9460	Wire Jumper.	3198 036 90010
9463	Wire Jumper.	3198 036 90010
9500	Wire Jumper.	3198 036 90010
9501	Wire Jumper.	3198 036 90010
9503	Wire Jumper.	3198 036 90010
9506	Wire Jumper.	3198 036 90010
9507	Wire Jumper.	3198 036 90010
9511	Wire Jumper.	3198 036 90010
9512	Wire Jumper.	3198 036 90010
9513	Wire Jumper.	3198 036 90010
9514	Wire Jumper.	3198 036 90010
9515	Wire Jumper.	3198 036 90010
9516	Wire Jumper.	3198 036 90010
9518	Wire Jumper.	3198 036 90010
9520	Wire Jumper.	3198 036 90010
9521	Wire Jumper.	3198 036 90010
9522	Wire Jumper.	3198 036 90010
9524	Wire Jumper.	3198 036 90010
9528	Wire Jumper.	3198 036 90010
9530	Wire Jumper.	3198 036 90010
9611	Coil, 27u, 10%	3198 018 22790
9612	Wire Jumper.	3198 036 90010
9613	Wire Jumper.	3198 036 90010
9614	Wire Jumper.	3198 036 90010
9615	Wire Jumper.	3198 036 90010
9618	Wire Jumper.	3198 036 90010
9619	Wire Jumper.	3198 036 90010
9620	Wire Jumper.	3198 036 90010
9621	Wire Jumper.	3198 036 90010
9622	Wire Jumper.	3198 036 90010
9623	Wire Jumper.	3198 036 90010
9624	Wire Jumper.	3198 036 90010
9626	Wire Jumper.	3198 036 90010
9627	Wire Jumper.	3198 036 90010
9628	Wire Jumper.	3198 036 90010
9629	Wire Jumper.	3198 036 90010
9631	Wire Jumper.	3198 036 90010
9632	Wire Jumper.	3198 036 90010
9633	Wire Jumper.	3198 036 90010
9637	Wire Jumper.	3198 036 90010
9638	Wire Jumper.	3198 036 90010
9640	Wire Jumper.	3198 036 90010
9641	Wire Jumper.	3198 036 90010
9642	Wire Jumper.	3198 036 90010
9643	Wire Jumper.	3198 036 90010
9644	Wire Jumper.	3198 036 90010
9645	Wire Jumper.	3198 036 90010
9648	Wire Jumper.	3198 036 90010
9650	Wire Jumper.	3198 036 90010
9652	Wire Jumper.	3198 036 90010
9654	Wire Jumper.	3198 036 90010
9655	Wire Jumper.	3198 036 90010
9656	Wire Jumper.	3198 036 90010
9657	Wire Jumper.	3198 036 90010
9658	Wire Jumper.	3198 036 90010
9659	Wire Jumper.	3198 036 90010
9660	Wire Jumper.	3198 036 90010
9661	Wire Jumper.	3198 036 90010
9662	Wire Jumper.	3198 036 90010
9663	Wire Jumper.	3198 036 90010
9664	Wire Jumper.	3198 036 90010
9665	Wire Jumper.	3198 036 90010
9666	Wire Jumper.	3198 036 90010
9667	Wire Jumper.	3198 036 90010
9668	Wire Jumper.	3198 036 90010
9669	Wire Jumper.	3198 036 90010
9670	Wire Jumper.	3198 036 90010
9671	Wire Jumper.	3198 036 90010
9672	Coil, 22u, 10%	3198 018 22290
9674	Wire Jumper.	3198 036 90010
9675	Wire Jumper.	3198 036 90010
9676	Wire Jumper.	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper.	3198 036 90010
9680	Wire Jumper.	3198 036 90010
9681	Wire Jumper.	3198 036 90010
9685	Wire Jumper.	3198 036 90010
9686	Wire Jumper.	3198 036 90010
9687	Wire Jumper.	3198 036 90010
9688	Wire Jumper.	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

29DV6931/85R (continued)

Ref	Description	Part No.
9689	Wire Jumper.	3198 036 90010
9690	Wire Jumper.	3198 036 90010
9691	Wire Jumper.	3198 036 90010
9694	Wire Jumper.	3198 036 90010
9695	Wire Jumper.	3198 036 90010
9697	Wire Jumper.	3198 036 90010
9698	Wire Jumper.	3198 036 90010
9699	Wire Jumper.	3198 036 90010
9821	Wire Jumper.	3198 036 90010
9822	Wire Jumper.	3198 036 90010
9825	Wire Jumper.	3198 036 90010
9828	Wire Jumper.	3198 036 90010
9829	Wire Jumper.	3198 036 90010
9831	Wire Jumper.	3198 036 90010
9832	Wire Jumper.	3198 036 90010
9837	Wire Jumper.	3198 036 90010
9838	Wire Jumper.	3198 036 90010
9839	Wire Jumper.	3198 036 90010
9846	Wire Jumper.	3198 036 90010
9847	Wire Jumper.	3198 036 90010
9849	Wire Jumper.	3198 036 90010
9851	Wire Jumper.	3198 036 90010
9856	Wire Jumper.	3198 036 90010
9858	Wire Jumper.	3198 036 90010
9859	Wire Jumper.	3198 036 90010
9860	Wire Jumper.	3198 036 90010
9862	Wire Jumper.	3198 036 90010
9864	Wire Jumper.	3198 036 90010
9865	Wire Jumper.	3198 036 90010
9867	Wire Jumper.	3198 036 90010
9868	Wire Jumper.	3198 036 90010
9869	Wire Jumper.	3198 036 90010
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9876	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010
9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9923	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9998	Wire Jumper.	3198 036 90010
CBA	Main Chassis Assembly.	3139 187 23581
CBA	DVD Loader SD5.12.	3139 188 55471
CBA	DVD MPEG Assembly SD5.12	3139 188 55481
CBA	DVD Module SD5.12 (contains Loader and MPEG Assembly)	4835 310 57599

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

Ref	Description	Part No.
0267	3 Pin Board Connector.	2422 025 09191
0361	Eject Button	3139 177 63451
1110	Tact Switch.	2422 128 02742
CBA	DVD Eject Panel Assembly	3139 187 23311

DVD Interface Panel Parts

DVD Interface Panel Parts

Ref	Description	Part No.
0226	Connector, 6 Pin	2422 025 12482
0228	Connector, 3 Pin	2412 020 00725
0251	Connector, 4 Pin	2422 025 15847
0253	Connector, 7 Pin	2422 025 11244
0254	Connector, 3 Pin	2422 025 16382
0266	Connector, 6 Pin	2422 025 15849
0269	Connector, 5 Pin	2422 025 15848
1100	Socket, Cinch, 1 Pin	2422 026 04425
1101	Connector, 8 Pin	2422 025 12483
S 1330	Fuse, 2A, 250V	2422 086 10422
S 1331	Fuse, 2A, 250V	2422 086 10422
S 1332	Fuse, 2A, 250V	2422 086 10421
2101	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2102	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
2103	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2104	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
2110	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
2111	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2112	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2113	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2114	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2185	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2263	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
2300	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
2301	Cap, 22n, 10%, 400v, Metalized Polyeste	2222 365 55223
2302	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2310	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2311	Cap, 470n, 10%, 25v, Ceramic	2020 552 96465
2313	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2315	Cap, 220p, 10%, 1KV, Ceramic	3198 019 62210
2316	Cap, 33n, 10%, 16v, Ceramic.	3198 017 33330
2319	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
2330	Cap, 2u2, 20%, 25v, Electrolytic	3198 026 32220
2331	Cap, 470u, 20%, 10v, Electrolytic.	3198 025 14710
2332	Cap, 2u2, 20%, 25v, Electrolytic	3198 026 32220
2333	Cap, 1000u, 20%, 10v, Electrolytic	2020 021 91631
2337	Cap, 1000u, 20%, 25v, Electrolytic	3198 026 31020
2338	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710
2339	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710
2341	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
2342	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2350	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2351	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2353	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
3101	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3102	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3110	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3111	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3112	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3113	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3114	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3115	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3116	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3117	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3118	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3180	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3182	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3262	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3266	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
S 3300	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
S 3301	Power Resistor, 68K, 5%, 2W.	3198 012 26830
3308	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3309	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3310	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3311	Res, 180 ohm, 5%, 1/16W, Metalized Glas	3198 021 31810
3312	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3313	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3314	Res, 1 ohm, 5%, 1/6W, Carbon Film.	3198 011 01080
3315	Res, 1 ohm, 5%, 1/6W, Carbon Film.	3198 011 01080
3317	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3318	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3319	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3320	Res, 100K, 1%, 1/16W, Metalized Glass.	2322 704 61004
3339	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3340	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3342	Res, 4K7, 1%, 1/16W, Metalized Glass	2322 704 64702
3344	Res, 4K7, 1%, 1/16W, Metalized Glass	2322 704 64702
3360	Res, 4R7, 5%, 1/16W, Metalized Glass	3198 021 34780
3361	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
4105	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4106	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4185	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4226	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4261	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4265	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4266	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4316	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4342	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4343	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4361	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4363	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4364	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5100	Inductor, Variable, 100uH, 10%	2422 549 41663
5110	Coil, 220n	3198 018 12270
5300	Coil, 27u.	3198 018 22790
5301	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
S 5315	Transformer, SS25113-00.	2422 531 02596
5331	Coil, 10u, 5%.	2422 535 95363
5333	Coil, 10u, 5%.	2422 535 95363
5337	Coil, 10u, 10%	2422 535 97328
5339	Coil, 10u, 10%	2422 535 97328
6100	Diode, Signal, BAS316.	3198 010 10630
6101	Diode, Signal, BAS316.	3198 010 10630
6300	Diode, Rect, BYD33J	9337 234 20133
6311	Diode, Signal, BAS316.	3198 010 10630
6312	Zener Diode, 22 volt	3198 020 52290
6330	Diode, Rect, EGP20DL-5100	9322 164 42682
6332	Diode, Rect, SB340L-7024.	9322 161 76682
6336	Diode, Rect, BYV27-200.	9335 526 80133
7110	IC, HEF4053BT.	9333 729 60653

S = Safety Part   Be sure to use exact replacement part.

29DV6931/85R (continued)

S	Ref	Description	Part No.
	7262	Transistor, NPN, PDTC124ET	9340 310 20215
	7310	Transistor, NPN, PDTC114ET	3198 010 44110
	7311	Transistor, PNP, PDTA114ET	3198 010 44010
	7312	Transistor, PNP, BC857B.	3198 010 42150
	7313	Transistor, NPN, BC847B.	3198 010 42030
	7315	IC, TEA1523P/N2.	9352 699 68112
S	7340	Optical Coupler, TCET1103(G)	9322 140 14667
	7341	IC, TL431CLP	9337 711 00676
	9110	Wire Jumper.	3198 036 90010
	9111	Wire Jumper.	3198 036 90010
	9183	Wire Jumper.	3198 036 90010
	9266	Wire Jumper.	3198 036 90010
	9315	Wire Jumper.	3198 036 90010
	9350	Wire Jumper.	3198 036 90010
	9351	Wire Jumper.	3198 036 90010
	9352	Wire Jumper.	3198 036 90010
	9355	Wire Jumper.	3198 036 90010
	9357	Wire Jumper.	3198 036 90010
	CBA	DVD Interface Panel Assembly	3141 058 64801

Front Interface Panel Parts

Front Interface Panel Parts

S	Ref	Description	Part No.
S	0211	2 Pin Connector.	2422 025 16268
S	0212	2 Pin Connector.	2422 025 16559
	0214	5 Pin Connector.	2422 025 06353
	1606	Tact Switch.	2422 128 02742
	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2692	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
	2693	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
	2694	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
	2695	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
	2698	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
S	3500	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322 242 13335
S	3501	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322 242 13335
	3685	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
	3691	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
	3693	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
	6691	LED, LTL-10234WHCR	9322 185 69682
	6692	IR Receiver, TSOP1836UH3V.	9322 127 54667
	9001	Wire Jumper.	3198 036 90010
	9002	Wire Jumper.	3198 036 90010
	CBA	Front Interface Panel Assembly	3139 177 26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts

Side Jack Panel Parts

S	Ref	Description	Part No.
	0232	Headphone Jack	2422 026 04747
	0250	A/V Jack	2422 026 04815
	0251	6 Pin Connector.	2422 025 15849
	0254	5 Pin Connector.	2422 025 12481
	0255	4 Pin Connector.	2422 025 12479
	2171	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
	2172	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
	2173	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
	2174	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
	2176	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
	2177	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2178	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
	2179	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	3150	Res, 47k, 5%, 1/6W, Carbon	3198 011 04730
	3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
	3152	Res, 47k, 5%, 1/6W, Carbon	3198 011 04730
	3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
	3156	Res, 120 ohm, 5%, 1/6W, Carbon Film.	3198 011 01210
	3157	Res, 120 ohm, 5%, 1/6W, Carbon Film.	3198 011 01210
	6161	Zener Diode, 6.8 volt.	3198 010 26880
	9153	Wire Jumper.	3198 036 90010
	9170	Wire Jumper.	3198 036 90010
	9171	Wire Jumper.	3198 036 90010
	CBA	Side Jack Panel Assembly	3139 188 03541

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

S	Ref	Description	Part No.
	0215	3 Pin Connector.	2422 025 16601
	1091	Tact Switch.	2422 128 02742
	1092	Tact Switch.	2422 128 02742
	1093	Tact Switch.	2422 128 02742
	1094	Tact Switch.	2422 128 02742
	3091	Res, 560 ohm, 5%, Metalized Glass.	3198 021 35610
	3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
	3093	Res, 560 ohm, 5%, Metalized Glass.	3198 021 35610
	3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
	3095	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3096	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
	4085	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4089	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4090	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	6091	Diode, Signal.	9340 453 90115
	CBA	Top Control Panel Assembly	3139 187 15841

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S	Ref	Description	Part No.
S	AC01	AC Cord.	3135 010 03831
	AC03	Anode Lead Spacer (3 Used)	3135 014 04471
	AC04	Batteries for Remote Control Transmitte	9299 000 65263
	AC05	Cabinet Back	3139 124 44931
	AC06	Cabinet Back Screw Cover (2 Used).	3139 124 39301
	AC08	Chassis Tray	3139 124 31325
S	AC09	CRT, A68QCU754X73(N)	9301 925 60527
S	AC12	Degaussing Coil.	2422 549 45709
	AC13	Front Interface Panel Bracket.	3139 124 32891
	AC15	Holder, Degaussing Coil (4 Used)	3135 013 01641
	AC17	Owner's Manual	3121 235 21341
	AC18	Quick Use Guide.	3121 233 44461
	AC19	Side Jack Panel Bracket.	3139 124 37061
	AC20	Cabinet Front Assembly	3121 237 53503
	AC20A	Cabinet Front.	3139 177 75451
	AC20C	Light Guide.	3139 124 39701
	AC20D	Nameplate.	3141 050 00161
	AC20E	Power Button	3139 138 10881
	AC20H	Speaker, 8 ohm, 10W (2 Used)	3139 128 76521
	AC20J	Top Control Assembly	3139 177 56381
	AC23	DVD Door	3139 177 63441
	AC24	DVD Interface Panel Bracket.	3139 124 43291
	REMOTE	Remote Control Transmitter, RC19042007/ 01.	3128 147 14521

S = Safety Part   Be sure to use exact replacement part.

29DV693R85A - Manual no. 7638

Main Chassis Parts

S	Ref	Description	Part No.
		Main Chassis Parts	
	0130	Bead, Ferrite, 100MHz	2422 549 45808
	0211	2 Pin Connector.	2422 025 16374
	0212	2 Pin Connector.	2422 025 16375
	0214	5 Pin Connector.	2422 025 12481
	0217	3 Pin Connector.	2412 020 00725
	0219	6 Pin Connector.	2422 025 12482
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0222	2 Pin Connector.	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0229	7 Pin Connector.	2422 025 11244
	0239	3 Pin Connector.	2422 025 16382
	0240	4 Pin Connector.	2422 025 12479
	0243	6 Pin Connector.	2422 025 04854
	0244	5 Pin Connector.	2422 025 04853
	0245	6 Pin Connector.	2422 025 04854
	0246	5 Pin Connector.	2422 025 12481
	0251	4 Pin Connector.	2422 025 15847
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector.	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U, PLL	2422 542 90108
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1660	Crystal, 12MHz000	2422 543 01203
	1810	6 Pin Connector.	2422 025 15849
	1831	Crystal, Resonator, 18MHz432, 12 Pin, HC49/U A.	2422 543 00842
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
	2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
	2451	Cap, 22n, 10%, 50v, Polyester.	3198 014 02230
	2452	Cap, 180p, 5%, 50v, Ceramic.	3198 016 01810
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 360n, 5%, 250v, Metalized Polypropylene.	2022 333 00163
	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
S	2463	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene	2222 479 90042
S	2465	Cap, 15n, 5%, 1600v, Polypropylene	2020 301 90255
	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
	2468	Cap, 27n, 10%, 400v, Polyester	2222 347 90232
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 120n, 5%, 250v, Metalized Polypropylene.	2222 479 90051
	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91374
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2604	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250

S = Safety Part   Be sure to use exact replacement part.

29DV693R85A (continued)

Ref	Description	Part No.
2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
2837	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
2840	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2841	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2843	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2844	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2846	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2902	Cap, 1000u, 20%, 25v, Electrolytic . .	3198 026 31020
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
3403	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102
3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3470	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3471	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3472	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3473	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2120 101 74158
3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S 3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 32290
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3507	Surge Protector.	2422 549 43073
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S 3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370

S = Safety Part   Be sure to use exact replacement part.

29DV693R85A (continued)

S	Ref	Description	Part No.
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
	3552	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3557	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
S	3591	Res, 10 ohm, 5%, 1/3W, Metal Film	2306 204 03109
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3814	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3831	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3832	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3843	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
	3901	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
	3903	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3905	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3909	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
	3910	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
	3912	Res, 820 ohm, 5%, 1/6W, Carbon Film	3198 011 08210
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4837	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4838	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%	3198 018 18270
	5201	Coil, 6u8, 5%	3198 018 16880
	5202	Wire Jumper	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5241	Wire Jumper	3198 036 90010
	5242	Coil, 10u, 5%	3198 018 11090
	5341	Coil, 22u	2422 535 97333
	5342	Coil, 3u9, 10%	2422 535 97323
	5401	Coil, 1mH, 10%	3198 018 71020
S	5445	Transformer, LOT	2422 531 02574
	5451	Coil, 22u, 10%	3198 018 72290
	5452	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
S	5457	Coil, 25u	2422 535 91028
	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
	5463	Coil, Choke	3128 138 37021
	5471	Coil, 6u8, 20%	3198 018 76880
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 47u, 10%	2422 535 97337
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS42202-00 B	2422 531 02562
	5521	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5561	Coil, 27u, 5%	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5602	Coil, 5u6, 5%	3198 018 15680
	5603	Coil, 5u6, 5%	3198 018 15680
	5604	Coil, 5u6, 5%	3198 018 15680
	5831	Coil, 6u8, 5%	3198 018 16880
	5832	Coil, 6u8, 5%	3198 018 16880
	5833	Coil, 6u8, 5%	3198 018 16880
	5835	Coil, 12u, 10%	3198 018 31290
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316	3198 010 10630
	6201	Diode, Signal, BAS316	3198 010 10630
	6202	Diode, Signal, BAS316	3198 010 10630
	6206	Zener Diode, 6.8 volt	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6400	Res, 1K, 1%, 3/5W, Metal Film	2312 915 11002
	6401	Zener Diode, 47 volt	3198 010 24790
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148	3198 010 10010
	6448	Zener Diode, 6.2 volt	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6460	Diode, Rect, BY228/24	9340 559 50112
	6461	Diode, Rect, RGP30J-L7004	9338 617 60682
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316	3198 010 10630
	6468	Diode, Signal, BAS316	3198 010 10630
	6469	Diode, Rect, BYV95C	9335 001 80133

S = Safety Part   Be sure to use exact replacement part.

29DV693R85A (continued)

Ref	Description	Part No.
6470	Diode, Signal, BAV99	3198 010 10620
6476	Zener Diode, 15 volt	3198 010 21590
6481	Zener Diode, 5.6 volt.	3198 010 25680
6482	Zener Diode, 9.1 volt.	9331 177 80133
6483	Zener Diode, 33 volt	3198 010 23390
6485	Diode, Rect, BYV95C.	9335 001 80133
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
6487	Diode, Rect, BYV95A.	9335 000 90133
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
6490	Diode, Rect, BYV95C.	9335 001 80133
6500	Diode, Bridge Rect, GBU4JL-7002.	9322 132 55667
6520	Diode, Rect, BYV95A.	9335 000 90133
6523	Diode, Signal, 1N4148.	3198 010 10010
6524	Diode, Rect, 1N5062.	3198 010 10120
6525	Diode, Rect, 1N5062.	3198 010 10120
6526	Zener Diode, 22 volt	3198 020 52290
6540	Zener Diode, 6.2 volt.	9331 668 30133
6541	Zener Diode, 10 volt	3198 020 51090
6560	Diode, Rect, BYV29X-500.	9340 555 59127
6563	Diode, Signal, BAS316.	3198 010 10630
6565	Diode, Signal, BAV70	9331 849 10215
6566	Diode, Signal, 1N4148.	3198 010 10010
6569	Diode, Signal, BAS316.	3198 010 10630
6570	Zener Diode, 6.8 volt.	3198 020 56880
6580	Diode, Signal, BAS316.	3198 010 10630
6582	Diode, Rect, STPS10L60D.	9322 175 70667
6831	Diode, Signal, 1N4148.	3198 010 10010
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
7101	Transistor, NPN, BC847B(COL)	3198 010 42030
7102	Transistor, PNP, BC857B(COL)	3198 010 42150
7103	Transistor, NPN, BC847B(COL)	3198 010 42030
7200	IC, TDA9569H/N1/4I/1313.	9352 743 94557
7201	Transistor, NPN, BC847B(COL)	3198 010 42030
7204	Transistor, PNP, BC857B(COL)	3198 010 42150
7205	Transistor, PNP, BC857B(COL)	3198 010 42150
7330	IC, TDA6107JF/N3	9352 713 37112
7400	Power FET, STP3NC60FP.	9322 157 37687
7441	Transistor, PNP, BC857B(COL)	3198 010 42150
7443	Transistor, PNP, BC557B(COL)	3198 020 40110
7460	Transistor, NPN, BU4508DX.	9340 550 92127
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
7462	Transistor, NPN, PDTC143ZT	9340 547 00215
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
7471	IC, TDA8359J/N2.	9352 701 64112
7480	Transistor, NPN, BD135	3198 020 41010
7482	Transistor, NPN, BD135	3198 020 41010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667
7520	IC, TEA1507P/N1.	9352 673 56112
7521	Power FET, FQPF9N50.	9322 187 16687
7522	Transistor, NPN, BC847B(COL)	3198 010 42030
7540	Transistor, NPN, BC547B(COL)	3198 020 40030
7541	Transistor, NPN, PDTC114ET	9340 310 10215
7542	Transistor, PNP, BC857B(COL)	3198 010 42150
7560	IC, L78L33ACZ.	9322 134 92676
7561	Transistor, NPN, PDTC143ZT	9340 547 00215
7580	Transistor, PNP, BC857B(COL)	3198 010 42150
7602	IC, M24C08-WBN6.	9322 154 38682
7606	Transistor, NPN, PDTC143ZT	9340 547 00215
7802	IC, HEF4053BT.	9333 729 60653
7803	IC, HEF4053BT.	9333 729 60653
7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682
7901	IC, AN7580	9322 166 29682
7903	Transistor, NPN, BC847B(COL)	3198 010 42030
9001	Wire Jumper.	3198 036 90010
9101	Wire Jumper.	3198 036 90010
9102	Wire Jumper.	3198 036 90010
9103	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010
9175	Wire Jumper.	3198 036 90010
9176	Wire Jumper.	3198 036 90010
9178	Wire Jumper.	3198 036 90010
9179	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010
9182	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010
9192	Wire Jumper.	3198 036 90010
9193	Wire Jumper.	3198 036 90010
9311	Wire Jumper.	3198 036 90010
9312	Wire Jumper.	3198 036 90010
9406	Wire Jumper.	3198 036 90010
9407	Wire Jumper.	3198 036 90010
9408	Wire Jumper.	3198 036 90010
9409	Wire Jumper.	3198 036 90010
9410	Wire Jumper.	3198 036 90010
9411	Wire Jumper.	3198 036 90010
9412	Wire Jumper.	3198 036 90010
9413	Wire Jumper.	3198 036 90010
9414	Wire Jumper.	3198 036 90010
9415	Wire Jumper.	3198 036 90010
9416	Wire Jumper.	3198 036 90010
9417	Wire Jumper.	3198 036 90010
9418	Wire Jumper.	3198 036 90010
9419	Wire Jumper.	3198 036 90010
9421	Wire Jumper.	3198 036 90010
9422	Wire Jumper.	3198 036 90010
9424	Wire Jumper.	3198 036 90010
9425	Wire Jumper.	3198 036 90010
9426	Wire Jumper.	3198 036 90010
9427	Wire Jumper.	3198 036 90010
9453	Wire Jumper.	3198 036 90010
9460	Wire Jumper.	3198 036 90010
9463	Wire Jumper.	3198 036 90010
9500	Wire Jumper.	3198 036 90010
9501	Wire Jumper.	3198 036 90010
9503	Wire Jumper.	3198 036 90010
9506	Wire Jumper.	3198 036 90010
9507	Wire Jumper.	3198 036 90010
9511	Wire Jumper.	3198 036 90010
9512	Wire Jumper.	3198 036 90010
9513	Wire Jumper.	3198 036 90010
9514	Wire Jumper.	3198 036 90010
9515	Wire Jumper.	3198 036 90010
9516	Wire Jumper.	3198 036 90010
9518	Wire Jumper.	3198 036 90010
9520	Wire Jumper.	3198 036 90010
9521	Wire Jumper.	3198 036 90010
9522	Wire Jumper.	3198 036 90010
9524	Wire Jumper.	3198 036 90010
9528	Wire Jumper.	3198 036 90010
9530	Wire Jumper.	3198 036 90010
9611	Coil, 27u, 10%	3198 018 22790
9612	Wire Jumper.	3198 036 90010
9613	Wire Jumper.	3198 036 90010
9614	Wire Jumper.	3198 036 90010
9615	Wire Jumper.	3198 036 90010
9618	Wire Jumper.	3198 036 90010
9619	Wire Jumper.	3198 036 90010
9620	Wire Jumper.	3198 036 90010
9621	Wire Jumper.	3198 036 90010
9622	Wire Jumper.	3198 036 90010
9623	Wire Jumper.	3198 036 90010
9624	Wire Jumper.	3198 036 90010
9626	Wire Jumper.	3198 036 90010
9627	Wire Jumper.	3198 036 90010
9628	Wire Jumper.	3198 036 90010
9629	Wire Jumper.	3198 036 90010
9631	Wire Jumper.	3198 036 90010
9632	Wire Jumper.	3198 036 90010
9633	Wire Jumper.	3198 036 90010
9637	Wire Jumper.	3198 036 90010
9638	Wire Jumper.	3198 036 90010
9640	Wire Jumper.	3198 036 90010
9641	Wire Jumper.	3198 036 90010
9642	Wire Jumper.	3198 036 90010
9643	Wire Jumper.	3198 036 90010
9644	Wire Jumper.	3198 036 90010
9645	Wire Jumper.	3198 036 90010
9648	Wire Jumper.	3198 036 90010
9650	Wire Jumper.	3198 036 90010
9652	Wire Jumper.	3198 036 90010
9654	Wire Jumper.	3198 036 90010
9655	Wire Jumper.	3198 036 90010
9656	Wire Jumper.	3198 036 90010
9657	Wire Jumper.	3198 036 90010
9658	Wire Jumper.	3198 036 90010
9659	Wire Jumper.	3198 036 90010
9660	Wire Jumper.	3198 036 90010
9661	Wire Jumper.	3198 036 90010
9662	Wire Jumper.	3198 036 90010
9663	Wire Jumper.	3198 036 90010
9664	Wire Jumper.	3198 036 90010
9665	Wire Jumper.	3198 036 90010
9666	Wire Jumper.	3198 036 90010
9667	Wire Jumper.	3198 036 90010
9668	Wire Jumper.	3198 036 90010
9669	Wire Jumper.	3198 036 90010
9670	Wire Jumper.	3198 036 90010
9671	Wire Jumper.	3198 036 90010
9672	Coil, 22u, 10%	3198 018 22290
9674	Wire Jumper.	3198 036 90010
9675	Wire Jumper.	3198 036 90010
9676	Wire Jumper.	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper.	3198 036 90010
9680	Wire Jumper.	3198 036 90010
9681	Wire Jumper.	3198 036 90010
9685	Wire Jumper.	3198 036 90010
9686	Wire Jumper.	3198 036 90010
9687	Wire Jumper.	3198 036 90010
9688	Wire Jumper.	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

9689	Wire Jumper	3198 036 90010
9690	Wire Jumper	3198 036 90010
9691	Wire Jumper	3198 036 90010
9694	Wire Jumper	3198 036 90010
9695	Wire Jumper	3198 036 90010
9697	Wire Jumper	3198 036 90010
9698	Wire Jumper	3198 036 90010
9699	Wire Jumper	3198 036 90010
9821	Wire Jumper	3198 036 90010
9822	Wire Jumper	3198 036 90010
9825	Wire Jumper	3198 036 90010
9828	Wire Jumper	3198 036 90010
9829	Wire Jumper	3198 036 90010
9831	Wire Jumper	3198 036 90010
9832	Wire Jumper	3198 036 90010
9837	Wire Jumper	3198 036 90010
9838	Wire Jumper	3198 036 90010
9839	Wire Jumper	3198 036 90010
9846	Wire Jumper	3198 036 90010
9847	Wire Jumper	3198 036 90010
9849	Wire Jumper	3198 036 90010
9851	Wire Jumper	3198 036 90010
9856	Wire Jumper	3198 036 90010
9858	Wire Jumper	3198 036 90010
9859	Wire Jumper	3198 036 90010
9860	Wire Jumper	3198 036 90010
9862	Wire Jumper	3198 036 90010
9864	Wire Jumper	3198 036 90010
9865	Wire Jumper	3198 036 90010
9867	Wire Jumper	3198 036 90010
9868	Wire Jumper	3198 036 90010
9869	Wire Jumper	3198 036 90010
9873	Wire Jumper	3198 036 90010
9874	Wire Jumper	3198 036 90010
9875	Wire Jumper	3198 036 90010
9876	Wire Jumper	3198 036 90010
9877	Wire Jumper	3198 036 90010
9901	Wire Jumper	3198 036 90010
9902	Wire Jumper	3198 036 90010
9903	Wire Jumper	3198 036 90010
9904	Wire Jumper	3198 036 90010
9911	Wire Jumper	3198 036 90010
9913	Wire Jumper	3198 036 90010
9914	Wire Jumper	3198 036 90010
9915	Wire Jumper	3198 036 90010
9923	Wire Jumper	3198 036 90010
9991	Wire Jumper	3198 036 90010
9996	Wire Jumper	3198 036 90010
9998	Wire Jumper	3198 036 90010
CBA	Main Chassis Assembly	3139 187 23581
CBA	DVD Loader SD5.12	3139 188 55471
CBA	DVD MPEG Assembly SD5.12	3139 188 55481
CBA	DVD Module SD5.12 (contains Loader and MPEG Assembly)	4835 310 57599

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

0267	3 Pin Board Connector	2422 025 09191
0361	Eject Button	3139 177 63451
1110	Tact Switch	2422 128 02742
CBA	DVD Eject Panel Assembly	3139 187 23311

DVD Interface Panel Parts

DVD Interface Panel Parts

0226	Connector, 6 Pin	2422 025 12482
0228	Connector, 3 Pin	2412 020 00725
0251	Connector, 4 Pin	2422 025 15847
0253	Connector, 7 Pin	2422 025 11244
0254	Connector, 3 Pin	2422 025 16382
0266	Connector, 6 Pin	2422 025 15849
0269	Connector, 5 Pin	2422 025 15848
1100	Socket, Cinch, 1 Pin	2422 026 04425
1101	Connector, 8 Pin	2422 025 12483
S 1330	Fuse, 2A, 250V	2422 086 10422
S 1331	Fuse, 2A, 250V	2422 086 10422
S 1332	Fuse, 2A, 250V	2422 086 10421
2101	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2102	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
2103	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2104	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
2110	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
2111	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2112	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2113	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2114	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2185	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2263	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
2300	Cap, 10u, 20%, 250v, Electrolytic	2020 012 93495
2301	Cap, 22n, 10%, 400v, Metalized Polyeste	2222 365 55223
2302	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2310	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2311	Cap, 470n, 10%, 25v, Ceramic	2020 552 96465
2313	Cap, 470p, 5%, 50v, Ceramic	3198 016 34710
2315	Cap, 220p, 10%, 1KV, Ceramic	3198 019 62210
2316	Cap, 33n, 10%, 16v, Ceramic	3198 017 33330
2319	Cap, 220n, +80/-20%, 25v, Ceramic	3198 023 22240
2330	Cap, 2u2, 20%, 25v, Electrolytic	3198 026 32220
2331	Cap, 470u, 20%, 10v, Electrolytic	3198 025 14710
2332	Cap, 2u2, 20%, 25v, Electrolytic	3198 026 32220
2333	Cap, 1000u, 20%, 10v, Electrolytic	2020 021 91631
2337	Cap, 1000u, 20%, 25v, Electrolytic	3198 026 31020
2338	Cap, 470u, 20%, 16v, Electrolytic	3198 025 24710
2339	Cap, 470u, 20%, 16v, Electrolytic	3198 025 24710
2341	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
2342	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2350	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2351	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2353	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
3101	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3102	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3110	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3111	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3112	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3113	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3114	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3115	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3116	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3117	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3118	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3180	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3182	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3262	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3266	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
S 3300	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
S 3301	Power Resistor, 68K, 5%, 2W	3198 012 26830
3308	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3309	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3310	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3311	Res, 180 ohm, 5%, 1/16W, Metalized Glas	3198 021 31810
3312	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3313	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3314	Res, 1 ohm, 5%, 1/6W, Carbon Film	3198 011 01080
3315	Res, 1 ohm, 5%, 1/6W, Carbon Film	3198 011 01080
3317	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3318	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3319	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3320	Res, 100K, 1%, 1/16W, Metalized Glass	2322 704 61004
3339	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
3340	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3342	Res, 4K7, 1%, 1/16W, Metalized Glass	2322 704 64702
3344	Res, 4K7, 1%, 1/16W, Metalized Glass	2322 704 64702
3360	Res, 4R7, 5%, 1/16W, Metalized Glass	3198 021 34780
3361	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
4105	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4106	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4185	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4226	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4261	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4265	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4266	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4316	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4342	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4343	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4361	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4363	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4364	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5100	Inductor, Variable, 100uH, 10%	2422 549 41663
5110	Coil, 220n	3198 018 12270
5300	Coil, 27u	3198 018 22790
5301	Fixed, Inductor, 100MHz, 50R	3198 018 90010
S 5315	Transformer, SS25113-00	2422 531 02596
5331	Coil, 10u, 5%	2422 535 95363
5333	Coil, 10u, 5%	2422 535 95363
5337	Coil, 10u, 10%	2422 535 97328
5339	Coil, 10u, 10%	2422 535 97328
6100	Diode, Signal, BAS316	3198 010 10630
6101	Diode, Signal, BAS316	3198 010 10630
6300	Diode, Rect, BYD33J	9337 234 20133
6311	Diode, Signal, BAS316	3198 010 10630
6312	Zener Diode, 22 volt	3198 020 52290
6330	Diode, Rect, EGP20DL-5100	9322 164 42682
6332	Diode, Rect, SB340L-7024	9322 161 76682
6336	Diode, Rect, BYV27-200	9335 526 80133
7110	IC, HEF4053BT	9333 729 60653

S = Safety Part   Be sure to use exact replacement part.

29DV693R85A (continued)

7262	Transistor, NPN, PDTC124ET	9340 310 20215
7310	Transistor, NPN, PDTC114ET	3198 010 44110
7311	Transistor, PNP, PDTA114ET	3198 010 44010
7312	Transistor, PNP, BC857B.	3198 010 42150
7313	Transistor, NPN, BC847B.	3198 010 42030
7315	IC, TEA1523P/N2.	9352 699 68112
S 7340	Optical Coupler, TCET1103(G)	9322 140 14667
7341	IC, TL431CLP	9337 711 00676
9110	Wire Jumper.	3198 036 90010
9111	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010
9266	Wire Jumper.	3198 036 90010
9315	Wire Jumper.	3198 036 90010
9350	Wire Jumper.	3198 036 90010
9351	Wire Jumper.	3198 036 90010
9352	Wire Jumper.	3198 036 90010
9355	Wire Jumper.	3198 036 90010
9357	Wire Jumper.	3198 036 90010
CBA	DVD Interface Panel Assembly	3141 058 64801

Front Interface Panel Parts

Front Interface Panel Parts

S 0211	2 Pin Connector.	2422 025 16268
S 0212	2 Pin Connector.	2422 025 16559
0214	5 Pin Connector.	2422 025 06353
1606	Tact Switch.	2422 128 02742
2691	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2698	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
6691	LED, LTL-10234WHCR	9322 185 69682
6692	IR Receiver, TSOP1836UH3V.	9322 127 54667
9001	Wire Jumper.	3198 036 90010
9002	Wire Jumper.	3198 036 90010
CBA	Front Interface Panel Assembly	3139 177 26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422 026 04747
0250	A/V Jack	2422 026 04815
0251	6 Pin Connector.	2422 025 15849
0254	5 Pin Connector.	2422 025 12481
0255	4 Pin Connector.	2422 025 12479
2171	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
2172	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
2173	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
2174	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
2176	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
2177	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
2179	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
3150	Res, 47k, 5%, 1/6W, Carbon	3198 011 04730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3152	Res, 47k, 5%, 1/6W, Carbon	3198 011 04730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3156	Res, 120 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01210
3157	Res, 120 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01210
6161	Zener Diode, 6.8 volt.	3198 010 26880
9153	Wire Jumper.	3198 036 90010
9170	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010
CBA	Side Jack Panel Assembly	3139 188 03541

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

0215	3 Pin Connector.	2422 025 16601
1091	Tact Switch.	2422 128 02742
1092	Tact Switch.	2422 128 02742
1093	Tact Switch.	2422 128 02742
1094	Tact Switch.	2422 128 02742
3091	Res, 560 ohm, 5%, Metalized Glass. . .	3198 021 35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3093	Res, 560 ohm, 5%, Metalized Glass. . .	3198 021 35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
4085	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4089	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4090	Res, Zero ohm, "Chip" Jumper	3198 021 90030
6091	Diode, Signal.	9340 453 90115
CBA	Top Control Panel Assembly	3139 187 15841

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	3135 010 03831
AC03	Anode Lead Spacer (3 Used)	3135 014 04471
AC04	Batteries for Remote Control Transmitte	9299 000 65263
AC05	Cabinet Back	3139 124 44931
AC06	Cabinet Back Screw Cover (2 Used). . .	3139 124 39301
AC08	Chassis Tray	3139 124 31325
S AC09	CRT, A68QCU754X73(N)	9301 925 60527
S AC12	Degaussing Coil.	2422 549 45709
AC13	Front Interface Panel Bracket.	3139 124 32891
AC15	Holder, Degaussing Coil (4 Used) . . .	3135 013 01641
AC17	Owner's Manual	3121 235 21341
AC18	Quick Use Guide.	3121 233 44461
AC19	Side Jack Panel Bracket.	3139 124 37061
AC20	Cabinet Front Assembly	3121 237 53503
AC20A	Cabinet Front.	3139 177 75451
AC20C	Light Guide.	3139 124 39701
AC20D	Nameplate.	3141 050 00161
AC20E	Power Button	3139 138 10881
AC20H	Speaker, 8 ohm, 10W (2 Used)	3139 128 76521
AC20J	Top Control Assembly	3139 177 56381
AC23	DVD Door	3139 177 63441
AC24	DVD Interface Panel Bracket.	3139 124 43291
REMOTE	Remote Control Transmitter, RC19042007/ 01.	3128 147 14521

S = Safety Part   Be sure to use exact replacement part.

29DV693R85C - Manual no. 7638

Main Chassis Parts

Main Chassis Parts

S	Ref	Description	Part No.
	0130	Bead, Ferrite, 100MHz	2422 549 45808
	0211	2 Pin Connector	2422 025 16374
	0212	2 Pin Connector	2422 025 16375
	0214	5 Pin Connector	2422 025 12481
	0217	3 Pin Connector	2412 020 00725
	0219	6 Pin Connector	2422 025 12482
	0220	5 Pin Connector	2422 025 04853
	0221	2 Pin Connector	2422 025 15503
	0222	2 Pin Connector	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack	2422 026 04926
	0229	7 Pin Connector	2422 025 11244
	0239	3 Pin Connector	2422 025 16382
	0240	4 Pin Connector	2422 025 12479
	0243	6 Pin Connector	2422 025 04854
	0244	5 Pin Connector	2422 025 04853
	0245	6 Pin Connector	2422 025 04854
	0246	5 Pin Connector	2422 025 12481
	0251	4 Pin Connector	2422 025 15847
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U, PLL	2422 542 90108
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC	2422 086 10914
S	1515	Relay, 5 Amp, 12V	2422 132 07444
	1660	Crystal, 12MHz000	2422 543 01203
	1810	6 Pin Connector	2422 025 15849
	1831	Crystal, Resonator, 18MHz432, 12 Pin, HC49/U A	2422 543 00842
	2004	Cap, 47n, 10%, 50v, Ceramic	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2241	Cap, 1n5, 10%, 50v, Ceramic	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
	2402	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic	3198 016 03310
	2441	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic	2020 021 91139
	2451	Cap, 22n, 10%, 50v, Polyester	3198 014 02230
	2452	Cap, 180p, 5%, 50v, Ceramic	3198 016 01810
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 360n, 5%, 250v, Metalized Polypropylene	2022 333 00163
	2458	Cap, 2u2, 20%, 100v, Electrolytic	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
S	2463	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene	2222 479 90042
S	2465	Cap, 15n, 5%, 1600v, Polypropylene	2020 301 90255
	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
	2468	Cap, 27n, 10%, 400v, Polyester	2222 347 90232
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2482	Cap, 120n, 5%, 250v, Metalized Polypropylene	2222 479 90051
	2485	Cap, 4u7, 20%, 250v, Electrolytic	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91374
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2604	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2606	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic	3198 017 21050
	2802	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250

S = Safety Part   Be sure to use exact replacement part.

29DV693R85C (continued)

Ref	Description	Part No.
2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
2837	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
2840	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2841	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2843	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2844	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2846	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2902	Cap, 1000u, 20%, 25v, Electrolytic . .	3198 026 31020
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
3403	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102
3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3470	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3471	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3472	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3473	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2120 101 74158
3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S 3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 32290
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3507	Surge Protector.	2422 549 43073
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S 3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370

S = Safety Part   Be sure to use exact replacement part.

29DV693R85C (continued)

	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
S	3591	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3831	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3843	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3901	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198 021 36820
	3903	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3905	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3909	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3910	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3912	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4837	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4838	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5202	Wire Jumper.	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5241	Wire Jumper.	3198 036 90010
	5242	Coil, 10u, 5%.	3198 018 11090
	5341	Coil, 22u.	2422 535 97333
	5342	Coil, 3u9, 10%	2422 535 97323
	5401	Coil, 1mH, 10%	3198 018 71020
S	5445	Transformer, LOT	2422 531 02574
	5451	Coil, 22u, 10%	3198 018 72290
	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
S	5457	Coil, 25u.	2422 535 91028
	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
	5463	Coil, Choke.	3128 138 37021
	5471	Coil, 6u8, 20%	3198 018 76880
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 47u, 10%	2422 535 97337
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS42202-00 B.	2422 531 02562
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5831	Coil, 6u8, 5%.	3198 018 16880
	5832	Coil, 6u8, 5%.	3198 018 16880
	5833	Coil, 6u8, 5%.	3198 018 16880
	5835	Coil, 12u, 10%	3198 018 31290
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316.	3198 010 10630
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630
	6206	Zener Diode, 6.8 volt.	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316.	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002
	6401	Zener Diode, 47 volt	3198 010 24790
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148.	3198 010 10010
	6448	Zener Diode, 6.2 volt.	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6460	Diode, Rect, BY228/24.	9340 559 50112
	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316.	3198 010 10630
	6468	Diode, Signal, BAS316.	3198 010 10630
	6469	Diode, Rect, BYV95C.	9335 001 80133

S = Safety Part   Be sure to use exact replacement part.

29DV693R85C (continued)

Ref	Description	Part No.
6470	Diode, Signal, BAV99	3198 010 10620
6476	Zener Diode, 15 volt	3198 010 21590
6481	Zener Diode, 5.6 volt	3198 010 25680
6482	Zener Diode, 9.1 volt	9331 177 80133
6483	Zener Diode, 33 volt	3198 010 23390
6485	Diode, Rect, BYV95C	9335 001 80133
6486	Diode, Rect, EGP20DL-5100	9322 164 42682
6487	Diode, Rect, BYV95A	9335 000 90133
6488	Diode, Rect, EGP20DL-5100	9322 164 42682
6490	Diode, Rect, BYV95C	9335 001 80133
6500	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
6520	Diode, Rect, BYV95A	9335 000 90133
6523	Diode, Signal, 1N4148	3198 010 10010
6524	Diode, Rect, 1N5062	3198 010 10120
6525	Diode, Rect, 1N5062	3198 010 10120
6526	Zener Diode, 22 volt	3198 020 52290
6540	Zener Diode, 6.2 volt	9331 668 30133
6541	Zener Diode, 10 volt	3198 020 51090
6560	Diode, Rect, BYV29X-500	9340 555 59127
6563	Diode, Signal, BAS316	3198 010 10630
6565	Diode, Signal, BAV70	9331 849 10215
6566	Diode, Signal, 1N4148	3198 010 10010
6569	Diode, Signal, BAS316	3198 010 10630
6570	Zener Diode, 6.8 volt	3198 020 56880
6580	Diode, Signal, BAS316	3198 010 10630
6582	Diode, Rect, STPS10L60D	9322 175 70667
6831	Diode, Signal, 1N4148	3198 010 10010
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
7101	Transistor, NPN, BC847B(COL)	3198 010 42030
7102	Transistor, PNP, BC857B(COL)	3198 010 42150
7103	Transistor, NPN, BC847B(COL)	3198 010 42030
7200	IC, TDA9569H/N1/4I/1313	9352 743 94557
7201	Transistor, NPN, BC847B(COL)	3198 010 42030
7204	Transistor, PNP, BC857B(COL)	3198 010 42150
7205	Transistor, PNP, BC857B(COL)	3198 010 42150
7330	IC, TDA6107JF/N3	9352 713 37112
7400	Power FET, STP3NC60FP	9322 157 37687
7441	Transistor, PNP, BC857B(COL)	3198 010 42150
7443	Transistor, PNP, BC557B(COL)	3198 020 40110
7460	Transistor, NPN, BU4508DX	9340 550 92127
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
7462	Transistor, NPN, PDTC143ZT	9340 547 00215
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
7471	IC, TDA8359J/N2	9352 701 64112
7480	Transistor, NPN, BD135	3198 020 41010
7482	Transistor, NPN, BD135	3198 020 41010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667
7520	IC, TEA1507P/N1	9352 673 56112
7521	Power FET, FQPF9N50	9322 187 16687
7522	Transistor, NPN, BC847B(COL)	3198 010 42030
7540	Transistor, NPN, BC547B(COL)	3198 020 40030
7541	Transistor, NPN, PDTC114ET	9340 310 10215
7542	Transistor, PNP, BC857B(COL)	3198 010 42150
7560	IC, L78L33ACZ	9322 134 92676
7561	Transistor, NPN, PDTC143ZT	9340 547 00215
7580	Transistor, PNP, BC857B(COL)	3198 010 42150
7602	IC, M24C08-WBN6	9322 154 38682
7606	Transistor, NPN, PDTC143ZT	9340 547 00215
7802	IC, HEF4053BT	9333 729 60653
7803	IC, HEF4053BT	9333 729 60653
7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682
7901	IC, AN7580	9322 166 29682
7903	Transistor, NPN, BC847B(COL)	3198 010 42030
9001	Wire Jumper	3198 036 90010
9101	Wire Jumper	3198 036 90010
9102	Wire Jumper	3198 036 90010
9103	Wire Jumper	3198 036 90010
9104	Wire Jumper	3198 036 90010
9123	Wire Jumper	3198 036 90010
9171	Wire Jumper	3198 036 90010
9173	Wire Jumper	3198 036 90010
9175	Wire Jumper	3198 036 90010
9176	Wire Jumper	3198 036 90010
9178	Wire Jumper	3198 036 90010
9179	Wire Jumper	3198 036 90010
9181	Wire Jumper	3198 036 90010
9182	Wire Jumper	3198 036 90010
9183	Wire Jumper	3198 036 90010
9192	Wire Jumper	3198 036 90010
9193	Wire Jumper	3198 036 90010
9311	Wire Jumper	3198 036 90010
9312	Wire Jumper	3198 036 90010
9406	Wire Jumper	3198 036 90010
9407	Wire Jumper	3198 036 90010
9408	Wire Jumper	3198 036 90010
9409	Wire Jumper	3198 036 90010
9410	Wire Jumper	3198 036 90010
9411	Wire Jumper	3198 036 90010
9412	Wire Jumper	3198 036 90010
9413	Wire Jumper	3198 036 90010
9414	Wire Jumper	3198 036 90010
9415	Wire Jumper	3198 036 90010
9416	Wire Jumper	3198 036 90010
9417	Wire Jumper	3198 036 90010
9418	Wire Jumper	3198 036 90010
9419	Wire Jumper	3198 036 90010
9421	Wire Jumper	3198 036 90010
9422	Wire Jumper	3198 036 90010
9424	Wire Jumper	3198 036 90010
9425	Wire Jumper	3198 036 90010
9426	Wire Jumper	3198 036 90010
9427	Wire Jumper	3198 036 90010
9453	Wire Jumper	3198 036 90010
9460	Wire Jumper	3198 036 90010
9463	Wire Jumper	3198 036 90010
9500	Wire Jumper	3198 036 90010
9501	Wire Jumper	3198 036 90010
9503	Wire Jumper	3198 036 90010
9506	Wire Jumper	3198 036 90010
9507	Wire Jumper	3198 036 90010
9511	Wire Jumper	3198 036 90010
9512	Wire Jumper	3198 036 90010
9513	Wire Jumper	3198 036 90010
9514	Wire Jumper	3198 036 90010
9515	Wire Jumper	3198 036 90010
9516	Wire Jumper	3198 036 90010
9518	Wire Jumper	3198 036 90010
9520	Wire Jumper	3198 036 90010
9521	Wire Jumper	3198 036 90010
9522	Wire Jumper	3198 036 90010
9524	Wire Jumper	3198 036 90010
9528	Wire Jumper	3198 036 90010
9530	Wire Jumper	3198 036 90010
9611	Coil, 27u, 10%	3198 018 22790
9612	Wire Jumper	3198 036 90010
9613	Wire Jumper	3198 036 90010
9614	Wire Jumper	3198 036 90010
9615	Wire Jumper	3198 036 90010
9618	Wire Jumper	3198 036 90010
9619	Wire Jumper	3198 036 90010
9620	Wire Jumper	3198 036 90010
9621	Wire Jumper	3198 036 90010
9622	Wire Jumper	3198 036 90010
9623	Wire Jumper	3198 036 90010
9624	Wire Jumper	3198 036 90010
9626	Wire Jumper	3198 036 90010
9627	Wire Jumper	3198 036 90010
9628	Wire Jumper	3198 036 90010
9629	Wire Jumper	3198 036 90010
9631	Wire Jumper	3198 036 90010
9632	Wire Jumper	3198 036 90010
9633	Wire Jumper	3198 036 90010
9637	Wire Jumper	3198 036 90010
9638	Wire Jumper	3198 036 90010
9640	Wire Jumper	3198 036 90010
9641	Wire Jumper	3198 036 90010
9642	Wire Jumper	3198 036 90010
9643	Wire Jumper	3198 036 90010
9644	Wire Jumper	3198 036 90010
9645	Wire Jumper	3198 036 90010
9648	Wire Jumper	3198 036 90010
9650	Wire Jumper	3198 036 90010
9652	Wire Jumper	3198 036 90010
9654	Wire Jumper	3198 036 90010
9655	Wire Jumper	3198 036 90010
9656	Wire Jumper	3198 036 90010
9657	Wire Jumper	3198 036 90010
9658	Wire Jumper	3198 036 90010
9659	Wire Jumper	3198 036 90010
9660	Wire Jumper	3198 036 90010
9661	Wire Jumper	3198 036 90010
9662	Wire Jumper	3198 036 90010
9663	Wire Jumper	3198 036 90010
9664	Wire Jumper	3198 036 90010
9665	Wire Jumper	3198 036 90010
9666	Wire Jumper	3198 036 90010
9667	Wire Jumper	3198 036 90010
9668	Wire Jumper	3198 036 90010
9669	Wire Jumper	3198 036 90010
9670	Wire Jumper	3198 036 90010
9671	Wire Jumper	3198 036 90010
9672	Coil, 22u, 10%	3198 018 22290
9674	Wire Jumper	3198 036 90010
9675	Wire Jumper	3198 036 90010
9676	Wire Jumper	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper	3198 036 90010
9680	Wire Jumper	3198 036 90010
9681	Wire Jumper	3198 036 90010
9685	Wire Jumper	3198 036 90010
9686	Wire Jumper	3198 036 90010
9687	Wire Jumper	3198 036 90010
9688	Wire Jumper	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

29DV693R85C (continued)

	Ref	Description	Part No.
	9689	Wire Jumper.	3198 036 90010
	9690	Wire Jumper.	3198 036 90010
	9691	Wire Jumper.	3198 036 90010
	9694	Wire Jumper.	3198 036 90010
	9695	Wire Jumper.	3198 036 90010
	9697	Wire Jumper.	3198 036 90010
	9698	Wire Jumper.	3198 036 90010
	9699	Wire Jumper.	3198 036 90010
	9821	Wire Jumper.	3198 036 90010
	9822	Wire Jumper.	3198 036 90010
	9825	Wire Jumper.	3198 036 90010
	9828	Wire Jumper.	3198 036 90010
	9829	Wire Jumper.	3198 036 90010
	9831	Wire Jumper.	3198 036 90010
	9832	Wire Jumper.	3198 036 90010
	9837	Wire Jumper.	3198 036 90010
	9838	Wire Jumper.	3198 036 90010
	9839	Wire Jumper.	3198 036 90010
	9846	Wire Jumper.	3198 036 90010
	9847	Wire Jumper.	3198 036 90010
	9849	Wire Jumper.	3198 036 90010
	9851	Wire Jumper.	3198 036 90010
	9856	Wire Jumper.	3198 036 90010
	9858	Wire Jumper.	3198 036 90010
	9859	Wire Jumper.	3198 036 90010
	9860	Wire Jumper.	3198 036 90010
	9862	Wire Jumper.	3198 036 90010
	9864	Wire Jumper.	3198 036 90010
	9865	Wire Jumper.	3198 036 90010
	9867	Wire Jumper.	3198 036 90010
	9868	Wire Jumper.	3198 036 90010
	9869	Wire Jumper.	3198 036 90010
	9873	Wire Jumper.	3198 036 90010
	9874	Wire Jumper.	3198 036 90010
	9875	Wire Jumper.	3198 036 90010
	9876	Wire Jumper.	3198 036 90010
	9877	Wire Jumper.	3198 036 90010
	9901	Wire Jumper.	3198 036 90010
	9902	Wire Jumper.	3198 036 90010
	9903	Wire Jumper.	3198 036 90010
	9904	Wire Jumper.	3198 036 90010
	9911	Wire Jumper.	3198 036 90010
	9913	Wire Jumper.	3198 036 90010
	9914	Wire Jumper.	3198 036 90010
	9915	Wire Jumper.	3198 036 90010
	9923	Wire Jumper.	3198 036 90010
	9991	Wire Jumper.	3198 036 90010
	9996	Wire Jumper.	3198 036 90010
	9998	Wire Jumper.	3198 036 90010
	CBA	Main Chassis Assembly.	3139 187 23581
	CBA	DVD Loader SD5.12.	3139 188 55471
	CBA	DVD MPEG Assembly SD5.12	3139 188 55481
	CBA	DVD Module SD5.12 (contains Loader and MPEG Assembly)	4835 310 57599

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

	Ref	Description	Part No.
	0267	3 Pin Board Connector.	2422 025 09191
	0361	Eject Button	3139 177 63451
	1110	Tact Switch.	2422 128 02742
	CBA	DVD Eject Panel Assembly	3139 187 23311

DVD Interface Panel Parts

DVD Interface Panel Parts

	Ref	Description	Part No.
	0226	Connector, 6 Pin	2422 025 12482
	0228	Connector, 3 Pin	2412 020 00725
	0251	Connector, 4 Pin	2422 025 15847
	0253	Connector, 7 Pin	2422 025 11244
	0254	Connector, 3 Pin	2422 025 16382
	0266	Connector, 6 Pin	2422 025 15849
	0269	Connector, 5 Pin	2422 025 15848
	1100	Socket, Cinch, 1 Pin	2422 026 04425
	1101	Connector, 8 Pin	2422 025 12483
S	1330	Fuse, 2A, 250V	2422 086 10422
S	1331	Fuse, 2A, 250V	2422 086 10422
S	1332	Fuse, 2A, 250V	2422 086 10421
	2101	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
	2102	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
	2103	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
	2104	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2110	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2111	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2112	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2113	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2114	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2185	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2263	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2300	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
	2301	Cap, 22n, 10%, 400v, Metalized Polyeste	2222 365 55223
	2302	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
	2310	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
	2311	Cap, 470n, 10%, 25v, Ceramic	2020 552 96465
	2313	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
	2315	Cap, 220p, 10%, 1KV, Ceramic	3198 019 62210
	2316	Cap, 33n, 10%, 16v, Ceramic.	3198 017 33330
	2319	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
	2330	Cap, 2u2, 20%, 25v, Electrolytic	3198 026 32220
	2331	Cap, 470u, 20%, 10v, Electrolytic.	3198 025 14710
	2332	Cap, 2u2, 20%, 25v, Electrolytic	3198 026 32220
	2333	Cap, 1000u, 20%, 10v, Electrolytic	2020 021 91631
	2337	Cap, 1000u, 20%, 25v, Electrolytic	3198 026 31020
	2338	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710
	2339	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710
	2341	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2342	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2350	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2351	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2353	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	3101	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3102	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
	3110	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3111	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3112	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3113	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3114	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3115	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3116	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3117	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3118	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3180	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3182	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3262	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3266	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
S	3300	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
S	3301	Power Resistor, 68K, 5%, 2W.	3198 012 26830
	3308	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3309	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3310	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3311	Res, 180 ohm, 5%, 1/16W, Metalized Glas	3198 021 31810
	3312	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
	3313	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3314	Res, 1 ohm, 5%, 1/6W, Carbon Film.	3198 011 01080
	3315	Res, 1 ohm, 5%, 1/6W, Carbon Film.	3198 011 01080
	3317	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3318	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3319	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3320	Res, 100K, 1%, 1/16W, Metalized Glass.	2322 704 61004
	3339	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3340	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3342	Res, 4K7, 1%, 1/16W, Metalized Glass .	2322 704 64702
	3344	Res, 4K7, 1%, 1/16W, Metalized Glass .	2322 704 64702
	3360	Res, 4R7, 5%, 1/16W, Metalized Glass .	3198 021 34780
	3361	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	4105	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4106	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4185	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4226	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4261	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4265	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4266	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4316	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4342	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4343	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4361	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4363	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4364	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	5100	Inductor, Variable, 100uH, 10%	2422 549 41663
	5110	Coil, 220n	3198 018 12270
	5300	Coil, 27u.	3198 018 22790
	5301	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
S	5315	Transformer, SS25113-00.	2422 531 02596
	5331	Coil, 10u, 5%.	2422 535 95363
	5333	Coil, 10u, 5%.	2422 535 95363
	5337	Coil, 10u, 10%	2422 535 97328
	5339	Coil, 10u, 10%	2422 535 97328
	6100	Diode, Signal, BAS316.	3198 010 10630
	6101	Diode, Signal, BAS316.	3198 010 10630
	6300	Diode, Rect, BYD33J	9337 234 20133
	6311	Diode, Signal, BAS316.	3198 010 10630
	6312	Zener Diode, 22 volt	3198 020 52290
	6330	Diode, Rect, EGP20DL-5100	9322 164 42682
	6332	Diode, Rect, SB340L-7024.	9322 161 76682
	6336	Diode, Rect, BYV27-200.	9335 526 80133
	7110	IC, HEF4053BT.	9333 729 60653

S = Safety Part   Be sure to use exact replacement part.

29DV693R85C (continued)

	Ref	Description	Part No.
	7262	Transistor, NPN, PDTC124ET	9340 310 20215
	7310	Transistor, NPN, PDTC114ET	3198 010 44110
	7311	Transistor, PNP, PDTA114ET	3198 010 44010
	7312	Transistor, PNP, BC857B.	3198 010 42150
	7313	Transistor, NPN, BC847B.	3198 010 42030
	7315	IC, TEA1523P/N2.	9352 699 68112
S	7340	Optical Coupler, TCET1103(G)	9322 140 14667
	7341	IC, TL431CLP	9337 711 00676
	9110	Wire Jumper.	3198 036 90010
	9111	Wire Jumper.	3198 036 90010
	9183	Wire Jumper.	3198 036 90010
	9266	Wire Jumper.	3198 036 90010
	9315	Wire Jumper.	3198 036 90010
	9350	Wire Jumper.	3198 036 90010
	9351	Wire Jumper.	3198 036 90010
	9352	Wire Jumper.	3198 036 90010
	9355	Wire Jumper.	3198 036 90010
	9357	Wire Jumper.	3198 036 90010
	CBA	DVD Interface Panel Assembly	3141 058 64801

Front Interface Panel Parts

Front Interface Panel Parts

	Ref	Description	Part No.
S	0211	2 Pin Connector.	2422 025 16268
S	0212	2 Pin Connector.	2422 025 16559
	0214	5 Pin Connector.	2422 025 06353
	1606	Tact Switch.	2422 128 02742
	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2692	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
	2693	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
	2694	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
	2695	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
	2698	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
S	3500	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322 242 13335
S	3501	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322 242 13335
	3685	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
	3691	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
	3693	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
	6691	LED, LTL-10234WHCR	9322 185 69682
	6692	IR Receiver, TSOP1836UH3V.	9322 127 54667
	9001	Wire Jumper.	3198 036 90010
	9002	Wire Jumper.	3198 036 90010
	CBA	Front Interface Panel Assembly	3139 177 26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts

Side Jack Panel Parts

	Ref	Description	Part No.
	0232	Headphone Jack	2422 026 04747
	0250	A/V Jack	2422 026 04815
	0251	6 Pin Connector.	2422 025 15849
	0254	5 Pin Connector.	2422 025 12481
	0255	4 Pin Connector.	2422 025 12479
	2171	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
	2172	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
	2173	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
	2174	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
	2176	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
	2177	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2178	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
	2179	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	3150	Res, 47k, 5%, 1/6W, Carbon	3198 011 04730
	3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
	3152	Res, 47k, 5%, 1/6W, Carbon	3198 011 04730
	3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
	3156	Res, 120 ohm, 5%, 1/6W, Carbon Film.	3198 011 01210
	3157	Res, 120 ohm, 5%, 1/6W, Carbon Film.	3198 011 01210
	6161	Zener Diode, 6.8 volt.	3198 010 26880
	9153	Wire Jumper.	3198 036 90010
	9170	Wire Jumper.	3198 036 90010
	9171	Wire Jumper.	3198 036 90010
	CBA	Side Jack Panel Assembly	3139 188 03541

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

	Ref	Description	Part No.
	0215	3 Pin Connector.	2422 025 16601
	1091	Tact Switch.	2422 128 02742
	1092	Tact Switch.	2422 128 02742
	1093	Tact Switch.	2422 128 02742
	1094	Tact Switch.	2422 128 02742
	3091	Res, 560 ohm, 5%, Metalized Glass.	3198 021 35610
	3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
	3093	Res, 560 ohm, 5%, Metalized Glass.	3198 021 35610
	3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
	3095	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3096	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
	4085	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4089	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4090	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	6091	Diode, Signal.	9340 453 90115
	CBA	Top Control Panel Assembly	3139 187 15841

Cabinet & Accessory Parts

Cabinet & Accessory Parts

	Ref	Description	Part No.
S	AC01	AC Cord.	3135 010 03831
	AC03	Anode Lead Spacer (3 Used)	3135 014 04471
	AC04	Batteries for Remote Control Transmitte	9299 000 65263
	AC05	Cabinet Back	3139 124 44931
	AC06	Cabinet Back Screw Cover (2 Used).	3139 124 39301
	AC08	Chassis Tray	3139 124 31325
S	AC09	CRT, A68QCU754X73(N)	9301 925 60527
S	AC12	Degaussing Coil.	2422 549 45709
	AC13	Front Interface Panel Bracket.	3139 124 32891
	AC15	Holder, Degaussing Coil (4 Used)	3135 013 01641
	AC17	Owner's Manual	3121 235 21341
	AC18	Quick Use Guide.	3121 233 44461
	AC19	Side Jack Panel Bracket.	3139 124 37061
	AC20	Cabinet Front Assembly	3121 237 53503
	AC20A	Cabinet Front.	3139 177 75451
	AC20C	Light Guide.	3139 124 39701
	AC20D	Nameplate.	3141 050 00161
	AC20E	Power Button	3139 138 10881
	AC20H	Speaker, 8 ohm, 10W (2 Used)	3139 128 76521
	AC20J	Top Control Assembly	3139 177 56381
	AC23	DVD Door	3139 177 63441
	AC24	DVD Interface Panel Bracket.	3139 124 43291
	REMOTE	Remote Control Transmitter, RC19042007/01.	3128 147 14521

S = Safety Part   Be sure to use exact replacement part.

Main Chassis Parts

Safety	Ref.	Description	Part No.
		Main Chassis Parts	
	0211	2 Pin Connector.	2422 025 16269
	0212	2 Pin Connector.	2422 025 16375
	0219	6 Pin Connector.	2422 025 12482
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0222	2 Pin Connector.	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0229	3 Pin Connector.	2412 020 00725
	0243	6 Pin Connector.	2422 025 04854
	0244	5 Pin Connector.	2422 025 04853
	0245	6 Pin Connector.	2422 025 04854
	0246	5 Pin Connector.	2422 025 15848
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector.	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U PLL	2422 542 90098
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1600	Tact Switch.	2422 128 02742
	1601	Tact Switch.	2422 128 02742
	1602	Tact Switch.	2422 128 02742
	1603	Tact Switch.	2422 128 02742
	1606	Tact Switch.	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1811	3 Pin Connector.	2412 020 00725
	1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic. . .	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic. . .	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic. . .	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic . .	2020 558 90445
	2405	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
	2441	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic . . .	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic. . .	2020 021 91139
	2451	Cap, 15n, 10%, 50v, Polyester.	3198 014 01530
	2455	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
	2457	Cap, 470n, 5%, 250v, Metalized Polypropylene.	2022 333 00086
	2458	Cap, 2u2, 20%, 100v, Electrolytic. . .	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
	2462	Cap, 330n, 10%, 250v, MPP.	2022 333 00084
	2463	Cap, 1nf, 10%, 2000v, Ceramic Only with 5445 (JF0501-21835) Layer Wound. . . .	2020 558 90487
	2463	Cap, 680p, 10%, 2000v, Ceramic	2020 558 90485
S	2465	Cap, 11n, 5%, 1600v, Polypropylene . .	2020 301 90251
S	2465	Cap, 12n, 5%, 1600v, Polypropylene Only with 5445 (JF0501-21835) Layer Wound .	2222 375 90156
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic . . .	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic. . .	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic. . .	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic . . .	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic . .	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic. . .	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 330u, 20%, 400v, Electrolytic . .	2020 024 90561
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
	2509	Cap, 100n, 20%, 275v, Metalized Polypropylene	2222 336 29144
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic . . .	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic . .	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic . . .	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic . . .	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic . . .	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic. . .	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic. . .	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2606	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050
	2691	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
	2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2803	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250

29PT543S44A (continued)

Safety	Ref	Description	Part No.
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
	2862	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
	2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
	2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
	2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
	2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
	2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
	2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240
	2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
	2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
	2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
	2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
	2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
	3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
	3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
	3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202
	3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
	3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
	3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
	3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
	3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840
	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
	3452	Res, 5K6, 1%, 3/5W, Metal Film Only wit h 5445 (JF0501-21835) Layer Wound. . .	2312 915 15602
	3452	Res, 47K, 1%, 3/5W, Metal Film	2312 915 14703
	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3454	Res, 15K, 1%, 3/5W, Metal Film	2312 915 11503
	3454	Res, 2K, 1%, 3/5W, Metal Film Only with 5445 (JF0501-21835) Layer Wound. . . .	2312 915 12002
S	3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
	3456	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3457	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S	3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3461	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020
	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
	3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
	3470	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
	3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S	3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 33390
	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3491	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S	3504	Res, PTC, 9 ohm, 265V.	2122 663 00021
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
	3521	Res, 22 ohm, 5%, 1/6W, Carbon Film . .	3198 011 02290
	3522	Res, 390K, 5%, 1/8W, Metalized Glass .	2322 730 61394
S	3523	Res, 47 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03479
	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020

S = Safety Part   Be sure to use exact replacement part.

29PT543S44A (continued)

	3526	Res, 0R15, 5%, 3/5W, Metal Film. . . .	3198 012 11570
	3527	Res, 0R22, 5%, 3/5W, Metal Film. . . .	3198 012 12270
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3561	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 8K2, 5%, 1/10W, Metalized Glass .	3198 021 58220
S	3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3630	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3681	Res, 180 ohm, 1%, 1/8W, Metalized Glass	2322 734 61801
	3682	Res, 270 ohm, 1%, 1/8W, Metalized Glass	2322 734 62701
	3683	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322 734 63901
	3684	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322 734 63901
	3686	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3687	Res, 75 ohm, 1%, 1/8W, Metalized Glass	2322 734 67509
	3688	Res, 68 ohm, 1%, 1/8W, Metalized Glass	2322 734 66809
	3689	Res, 2K7, 1%, 1/8W, Metalized Glass. .	2322 734 62702
	3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198 021 31530
	3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198 021 31220
	3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220

	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4122	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4123	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4127	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5202	Wire Jumper.	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5241	Wire Jumper.	3198 036 90010
	5242	Coil, 10u, 5%.	3198 018 11090
	5342	Coil, 22u.	2422 535 97333
S	5445	Transformer, LOT (JF0501-21835) Layer W ound	2422 531 02611
S	5445	Transformer, LOT	3128 138 21391
	5451	Coil, 33u, 10%	3198 018 73390
	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5453	Coil, 22u, 5%.	3198 018 12290
S	5457	Coil, 42u.	2422 535 94865
	5461	Transformer, Signal Driver, SC10027-00	2422 531 02478
	5471	Coil, 3u3, 20%	3198 018 73380
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 39u, 10%	2422 535 97336
S	5500	Mains Filter	2422 549 43567
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS42025-03.	2422 531 02462
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5861	Coil, 10u, 5%.	3198 018 11090
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316.	3198 010 10630
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630

S = Safety Part   Be sure to use exact replacement part.

29PT543S44A (continued)

	Ref	Description	Part No.
	6206	Zener Diode, 6.8 volt	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148	3198 010 10010
	6448	Zener Diode, 6.2 volt	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6453	Zener Diode, 6.8 volt	3198 020 56880
	6460	Diode, Rect, BY228/24	9340 559 50112
	6461	Diode, Rect, RGP30J-L7004	9338 617 60682
	6462	Zener Diode, 9.1 volt	9331 177 80133
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316	3198 010 10630
	6468	Diode, Signal, BAS316	3198 010 10630
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt	3198 010 25680
	6482	Zener Diode, 9.1 volt	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYD33J	9337 234 20133
	6486	Diode, Rect, EGP20DL-5100	9322 164 42682
	6487	Diode, Rect, BYD33D	9337 234 00133
	6488	Diode, Rect, EGP20DL-5100	9322 164 42682
	6500	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
	6520	Diode, Rect, BYD33D	9337 234 00133
	6523	Diode, Signal, 1N4148	3198 010 10010
	6524	Diode, Rect, 1N5062	3198 010 10120
	6525	Diode, Rect, 1N5062	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt	9331 668 30133
	6541	Zener Diode, 9.1 volt	9322 150 08685
	6560	Diode, Rect, BYV29X-500	9340 555 59127
	6562	Diode, Rect, EGP20DL-5100	9322 164 42682
	6563	Diode, Signal, BAS316	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148	3198 010 10010
	6567	Zener Diode, 4.7 volt	3198 020 54780
	6569	Diode, Signal, BAS316	3198 010 10630
	6570	Zener Diode, 6.2 volt	9322 163 91685
	6580	Diode, Signal, BAS316	3198 010 10630
	6691	LED, LTL-10234WHCR	9322 185 69682
	6692	IR Receiver	9322 127 54667
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7102	Transistor, PNP, BC857B(COL)	3198 010 42150
	7103	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9577H/N1/AI/1130	9352 731 51557
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7450	Transistor, PNP, PDTA114ET	3198 010 44010
	7460	Transistor, NPN, BU4508DX	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1104(G)	9322 175 72667
	7520	IC, TEA1507P/N1	9352 673 56112
	7521	Power FET, STU9NC80ZI	9322 163 76687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, L78L33ACZ	9322 134 92676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C08-WBN6	9322 154 38682
	7802	IC, HEF4053BT	9333 729 60653
	7861	IC, TDA9853H/V1	9352 671 19557
	7891	Transistor, NPN, BC847B(COL)	3198 010 42030
	7892	Transistor, NPN, BC847B(COL)	3198 010 42030
	7901	IC, AN7522N PH	9322 181 41682
	9001	Wire Jumper	3198 036 90010
	9101	Wire Jumper	3198 036 90010
	9102	Wire Jumper	3198 036 90010
	9103	Wire Jumper	3198 036 90010
	9104	Wire Jumper	3198 036 90010
	9123	Wire Jumper	3198 036 90010
	9171	Wire Jumper	3198 036 90010
	9173	Wire Jumper	3198 036 90010
	9175	Wire Jumper	3198 036 90010
	9176	Wire Jumper	3198 036 90010
	9178	Wire Jumper	3198 036 90010
	9179	Wire Jumper	3198 036 90010
	9181	Wire Jumper	3198 036 90010
	9182	Wire Jumper	3198 036 90010
	9183	Wire Jumper	3198 036 90010
	9184	Wire Jumper	3198 036 90010
	9192	Wire Jumper	3198 036 90010
	9193	Wire Jumper	3198 036 90010
	9311	Wire Jumper	3198 036 90010
	9312	Wire Jumper	3198 036 90010
	9406	Wire Jumper	3198 036 90010
	9407	Wire Jumper	3198 036 90010
	9408	Wire Jumper	3198 036 90010
	9409	Wire Jumper	3198 036 90010
	9410	Wire Jumper	3198 036 90010
	9411	Wire Jumper	3198 036 90010
	9412	Wire Jumper	3198 036 90010
	9413	Wire Jumper	3198 036 90010
	9415	Wire Jumper	3198 036 90010
	9416	Wire Jumper	3198 036 90010
	9417	Wire Jumper	3198 036 90010
	9418	Wire Jumper	3198 036 90010
	9419	Wire Jumper	3198 036 90010
	9421	Wire Jumper	3198 036 90010
	9422	Wire Jumper	3198 036 90010
	9423	Wire Jumper	3198 036 90010
	9425	Wire Jumper	3198 036 90010
	9427	Wire Jumper	3198 036 90010
	9453	Wire Jumper	3198 036 90010
	9460	Wire Jumper	3198 036 90010
	9500	Wire Jumper	3198 036 90010
	9501	Wire Jumper	3198 036 90010
	9503	Wire Jumper	3198 036 90010
	9510	Wire Jumper	3198 036 90010
	9511	Wire Jumper	3198 036 90010
	9512	Wire Jumper	3198 036 90010
	9513	Wire Jumper	3198 036 90010
	9514	Wire Jumper	3198 036 90010
	9515	Wire Jumper	3198 036 90010
	9516	Wire Jumper	3198 036 90010
	9518	Wire Jumper	3198 036 90010
	9520	Wire Jumper	3198 036 90010
	9521	Wire Jumper	3198 036 90010
	9522	Wire Jumper	3198 036 90010
	9524	Wire Jumper	3198 036 90010
	9528	Wire Jumper	3198 036 90010
	9530	Wire Jumper	3198 036 90010
	9611	Coil, 27u, 10%	3198 018 22790
	9612	Wire Jumper	3198 036 90010
	9613	Wire Jumper	3198 036 90010
	9614	Wire Jumper	3198 036 90010
	9615	Wire Jumper	3198 036 90010
	9617	Wire Jumper	3198 036 90010
	9618	Wire Jumper	3198 036 90010
	9619	Wire Jumper	3198 036 90010
	9620	Wire Jumper	3198 036 90010
	9621	Wire Jumper	3198 036 90010
	9622	Wire Jumper	3198 036 90010
	9623	Wire Jumper	3198 036 90010
	9624	Wire Jumper	3198 036 90010
	9626	Wire Jumper	3198 036 90010
	9627	Wire Jumper	3198 036 90010
	9628	Wire Jumper	3198 036 90010
	9629	Wire Jumper	3198 036 90010
	9631	Wire Jumper	3198 036 90010
	9632	Wire Jumper	3198 036 90010
	9633	Wire Jumper	3198 036 90010
	9637	Wire Jumper	3198 036 90010
	9638	Wire Jumper	3198 036 90010
	9639	Wire Jumper	3198 036 90010
	9640	Wire Jumper	3198 036 90010
	9641	Wire Jumper	3198 036 90010
	9642	Wire Jumper	3198 036 90010
	9643	Wire Jumper	3198 036 90010
	9648	Wire Jumper	3198 036 90010
	9650	Wire Jumper	3198 036 90010
	9651	Wire Jumper	3198 036 90010
	9652	Wire Jumper	3198 036 90010
	9654	Wire Jumper	3198 036 90010
	9655	Wire Jumper	3198 036 90010
	9657	Wire Jumper	3198 036 90010
	9658	Wire Jumper	3198 036 90010
	9659	Wire Jumper	3198 036 90010
	9660	Wire Jumper	3198 036 90010
	9661	Wire Jumper	3198 036 90010
	9662	Wire Jumper	3198 036 90010
	9663	Wire Jumper	3198 036 90010
	9664	Wire Jumper	3198 036 90010
	9665	Wire Jumper	3198 036 90010
	9666	Wire Jumper	3198 036 90010
	9667	Wire Jumper	3198 036 90010
	9668	Wire Jumper	3198 036 90010
	9669	Wire Jumper	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

9670	Wire Jumper.	3198 036 90010
9671	Wire Jumper.	3198 036 90010
9672	Coil, 22u, 10%	3198 018 22290
9674	Wire Jumper.	3198 036 90010
9675	Wire Jumper.	3198 036 90010
9676	Wire Jumper.	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper.	3198 036 90010
9680	Wire Jumper.	3198 036 90010
9681	Wire Jumper.	3198 036 90010
9685	Wire Jumper.	3198 036 90010
9686	Wire Jumper.	3198 036 90010
9687	Wire Jumper.	3198 036 90010
9688	Wire Jumper.	3198 036 90010
9689	Wire Jumper.	3198 036 90010
9690	Wire Jumper.	3198 036 90010
9691	Wire Jumper.	3198 036 90010
9694	Wire Jumper.	3198 036 90010
9695	Wire Jumper.	3198 036 90010
9697	Wire Jumper.	3198 036 90010
9698	Wire Jumper.	3198 036 90010
9699	Wire Jumper.	3198 036 90010
9821	Wire Jumper.	3198 036 90010
9822	Wire Jumper.	3198 036 90010
9825	Wire Jumper.	3198 036 90010
9828	Wire Jumper.	3198 036 90010
9829	Wire Jumper.	3198 036 90010
9831	Wire Jumper.	3198 036 90010
9832	Wire Jumper.	3198 036 90010
9837	Wire Jumper.	3198 036 90010
9838	Wire Jumper.	3198 036 90010
9839	Wire Jumper.	3198 036 90010
9846	Wire Jumper.	3198 036 90010
9847	Wire Jumper.	3198 036 90010
9849	Wire Jumper.	3198 036 90010
9850	Wire Jumper.	3198 036 90010
9851	Wire Jumper.	3198 036 90010
9852	Wire Jumper.	3198 036 90010
9853	Wire Jumper.	3198 036 90010
9856	Wire Jumper.	3198 036 90010
9860	Wire Jumper.	3198 036 90010
9861	Wire Jumper.	3198 036 90010
9862	Wire Jumper.	3198 036 90010
9864	Wire Jumper.	3198 036 90010
9865	Wire Jumper.	3198 036 90010
9868	Wire Jumper.	3198 036 90010
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9891	Wire Jumper.	3198 036 90010
9892	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010
9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9905	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9918	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9993	Wire Jumper.	3198 036 90010
9994	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9997	Wire Jumper.	3198 036 90010
9998	Wire Jumper.	3198 036 90010
CBA	Main Chassis Assembly.	3141 058 58181

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422 026 04747
0250	A/V Jack	2422 026 04815
0251	6 Pin Connector.	2422 025 12482
0254	5 Pin Connector.	2422 025 12481
0255	4 Pin Connector.	2422 025 12479
1810	3 Pin Connector.	2412 020 00725
1811	3 Pin Connector.	2412 020 00725
2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2177	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2179	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
6161	Zener Diode, 6.8 volt.	3198 010 26880
7802	IC, HEF4053BT.	9333 729 60653
9150	Wire Jumper.	3198 036 90010
9151	Wire Jumper.	3198 036 90010
9152	Wire Jumper.	3198 036 90010
9153	Wire Jumper.	3198 036 90010
9154	Wire Jumper.	3198 036 90010
9170	Wire Jumper.	3198 036 90010
CBA	Side Jack Panel Assembly	3139 177 26231

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	2422 070 98239
AC03	Anode Lead Spacer (3 Used)	3135 014 04471
AC04	Batteries for Remote Control Transmitte	9299 000 65263
AC05	Cabinet Back	3139 124 35953
S AC09	CRT, A68AJB82X01	9301 787 70612
AC10	Customer Control Buttons	3139 177 60751
S AC12	Degaussing Coil.	2422 549 45506
AC15	Holder, Degaussing Coil (4 Used) . . .	3135 013 01641
AC17	Owner's Manual	3121 235 20761
AC19	Side Jack Panel Bracket.	3139 124 37061
AC20	Cabinet Front Assembly	3121 237 53071
AC20A	Cabinet Front.	3139 177 53551
AC20B	Chassis Guide (2 Used)	3139 124 31381
AC20C	Light Guide.	3139 124 35111
AC20D	Nameplate.	3141 050 00161
AC20E	Power Button	3139 177 60761
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00411
REMOTE	Remote Control Transmitter, RC19335004/ 01.	3139 228 86463

Main Chassis Parts

	Ref	Description	Part No.
		Main Chassis Parts	
	0211	2 Pin Connector	2422 025 16269
	0212	2 Pin Connector	2422 025 16375
	0219	6 Pin Connector	2422 025 12482
	0220	5 Pin Connector	2422 025 04853
	0221	2 Pin Connector	2422 025 15503
	0222	2 Pin Connector	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack	2422 026 04926
	0229	3 Pin Connector	2412 020 00725
	0243	6 Pin Connector	2422 025 04854
	0244	5 Pin Connector	2422 025 04853
	0245	6 Pin Connector	2422 025 04854
	0246	5 Pin Connector	2422 025 12481
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U PLL	2422 542 90098
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC	2422 086 10914
S	1515	Relay, 5 Amp, 12V	2422 132 07444
	1600	Tact Switch	2422 128 02742
	1601	Tact Switch	2422 128 02742
	1602	Tact Switch	2422 128 02742
	1603	Tact Switch	2422 128 02742
	1606	Tact Switch	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1811	3 Pin Connector	2412 020 00725
	1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344
	2004	Cap, 47n, 10%, 50v, Ceramic	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2226	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2241	Cap, 1n5, 10%, 50v, Ceramic	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2405	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2441	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic	2020 021 91139
	2451	Cap, 15n, 10%, 50v, Polyester	3198 014 01530
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 470n, 5%, 250v, Metalized Polypropylene	2222 479 90023
	2458	Cap, 2u2, 20%, 100v, Electrolytic	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
	2462	Cap, 330n, 10%, 250v, MPP	2022 333 00084
	2463	Cap, 1nf, 10%, 2000v, Ceramic Only with 5445 (JF0501-21835) Layer Wound	2020 558 90487
	2463	Cap, 680p, 10%, 2000v, Ceramic	2020 558 90485
S	2465	Cap, 12n, 5%, 1600v, Polypropylene Only with 5445 (JF0501-21835) Layer Wound	2222 375 90156
S	2465	Cap, 11n, 5%, 1600v, Polypropylene	2222 375 90155
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic	3198 019 41020
	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2222 336 29148
	2501	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2606	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic	3198 017 21050
	2691	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2802	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2803	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2816	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740

29PT543S85A (continued)

2862 Cap, 2u2, +80/-20%, 10v, Ceramic . . . 3198 017 22250
2864 Cap, 2u2, 20%, 50v, Electrolytic . . . 3198 025 52280
2865 Cap, 2u2, 20%, 50v, Electrolytic . . . 3198 025 52280
2866 Cap, 2u2, +80/-20%, 10v, Ceramic . . . 3198 017 22250
2867 Cap, 1n8, 10%, 50v, Ceramic. 2238 586 15626
2868 Cap, 150p, 5%, 50v, Ceramic. 3198 016 31510
2869 Cap, 68n, 10%, 50v, Polyester. 3198 014 06830
2870 Cap, 68n, 10%, 50v, Polyester. 3198 014 06830
2871 Cap, 150p, 5%, 50v, Ceramic. 3198 016 31510
2872 Cap, 1n8, 10%, 50v, Ceramic. 2238 586 15626
2873 Cap, 2u2, +80/-20%, 10v, Ceramic . . . 3198 017 22250
2874 Cap, 100u, 20%, 25v, Electrolytic. . . 3198 025 31010
2875 Cap, 100u, 20%, 25v, Electrolytic. . . 3198 025 31010
2876 Cap, 4u7, 20%, 50v, Electrolytic . . . 3198 025 54780
2877 Cap, 10u, 20%, 50v, Electrolytic . . . 3198 025 51090
2878 Cap, 1u, 20%, 50v, Electrolytic. . . . 3198 025 51080
2879 Cap, 4n7, 10%, 50v, Ceramic. 3198 017 34720
2880 Cap, 22n, 10%, 25v, Ceramic. 3198 017 32230
2883 Cap, 470u, 20%, 16v, Electrolytic. . . 3198 025 24710
2884 Cap, 2u2, 20%, 50v, Electrolytic . . . 3198 025 52280
2885 Cap, 220n, 10%, 50v, Polyester 3198 014 02240
2886 Cap, 220n, +80/-20%, 16v, Ceramic. . . 3198 017 42240
2892 Cap, 100n, +80/-20%, 25v, Ceramic. . . 3198 023 41040
2893 Cap, 100n, +80/-20%, 25v, Ceramic. . . 3198 023 41040
2902 Cap, 1000u, 20%, 16v, Electrolytic . . 3198 026 21020
2903 Cap, 1u, 20%, 50v, Electrolytic. . . . 3198 025 51080
2904 Cap, 27n, 10%, 50v, Ceramic. 2238 580 15642
2905 Cap, 1n2, 10%, 50v, Ceramic. 2238 586 15624
2906 Cap, 27n, 10%, 50v, Ceramic. 2238 580 15642
2907 Cap, 1n2, 10%, 50v, Ceramic. 2238 586 15624
2908 Cap, 10u, 20%, 50v, Electrolytic . . . 3198 025 51090
2910 Cap, 10n, 10%, 50v, Ceramic. 3198 017 31030
2911 Cap, 10n, 10%, 50v, Ceramic. 3198 017 31030
2950 Cap, 330p, 5%, 50v, Ceramic. 3198 016 33310
3000 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3001 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3002 Res, Zero ohm, "Chip" Jumper 3198 021 90030
3003 Res, 1K5, 5%, 1/16W, Metalized Glass . 3198 021 31520
3004 Res, 8K2, 5%, 1/16W, Metalized Glass . 3198 021 38220
3005 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3101 Res, 68 ohm, 5%, 1/6W, Carbon Film . . 3198 011 06890
3102 Res, 1K, 5%, 1/16W, Metalized Glass. . 3198 021 31020
3103 Res, 150 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01510
3104 Res, 220K, 5%, 1/16W, Metalized Glass. 3198 021 32240
3105 Res, 150 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01510
3106 Res, 220K, 5%, 1/16W, Metalized Glass. 3198 021 32240
3111 Res, 75 ohm, 5%, 1/6W, Carbon Film . . 3198 011 07590
3112 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3113 Res, 75 ohm, 5%, 1/6W, Carbon Film . . 3198 011 07590
3114 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3115 Res, 75 ohm, 5%, 1/6W, Carbon Film . . 3198 011 07590
3116 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3123 Res, 150 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01510
3124 Res, 47K, 5%, 1/16W, Metalized Glass . 3198 021 34730
3125 Res, 150 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01510
3126 Res, 47K, 5%, 1/16W, Metalized Glass . 3198 021 34730
3131 Res, 150 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01510
3132 Res, 47K, 5%, 1/16W, Metalized Glass . 3198 021 34730
3133 Res, 150 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01510
3134 Res, 47K, 5%, 1/16W, Metalized Glass . 3198 021 34730
3135 Res, 75 ohm, 5%, 1/6W, Carbon Film . . 3198 011 07590
3136 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3141 Res, 1K, 5%, 1/6W, Carbon Film 3198 011 01020
3149 Res, 100K, 5%, 1/16W, Metalized Glass. 3198 021 31040
3150 Res, 150K, 5%, 1/16W, Metalized Glass. 3198 021 31540
3154 Res, 5K6, 5%, 1/6W, Carbon Film. . . . 3198 011 05620
3156 Res, 10K, 5%, 1/6W, Carbon Film. . . . 3198 011 01030
3157 Res, 1K5, 5%, 1/16W, Metalized Glass . 3198 021 31520
3158 Res, 10K, 5%, 1/16W, Metalized Glass . 3198 021 31030
3159 Res, 1K2, 1%, 1/8W, Metalized Glass. . 2322 734 61202
3200 Res, 390 ohm, 5%, 1/6W, Carbon Film. . 3198 011 03910
3201 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3202 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3203 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3204 Res, 22K, 5%, 1/6W, Carbon Film. . . . 3198 011 02230
3205 Res, 1K, 5%, 1/16W, Metalized Glass. . 3198 021 31020
3206 Res, 33K, 5%, 1/16W, Metalized Glass . 3198 021 33330
3207 Res, 1K, 5%, 1/6W, Carbon Film 3198 011 01020
3208 Res, 220 ohm, 5%, 1/16W, Metalized Glas 3198 021 32210
3209 Res, 68 ohm, 5%, 1/16W, Metalized Glass 3198 021 36890
3212 Res, 470 ohm, 5%, 1/16W, Metalized Glas 3198 021 34710
3213 Res, 560 ohm, 5%, 1/6W, Carbon Film. . 3198 011 05610
3217 Res, 330K, 5%, 1/16W, Metalized Glass. 3198 021 33340
3218 Res, 82K, 5%, 1/16W, Metalized Glass . 3198 021 38230
3219 Res, 2K2, 5%, 1/16W, Metalized Glass . 3198 021 32220
3220 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3221 Res, 560 ohm, 5%, 1/6W, Carbon Film. . 3198 011 05610
3222 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3226 Res, 560 ohm, 5%, 1/16W, Metalized Glas 3198 021 35610
3232 Res, 2K2, 5%, 1/16W, Metalized Glass . 3198 021 32220
3235 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3241 Res, 22K, 5%, 1/16W, Metalized Glass . 3198 021 32230
3242 Res, 27K, 5%, 1/16W, Metalized Glass . 3198 021 32730
3244 Res, 820 ohm, 5%, 1/6W, Carbon Film. . 3198 011 08210
3245 Res, 39K, 1%, 1/16W, Metalized Glass . 2322 704 63903
3246 Res, 10K, 5%, 1/16W, Metalized Glass . 3198 021 31030
3247 Res, 680K, 5%, 1/16W, Metalized Glass. 3198 021 36840
3248 Res, 33K, 5%, 1/16W, Metalized Glass . 3198 021 33330
3249 Res, 820 ohm, 5%, 1/6W, Carbon Film. . 3198 011 08210
3251 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3256 Res, 1K, 5%, 1/16W, Metalized Glass. . 3198 021 31020
3257 Res, 10M, 5%, 1/16W, Metalized Glass . 3198 021 31060
3258 Res, 100K, 5%, 1/16W, Metalized Glass. 3198 021 31040
3259 Res, 470K, 5%, 1/16W, Metalized Glass. 3198 021 34740
3331 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3332 Res, 1K, 20%, 1/2W, Carbon Film. . . . 3198 013 01020
3333 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3334 Res, 1K, 20%, 1/2W, Carbon Film. . . . 3198 013 01020
3335 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3336 Res, 1K, 20%, 1/2W, Carbon Film. . . . 3198 013 01020
3340 Res, 10 ohm, 5%, 1/2W, Metal Film. . . 2306 207 03109
S 3341 Res, 1 ohm, 5%, 1/3W, Metal Film . . . 2306 204 03108
S 3342 Res, 1 ohm, 5%, 1/3W, Metal Film . . . 2306 204 03108
3343 Res, 1K5, 20%, 1/2W, Carbon Film . . . 3198 013 01520
3344 Res, 33 ohm, 5%, 1/6W, Carbon Film . . 3198 011 03390
S 3345 Varactor, 1MA/50V, Max 115V. 2322 593 13507
3346 Res, 33 ohm, 5%, 1/6W, Carbon Film . . 3198 011 03390
3441 Res, 100 ohm, 5%, 1/10W, Metalized Glas 3198 021 51010
3442 Res, Zero ohm, "Chip" Jumper 3198 021 90030
3443 Res, 1M, 5%, 1/16W, Metalized Glass. . 3198 021 31050
3445 Res, 15K, 5%, 1/6W, Carbon Film. . . . 3198 011 01530
3446 Res, 5K6, 5%, 1/6W, Carbon Film. . . . 3198 011 05620
3447 Res, 180 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01810
3448 Res, 820 ohm, 5%, 1/6W, Carbon Film. . 3198 011 08210
3449 Res, 68 ohm, 5%, 1/6W, Carbon Film . . 3198 011 06890
3450 Res, 33 ohm, 5%, 1/6W, Carbon Film . . 3198 011 03390
S 3451 Res, 10 ohm, 5%, 1/3W, Metal Film. . . 2306 204 03109
3452 Res, 5K6, 1%, 3/5W, Metal Film Only wit
h 5445 (JF0501-21835) Layer Wound. . . 2312 915 15602
3452 Res, 10K, 1%, 3/5W, Metal Film 2312 915 11003
3453 Res, 1K, 5%, 1/6W, Carbon Film 3198 011 01020
3454 Res, 2K, 1%, 3/5W, Metal Film Only with
5445 (JF0501-21835) Layer Wound. . . . 2312 915 12002
3454 Res, 3K9, 1%, 3/5W, Metal Film 2312 915 13902
S 3455 Res, 6R8, 5%, 1 1/3W, Metal Film . . . 3198 012 26880
3458 Res, 1K, 5%, 1/6W, Carbon Film 3198 011 01020
S 3459 Res, 15K, 5%, 1 1/3W, Metal Film . . . 3198 012 21530
3460 Res, 3K9, 5%, 1/6W, Carbon Film. . . . 3198 011 03920
3463 Res, 33 ohm, 5%, 1/6W, Carbon Film . . 3198 011 03390
3465 Res, 27K, 1%, 3/5W, Metal Film 2312 915 12703
3468 Res, 220 ohm, 5%, 1/6W, Carbon Film. . 3198 011 02210
3469 Res, 3K3, 5%, 1/6W, Carbon Film. . . . 3198 011 03320
3470 Res, 330K, 5%, 1/10W, Metalized Glass. 3198 021 53340
3471 Res, 3R3, 1%, 3/5W, Metal Film 2312 915 13308
3472 Res, 3R3, 1%, 3/5W, Metal Film 2312 915 13308
3473 Res, 3R3, 1%, 3/5W, Metal Film 2312 915 13308
3474 Res, 2K2, 1%, 3/5W, Metal Film 2312 915 12202
3475 Res, 2K2, 1%, 3/5W, Metal Film 2312 915 12202
3477 Res, 150 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01510
3478 Res, 150 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01510
3479 Res, 2K7, 5%, 1/10W, Metalized Glass . 3198 021 52720
3480 Res, 1R5, 5%, 1/4W, Carbon Film. . . . 2122 101 02083
3481 Res, 12K, 1%, 3/5W, Metal Film 2312 915 11203
3482 Res, 12K, 1%, 3/5W, Metal Film 2312 915 11203
3484 Res, 3K9, 5%, 1/6W, Carbon Film. . . . 3198 011 03920
S 3486 Res, 33 ohm, 5%, 2 1/2W, Metal Film. . 3198 012 33390
3488 Res, 4R7, 5%, 1/2W, Metal Film 2306 207 03478
3490 Res, 8K2, 5%, 1/6W, Carbon Film. . . . 3198 011 08220
3492 Res, 1K, 5%, 1/10W, Metalized Glass. . 3198 021 51020
3493 Res, 6R8, 5%, 1/3W, Metal Film 2306 204 03688
3494 Res, 4R7, 5%, 1/2W, Metal Film 2306 207 03478
3495 Res, 22K, 5%, 1/16W, Metalized Glass . 3198 021 32230
3496 Res, 100K, 5%, 1/16W, Metalized Glass. 3198 021 31040
3497 Res, 100K, 5%, 1/16W, Metalized Glass. 3198 021 31040
3498 Res, 12K, 5%, 1/16W, Metalized Glass . 3198 021 31230
3499 Res, 10K, 5%, 1/10W, Metalized Glass . 3198 021 51030
3500 Res, 3M3, 5%, 1/2W, Metalized Glass. . 2322 242 13335
3501 Res, 3M3, 5%, 1/2W, Metalized Glass. . 2322 242 13335
S 3504 Res, PTC, 3 ohm, 144V. 2122 663 00019
3506 Res, 1M5, 5%, 1/2W, Metalized Glass. . 2322 242 13155
3507 Surge Protector. 2422 549 43073
3508 Res, 220 ohm, 20%, 1/2W, Carbon Film . 3198 013 02210
S 3510 Res, NTC, 4R7, 20%, 3W1. . . . . 2122 612 00056
3519 Res, 270 ohm, 5%, 1/6W, Carbon Film. . 3198 011 02710
3520 Res, 1K2, 5%, 1/10W, Metalized Glass . 3198 021 51220
3521 Res, 4R7, 5%, 1/6W, Carbon Film. . . . 3198 011 04780
3522 Res, 330K, 5%, 1/10W, Metalized Glass. 3198 021 53340
3523 Res, 100 ohm, 5%, 1/3W, Metal Film . . 2306 204 03101
3524 Res, 56K, 5%, 1/10W, Metalized Glass . 3198 021 55630
3525 Res, 1K, 5%, 1/10W, Metalized Glass. . 3198 021 51020
3526 Res, 0R1, 5%, 3/5W, Metal Film 3198 012 11070
S 3527 Res, 0R33, 5%, 3/5W, Metal Film. . . . 3198 012 13370
3528 Res, Zero ohm, "Chip" Jumper 3198 021 90020
3529 Res, 47K, 5%, 1/10W, Metalized Glass . 3198 021 54730

S = Safety Part   Be sure to use exact replacement part.

29PT543S85A (continued)

S	Ref	Description	Part No.
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3630	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3681	Res, 180 ohm, 1%, 1/8W, Metalized Glass	2322 734 61801
	3682	Res, 270 ohm, 1%, 1/8W, Metalized Glass	2322 734 62701
	3683	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322 734 63901
	3684	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322 734 63901
	3686	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3687	Res, 75 ohm, 1%, 1/8W, Metalized Glass	2322 734 67509
	3688	Res, 68 ohm, 1%, 1/8W, Metalized Glass	2322 734 66809
	3689	Res, 2K7, 1%, 1/8W, Metalized Glass. .	2322 734 62702
	3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198 021 31530
	3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198 021 31220
	3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4122	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4123	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4127	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5202	Wire Jumper.	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5241	Wire Jumper.	3198 036 90010
	5242	Coil, 10u, 5%.	3198 018 11090
	5342	Coil, 22u.	2422 535 97333
S	5445	Transformer, LOT (JF0501-21835) Layer W ound	2422 531 02611
S	5445	Transformer, LOT (1342.0043B).	2422 531 02506
	5451	Coil, 33u, 10%	3198 018 73390
	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
S	5457	Coil, 42u.	2422 535 94865
	5461	Transformer, Signal Driver, SC10027-00	2422 531 02478
	5471	Coil, 3u3, 20%	3198 018 73380
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 39u, 10%	2422 535 97336
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04.	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5861	Coil, 10u, 5%.	3198 018 11090
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316.	3198 010 10630
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630
	6206	Zener Diode, 6.8 volt.	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316.	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070

S = Safety Part   Be sure to use exact replacement part.

29PT543S85A (continued)

	Ref	Description	Part No.
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148	3198 010 10010
	6448	Zener Diode, 6.2 volt	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6460	Diode, Rect, BY228/24	9340 559 50112
	6461	Diode, Rect, RGP30J-L7004	9338 617 60682
	6462	Zener Diode, 9.1 volt	9331 177 80133
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316	3198 010 10630
	6468	Diode, Signal, BAS316	3198 010 10630
	6469	Diode, Rect, BYD33J	9337 234 20133
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt	3198 010 25680
	6482	Zener Diode, 9.1 volt	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYD33J	9337 234 20133
	6486	Diode, Rect, EGP20DL-5100	9322 164 42682
	6487	Diode, Rect, BYD33D	9337 234 00133
	6488	Diode, Rect, EGP20DL-5100	9322 164 42682
	6500	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
	6520	Diode, Rect, BYD33D	9337 234 00133
	6523	Diode, Signal, 1N4148	3198 010 10010
	6524	Diode, Rect, 1N5062	3198 010 10120
	6525	Diode, Rect, 1N5062	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500	9340 555 59127
	6562	Diode, Rect, EGP20DL-5100	9322 164 42682
	6563	Diode, Signal, BAS316	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148	3198 010 10010
	6569	Diode, Signal, BAS316	3198 010 10630
	6570	Zener Diode, 6.8 volt	3198 020 56880
	6580	Diode, Signal, BAS316	3198 010 10630
	6691	LED, LTL-10234WHCR	9322 185 69682
	6692	IR Receiver	9322 127 54667
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7102	Transistor, PNP, BC857B(COL)	3198 010 42150
	7103	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9577H/N1/AI/1130	9352 731 51557
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7460	Transistor, NPN, BU4508DX	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1	9352 673 56112
	7521	Power FET, FQPF9N50	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, L78L33ACZ	9322 134 92676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C08-WBN6	9322 154 38682
	7802	IC, HEF4053BT	9333 729 60653
	7861	IC, TDA9853H/V1	9352 671 19557
	7891	Transistor, NPN, BC847B(COL)	3198 010 42030
	7892	Transistor, NPN, BC847B(COL)	3198 010 42030
	7901	IC, AN7522N PH	9322 181 41682
	9001	Wire Jumper	3198 036 90010
	9101	Wire Jumper	3198 036 90010
	9102	Wire Jumper	3198 036 90010
	9103	Wire Jumper	3198 036 90010
	9104	Wire Jumper	3198 036 90010
	9123	Wire Jumper	3198 036 90010
	9171	Wire Jumper	3198 036 90010
	9173	Wire Jumper	3198 036 90010
	9175	Wire Jumper	3198 036 90010
	9176	Wire Jumper	3198 036 90010
	9178	Wire Jumper	3198 036 90010
	9179	Wire Jumper	3198 036 90010
	9181	Wire Jumper	3198 036 90010
	9182	Wire Jumper	3198 036 90010
	9183	Wire Jumper	3198 036 90010
	9184	Wire Jumper	3198 036 90010
	9192	Wire Jumper	3198 036 90010
	9193	Wire Jumper	3198 036 90010
	9311	Wire Jumper	3198 036 90010
	9312	Wire Jumper	3198 036 90010
	9406	Wire Jumper	3198 036 90010
	9407	Wire Jumper	3198 036 90010
	9408	Wire Jumper	3198 036 90010
	9409	Wire Jumper	3198 036 90010
	9410	Wire Jumper	3198 036 90010
	9411	Wire Jumper	3198 036 90010
	9412	Wire Jumper	3198 036 90010
	9413	Wire Jumper	3198 036 90010
	9415	Wire Jumper	3198 036 90010
	9416	Wire Jumper	3198 036 90010
	9417	Wire Jumper	3198 036 90010
	9418	Wire Jumper	3198 036 90010
	9419	Wire Jumper	3198 036 90010
	9421	Wire Jumper	3198 036 90010
	9422	Wire Jumper	3198 036 90010
	9423	Wire Jumper	3198 036 90010
	9425	Wire Jumper	3198 036 90010
	9427	Wire Jumper	3198 036 90010
	9453	Wire Jumper	3198 036 90010
	9460	Wire Jumper	3198 036 90010
	9500	Wire Jumper	3198 036 90010
	9501	Wire Jumper	3198 036 90010
	9503	Wire Jumper	3198 036 90010
	9506	Wire Jumper	3198 036 90010
	9507	Wire Jumper	3198 036 90010
	9510	Wire Jumper	3198 036 90010
	9511	Wire Jumper	3198 036 90010
	9512	Wire Jumper	3198 036 90010
	9513	Wire Jumper	3198 036 90010
	9514	Wire Jumper	3198 036 90010
	9515	Wire Jumper	3198 036 90010
	9516	Wire Jumper	3198 036 90010
	9518	Wire Jumper	3198 036 90010
	9520	Wire Jumper	3198 036 90010
	9521	Wire Jumper	3198 036 90010
	9522	Wire Jumper	3198 036 90010
	9524	Wire Jumper	3198 036 90010
	9528	Wire Jumper	3198 036 90010
	9530	Wire Jumper	3198 036 90010
	9611	Coil, 27u, 10%	3198 018 22790
	9612	Wire Jumper	3198 036 90010
	9613	Wire Jumper	3198 036 90010
	9614	Wire Jumper	3198 036 90010
	9615	Wire Jumper	3198 036 90010
	9617	Wire Jumper	3198 036 90010
	9618	Wire Jumper	3198 036 90010
	9619	Wire Jumper	3198 036 90010
	9620	Wire Jumper	3198 036 90010
	9621	Wire Jumper	3198 036 90010
	9622	Wire Jumper	3198 036 90010
	9623	Wire Jumper	3198 036 90010
	9624	Wire Jumper	3198 036 90010
	9626	Wire Jumper	3198 036 90010
	9627	Wire Jumper	3198 036 90010
	9628	Wire Jumper	3198 036 90010
	9629	Wire Jumper	3198 036 90010
	9631	Wire Jumper	3198 036 90010
	9632	Wire Jumper	3198 036 90010
	9633	Wire Jumper	3198 036 90010
	9637	Wire Jumper	3198 036 90010
	9638	Wire Jumper	3198 036 90010
	9639	Wire Jumper	3198 036 90010
	9640	Wire Jumper	3198 036 90010
	9641	Wire Jumper	3198 036 90010
	9642	Wire Jumper	3198 036 90010
	9643	Wire Jumper	3198 036 90010
	9648	Wire Jumper	3198 036 90010
	9650	Wire Jumper	3198 036 90010
	9651	Wire Jumper	3198 036 90010
	9652	Wire Jumper	3198 036 90010
	9654	Wire Jumper	3198 036 90010
	9655	Wire Jumper	3198 036 90010
	9657	Wire Jumper	3198 036 90010
	9658	Wire Jumper	3198 036 90010
	9659	Wire Jumper	3198 036 90010
	9660	Wire Jumper	3198 036 90010
	9661	Wire Jumper	3198 036 90010
	9662	Wire Jumper	3198 036 90010
	9663	Wire Jumper	3198 036 90010
	9664	Wire Jumper	3198 036 90010
	9665	Wire Jumper	3198 036 90010
	9666	Wire Jumper	3198 036 90010
	9667	Wire Jumper	3198 036 90010
	9668	Wire Jumper	3198 036 90010
	9669	Wire Jumper	3198 036 90010
	9670	Wire Jumper	3198 036 90010
	9671	Wire Jumper	3198 036 90010
	9672	Coil, 22u, 10%	3198 018 22290
	9674	Wire Jumper	3198 036 90010
	9675	Wire Jumper	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

29PT543S85A (continued)

Ref	Description	Part No.
9676	Wire Jumper	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper	3198 036 90010
9680	Wire Jumper	3198 036 90010
9681	Wire Jumper	3198 036 90010
9685	Wire Jumper	3198 036 90010
9686	Wire Jumper	3198 036 90010
9687	Wire Jumper	3198 036 90010
9688	Wire Jumper	3198 036 90010
9689	Wire Jumper	3198 036 90010
9690	Wire Jumper	3198 036 90010
9691	Wire Jumper	3198 036 90010
9694	Wire Jumper	3198 036 90010
9695	Wire Jumper	3198 036 90010
9697	Wire Jumper	3198 036 90010
9698	Wire Jumper	3198 036 90010
9699	Wire Jumper	3198 036 90010
9821	Wire Jumper	3198 036 90010
9822	Wire Jumper	3198 036 90010
9825	Wire Jumper	3198 036 90010
9828	Wire Jumper	3198 036 90010
9829	Wire Jumper	3198 036 90010
9831	Wire Jumper	3198 036 90010
9832	Wire Jumper	3198 036 90010
9837	Wire Jumper	3198 036 90010
9838	Wire Jumper	3198 036 90010
9839	Wire Jumper	3198 036 90010
9846	Wire Jumper	3198 036 90010
9847	Wire Jumper	3198 036 90010
9849	Wire Jumper	3198 036 90010
9850	Wire Jumper	3198 036 90010
9851	Wire Jumper	3198 036 90010
9852	Wire Jumper	3198 036 90010
9853	Wire Jumper	3198 036 90010
9856	Wire Jumper	3198 036 90010
9860	Wire Jumper	3198 036 90010
9861	Wire Jumper	3198 036 90010
9862	Wire Jumper	3198 036 90010
9864	Wire Jumper	3198 036 90010
9865	Wire Jumper	3198 036 90010
9868	Wire Jumper	3198 036 90010
9873	Wire Jumper	3198 036 90010
9874	Wire Jumper	3198 036 90010
9875	Wire Jumper	3198 036 90010
9877	Wire Jumper	3198 036 90010
9891	Wire Jumper	3198 036 90010
9892	Wire Jumper	3198 036 90010
9901	Wire Jumper	3198 036 90010
9902	Wire Jumper	3198 036 90010
9903	Wire Jumper	3198 036 90010
9904	Wire Jumper	3198 036 90010
9905	Wire Jumper	3198 036 90010
9911	Wire Jumper	3198 036 90010
9913	Wire Jumper	3198 036 90010
9914	Wire Jumper	3198 036 90010
9915	Wire Jumper	3198 036 90010
9918	Wire Jumper	3198 036 90010
9991	Wire Jumper	3198 036 90010
9993	Wire Jumper	3198 036 90010
9994	Wire Jumper	3198 036 90010
9996	Wire Jumper	3198 036 90010
9997	Wire Jumper	3198 036 90010
9998	Wire Jumper	3198 036 90010
CBA	Main Chassis Assembly	3141 058 57971

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts

Side Jack Panel Parts

Ref	Description	Part No.
0232	Headphone Jack	2422 026 04747
0250	A/V Jack	2422 026 04815
0251	6 Pin Connector	2422 025 12482
0254	5 Pin Connector	2422 025 12481
0255	4 Pin Connector	2422 025 12479
1810	3 Pin Connector	2412 020 00725
1811	3 Pin Connector	2412 020 00725
2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
6161	Zener Diode, 6.8 volt	3198 010 26880
7802	IC, HEF4053BT	9333 729 60653
9150	Wire Jumper	3198 036 90010
9151	Wire Jumper	3198 036 90010
9152	Wire Jumper	3198 036 90010
9153	Wire Jumper	3198 036 90010
9154	Wire Jumper	3198 036 90010
9170	Wire Jumper	3198 036 90010
CBA	Side Jack Panel Assembly	3139 177 26231

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

Ref	Description	Part No.
S AC01	AC Cord	3135 010 03831
AC03	Anode Lead Spacer (3 Used)	3135 014 04471
AC04	Batteries for Remote Control Transmitte	9299 000 65263
AC05	Cabinet Back	3139 124 35953
S AC09	CRT, A68AJB82X11	9301 891 90631
AC10	Customer Control Buttons	3139 177 60751
S AC12	Degaussing Coil	2422 549 43967
AC15	Holder, Degaussing Coil (4 Used)	3135 013 01641
AC17	Owner's Manual	3121 235 20771
AC19	Side Jack Panel Bracket	3139 124 37061
AC20	Cabinet Front Assembly	3121 237 53071
AC20A	Cabinet Front	3139 177 53551
AC20B	Chassis Guide (2 Used)	3139 124 31381
AC20C	Light Guide	3139 124 35111
AC20D	Nameplate	3141 050 00161
AC20E	Power Button	3139 177 60761
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00411
REMOTE	Remote Control Transmitter, RC19335004/ 01.	3139 228 86463

29PT563S85A - Manual no. 7638

Main Chassis Parts

Main Chassis Parts

S	Ref	Description	Part No.
	0211	2 Pin Connector.	2422 025 16269
	0212	2 Pin Connector.	2422 025 16375
	0219	6 Pin Connector.	2422 025 12482
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0222	2 Pin Connector.	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0243	6 Pin Connector.	2422 025 04854
	0244	5 Pin Connector.	2422 025 04853
	0245	6 Pin Connector.	2422 025 04854
	0246	5 Pin Connector.	2422 025 12481
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector.	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U PLL	2422 542 90098
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1600	Tact Switch.	2422 128 02742
	1601	Tact Switch.	2422 128 02742
	1602	Tact Switch.	2422 128 02742
	1603	Tact Switch.	2422 128 02742
	1606	Tact Switch.	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1810	6 Pin Connector.	2422 025 16607
	1831	Crystal, Resonator, 18MHz432, 12 Pin, HC49/U A.	2422 543 00842
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic. . .	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic. . .	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic. . .	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic . .	2020 558 90445
	2405	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
	2441	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic . . .	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic. . .	2020 021 91139
	2451	Cap, 15n, 10%, 50v, Polyester.	3198 014 01530
	2455	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
	2457	Cap, 470n, 5%, 250v, Metalized Polypropylene.	2222 479 90023
	2458	Cap, 2u2, 20%, 100v, Electrolytic. . .	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
	2462	Cap, 330n, 10%, 250v, MPP.	2022 333 00084
	2463	Cap, 1nf, 10%, 2000v, Ceramic Only with 5445 (JF0501-21835) Layer Wound. . . .	2020 558 90487
	2463	Cap, 680p, 10%, 2000v, Ceramic	2020 558 90485
S	2465	Cap, 12n, 5%, 1600v, Polypropylene Only with 5445 (JF0501-21835) Layer Wound .	2222 375 90156
S	2465	Cap, 11n, 5%, 1600v, Polypropylene . .	2222 375 90155
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic . . .	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic. . .	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic. . .	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic . . .	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic . .	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic. . .	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2222 336 29148
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic . .	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic . . .	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic . .	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic . . .	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic . . .	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic . . .	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic. . .	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic. . .	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050
	2691	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
	2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2807	Cap, 220n, +80/-20%, 25v, Ceramic. . .	3198 023 22240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
	2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
	2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
	2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
	2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
	2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210

S = Safety Part   Be sure to use exact replacement part.

29PT563S85A (continued)

Ref	Description	Part No.
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
2837	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
2840	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2841	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2843	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2844	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2846	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2910	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320
2911	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840
3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
3452	Res, 5K6, 1%, 3/5W, Metal Film Only wit h 5445 (JF0501-21835) Layer Wound. . .	2312 915 15602
3452	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3454	Res, 2K, 1%, 3/5W, Metal Film Only with 5445 (JF0501-21835) Layer Wound. . . .	2312 915 12002
3454	Res, 3K9, 1%, 3/5W, Metal Film	2312 915 13902
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3470	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 33390
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S 3504	Res, PTC, 3R0, Degaussing.	2120 661 00025
3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3507	Surge Protector.	2422 549 43073
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S 3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710

S = Safety Part   Be sure to use exact replacement part.

29PT563S85A (continued)

S	Ref	Description	Part No.
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198 021 53320
	3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3811	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3812	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3813	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3831	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3843	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4824	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4837	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4838	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4884	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5202	Wire Jumper.	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5241	Wire Jumper.	3198 036 90010
	5242	Coil, 10u, 5%.	3198 018 11090
	5342	Coil, 22u.	2422 535 97333
S	5445	Transformer, LOT (JF0501-21835) Layer Wound	2422 531 02611
S	5445	Transformer, LOT (1342.0043B).	2422 531 02506
	5451	Coil, 33u, 10%	3198 018 73390
	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
S	5457	Coil, 42u.	2422 535 94865
	5461	Transformer, Signal Driver, SC10027-00	2422 531 02478
	5471	Coil, 3u3, 20%	3198 018 73380
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 39u, 10%	2422 535 97336
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04.	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5810	Coil, 10u, 10%	3198 018 51090
	5831	Coil, 6u8, 5%.	3198 018 16880
	5832	Coil, 6u8, 5%.	3198 018 16880
	5833	Coil, 6u8, 5%.	3198 018 16880
	5835	Coil, 12u, 10%	3198 018 31290
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316.	3198 010 10630
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630
	6206	Zener Diode, 6.8 volt.	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316.	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148.	3198 010 10010

S = Safety Part   Be sure to use exact replacement part.

29PT563S85A (continued)

Ref	Description	Part No.
6448	Zener Diode, 6.2 volt	9331 668 30133
6449	Diode, Signal, BAV99	3198 010 10620
6460	Diode, Rect, BY228/24	9340 559 50112
6461	Diode, Rect, RGP30J-L7004	9338 617 60682
6462	Zener Diode, 9.1 volt	9331 177 80133
6465	Diode, Signal, BAV21	3198 010 10070
6466	Diode, Signal, BAV21	3198 010 10070
6467	Diode, Signal, BAS316	3198 010 10630
6468	Diode, Signal, BAS316	3198 010 10630
6469	Diode, Rect, BYD33J	9337 234 20133
6470	Diode, Signal, BAV99	3198 010 10620
6476	Zener Diode, 15 volt	3198 010 21590
6481	Zener Diode, 5.6 volt	3198 010 25680
6482	Zener Diode, 9.1 volt	9331 177 80133
6483	Zener Diode, 33 volt	3198 010 23390
6485	Diode, Rect, BYD33J	9337 234 20133
6486	Diode, Rect, EGP20DL-5100	9322 164 42682
6487	Diode, Rect, BYD33D	9337 234 00133
6488	Diode, Rect, EGP20DL-5100	9322 164 42682
6500	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
6520	Diode, Rect, BYD33D	9337 234 00133
6523	Diode, Signal, 1N4148	3198 010 10010
6524	Diode, Rect, 1N5062	3198 010 10120
6525	Diode, Rect, 1N5062	3198 010 10120
6526	Zener Diode, 22 volt	3198 020 52290
6540	Zener Diode, 6.2 volt	9331 668 30133
6541	Zener Diode, 10 volt	3198 020 51090
6560	Diode, Rect, BYV29X-500	9340 555 59127
6562	Diode, Rect, EGP20DL-5100	9322 164 42682
6563	Diode, Signal, BAS316	3198 010 10630
6565	Diode, Signal, BAV70	9331 849 10215
6566	Diode, Signal, 1N4148	3198 010 10010
6569	Diode, Signal, BAS316	3198 010 10630
6570	Zener Diode, 6.8 volt	3198 020 56880
6580	Diode, Signal, BAS316	3198 010 10630
6681	Diode, Signal, BAT85	9336 247 60133
6691	LED, LTL-10234WHCR	9322 185 69682
6692	IR Receiver	9322 127 54667
6831	Diode, Signal, 1N4148	3198 010 10010
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
7101	Transistor, NPN, BC847B(COL)	3198 010 42030
7102	Transistor, PNP, BC857B(COL)	3198 010 42150
7103	Transistor, NPN, BC847B(COL)	3198 010 42030
7200	IC, TDA9587H/N1/3I/0990	9352 725 47557
7201	Transistor, NPN, BC847B(COL)	3198 010 42030
7204	Transistor, PNP, BC857B(COL)	3198 010 42150
7205	Transistor, PNP, BC857B(COL)	3198 010 42150
7330	IC, TDA6107JF/N3	9352 713 37112
7441	Transistor, PNP, BC857B(COL)	3198 010 42150
7443	Transistor, PNP, BC557B(COL)	3198 020 40110
7460	Transistor, NPN, BU4508DX	9340 550 92127
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
7462	Transistor, NPN, PDTC143ZT	9340 547 00215
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
7471	IC, TDA8359J/N2	9352 701 64112
7480	Transistor, NPN, BD135	3198 020 41010
7482	Transistor, NPN, BD135	3198 020 41010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667
7520	IC, TEA1507P/N1	9352 673 56112
7521	Power FET, FQPF9N50	9322 187 16687
7522	Transistor, NPN, BC847B(COL)	3198 010 42030
7540	Transistor, NPN, BC547B(COL)	3198 020 40030
7541	Transistor, NPN, PDTC114ET	9340 310 10215
7542	Transistor, PNP, BC857B(COL)	3198 010 42150
7560	IC, L78L33ACZ	9322 134 92676
7561	Transistor, NPN, PDTC143ZT	9340 547 00215
7580	Transistor, PNP, BC857B(COL)	3198 010 42150
7602	IC, M24C08-WBN6	9322 154 38682
7802	IC, HEF4053BT	9333 729 60653
7803	IC, HEF4053BT	9333 729 60653
7804	Transistor, NPN, BC847B(COL)	3198 010 42030
7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682
7901	IC, AN7522N PH	9322 181 41682
9001	Wire Jumper	3198 036 90010
9101	Wire Jumper	3198 036 90010
9102	Wire Jumper	3198 036 90010
9103	Wire Jumper	3198 036 90010
9104	Wire Jumper	3198 036 90010
9123	Wire Jumper	3198 036 90010
9171	Wire Jumper	3198 036 90010
9173	Wire Jumper	3198 036 90010
9175	Wire Jumper	3198 036 90010
9176	Wire Jumper	3198 036 90010
9178	Wire Jumper	3198 036 90010
9179	Wire Jumper	3198 036 90010
9181	Wire Jumper	3198 036 90010
9182	Wire Jumper	3198 036 90010
9183	Wire Jumper	3198 036 90010
9192	Wire Jumper	3198 036 90010
9193	Wire Jumper	3198 036 90010
9311	Wire Jumper	3198 036 90010
9312	Wire Jumper	3198 036 90010
9406	Wire Jumper	3198 036 90010
9407	Wire Jumper	3198 036 90010
9408	Wire Jumper	3198 036 90010
9409	Wire Jumper	3198 036 90010
9410	Wire Jumper	3198 036 90010
9411	Wire Jumper	3198 036 90010
9412	Wire Jumper	3198 036 90010
9413	Wire Jumper	3198 036 90010
9415	Wire Jumper	3198 036 90010
9416	Wire Jumper	3198 036 90010
9417	Wire Jumper	3198 036 90010
9418	Wire Jumper	3198 036 90010
9419	Wire Jumper	3198 036 90010
9421	Wire Jumper	3198 036 90010
9422	Wire Jumper	3198 036 90010
9423	Wire Jumper	3198 036 90010
9425	Wire Jumper	3198 036 90010
9427	Wire Jumper	3198 036 90010
9453	Wire Jumper	3198 036 90010
9460	Wire Jumper	3198 036 90010
9500	Wire Jumper	3198 036 90010
9501	Wire Jumper	3198 036 90010
9503	Wire Jumper	3198 036 90010
9506	Wire Jumper	3198 036 90010
9507	Wire Jumper	3198 036 90010
9510	Wire Jumper	3198 036 90010
9511	Wire Jumper	3198 036 90010
9512	Wire Jumper	3198 036 90010
9513	Wire Jumper	3198 036 90010
9514	Wire Jumper	3198 036 90010
9515	Wire Jumper	3198 036 90010
9516	Wire Jumper	3198 036 90010
9518	Wire Jumper	3198 036 90010
9520	Wire Jumper	3198 036 90010
9521	Wire Jumper	3198 036 90010
9522	Wire Jumper	3198 036 90010
9524	Wire Jumper	3198 036 90010
9528	Wire Jumper	3198 036 90010
9530	Wire Jumper	3198 036 90010
9611	Coil, 27u, 10%	3198 018 22790
9612	Wire Jumper	3198 036 90010
9613	Wire Jumper	3198 036 90010
9614	Wire Jumper	3198 036 90010
9615	Wire Jumper	3198 036 90010
9618	Wire Jumper	3198 036 90010
9619	Wire Jumper	3198 036 90010
9620	Wire Jumper	3198 036 90010
9621	Wire Jumper	3198 036 90010
9622	Wire Jumper	3198 036 90010
9623	Wire Jumper	3198 036 90010
9624	Wire Jumper	3198 036 90010
9626	Wire Jumper	3198 036 90010
9627	Wire Jumper	3198 036 90010
9628	Wire Jumper	3198 036 90010
9629	Wire Jumper	3198 036 90010
9631	Wire Jumper	3198 036 90010
9632	Wire Jumper	3198 036 90010
9633	Wire Jumper	3198 036 90010
9637	Wire Jumper	3198 036 90010
9638	Wire Jumper	3198 036 90010
9639	Wire Jumper	3198 036 90010
9640	Wire Jumper	3198 036 90010
9641	Wire Jumper	3198 036 90010
9642	Wire Jumper	3198 036 90010
9643	Wire Jumper	3198 036 90010
9648	Wire Jumper	3198 036 90010
9650	Wire Jumper	3198 036 90010
9651	Wire Jumper	3198 036 90010
9652	Wire Jumper	3198 036 90010
9654	Wire Jumper	3198 036 90010
9655	Wire Jumper	3198 036 90010
9657	Wire Jumper	3198 036 90010
9658	Wire Jumper	3198 036 90010
9659	Wire Jumper	3198 036 90010
9660	Wire Jumper	3198 036 90010
9661	Wire Jumper	3198 036 90010
9662	Wire Jumper	3198 036 90010
9663	Wire Jumper	3198 036 90010
9664	Wire Jumper	3198 036 90010
9665	Wire Jumper	3198 036 90010
9666	Wire Jumper	3198 036 90010
9667	Wire Jumper	3198 036 90010
9668	Wire Jumper	3198 036 90010
9669	Wire Jumper	3198 036 90010
9670	Wire Jumper	3198 036 90010
9671	Wire Jumper	3198 036 90010
9672	Coil, 22u, 10%	3198 018 22290
9674	Wire Jumper	3198 036 90010
9675	Wire Jumper	3198 036 90010
9676	Wire Jumper	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290

S = Safety Part   Be sure to use exact replacement part.

Ref	Description	Part Number
9679	Wire Jumper	3198 036 90010
9680	Wire Jumper	3198 036 90010
9681	Wire Jumper	3198 036 90010
9682	Wire Jumper	3198 036 90010
9685	Wire Jumper	3198 036 90010
9686	Wire Jumper	3198 036 90010
9687	Wire Jumper	3198 036 90010
9688	Wire Jumper	3198 036 90010
9689	Wire Jumper	3198 036 90010
9690	Wire Jumper	3198 036 90010
9691	Wire Jumper	3198 036 90010
9694	Wire Jumper	3198 036 90010
9695	Wire Jumper	3198 036 90010
9697	Wire Jumper	3198 036 90010
9698	Wire Jumper	3198 036 90010
9699	Wire Jumper	3198 036 90010
9821	Wire Jumper	3198 036 90010
9822	Wire Jumper	3198 036 90010
9825	Wire Jumper	3198 036 90010
9828	Wire Jumper	3198 036 90010
9829	Wire Jumper	3198 036 90010
9831	Wire Jumper	3198 036 90010
9832	Wire Jumper	3198 036 90010
9837	Wire Jumper	3198 036 90010
9838	Wire Jumper	3198 036 90010
9839	Wire Jumper	3198 036 90010
9846	Wire Jumper	3198 036 90010
9847	Wire Jumper	3198 036 90010
9849	Wire Jumper	3198 036 90010
9851	Wire Jumper	3198 036 90010
9856	Wire Jumper	3198 036 90010
9858	Wire Jumper	3198 036 90010
9859	Wire Jumper	3198 036 90010
9860	Wire Jumper	3198 036 90010
9862	Wire Jumper	3198 036 90010
9863	Wire Jumper	3198 036 90010
9864	Wire Jumper	3198 036 90010
9865	Wire Jumper	3198 036 90010
9867	Wire Jumper	3198 036 90010
9868	Wire Jumper	3198 036 90010
9869	Wire Jumper	3198 036 90010
9870	Wire Jumper	3198 036 90010
9871	Wire Jumper	3198 036 90010
9873	Wire Jumper	3198 036 90010
9874	Wire Jumper	3198 036 90010
9875	Wire Jumper	3198 036 90010
9876	Wire Jumper	3198 036 90010
9877	Wire Jumper	3198 036 90010
9878	Wire Jumper	3198 036 90010
9901	Wire Jumper	3198 036 90010
9902	Wire Jumper	3198 036 90010
9903	Wire Jumper	3198 036 90010
9904	Wire Jumper	3198 036 90010
9905	Wire Jumper	3198 036 90010
9911	Wire Jumper	3198 036 90010
9913	Wire Jumper	3198 036 90010
9914	Wire Jumper	3198 036 90010
9915	Wire Jumper	3198 036 90010
9991	Wire Jumper	3198 036 90010
9993	Wire Jumper	3198 036 90010
9994	Wire Jumper	3198 036 90010
9996	Wire Jumper	3198 036 90010
9997	Wire Jumper	3198 036 90010
9998	Wire Jumper	3198 036 90010
CBA	Main Chassis Assembly	3141 058 58141

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

Ref	Description	Part Number
0266	6 Pin Connector	2422 025 16609
2401	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2402	Cap, 4u7, 20%, 35v, Electrolytic	3198 028 44780
2403	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2407	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2408	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2409	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2411	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
2412	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2413	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2414	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2415	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2416	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2419	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2420	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
2425	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2426	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2427	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2428	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2429	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2430	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2431	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2432	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2433	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2434	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2435	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2436	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2440	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
2442	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2443	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2450	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
2452	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2453	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
3401	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3402	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3403	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3404	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3405	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3406	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3407	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3408	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3412	Res, 510K, 5%, 1/10W, Metalized Glass.	2122 118 05951
3419	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3425	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3427	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3431	Res, 8K2, 1%, 1/16W, Metalized Glass	2322 704 68202
3432	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3440	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3441	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3442	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3443	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3444	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3450	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3451	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3452	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3453	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3454	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3455	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3456	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3457	Wire Jumper	3198 036 90010
3458	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4403	Res, Zero ohm, "Chip" Jumper	3198 021 90030
5401	Coil, 10u, 10%	3198 018 31090
5407	Coil, 33u, 5%.	3198 018 13390
5408	Coil, 33u, 20%	3198 018 33390
5421	Inductor, 100 MHz, 120 ohm	3198 018 90070
5425	Coil, 10u, 10%	3198 018 31090
5428	Coil, 10u, 5%.	3198 018 11090
5429	Coil, 10u, 10%	3198 018 31090
5430	Coil, 10u, 10%	3198 018 31090
5440	Coil, 10u, 10%	3198 018 31090
5442	Coil, 22u, 5%.	3198 018 12290
5450	Coil, 10u, 10%	3198 018 31090
5452	Coil, 33u, 5%.	3198 018 13390
7401	Transistor, PNP, BC857B(COL)	3198 010 42150
7402	Transistor, NPN, BC847B(COL)	3198 010 42030
7403	Transistor, NPN, BC847B(COL)	3198 010 42030
7421	IC, TC90A53N	9322 182 18682
7440	Transistor, NPN, BC847B(COL)	3198 010 42030
7444	Transistor, NPN, BC847B(COL)	3198 010 42030
7450	Transistor, NPN, BC847B(COL)	3198 010 42030
7454	Transistor, NPN, BC847B(COL)	3198 010 42030
9401	Wire Jumper	3198 036 90010
9402	Wire Jumper	3198 036 90010
9403	Wire Jumper	3198 036 90010
CBA	2D 3 Line Comb Filter Assembly	3139 177 26561

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts

Side Jack Panel Parts

29PT563S85A (continued)

	Ref	Description	Part No.
	0232	Headphone Jack	2422 026 04747
	0250	A/V Jack	2422 026 04815
	0251	6 Pin Connector.	2422 025 12482
	0254	5 Pin Connector.	2422 025 12481
	0255	4 Pin Connector.	2422 025 12479
	2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2176	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
	2177	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2178	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
	2179	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	3150	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
	3152	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
	3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
	3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
	4817	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4819	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4821	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4822	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6161	Zener Diode, 6.8 volt.	3198 010 26880
	9151	Wire Jumper.	3198 036 90010
	9152	Wire Jumper.	3198 036 90010
	9153	Wire Jumper.	3198 036 90010
	9170	Wire Jumper.	3198 036 90010
	CBA	Side Jack Panel Assembly	3139 187 15141

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

	Ref	Description	Part No.
S	AC01	AC Cord.	3135 010 03831
	AC03	Anode Lead Spacer (3 Used)	3135 014 04471
	AC04	Batteries for Remote Control Transmitte	9299 000 65263
	AC05	Cabinet Back	3139 124 43281
S	AC09	CRT, A68AJB82X11	9301 891 90631
S	AC12	Degaussing Coil.	2422 549 43967
	AC15	Holder, Degaussing Coil (4 Used) . . .	3135 013 01641
	AC17	Owner's Manual	3121 235 20791
	AC19	Side Jack Panel Bracket.	3139 124 37061
	AC20	Cabinet Front Assembly	3121 237 53081
	AC20A	Cabinet Front.	3139 177 55961
	AC20B	Chassis Guide (2 Used)	3139 124 31381
	AC20D	Nameplate.	3141 050 00161
	AC20E	Power Button	3121 237 53341
	AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00411
	REMOTE	Remote Control Transmitter, RC19335004/ 01.	3139 228 86463

29PT633R85A - Manual no. 7638

Main Chassis Parts

Main Chassis Parts

S	Ref	Description	Part No.
	0211	2 Pin Connector	2422 025 16374
	0212	2 Pin Connector	2422 025 16375
	0214	5 Pin Connector	2422 025 12481
	0219	6 Pin Connector	2422 025 12482
	0220	5 Pin Connector	2422 025 04853
	0221	2 Pin Connector	2422 025 15503
	0222	2 Pin Connector	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack	2422 026 04926
	0229	3 Pin Connector	2412 020 00725
	0239	3 Pin Connector	2422 025 16382
	0243	6 Pin Connector	2422 025 04854
	0244	5 Pin Connector	2422 025 04853
	0245	6 Pin Connector	2422 025 04854
	0246	5 Pin Connector	2422 025 12481
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U PLL	2422 542 90098
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC	2422 086 10914
S	1515	Relay, 5 Amp, 12V	2422 132 07444
	1660	Crystal, 12MHz000	2422 543 01203
	1811	3 Pin Connector	2412 020 00725
	1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344
	2004	Cap, 47n, 10%, 50v, Ceramic	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2226	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2241	Cap, 1n5, 10%, 50v, Ceramic	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
	2402	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic	3198 016 03310
	2441	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic	2020 021 91139
	2451	Cap, 22n, 10%, 50v, Polyester	3198 014 02230
	2452	Cap, 180p, 5%, 50v, Ceramic	3198 016 01810
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 360n, 5%, 250v, Metalized Polypropylene	2022 333 00163
	2458	Cap, 2u2, 20%, 100v, Electrolytic	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
S	2463	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene	2222 479 90042
S	2465	Cap, 15n, 5%, 1600v, Polypropylene	2020 301 90255
	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
	2468	Cap, 27n, 10%, 400v, Polyester	2222 347 90232
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2482	Cap, 120n, 5%, 250v, Metalized Polypropylene	2222 479 90051
	2485	Cap, 4u7, 20%, 250v, Electrolytic	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic	3198 017 21050
	2802	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2803	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250

S = Safety Part   Be sure to use exact replacement part.

29PT633R85A (continued)

Ref	Description	Part No.
2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
2862	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
3403	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102
3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3470	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3471	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3472	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3473	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2120 101 74158
3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S 3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 32290
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3507	Surge Protector.	2422 549 43073
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630

S = Safety Part   Be sure to use exact replacement part.

	Ref	Description	Part No.
	3525	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3814	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3861	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3862	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
	3863	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
	3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3865	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3866	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3867	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3901	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4122	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4123	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4127	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%	3198 018 18270
	5201	Coil, 6u8, 5%	3198 018 16880
	5202	Wire Jumper	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5241	Wire Jumper	3198 036 90010
	5242	Coil, 10u, 5%	3198 018 11090
	5341	Coil, 22u	2422 535 97333
	5342	Coil, 22u	2422 535 97333
	5401	Coil, 1mH, 10%	3198 018 71020
S	5445	Transformer, LOT	2422 531 02574
	5451	Coil, 22u, 10%	3198 018 72290
	5452	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
S	5457	Coil, 25u	2422 535 91028
	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
	5463	Coil, Choke	3128 138 37021
	5471	Coil, 6u8, 20%	3198 018 76880
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 27u, 10%	3198 018 22790
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5561	Coil, 27u, 5%	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5602	Coil, 5u6, 5%	3198 018 15680
	5603	Coil, 5u6, 5%	3198 018 15680
	5604	Coil, 5u6, 5%	3198 018 15680
	5861	Coil, 10u, 5%	3198 018 11090
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316	3198 010 10630
	6201	Diode, Signal, BAS316	3198 010 10630
	6202	Diode, Signal, BAS316	3198 010 10630
	6206	Zener Diode, 6.8 volt	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6400	Res, 1K, 1%, 3/5W, Metal Film	2312 915 11002
	6401	Zener Diode, 47 volt	3198 010 24790
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148	3198 010 10010
	6448	Zener Diode, 6.2 volt	9331 668 30133

S = Safety Part   Be sure to use exact replacement part.

29PT633R85A (continued)

	Ref	Description	Part No.
	6449	Diode, Signal, BAV99	3198 010 10620
	6460	Diode, Rect, BY228/24.	9340 559 50112
	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
	6462	Zener Diode, 9.1 volt.	9331 177 80133
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316.	3198 010 10630
	6468	Diode, Signal, BAS316.	3198 010 10630
	6469	Diode, Rect, BYD33J.	9337 234 20133
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt.	3198 010 25680
	6482	Zener Diode, 9.1 volt.	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYD33J.	9337 234 20133
	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6487	Diode, Rect, BYD33D.	9337 234 00133
	6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667
	6520	Diode, Rect, BYD33D.	9337 234 00133
	6523	Diode, Signal, 1N4148.	3198 010 10010
	6524	Diode, Rect, 1N5062.	3198 010 10120
	6525	Diode, Rect, 1N5062.	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt.	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500.	9340 555 59127
	6562	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6563	Diode, Signal, BAS316.	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148.	3198 010 10010
	6569	Diode, Signal, BAS316.	3198 010 10630
	6570	Zener Diode, 6.8 volt.	3198 020 56880
	6580	Diode, Signal, BAS316.	3198 010 10630
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7102	Transistor, PNP, BC857B(COL)	3198 010 42150
	7103	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9588H/N1/3I/1053.	9352 728 40557
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7400	Power FET, STP3NC60FP.	9322 157 37687
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7460	Transistor, NPN, BU4508DX.	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2.	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1.	9352 673 56112
	7521	Power FET, FQPF9N50.	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, L78L33ACZ.	9322 134 92676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C08-WBN6.	9322 154 38682
	7606	Transistor, NPN, PDTC143ZT	9340 547 00215
	7802	IC, HEF4053BT.	9333 729 60653
	7861	IC, TDA9853H/V1.	9352 671 19557
	7891	Transistor, NPN, BC847B(COL)	3198 010 42030
	7892	Transistor, NPN, BC847B(COL)	3198 010 42030
	7901	IC, AN7522N PH	9322 181 41682
	9001	Wire Jumper.	3198 036 90010
	9101	Wire Jumper.	3198 036 90010
	9102	Wire Jumper.	3198 036 90010
	9103	Wire Jumper.	3198 036 90010
	9104	Wire Jumper.	3198 036 90010
	9123	Wire Jumper.	3198 036 90010
	9171	Wire Jumper.	3198 036 90010
	9173	Wire Jumper.	3198 036 90010
	9175	Wire Jumper.	3198 036 90010
	9176	Wire Jumper.	3198 036 90010
	9178	Wire Jumper.	3198 036 90010
	9179	Wire Jumper.	3198 036 90010
	9181	Wire Jumper.	3198 036 90010
	9182	Wire Jumper.	3198 036 90010
	9183	Wire Jumper.	3198 036 90010
	9192	Wire Jumper.	3198 036 90010
	9193	Wire Jumper.	3198 036 90010
	9311	Wire Jumper.	3198 036 90010
	9312	Wire Jumper.	3198 036 90010
	9406	Wire Jumper.	3198 036 90010
	9407	Wire Jumper.	3198 036 90010
	9408	Wire Jumper.	3198 036 90010
	9409	Wire Jumper.	3198 036 90010
	9410	Wire Jumper.	3198 036 90010
	9411	Wire Jumper.	3198 036 90010
	9412	Wire Jumper.	3198 036 90010
	9413	Wire Jumper.	3198 036 90010
	9414	Wire Jumper.	3198 036 90010
	9415	Wire Jumper.	3198 036 90010
	9416	Wire Jumper.	3198 036 90010
	9417	Wire Jumper.	3198 036 90010
	9418	Wire Jumper.	3198 036 90010
	9419	Wire Jumper.	3198 036 90010
	9421	Wire Jumper.	3198 036 90010
	9422	Wire Jumper.	3198 036 90010
	9423	Wire Jumper.	3198 036 90010
	9424	Wire Jumper.	3198 036 90010
	9425	Wire Jumper.	3198 036 90010
	9426	Wire Jumper.	3198 036 90010
	9427	Wire Jumper.	3198 036 90010
	9453	Wire Jumper.	3198 036 90010
	9460	Wire Jumper.	3198 036 90010
	9463	Wire Jumper.	3198 036 90010
	9500	Wire Jumper.	3198 036 90010
	9501	Wire Jumper.	3198 036 90010
	9503	Wire Jumper.	3198 036 90010
	9506	Wire Jumper.	3198 036 90010
	9507	Wire Jumper.	3198 036 90010
	9510	Wire Jumper.	3198 036 90010
	9511	Wire Jumper.	3198 036 90010
	9512	Wire Jumper.	3198 036 90010
	9513	Wire Jumper.	3198 036 90010
	9514	Wire Jumper.	3198 036 90010
	9515	Wire Jumper.	3198 036 90010
	9516	Wire Jumper.	3198 036 90010
	9518	Wire Jumper.	3198 036 90010
	9520	Wire Jumper.	3198 036 90010
	9521	Wire Jumper.	3198 036 90010
	9522	Wire Jumper.	3198 036 90010
	9524	Wire Jumper.	3198 036 90010
	9528	Wire Jumper.	3198 036 90010
	9530	Wire Jumper.	3198 036 90010
	9611	Coil, 27u, 10%	3198 018 22790
	9612	Wire Jumper.	3198 036 90010
	9613	Wire Jumper.	3198 036 90010
	9614	Wire Jumper.	3198 036 90010
	9615	Wire Jumper.	3198 036 90010
	9617	Wire Jumper.	3198 036 90010
	9618	Wire Jumper.	3198 036 90010
	9619	Wire Jumper.	3198 036 90010
	9620	Wire Jumper.	3198 036 90010
	9621	Wire Jumper.	3198 036 90010
	9622	Wire Jumper.	3198 036 90010
	9623	Wire Jumper.	3198 036 90010
	9624	Wire Jumper.	3198 036 90010
	9626	Wire Jumper.	3198 036 90010
	9627	Wire Jumper.	3198 036 90010
	9628	Wire Jumper.	3198 036 90010
	9629	Wire Jumper.	3198 036 90010
	9631	Wire Jumper.	3198 036 90010
	9632	Wire Jumper.	3198 036 90010
	9633	Wire Jumper.	3198 036 90010
	9637	Wire Jumper.	3198 036 90010
	9638	Wire Jumper.	3198 036 90010
	9639	Wire Jumper.	3198 036 90010
	9640	Wire Jumper.	3198 036 90010
	9641	Wire Jumper.	3198 036 90010
	9642	Wire Jumper.	3198 036 90010
	9643	Wire Jumper.	3198 036 90010
	9648	Wire Jumper.	3198 036 90010
	9650	Wire Jumper.	3198 036 90010
	9651	Wire Jumper.	3198 036 90010
	9652	Wire Jumper.	3198 036 90010
	9654	Wire Jumper.	3198 036 90010
	9655	Wire Jumper.	3198 036 90010
	9656	Wire Jumper.	3198 036 90010
	9657	Wire Jumper.	3198 036 90010
	9658	Wire Jumper.	3198 036 90010
	9659	Wire Jumper.	3198 036 90010
	9660	Wire Jumper.	3198 036 90010
	9661	Wire Jumper.	3198 036 90010
	9662	Wire Jumper.	3198 036 90010
	9663	Wire Jumper.	3198 036 90010
	9664	Wire Jumper.	3198 036 90010
	9665	Wire Jumper.	3198 036 90010
	9666	Wire Jumper.	3198 036 90010
	9667	Wire Jumper.	3198 036 90010
	9668	Wire Jumper.	3198 036 90010
	9669	Wire Jumper.	3198 036 90010
	9670	Wire Jumper.	3198 036 90010
	9671	Wire Jumper.	3198 036 90010
	9672	Coil, 22u, 10%	3198 018 22290
	9674	Wire Jumper.	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

29PT633R85A (continued)

9675	Wire Jumper.	3198 036 90010
9676	Wire Jumper.	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper.	3198 036 90010
9680	Wire Jumper.	3198 036 90010
9681	Wire Jumper.	3198 036 90010
9685	Wire Jumper.	3198 036 90010
9686	Wire Jumper.	3198 036 90010
9687	Wire Jumper.	3198 036 90010
9688	Wire Jumper.	3198 036 90010
9689	Wire Jumper.	3198 036 90010
9690	Wire Jumper.	3198 036 90010
9691	Wire Jumper.	3198 036 90010
9694	Wire Jumper.	3198 036 90010
9695	Wire Jumper.	3198 036 90010
9697	Wire Jumper.	3198 036 90010
9698	Wire Jumper.	3198 036 90010
9699	Wire Jumper.	3198 036 90010
9821	Wire Jumper.	3198 036 90010
9822	Wire Jumper.	3198 036 90010
9825	Wire Jumper.	3198 036 90010
9828	Wire Jumper.	3198 036 90010
9829	Wire Jumper.	3198 036 90010
9831	Wire Jumper.	3198 036 90010
9832	Wire Jumper.	3198 036 90010
9837	Wire Jumper.	3198 036 90010
9838	Wire Jumper.	3198 036 90010
9839	Wire Jumper.	3198 036 90010
9846	Wire Jumper.	3198 036 90010
9847	Wire Jumper.	3198 036 90010
9849	Wire Jumper.	3198 036 90010
9850	Wire Jumper.	3198 036 90010
9851	Wire Jumper.	3198 036 90010
9852	Wire Jumper.	3198 036 90010
9853	Wire Jumper.	3198 036 90010
9856	Wire Jumper.	3198 036 90010
9860	Wire Jumper.	3198 036 90010
9861	Wire Jumper.	3198 036 90010
9862	Wire Jumper.	3198 036 90010
9864	Wire Jumper.	3198 036 90010
9865	Wire Jumper.	3198 036 90010
9868	Wire Jumper.	3198 036 90010
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9891	Wire Jumper.	3198 036 90010
9892	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010
9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9905	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9918	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9993	Wire Jumper.	3198 036 90010
9994	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9997	Wire Jumper.	3198 036 90010
9998	Wire Jumper.	3198 036 90010
CBA	Main Chassis Assembly.	3141 058 58631

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

S 0211	2 Pin Connector.	2422 025 16268
S 0212	2 Pin Connector.	2422 025 16559
0214	5 Pin Connector.	2422 025 06353
1606	Tact Switch.	2422 128 02742
2691	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2698	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
6691	LED, LTL-10234WHCR	9322 185 69682
6692	IR Receiver, TSOP1836UH3V.	9322 127 54667
9001	Wire Jumper.	3198 036 90010
9002	Wire Jumper.	3198 036 90010
CBA	Front Interface Panel Assembly	3139 177 26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422 026 04747
0250	A/V Jack	2422 026 04815
0251	6 Pin Connector.	2422 025 12482
0254	5 Pin Connector.	2422 025 12481
0255	4 Pin Connector.	2422 025 12479
1810	3 Pin Connector.	2412 020 00725
1811	3 Pin Connector.	2412 020 00725
2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2177	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2179	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
6161	Zener Diode, 6.8 volt.	3198 010 26880
7802	IC, HEF4053BT.	9333 729 60653
9150	Wire Jumper.	3198 036 90010
9151	Wire Jumper.	3198 036 90010
9152	Wire Jumper.	3198 036 90010
9153	Wire Jumper.	3198 036 90010
9154	Wire Jumper.	3198 036 90010
9170	Wire Jumper.	3198 036 90010
CBA	Side Jack Panel Assembly	3139 177 26231

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

0215	3 Pin Connector.	2422 025 09191
1091	Tact Switch.	2422 128 02742
1092	Tact Switch.	2422 128 02742
1093	Tact Switch.	2422 128 02742
1094	Tact Switch.	2422 128 02742
3088	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3089	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3091	Res, 560 ohm, 5%, Metalized Glass. . .	3198 021 35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3093	Res, 560 ohm, 5%, Metalized Glass. . .	3198 021 35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
4092	Res, Zero ohm, "Chip" Jumper	3198 021 90030
6092	Diode, Signal.	9340 453 90115
CBA	Top Control Panel.	3139 187 10251

Cabinet & Accessory Parts

Cabinet & Accessory Parts

29PT633R85A (continued)

```
S AC01   AC Cord. . . . . . . . . . . . . . . .  3135 010 03831
  AC03   Anode Lead Spacer (3 Used) . . . . . .  3135 014 04471
  AC04   Batteries for Remote Control Transmitte 9299 000 65263
  AC05   Cabinet Back . . . . . . . . . . . . .  3139 124 36763
  AC08   Chassis Tray . . . . . . . . . . . . .  3139 124 31324
S AC09   CRT, A68QCU754X73(N) . . . . . . . . .  9301 925 60527
S AC12   Degaussing Coil. . . . . . . . . . . .  2422 549 43967
  AC13   Front Interface Panel Bracket. . . . .  3139 124 32891
  AC15   Holder, Degaussing Coil (4 Used) . . .  3139 124 31122
  AC17   Owner's Manual . . . . . . . . . . . .  3121 235 20811
  AC19   Side Jack Panel Bracket. . . . . . . .  3139 124 37061
  AC20   Cabinet Front Assembly . . . . . . . .  3121 237 53091
  AC20A  Cabinet Front. . . . . . . . . . . . .  3139 177 60011
  AC20C  Light Guide. . . . . . . . . . . . . .  3139 124 33811
  AC20D  Nameplate. . . . . . . . . . . . . . .  3141 050 00161
  AC20F  Power Button Cover . . . . . . . . . .  3139 124 32921
  AC20G  Power Button Shaft . . . . . . . . . .  3139 124 32791
  AC20H  Speaker, 16 ohm, 5W (2 Used) . . . . .  2422 264 00371
  AC20J1 Top Control Bracket. . . . . . . . . .  3139 124 33941
  AC20J3 Top Control Cover. . . . . . . . . . .  3139 124 31131
  AC20J4 Top Control Rubber . . . . . . . . . .  3139 124 30391
  REMOTE Remote Control Transmitter, RC19335004/
         01. . . . . . . . . . . . . . . . . . . 3139 228 86463
```

S = Safety Part   Be sure to use exact replacement part.

29PT633R85C - Manual no. 7638

Main Chassis Parts

S	Ref	Description	Part No.
		Main Chassis Parts	
	0211	2 Pin Connector.	2422 025 16374
	0212	2 Pin Connector.	2422 025 16375
	0214	5 Pin Connector.	2422 025 12481
	0219	6 Pin Connector.	2422 025 12482
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0222	2 Pin Connector.	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0229	3 Pin Connector.	2412 020 00725
	0239	3 Pin Connector.	2422 025 16382
	0243	6 Pin Connector.	2422 025 04854
	0244	5 Pin Connector.	2422 025 04853
	0245	6 Pin Connector.	2422 025 04854
	0246	5 Pin Connector.	2422 025 12481
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector.	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U PLL	2422 542 90098
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1660	Crystal, 12MHz000	2422 543 01203
	1811	3 Pin Connector.	2412 020 00725
	1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
	2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
	2451	Cap, 22n, 10%, 50v, Polyester.	3198 014 02230
	2452	Cap, 180p, 5%, 50v, Ceramic.	3198 016 01810
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 360n, 5%, 250v, Metalized Polypropylene.	2222 479 90019
	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
S	2463	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene	2222 479 90042
	2465	Cap, 15n, 5%, 1600v, Polypropylene	2222 375 90158
	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
	2468	Cap, 22n, 10%, 400v, Polyester	2222 347 90223
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 120n, 5%, 250v, Metalized Polypropylene.	2222 479 90051
	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2222 336 29148
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2803	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250

S = Safety Part   Be sure to use exact replacement part.

29PT633R85C (continued)

Ref	Description	Part No.
2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
2862	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3124	Res, 47 ohm, 5%, 1/16W, Metalized Glass	3198 021 34790
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3126	Res, 47 ohm, 5%, 1/16W, Metalized Glass	3198 021 34790
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010

Ref	Description	Part No.
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
3401	Res, 220K, 5%, 1/6W, Carbon Film . . .	3198 011 02240
3403	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102
3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3470	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
3472	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
3473	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S 3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 32290
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3507	Surge Protector.	2422 549 43073
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630

S = Safety Part   Be sure to use exact replacement part.

29PT633R85C (continued)

	Ref	Description	Part No.
	3525	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3814	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3861	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3862	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
	3863	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
	3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3865	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3866	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3867	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3901	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4122	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4123	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4127	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%	3198 018 18270
	5201	Coil, 6u8, 5%	3198 018 16880
	5202	Wire Jumper	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5241	Wire Jumper	3198 036 90010
	5242	Coil, 10u, 5%	3198 018 11090
	5341	Coil, 22u	2422 535 97333
	5342	Coil, 22u	2422 535 97333
	5401	Coil, 1mH, 10%	3198 018 71020
S	5445	Transformer, LOT	2422 531 02574
	5451	Coil, 22u, 10%	3198 018 72290
	5452	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
S	5457	Coil, 25u	2422 535 91028
	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
	5463	Coil, Choke	3128 138 37021
	5471	Coil, 6u8, 20%	3198 018 76880
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 47u, 10%	2422 535 97337
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5561	Coil, 27u, 5%	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5602	Coil, 5u6, 5%	3198 018 15680
	5603	Coil, 5u6, 5%	3198 018 15680
	5604	Coil, 5u6, 5%	3198 018 15680
	5861	Coil, 10u, 5%	3198 018 11090
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316	3198 010 10630
	6201	Diode, Signal, BAS316	3198 010 10630
	6202	Diode, Signal, BAS316	3198 010 10630
	6206	Zener Diode, 6.8 volt	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6400	Res, 1K, 1%, 3/5W, Metal Film	2312 915 11002
	6401	Zener Diode, 47 volt	3198 010 24790
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148	3198 010 10010
	6448	Zener Diode, 6.2 volt	9331 668 30133

S = Safety Part   Be sure to use exact replacement part.

29PT633R85C (continued)

	Ref	Description	Part No.
	6449	Diode, Signal, BAV99	3198 010 10620
	6460	Diode, Rect, BY228/24.	9340 559 50112
	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
	6462	Zener Diode, 9.1 volt.	9331 177 80133
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316.	3198 010 10630
	6468	Diode, Signal, BAS316.	3198 010 10630
	6469	Diode, Rect, BYD33J.	9337 234 20133
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt.	3198 010 25680
	6482	Zener Diode, 9.1 volt.	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYD33J.	9337 234 20133
	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6487	Diode, Rect, BYD33D.	9337 234 00133
	6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667
	6520	Diode, Rect, BYD33D.	9337 234 00133
	6523	Diode, Signal, 1N4148.	3198 010 10010
	6524	Diode, Rect, 1N5062.	3198 010 10120
	6525	Diode, Rect, 1N5062.	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt.	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500.	9340 555 59127
	6562	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6563	Diode, Signal, BAS316.	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148.	3198 010 10010
	6569	Diode, Signal, BAS316.	3198 010 10630
	6570	Zener Diode, 6.8 volt.	3198 020 56880
	6580	Diode, Signal, BAS316.	3198 010 10630
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7102	Transistor, PNP, BC857B(COL)	3198 010 42150
	7103	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9588H/N1/3I/1053.	9352 728 40557
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7400	Power FET, STP3NC60FP.	9322 157 37687
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7460	Transistor, NPN, BU4508DX.	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2.	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1.	9352 673 56112
	7521	Power FET, FQPF9N50.	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, L78L33ACZ.	9322 134 92676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C08-WBN6.	9322 154 38682
	7606	Transistor, NPN, PDTC143ZT	9340 547 00215
	7802	IC, HEF4053BT.	9333 729 60653
	7861	IC, TDA9853H/V1.	9352 671 19557
	7891	Transistor, NPN, BC847B(COL)	3198 010 42030
	7892	Transistor, NPN, BC847B(COL)	3198 010 42030
	7901	IC, AN7522N PH	9322 181 41682
	9001	Wire Jumper.	3198 036 90010
	9101	Wire Jumper.	3198 036 90010
	9102	Wire Jumper.	3198 036 90010
	9103	Wire Jumper.	3198 036 90010
	9104	Wire Jumper.	3198 036 90010
	9123	Wire Jumper.	3198 036 90010
	9171	Wire Jumper.	3198 036 90010
	9173	Wire Jumper.	3198 036 90010
	9175	Wire Jumper.	3198 036 90010
	9176	Wire Jumper.	3198 036 90010
	9178	Wire Jumper.	3198 036 90010
	9179	Wire Jumper.	3198 036 90010
	9181	Wire Jumper.	3198 036 90010
	9182	Wire Jumper.	3198 036 90010
	9183	Wire Jumper.	3198 036 90010
	9192	Wire Jumper.	3198 036 90010
	9193	Wire Jumper.	3198 036 90010
	9311	Wire Jumper.	3198 036 90010
	9312	Wire Jumper.	3198 036 90010
	9406	Wire Jumper.	3198 036 90010
	9407	Wire Jumper.	3198 036 90010
	9408	Wire Jumper.	3198 036 90010
	9409	Wire Jumper.	3198 036 90010
	9410	Wire Jumper.	3198 036 90010
	9411	Wire Jumper.	3198 036 90010
	9412	Wire Jumper.	3198 036 90010
	9413	Wire Jumper.	3198 036 90010
	9414	Wire Jumper.	3198 036 90010
	9415	Wire Jumper.	3198 036 90010
	9416	Wire Jumper.	3198 036 90010
	9417	Wire Jumper.	3198 036 90010
	9418	Wire Jumper.	3198 036 90010
	9419	Wire Jumper.	3198 036 90010
	9421	Wire Jumper.	3198 036 90010
	9422	Wire Jumper.	3198 036 90010
	9423	Wire Jumper.	3198 036 90010
	9424	Wire Jumper.	3198 036 90010
	9425	Wire Jumper.	3198 036 90010
	9426	Wire Jumper.	3198 036 90010
	9427	Wire Jumper.	3198 036 90010
	9453	Wire Jumper.	3198 036 90010
	9460	Wire Jumper.	3198 036 90010
	9463	Wire Jumper.	3198 036 90010
	9500	Wire Jumper.	3198 036 90010
	9501	Wire Jumper.	3198 036 90010
	9503	Wire Jumper.	3198 036 90010
	9506	Wire Jumper.	3198 036 90010
	9507	Wire Jumper.	3198 036 90010
	9510	Wire Jumper.	3198 036 90010
	9511	Wire Jumper.	3198 036 90010
	9512	Wire Jumper.	3198 036 90010
	9513	Wire Jumper.	3198 036 90010
	9514	Wire Jumper.	3198 036 90010
	9515	Wire Jumper.	3198 036 90010
	9516	Wire Jumper.	3198 036 90010
	9518	Wire Jumper.	3198 036 90010
	9520	Wire Jumper.	3198 036 90010
	9521	Wire Jumper.	3198 036 90010
	9522	Wire Jumper.	3198 036 90010
	9524	Wire Jumper.	3198 036 90010
	9528	Wire Jumper.	3198 036 90010
	9530	Wire Jumper.	3198 036 90010
	9611	Coil, 27u, 10%	3198 018 22790
	9612	Wire Jumper.	3198 036 90010
	9613	Wire Jumper.	3198 036 90010
	9614	Wire Jumper.	3198 036 90010
	9615	Wire Jumper.	3198 036 90010
	9617	Wire Jumper.	3198 036 90010
	9618	Wire Jumper.	3198 036 90010
	9619	Wire Jumper.	3198 036 90010
	9620	Wire Jumper.	3198 036 90010
	9621	Wire Jumper.	3198 036 90010
	9622	Wire Jumper.	3198 036 90010
	9623	Wire Jumper.	3198 036 90010
	9624	Wire Jumper.	3198 036 90010
	9626	Wire Jumper.	3198 036 90010
	9627	Wire Jumper.	3198 036 90010
	9628	Wire Jumper.	3198 036 90010
	9629	Wire Jumper.	3198 036 90010
	9631	Wire Jumper.	3198 036 90010
	9632	Wire Jumper.	3198 036 90010
	9633	Wire Jumper.	3198 036 90010
	9637	Wire Jumper.	3198 036 90010
	9638	Wire Jumper.	3198 036 90010
	9639	Wire Jumper.	3198 036 90010
	9640	Wire Jumper.	3198 036 90010
	9641	Wire Jumper.	3198 036 90010
	9642	Wire Jumper.	3198 036 90010
	9643	Wire Jumper.	3198 036 90010
	9648	Wire Jumper.	3198 036 90010
	9650	Wire Jumper.	3198 036 90010
	9651	Wire Jumper.	3198 036 90010
	9652	Wire Jumper.	3198 036 90010
	9654	Wire Jumper.	3198 036 90010
	9655	Wire Jumper.	3198 036 90010
	9656	Wire Jumper.	3198 036 90010
	9657	Wire Jumper.	3198 036 90010
	9658	Wire Jumper.	3198 036 90010
	9659	Wire Jumper.	3198 036 90010
	9660	Wire Jumper.	3198 036 90010
	9661	Wire Jumper.	3198 036 90010
	9662	Wire Jumper.	3198 036 90010
	9663	Wire Jumper.	3198 036 90010
	9664	Wire Jumper.	3198 036 90010
	9665	Wire Jumper.	3198 036 90010
	9666	Wire Jumper.	3198 036 90010
	9667	Wire Jumper.	3198 036 90010
	9668	Wire Jumper.	3198 036 90010
	9669	Wire Jumper.	3198 036 90010
	9670	Wire Jumper.	3198 036 90010
	9671	Wire Jumper.	3198 036 90010
	9672	Coil, 22u, 10%	3198 018 22290
	9674	Wire Jumper.	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

29PT633R85C (continued)

Ref	Description	Part No.
9675	Wire Jumper.	3198 036 90010
9676	Wire Jumper.	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper.	3198 036 90010
9680	Wire Jumper.	3198 036 90010
9681	Wire Jumper.	3198 036 90010
9685	Wire Jumper.	3198 036 90010
9686	Wire Jumper.	3198 036 90010
9687	Wire Jumper.	3198 036 90010
9688	Wire Jumper.	3198 036 90010
9689	Wire Jumper.	3198 036 90010
9690	Wire Jumper.	3198 036 90010
9691	Wire Jumper.	3198 036 90010
9694	Wire Jumper.	3198 036 90010
9695	Wire Jumper.	3198 036 90010
9697	Wire Jumper.	3198 036 90010
9698	Wire Jumper.	3198 036 90010
9699	Wire Jumper.	3198 036 90010
9821	Wire Jumper.	3198 036 90010
9822	Wire Jumper.	3198 036 90010
9825	Wire Jumper.	3198 036 90010
9828	Wire Jumper.	3198 036 90010
9829	Wire Jumper.	3198 036 90010
9831	Wire Jumper.	3198 036 90010
9832	Wire Jumper.	3198 036 90010
9837	Wire Jumper.	3198 036 90010
9838	Wire Jumper.	3198 036 90010
9839	Wire Jumper.	3198 036 90010
9846	Wire Jumper.	3198 036 90010
9847	Wire Jumper.	3198 036 90010
9849	Wire Jumper.	3198 036 90010
9850	Wire Jumper.	3198 036 90010
9851	Wire Jumper.	3198 036 90010
9852	Wire Jumper.	3198 036 90010
9853	Wire Jumper.	3198 036 90010
9856	Wire Jumper.	3198 036 90010
9860	Wire Jumper.	3198 036 90010
9861	Wire Jumper.	3198 036 90010
9862	Wire Jumper.	3198 036 90010
9864	Wire Jumper.	3198 036 90010
9865	Wire Jumper.	3198 036 90010
9868	Wire Jumper.	3198 036 90010
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9891	Wire Jumper.	3198 036 90010
9892	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010
9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9905	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9918	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9993	Wire Jumper.	3198 036 90010
9994	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9997	Wire Jumper.	3198 036 90010
9998	Wire Jumper.	3198 036 90010
CBA	Main Chassis Assembly.	3141 058 57981

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

Ref	Description	Part No.
S 0211	2 Pin Connector.	2422 025 16268
S 0212	2 Pin Connector.	2422 025 16559
0214	5 Pin Connector.	2422 025 06353
1606	Tact Switch.	2422 128 02742
2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2698	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322 242 13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322 242 13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
6691	LED, LTL-10234WHCR	9322 185 69682
6692	IR Receiver, TSOP1836UH3V.	9322 127 54667
9001	Wire Jumper.	3198 036 90010
9002	Wire Jumper.	3198 036 90010
CBA	Front Interface Panel Assembly	3139 177 26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts

Side Jack Panel Parts

Ref	Description	Part No.
0232	Headphone Jack	2422 026 04747
0250	A/V Jack	2422 026 04815
0251	6 Pin Connector.	2422 025 12482
0254	5 Pin Connector.	2422 025 12481
0255	4 Pin Connector.	2422 025 12479
1810	3 Pin Connector.	2412 020 00725
1811	3 Pin Connector.	2412 020 00725
2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
6161	Zener Diode, 6.8 volt.	3198 010 26880
7802	IC, HEF4053BT.	9333 729 60653
9150	Wire Jumper.	3198 036 90010
9151	Wire Jumper.	3198 036 90010
9152	Wire Jumper.	3198 036 90010
9153	Wire Jumper.	3198 036 90010
9154	Wire Jumper.	3198 036 90010
9170	Wire Jumper.	3198 036 90010
CBA	Side Jack Panel Assembly	3139 177 26231

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Ref	Description	Part No.
0215	3 Pin Connector.	2422 025 09191
1091	Tact Switch.	2422 128 02742
1092	Tact Switch.	2422 128 02742
1093	Tact Switch.	2422 128 02742
1094	Tact Switch.	2422 128 02742
3088	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3089	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3091	Res, 560 ohm, 5%, Metalized Glass.	3198 021 35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3093	Res, 560 ohm, 5%, Metalized Glass.	3198 021 35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
4092	Res, Zero ohm, "Chip" Jumper	3198 021 90030
6092	Diode, Signal.	9340 453 90115
CBA	Top Control Panel.	3139 187 10251

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S = Safety Part   Be sure to use exact replacement part.

29PT633R85C (continued)

```
S AC01   AC Cord. . . . . . . . . . . . . . . . .  3135 010 03831
  AC03   Anode Lead Spacer (3 Used) . . . . . .  3135 014 04471
  AC04   Batteries for Remote Control Transmitte 9299 000 65263
  AC05   Cabinet Back . . . . . . . . . . . . .  3139 124 36763
  AC08   Chassis Tray . . . . . . . . . . . . .  3139 124 31324
S AC09   CRT, A68QCP893X001 . . . . . . . . . .  9322 173 75682
S AC12   Degaussing Coil. . . . . . . . . . . .  2422 549 43967
  AC13   Front Interface Panel Bracket. . . . .  3139 124 32891
  AC15   Holder, Degaussing Coil (4 Used) . . .  3139 124 31122
  AC17   Owner's Manual . . . . . . . . . . . .  3121 235 20811
  AC19   Side Jack Panel Bracket. . . . . . . .  3139 124 37061
  AC20   Cabinet Front Assembly . . . . . . . .  3121 237 53091
  AC20A  Cabinet Front. . . . . . . . . . . . .  3139 177 60011
  AC20C  Light Guide. . . . . . . . . . . . . .  3139 124 33811
  AC20D  Nameplate. . . . . . . . . . . . . . .  3141 050 00161
  AC20F  Power Button Cover . . . . . . . . . .  3139 124 32921
  AC20G  Power Button Shaft . . . . . . . . . .  3139 124 32791
  AC20H  Speaker, 16 ohm, 5W (2 Used) . . . . .  2422 264 00371
  AC20J1 Top Control Bracket. . . . . . . . . .  3139 124 33941
  AC20J3 Top Control Cover. . . . . . . . . . .  3139 124 31131
  AC20J4 Top Control Rubber . . . . . . . . . .  3139 124 30391
  REMOTE Remote Control Transmitter, RC19335004/
         01. . . . . . . . . . . . . . . . . . . 3139 228 86463
```

S = Safety Part   Be sure to use exact replacement part.

29PT643R85A - Manual no. 7638

Main Chassis Parts

Main Chassis Parts

S	Ref	Description	Part No.
	0211	2 Pin Connector	2422 025 16374
	0212	2 Pin Connector	2422 025 16375
	0214	5 Pin Connector	2422 025 12481
	0219	6 Pin Connector	2422 025 12482
	0220	5 Pin Connector	2422 025 04853
	0221	2 Pin Connector	2422 025 15503
	0222	2 Pin Connector	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack	2422 026 04926
	0229	3 Pin Connector	2412 020 00725
	0239	3 Pin Connector	2422 025 16382
	0243	6 Pin Connector	2422 025 04854
	0244	5 Pin Connector	2422 025 04853
	0245	6 Pin Connector	2422 025 04854
	0246	5 Pin Connector	2422 025 12481
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U PLL	2422 542 90141
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC	2422 086 10914
S	1515	Relay, 5 Amp, 12V	2422 132 07444
	1660	Crystal, 12MHz000	2422 543 01203
	1811	3 Pin Connector	2412 020 00725
	1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344
	2004	Cap, 47n, 10%, 50v, Ceramic	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2226	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2241	Cap, 1n5, 10%, 50v, Ceramic	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
	2402	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic	3198 016 03310
	2441	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic	2020 021 91139
	2451	Cap, 22n, 10%, 50v, Polyester	3198 014 02230
	2452	Cap, 180p, 5%, 50v, Ceramic	3198 016 01810
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 360n, 5%, 250v, Metalized Polypropylene	2022 333 00163
	2458	Cap, 2u2, 20%, 100v, Electrolytic	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
S	2463	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene	2222 479 90042
S	2465	Cap, 15n, 5%, 1600v, Polypropylene	2020 301 90255
	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
	2468	Cap, 27n, 10%, 400v, Polyester	2222 347 90232
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2482	Cap, 120n, 5%, 250v, Metalized Polypropylene	2222 479 90051
	2485	Cap, 4u7, 20%, 250v, Electrolytic	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2601	Cap, 220n, +80/-20%, 25v, Ceramic	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic	3198 017 21050
	2802	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2803	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2816	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740

S = Safety Part   Be sure to use exact replacement part.

29PT643R85A (continued)

Ref	Description	Part No.
2862	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230

	Ref	Description	Part No.
	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
	3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
	3403	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
	3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102
	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
S	3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S	3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
	3470	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3471	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
	3472	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
	3473	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208
	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2120 101 74158
	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
	3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S	3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 32290
	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
S	3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070

S = Safety Part   Be sure to use exact replacement part.

29PT643R85A (continued)

S	Ref	Description	Part No.
S	3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198 021 31530
	3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198 021 31220
	3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4122	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4123	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4127	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5202	Wire Jumper.	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5241	Wire Jumper.	3198 036 90010
	5242	Coil, 10u, 5%.	3198 018 11090
	5341	Coil, 22u.	2422 535 97333
	5342	Coil, 3u9, 10%	2422 535 97323
	5401	Coil, 1mH, 10%	3198 018 71020
S	5445	Transformer, LOT	2422 531 02574
	5451	Coil, 22u, 10%	3198 018 72290
	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
S	5457	Coil, 25u.	2422 535 91028
	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
	5463	Coil, Choke.	3128 138 37021
	5471	Coil, 6u8, 20%	3198 018 76880
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 47u, 10%	2422 535 97337
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04.	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5861	Coil, 10u, 5%.	3198 018 11090
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316.	3198 010 10630
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630
	6206	Zener Diode, 6.8 volt.	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316.	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002
	6401	Zener Diode, 47 volt	3198 010 24790
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148.	3198 010 10010
	6448	Zener Diode, 6.2 volt.	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6460	Diode, Rect, BY228/24.	9340 559 50112

S = Safety Part   Be sure to use exact replacement part.

29PT643R85A (continued)

	Ref	Description	Part No.
	6461	Diode, Rect, RGP30J-L7004	9338 617 60682
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316	3198 010 10630
	6468	Diode, Signal, BAS316	3198 010 10630
	6469	Diode, Rect, BYV95C	9335 001 80133
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt	3198 010 25680
	6482	Zener Diode, 9.1 volt	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYV95C	9335 001 80133
	6486	Diode, Rect, EGP20DL-5100	9322 164 42682
	6487	Diode, Rect, BYV95A	9335 000 90133
	6488	Diode, Rect, EGP20DL-5100	9322 164 42682
	6500	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
	6520	Diode, Rect, BYV95A	9335 000 90133
	6523	Diode, Signal, 1N4148	3198 010 10010
	6524	Diode, Rect, 1N5062	3198 010 10120
	6525	Diode, Rect, 1N5062	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500	9340 555 59127
	6562	Diode, Rect, EGP20DL-5100	9322 164 42682
	6563	Diode, Signal, BAS316	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148	3198 010 10010
	6569	Diode, Signal, BAS316	3198 010 10630
	6570	Zener Diode, 6.8 volt	3198 020 56880
	6580	Diode, Signal, BAS316	3198 010 10630
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7102	Transistor, PNP, BC857B(COL)	3198 010 42150
	7103	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9588H/N1/3I/1053	9352 728 40557
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7400	Power FET, IR	9322 053 35687
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7460	Transistor, NPN, BU4508DX	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1	9352 673 56112
	7521	Power FET, FQPF9N50	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, L78L33ACZ	9322 134 92676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C08-WBN6	9322 154 38682
	7606	Transistor, NPN, PDTC143ZT	9340 547 00215
	7802	IC, HEF4053BT	9333 729 60653
	7861	IC, TDA9853H/V1	9352 671 19557
	7891	Transistor, NPN, BC847B(COL)	3198 010 42030
	7892	Transistor, NPN, BC847B(COL)	3198 010 42030
	7901	IC, AN7522N PH	9322 181 41682
	9001	Wire Jumper	3198 036 90010
	9101	Wire Jumper	3198 036 90010
	9102	Wire Jumper	3198 036 90010
	9103	Wire Jumper	3198 036 90010
	9104	Wire Jumper	3198 036 90010
	9123	Wire Jumper	3198 036 90010
	9171	Wire Jumper	3198 036 90010
	9173	Wire Jumper	3198 036 90010
	9175	Wire Jumper	3198 036 90010
	9176	Wire Jumper	3198 036 90010
	9178	Wire Jumper	3198 036 90010
	9179	Wire Jumper	3198 036 90010
	9181	Wire Jumper	3198 036 90010
	9182	Wire Jumper	3198 036 90010
	9183	Wire Jumper	3198 036 90010
	9192	Wire Jumper	3198 036 90010
	9193	Wire Jumper	3198 036 90010
	9311	Wire Jumper	3198 036 90010
	9312	Wire Jumper	3198 036 90010
	9406	Wire Jumper	3198 036 90010
	9407	Wire Jumper	3198 036 90010
	9408	Wire Jumper	3198 036 90010
	9409	Wire Jumper	3198 036 90010
	9410	Wire Jumper	3198 036 90010
	9411	Wire Jumper	3198 036 90010
	9412	Wire Jumper	3198 036 90010
	9413	Wire Jumper	3198 036 90010
	9414	Wire Jumper	3198 036 90010
	9415	Wire Jumper	3198 036 90010
	9416	Wire Jumper	3198 036 90010
	9417	Wire Jumper	3198 036 90010
	9418	Wire Jumper	3198 036 90010
	9419	Wire Jumper	3198 036 90010
	9421	Wire Jumper	3198 036 90010
	9422	Wire Jumper	3198 036 90010
	9423	Wire Jumper	3198 036 90010
	9424	Wire Jumper	3198 036 90010
	9425	Wire Jumper	3198 036 90010
	9426	Wire Jumper	3198 036 90010
	9427	Wire Jumper	3198 036 90010
	9453	Wire Jumper	3198 036 90010
	9460	Wire Jumper	3198 036 90010
	9463	Wire Jumper	3198 036 90010
	9500	Wire Jumper	3198 036 90010
	9501	Wire Jumper	3198 036 90010
	9503	Wire Jumper	3198 036 90010
	9506	Wire Jumper	3198 036 90010
	9507	Wire Jumper	3198 036 90010
	9510	Wire Jumper	3198 036 90010
	9511	Wire Jumper	3198 036 90010
	9512	Wire Jumper	3198 036 90010
	9513	Wire Jumper	3198 036 90010
	9514	Wire Jumper	3198 036 90010
	9515	Wire Jumper	3198 036 90010
	9516	Wire Jumper	3198 036 90010
	9518	Wire Jumper	3198 036 90010
	9520	Wire Jumper	3198 036 90010
	9521	Wire Jumper	3198 036 90010
	9522	Wire Jumper	3198 036 90010
	9524	Wire Jumper	3198 036 90010
	9528	Wire Jumper	3198 036 90010
	9530	Wire Jumper	3198 036 90010
	9611	Coil, 27u, 10%	3198 018 22790
	9612	Wire Jumper	3198 036 90010
	9613	Wire Jumper	3198 036 90010
	9614	Wire Jumper	3198 036 90010
	9615	Wire Jumper	3198 036 90010
	9617	Wire Jumper	3198 036 90010
	9618	Wire Jumper	3198 036 90010
	9619	Wire Jumper	3198 036 90010
	9620	Wire Jumper	3198 036 90010
	9621	Wire Jumper	3198 036 90010
	9622	Wire Jumper	3198 036 90010
	9623	Wire Jumper	3198 036 90010
	9624	Wire Jumper	3198 036 90010
	9626	Wire Jumper	3198 036 90010
	9627	Wire Jumper	3198 036 90010
	9628	Wire Jumper	3198 036 90010
	9629	Wire Jumper	3198 036 90010
	9631	Wire Jumper	3198 036 90010
	9632	Wire Jumper	3198 036 90010
	9633	Wire Jumper	3198 036 90010
	9637	Wire Jumper	3198 036 90010
	9638	Wire Jumper	3198 036 90010
	9640	Wire Jumper	3198 036 90010
	9641	Wire Jumper	3198 036 90010
	9642	Wire Jumper	3198 036 90010
	9643	Wire Jumper	3198 036 90010
	9648	Wire Jumper	3198 036 90010
	9650	Wire Jumper	3198 036 90010
	9651	Wire Jumper	3198 036 90010
	9652	Wire Jumper	3198 036 90010
	9654	Wire Jumper	3198 036 90010
	9655	Wire Jumper	3198 036 90010
	9656	Wire Jumper	3198 036 90010
	9657	Wire Jumper	3198 036 90010
	9658	Wire Jumper	3198 036 90010
	9659	Wire Jumper	3198 036 90010
	9660	Wire Jumper	3198 036 90010
	9661	Wire Jumper	3198 036 90010
	9662	Wire Jumper	3198 036 90010
	9663	Wire Jumper	3198 036 90010
	9664	Wire Jumper	3198 036 90010
	9665	Wire Jumper	3198 036 90010
	9666	Wire Jumper	3198 036 90010
	9667	Wire Jumper	3198 036 90010
	9668	Wire Jumper	3198 036 90010
	9669	Wire Jumper	3198 036 90010
	9670	Wire Jumper	3198 036 90010
	9671	Wire Jumper	3198 036 90010
	9672	Coil, 22u, 10%	3198 018 22290
	9674	Wire Jumper	3198 036 90010
	9675	Wire Jumper	3198 036 90010
	9676	Wire Jumper	3198 036 90010
	9678	Coil, 22u, 10%	3198 018 22290
	9679	Wire Jumper	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

29PT643R85A (continued)

9680	Wire Jumper.	3198 036 90010
9681	Wire Jumper.	3198 036 90010
9685	Wire Jumper.	3198 036 90010
9686	Wire Jumper.	3198 036 90010
9687	Wire Jumper.	3198 036 90010
9688	Wire Jumper.	3198 036 90010
9689	Wire Jumper.	3198 036 90010
9690	Wire Jumper.	3198 036 90010
9691	Wire Jumper.	3198 036 90010
9694	Wire Jumper.	3198 036 90010
9695	Wire Jumper.	3198 036 90010
9697	Wire Jumper.	3198 036 90010
9698	Wire Jumper.	3198 036 90010
9699	Wire Jumper.	3198 036 90010
9821	Wire Jumper.	3198 036 90010
9822	Wire Jumper.	3198 036 90010
9825	Wire Jumper.	3198 036 90010
9828	Wire Jumper.	3198 036 90010
9829	Wire Jumper.	3198 036 90010
9831	Wire Jumper.	3198 036 90010
9832	Wire Jumper.	3198 036 90010
9837	Wire Jumper.	3198 036 90010
9838	Wire Jumper.	3198 036 90010
9839	Wire Jumper.	3198 036 90010
9846	Wire Jumper.	3198 036 90010
9847	Wire Jumper.	3198 036 90010
9849	Wire Jumper.	3198 036 90010
9850	Wire Jumper.	3198 036 90010
9851	Wire Jumper.	3198 036 90010
9852	Wire Jumper.	3198 036 90010
9853	Wire Jumper.	3198 036 90010
9856	Wire Jumper.	3198 036 90010
9860	Wire Jumper.	3198 036 90010
9861	Wire Jumper.	3198 036 90010
9862	Wire Jumper.	3198 036 90010
9864	Wire Jumper.	3198 036 90010
9865	Wire Jumper.	3198 036 90010
9868	Wire Jumper.	3198 036 90010
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9891	Wire Jumper.	3198 036 90010
9892	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010
9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9905	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9918	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9998	Wire Jumper.	3198 036 90010
CBA	Main Chassis Assembly.	3141 058 58631

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

S 0211	2 Pin Connector.	2422 025 16268
S 0212	2 Pin Connector.	2422 025 16559
0214	5 Pin Connector.	2422 025 06353
1606	Tact Switch.	2422 128 02742
2691	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2698	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
6691	LED, LTL-10234WHCR	9322 185 69682
6692	IR Receiver, TSOP1836UH3V.	9322 127 54667
9001	Wire Jumper.	3198 036 90010
9002	Wire Jumper.	3198 036 90010
CBA	Front Interface Panel Assembly	3139 177 26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb ly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422 026 04747
0250	A/V Jack	2422 026 04815
0251	6 Pin Connector.	2422 025 12482
0254	5 Pin Connector.	2422 025 12481
0255	4 Pin Connector.	2422 025 12479
1810	3 Pin Connector.	2412 020 00725
1811	3 Pin Connector.	2412 020 00725
2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2177	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2179	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
6161	Zener Diode, 6.8 volt.	3198 010 26880
7802	IC, HEF4053BT.	9333 729 60653
9150	Wire Jumper.	3198 036 90010
9151	Wire Jumper.	3198 036 90010
9152	Wire Jumper.	3198 036 90010
9153	Wire Jumper.	3198 036 90010
9154	Wire Jumper.	3198 036 90010
9170	Wire Jumper.	3198 036 90010
CBA	Side Jack Panel Assembly	3139 177 26231

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

0215	3 Pin Connector.	2422 025 16601
1091	Tact Switch.	2422 128 02742
1092	Tact Switch.	2422 128 02742
1093	Tact Switch.	2422 128 02742
1094	Tact Switch.	2422 128 02742
3091	Res, 560 ohm, 5%, Metalized Glass. . .	3198 021 35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3093	Res, 560 ohm, 5%, Metalized Glass. . .	3198 021 35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
4085	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4089	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4090	Res, Zero ohm, "Chip" Jumper	3198 021 90030
6091	Diode, Signal.	9340 453 90115
CBA	Top Control Panel Assembly	3139 187 15841

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	3135 010 03831
AC03	Anode Lead Spacer (3 Used)	3135 014 04471
AC04	Batteries for Remote Control Transmitte	9299 000 65263
AC05	Cabinet Back	3139 124 44711
AC06	Cabinet Back Screw Cover (2 Used). . .	3139 124 39301
AC08	Chassis Tray	3139 124 31325
S AC09	CRT, A68QCU754X73(N)	9301 925 60527

29PT643R85A (continued)

	Ref.	Description	Part No.
S	AC12	Degaussing Coil.	2422 549 43967
	AC13	Front Interface Panel Bracket.	3139 124 32891
	AC15	Holder, Degaussing Coil (4 Used) . . .	3139 124 31122
	AC17	Owner's Manual	3121 235 21101
	AC19	Side Jack Panel Bracket.	3139 124 37061
	AC20	Cabinet Front Assembly	3121 237 53302
	AC20A	Cabinet Front.	3139 177 58401
	AC20C	Light Guide.	3139 124 39701
	AC20D	Nameplate.	3141 050 00161
	AC20E	Power Button	3139 138 10881
	AC20H	Speaker, 8 ohm, 5W (2 Used).	2422 264 00409
	AC20J	Top Control Assembly	3139 138 11451
	REMOTE	Remote Control Transmitter, RC19335004/ 01.	3139 228 86464

S = Safety Part   Be sure to use exact replacement part.

29PT6631/44 - Manual no. 7638

Main Chassis Parts

	Ref	Description	Part No.
		Main Chassis Parts	
	0022	Bracket.	3139 124 44421
	0122	Heatsink	3139 121 62214
	0127	Socket Fuse.	2422 088 00271
	0129	NTC Holder	3139 120 10151
	0136	IC-Spring.	3104 301 22081
	0137	Spring	3139 121 24583
	0138	IC-Spring.	3104 301 22081
	0139	Spring for Bracket	3122 121 24786
	0140	Spring	3139 121 24583
	0141	IC-Spring.	3104 301 22081
	0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421
	0153	Cable, DIPMate	3104 301 08381
	0211	2 Pin Connector.	2422 025 16374
	0214	5 Pin Connector.	2422 025 12481
	0219	6 Pin Connector.	2422 025 12482
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0239	3 Pin Connector.	2422 025 16382
	0246	5 Pin Connector.	2422 025 12481
S	0254	9 Pin CRT Socket	2422 500 80076
	0269	Jack	2422 026 05182
	0320	Factory Plate.	3122 120 01701
S	1000	Tuner, V+U, PLL	2422 542 90108
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1810	6 Pin Connector.	2422 025 16607
	1831	Crystal, Resonator, 18MHz432, 12 Pin, H C49/U A.	2422 543 00842
	2004	Cap, 47n, +80/-20%, 50v, Ceramic . . .	3198 024 44730
	2101	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic. . .	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2245	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2331	Cap, 10n, +80/-20% 1000v, Ceramic. . .	2020 558 90445
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2401	Cap, 2u2, 20%, 50v, Electrolytic . . .	2020 021 90552
	2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic . . .	3198 025 54790
	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2450	Cap, 47u, 20%, 160v, Electrolytic. . .	2020 021 91139
	2451	Cap, 22n, 10%, 50v, Polyester.	3198 014 02230
	2452	Cap, 180p, 5%, 50v, Ceramic.	3198 016 01810
	2457	Cap, 360n, 5%, 250v, Metalized Polyprop ylene.	2022 333 00163
	2458	Cap, 2u2, 20%, 100v, Electrolytic. . .	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
S	2463	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2464	Cap, 2u2, 5%, 160v, Metalized Polypropy lene	2222 479 90042
S	2465	Cap, 15n, 5%, 1600v, Polypropylene . .	2020 301 90255
	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
	2468	Cap, 22n, 10%, 400v, Polyester	2222 347 90223
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2480	Cap, 47u, 20%, 25v, Electrolytic . . .	2020 021 90586
	2482	Cap, 120n, 5%, 250v, Metalized Polyprop ylene.	2222 479 90051
	2485	Cap, 4u7, 20%, 250v, Electrolytic. . .	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic. . .	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic . . .	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic . .	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic. . .	2020 021 91577
S	2500	Cap, 470n, 20%, 275v, Metalized Polypro pylene	2022 330 00018
S	2503	Cap, 330u, 20%, 450v, Electrolytic . .	2020 024 90774
	2509	Cap, 100n, 20%, 275v, Metalized Polypro pylene	2222 336 29144
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
S	2516	Cap, 330p, 20%, 50v, Ceramic	2020 554 90121
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2564	Cap, 2u2, 20%, 25v, Electrolytic . . .	2020 021 91374
	2590	Cap, 330n, +80/-20%, 25v, Ceramic. . .	2222 910 19856
	2604	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2807	Cap, 220n, +80/-20%, 25v, Ceramic. . .	3198 023 22240
	2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
	2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
	2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
	2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
	2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
	2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
	2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2837	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
	2840	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2841	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2843	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2844	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2846	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
	2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
	2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
	2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610
	2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910
	2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2902	Cap, 1000u, 20%, 25v, Electrolytic . .	3198 026 31020
	2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
	2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
	2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3124	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3126	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3132	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3134	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
	3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
	3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202
	3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S	3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
	3401	Res, 220K, 5%, 1/6W, Carbon Film . . .	3198 011 02240

S = Safety Part   Be sure to use exact replacement part.

	Ref	Description	Part No.
	3403	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3405	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
	3406	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3410	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3443	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film.	3198 011 01810
S	3451	Res, 10 ohm, 5%, 1/3W, Metal Film.	2306 204 03109
	3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102
	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320
	3470	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
	3472	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
	3473	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208
	3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2122 101 02083
	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
	3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
S	3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	3198 012 32290
	3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3492	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
	3495	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3498	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
	3499	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
S	3504	Res, PTC, 9R 220V.	2120 661 00024
	3521	Res, 22 ohm, 5%, 1/6W, Carbon Film	3198 011 02290
	3522	Res, 330K, 1%, 1/8W, Metalized Glass	2322 734 63304
S	3523	Res, 47 ohm, 5%, 1/3W, Metal Film.	2306 204 03479
	3526	Res, 0R15, 5%, 3/5W, Metal Film.	3198 012 11570
	3527	Res, 0R22, 5%, 3/5W, Metal Film.	3198 012 12270
	3545	Res, 270K, 5%, 1/8W, Metalized Glass	2322 730 61274
	3552	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3557	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3561	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
	3563	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
S	3565	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310
S	3591	Res, 10 ohm, 5%, 1/3W, Metal Film.	2306 204 03109
	3601	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3811	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3812	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3813	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3831	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3832	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3843	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
	3901	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
	3903	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3905	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3909	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
	3910	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
	3912	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4824	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4837	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4838	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4884	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5202	Wire Jumper.	3198 036 90010
	5241	Wire Jumper.	3198 036 90010
	5341	Coil, 22u.	2422 535 97333
	5342	Coil, 3u9, 10%	2422 535 97323
	5401	Coil, 1mH, 10%	3198 018 71020
S	5445	Transformer, LOT	2422 531 02574
	5451	Coil, 22u, 10%	3198 018 72290
	5457	Coil, Linear	3128 138 53201
	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
	5463	Coil, Choke.	3128 138 37021
	5471	Coil, 6u8, 20%	3198 018 76880
	5480	Coil, 47u, 10%	2422 535 97337
S	5500	Mains Filter	2422 549 43567
S	5520	Transformer, SS49109-00 B.	2422 531 02579
	5810	Coil, 10u, 10%	3198 018 51090
	5831	Coil, 6u8, 5%.	3198 018 16880
	5832	Coil, 6u8, 5%.	3198 018 16880
	5833	Coil, 6u8, 5%.	3198 018 16880
	5835	Coil, 12u, 10%	3198 018 31290
	6150	Diode, Signal, BAS316.	3198 010 10630
	6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002
	6401	Zener Diode, 47 volt	3198 010 24790
	6448	Zener Diode, 6.2 volt.	9331 668 30133
	6460	Diode, Rect, BY228/24.	9340 559 50112
	6469	Diode, Rect, BYV95C.	9335 001 80133
	6476	Zener Diode, 15 volt	3198 010 21590
	6482	Zener Diode, 9.1 volt.	9331 177 80133
	6485	Diode, Rect, BYV95C.	9335 001 80133
	6487	Diode, Rect, BYV95A.	9335 000 90133
	6490	Diode, Rect, BYV95C.	9335 001 80133
	6500	Diode, Bridge Rect, GBU4JL-7002.	9322 132 55667
	6520	Diode, Rect, BYV95A.	9335 000 90133
	6541	Zener Diode, 9.1 volt.	9322 150 08685
	6560	Diode, Rect, BYV29X-500.	9340 555 59127
	6570	Zener Diode, 6.2 volt.	9322 163 91685
	6582	Diode, Rect, STPS10L60D.	9322 175 70667
	6831	Diode, Signal, 1N4148.	3198 010 10010
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7102	Transistor, PNP, BC857B(COL)	3198 010 42150
	7103	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9588H/N1/3I/1298.	9352 742 85557
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7400	Power FET, STP3NC60FP.	9322 157 37687
S	7515	Optical Coupler, TCET1104(G)	9322 175 72667
	7521	Power FET, STP7NC80ZFP	3139 120 51961
	7560	IC, L78L33ACZ.	9322 134 92676
	7602	IC, M24C08-WBN6.	9322 154 38682
	7606	Transistor, NPN, PDTC143ZT	9340 547 00215
	7802	IC, HEF4053BT.	9333 729 60653
	7803	IC, HEF4053BT.	9333 729 60653
	7804	Transistor, NPN, BC847B(COL)	3198 010 42030
	7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682
	7901	IC, AN7580	9322 166 29682
	7903	Transistor, NPN, BC847B(COL)	3198 010 42030
	9001	Wire Jumper.	3198 036 90010
	9101	Wire Jumper.	3198 036 90010
	9102	Wire Jumper.	3198 036 90010
	9103	Wire Jumper.	3198 036 90010
	9104	Wire Jumper.	3198 036 90010
	9123	Wire Jumper.	3198 036 90010
	9171	Wire Jumper.	3198 036 90010
	9173	Wire Jumper.	3198 036 90010
	9175	Wire Jumper.	3198 036 90010
	9176	Wire Jumper.	3198 036 90010
	9178	Wire Jumper.	3198 036 90010
	9179	Wire Jumper.	3198 036 90010
	9181	Wire Jumper.	3198 036 90010
	9182	Wire Jumper.	3198 036 90010
	9183	Wire Jumper.	3198 036 90010
	9192	Wire Jumper.	3198 036 90010
	9193	Wire Jumper.	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

Ref	Description	Part No.
9311	Wire Jumper.	3198 036 90010
9312	Wire Jumper.	3198 036 90010
9406	Wire Jumper.	3198 036 90010
9407	Wire Jumper.	3198 036 90010
9408	Wire Jumper.	3198 036 90010
9409	Wire Jumper.	3198 036 90010
9410	Wire Jumper.	3198 036 90010
9411	Wire Jumper.	3198 036 90010
9412	Wire Jumper.	3198 036 90010
9413	Wire Jumper.	3198 036 90010
9414	Wire Jumper.	3198 036 90010
9415	Wire Jumper.	3198 036 90010
9416	Wire Jumper.	3198 036 90010
9417	Wire Jumper.	3198 036 90010
9418	Wire Jumper.	3198 036 90010
9419	Wire Jumper.	3198 036 90010
9421	Wire Jumper.	3198 036 90010
9422	Wire Jumper.	3198 036 90010
9424	Wire Jumper.	3198 036 90010
9425	Wire Jumper.	3198 036 90010
9426	Wire Jumper.	3198 036 90010
9427	Wire Jumper.	3198 036 90010
9453	Wire Jumper.	3198 036 90010
9460	Wire Jumper.	3198 036 90010
9463	Wire Jumper.	3198 036 90010
9500	Wire Jumper.	3198 036 90010
9501	Wire Jumper.	3198 036 90010
9503	Wire Jumper.	3198 036 90010
9511	Wire Jumper.	3198 036 90010
9512	Wire Jumper.	3198 036 90010
9513	Wire Jumper.	3198 036 90010
9514	Wire Jumper.	3198 036 90010
9515	Wire Jumper.	3198 036 90010
9516	Wire Jumper.	3198 036 90010
9518	Wire Jumper.	3198 036 90010
9520	Wire Jumper.	3198 036 90010
9521	Wire Jumper.	3198 036 90010
9522	Wire Jumper.	3198 036 90010
9524	Wire Jumper.	3198 036 90010
9525	Wire Jumper, 0.58MM.	3198 036 90010
9528	Wire Jumper.	3198 036 90010
9530	Wire Jumper.	3198 036 90010
9612	Wire Jumper.	3198 036 90010
9613	Wire Jumper.	3198 036 90010
9614	Wire Jumper.	3198 036 90010
9615	Wire Jumper.	3198 036 90010
9618	Wire Jumper.	3198 036 90010
9619	Wire Jumper.	3198 036 90010
9620	Wire Jumper.	3198 036 90010
9621	Wire Jumper.	3198 036 90010
9622	Wire Jumper.	3198 036 90010
9623	Wire Jumper.	3198 036 90010
9624	Wire Jumper.	3198 036 90010
9626	Wire Jumper.	3198 036 90010
9627	Wire Jumper.	3198 036 90010
9628	Wire Jumper.	3198 036 90010
9629	Wire Jumper.	3198 036 90010
9631	Wire Jumper.	3198 036 90010
9632	Wire Jumper.	3198 036 90010
9633	Wire Jumper.	3198 036 90010
9637	Wire Jumper.	3198 036 90010
9638	Wire Jumper.	3198 036 90010
9639	Wire Jumper.	3198 036 90010
9640	Wire Jumper.	3198 036 90010
9641	Wire Jumper.	3198 036 90010
9642	Wire Jumper.	3198 036 90010
9643	Wire Jumper.	3198 036 90010
9648	Wire Jumper.	3198 036 90010
9650	Wire Jumper.	3198 036 90010
9651	Wire Jumper.	3198 036 90010
9652	Wire Jumper.	3198 036 90010
9654	Wire Jumper.	3198 036 90010
9655	Wire Jumper.	3198 036 90010
9656	Wire Jumper.	3198 036 90010
9657	Wire Jumper.	3198 036 90010
9658	Wire Jumper.	3198 036 90010
9659	Wire Jumper.	3198 036 90010
9660	Wire Jumper.	3198 036 90010
9661	Wire Jumper.	3198 036 90010
9662	Wire Jumper.	3198 036 90010
9663	Wire Jumper.	3198 036 90010
9664	Wire Jumper.	3198 036 90010
9665	Wire Jumper.	3198 036 90010
9666	Wire Jumper.	3198 036 90010
9667	Wire Jumper.	3198 036 90010
9668	Wire Jumper.	3198 036 90010
9669	Wire Jumper.	3198 036 90010
9670	Wire Jumper.	3198 036 90010
9671	Wire Jumper.	3198 036 90010
9674	Wire Jumper.	3198 036 90010
9675	Wire Jumper.	3198 036 90010
9676	Wire Jumper.	3198 036 90010
9679	Wire Jumper.	3198 036 90010
9680	Wire Jumper.	3198 036 90010
9681	Wire Jumper.	3198 036 90010
9682	Wire Jumper.	3198 036 90010
9685	Wire Jumper.	3198 036 90010
9686	Wire Jumper.	3198 036 90010
9687	Wire Jumper.	3198 036 90010
9688	Wire Jumper.	3198 036 90010
9689	Wire Jumper.	3198 036 90010
9690	Wire Jumper.	3198 036 90010
9691	Wire Jumper.	3198 036 90010
9694	Wire Jumper.	3198 036 90010
9695	Wire Jumper.	3198 036 90010
9697	Wire Jumper.	3198 036 90010
9698	Wire Jumper.	3198 036 90010
9699	Wire Jumper.	3198 036 90010
9821	Wire Jumper.	3198 036 90010
9822	Wire Jumper.	3198 036 90010
9825	Wire Jumper.	3198 036 90010
9828	Wire Jumper.	3198 036 90010
9829	Wire Jumper.	3198 036 90010
9831	Wire Jumper.	3198 036 90010
9832	Wire Jumper.	3198 036 90010
9837	Wire Jumper.	3198 036 90010
9838	Wire Jumper.	3198 036 90010
9839	Wire Jumper.	3198 036 90010
9846	Wire Jumper.	3198 036 90010
9847	Wire Jumper.	3198 036 90010
9849	Wire Jumper.	3198 036 90010
9851	Wire Jumper.	3198 036 90010
9856	Wire Jumper.	3198 036 90010
9858	Wire Jumper.	3198 036 90010
9859	Wire Jumper.	3198 036 90010
9860	Wire Jumper.	3198 036 90010
9862	Wire Jumper.	3198 036 90010
9863	Wire Jumper.	3198 036 90010
9864	Wire Jumper.	3198 036 90010
9865	Wire Jumper.	3198 036 90010
9867	Wire Jumper.	3198 036 90010
9868	Wire Jumper.	3198 036 90010
9869	Wire Jumper.	3198 036 90010
9870	Wire Jumper.	3198 036 90010
9871	Wire Jumper.	3198 036 90010
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9876	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9878	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010
9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9923	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9993	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9997	Wire Jumper.	3198 036 90010
9998	Wire Jumper.	3198 036 90010
CBA	Main Chassis	3141 058 58171

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

Ref	Description	Part No.
0266	6 Pin Connector.	2422 025 16609
2401	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2402	Cap, 4u7, 20%, 35v, Electrolytic	3198 028 44780
2403	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2407	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2408	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2409	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2411	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
2412	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2413	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2414	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2415	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2416	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2419	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2420	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
2425	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2426	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2427	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2428	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2429	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2430	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2431	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010

Ref	Description	Part No.
2432	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2433	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2434	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2435	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2436	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2440	Cap, 10u, 20%, 16v, Electrolytic . . .	3198 028 21090
2442	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2443	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2450	Cap, 10u, 20%, 16v, Electrolytic . . .	3198 028 21090
2452	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2453	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
3401	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3402	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3403	Res, 1K8, 5%, 1/16W, Metalized Glass .	3198 021 31820
3404	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3405	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3406	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198 021 36820
3407	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3408	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3412	Res, 510K, 5%, 1/10W, Metalized Glass.	2122 118 05951
3419	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3425	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3427	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3431	Res, 8K2, 1%, 1/16W, Metalized Glass .	2322 704 68202
3432	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3440	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3441	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3442	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3443	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198 021 32720
3444	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3450	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3451	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3452	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3453	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198 021 32720
3454	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3455	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3456	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3457	Wire Jumper.	3198 036 90010
3458	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4403	Res, Zero ohm, "Chip" Jumper	3198 021 90030
5401	Coil, 10u, 10%	3198 018 31090
5407	Coil, 33u, 5%.	3198 018 13390
5408	Coil, 33u, 20%	3198 018 33390
5421	Inductor, 100 MHz, 120 ohm	3198 018 90070
5425	Coil, 10u, 10%	3198 018 31090
5428	Coil, 10u, 5%.	3198 018 11090
5429	Coil, 10u, 10%	3198 018 31090
5430	Coil, 10u, 10%	3198 018 31090
5440	Coil, 10u, 10%	3198 018 31090
5442	Coil, 22u, 5%.	3198 018 12290
5450	Coil, 10u, 10%	3198 018 31090
5452	Coil, 33u, 5%.	3198 018 13390
7401	Transistor, PNP, BC857B(COL)	3198 010 42150
7402	Transistor, NPN, BC847B(COL)	3198 010 42030
7403	Transistor, NPN, BC847B(COL)	3198 010 42030
7421	IC, TC90A53N	9322 182 18682
7440	Transistor, NPN, BC847B(COL)	3198 010 42030
7444	Transistor, NPN, BC847B(COL)	3198 010 42030
7450	Transistor, NPN, BC847B(COL)	3198 010 42030
7454	Transistor, NPN, BC847B(COL)	3198 010 42030
9401	Wire Jumper.	3198 036 90010
9402	Wire Jumper.	3198 036 90010
9403	Wire Jumper.	3198 036 90010
CBA	2D 3 Line Comb Filter Assembly	3139 177 26561

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

Ref	Description	Part No.
S 0211	2 Pin Connector.	2422 025 16268
S 0212	2 Pin Connector.	2422 025 16559
0214	5 Pin Connector.	2422 025 06353
1606	Tact Switch.	2422 128 02742
2691	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2698	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
6691	LED, LTL-10234WHCR	9322 185 69682
6692	IR Receiver, TSOP1836UH3V.	9322 127 54667
9001	Wire Jumper.	3198 036 90010
9002	Wire Jumper.	3198 036 90010
CBA	Front Interface Panel Assembly	3139 177 26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts

Side Jack Panel Parts

Ref	Description	Part No.
0232	Headphone Jack	2422 026 04747
0250	A/V Jack	2422 026 04815
0251	6 Pin Connector.	2422 025 12482
0254	5 Pin Connector.	2422 025 12481
0255	4 Pin Connector.	2422 025 12479
2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2177	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2179	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
3150	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
4817	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4819	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4821	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4822	Res, Zero ohm, "Chip" Jumper	3198 021 90020
6161	Zener Diode, 6.8 volt.	3198 010 26880
9151	Wire Jumper.	3198 036 90010
9152	Wire Jumper.	3198 036 90010
9153	Wire Jumper.	3198 036 90010
9170	Wire Jumper.	3198 036 90010
CBA	Side Jack Panel Assembly	3139 187 15141

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Ref	Description	Part No.
0215	3 Pin Connector.	2422 025 16601
1091	Tact Switch.	2422 128 02742
1092	Tact Switch.	2422 128 02742
1093	Tact Switch.	2422 128 02742
1094	Tact Switch.	2422 128 02742
3091	Res, 560 ohm, 5%, Metalized Glass. . .	3198 021 35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3093	Res, 560 ohm, 5%, Metalized Glass. . .	3198 021 35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
4085	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4089	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4090	Res, Zero ohm, "Chip" Jumper	3198 021 90030
6091	Diode, Signal.	9340 453 90115
CBA	Top Control Panel Assembly	3139 187 15841

Cabinet & Accessory Parts

Cabinet & Accessory Parts

Ref	Description	Part No.
S AC01	AC Cord.	3121 231 00081
AC04	Batteries for Remote Control Transmitte	9299 000 65263
AC05	Cabinet Back	3139 124 44711
AC06	Cabinet Back Screw Cover (2 Used). . .	3139 124 39301
AC08	Chassis Tray	3139 124 31325
AC09	CRT, A68QCP893X003	9322 173 76682
S AC12	Degaussing Coil.	2422 549 45505
AC13	Front Interface Panel Bracket.	3139 124 32892
AC15	Holder, Degaussing Coil (4 Used) . . .	3139 124 31122
AC17	Owner's Manual	3121 235 20832
AC19	Side Jack Panel Bracket.	3139 124 37061
AC20	Front Control Assembly	3121 237 53102
AC20A	Cabinet Front.	3139 177 58401
AC20C	Light Guide.	3139 124 39701
AC20D	Nameplate.	3141 050 00161
AC20E	Power Button	3139 138 10881
AC20H	Speaker, 8 ohm, 10W (2 Used)	3139 128 76521
AC20J	Top Control Assembly	3139 177 56381

S = Safety Part   Be sure to use exact replacement part.

29PT6631/44 (continued)

REMOTE Remote Control Transmitter, RC19335004/
01. 3139 228 86464

29PT663R85A - Manual no. 7638

Main Chassis Parts

Main Chassis Parts

Safety	Ref	Description	Part No.
	0211	2 Pin Connector	2422 025 16374
	0212	2 Pin Connector	2422 025 16375
	0214	5 Pin Connector	2422 025 12481
	0219	6 Pin Connector	2422 025 12482
	0220	5 Pin Connector	2422 025 04853
	0221	2 Pin Connector	2422 025 15503
	0222	2 Pin Connector	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack	2422 026 04926
	0239	3 Pin Connector	2422 025 16382
	0243	6 Pin Connector	2422 025 04854
	0244	5 Pin Connector	2422 025 04853
	0245	6 Pin Connector	2422 025 04854
	0246	5 Pin Connector	2422 025 12481
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U PLL	2422 542 90098
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC	2422 086 10914
S	1515	Relay, 5 Amp, 12V	2422 132 07444
	1660	Crystal, 12MHz000	2422 543 01203
	1810	6 Pin Connector	2422 025 16607
	1831	Crystal, Resonator, 18MHz432, 12 Pin, HC49/U A	2422 543 00842
	2004	Cap, 47n, 10%, 50v, Ceramic	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2241	Cap, 1n5, 10%, 50v, Ceramic	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
	2402	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic	3198 016 03310
	2441	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic	2020 021 91139
	2451	Cap, 22n, 10%, 50v, Polyester	3198 014 02230
	2452	Cap, 180p, 5%, 50v, Ceramic	3198 016 01810
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 360n, 5%, 250v, Metalized Polypropylene	2022 333 00163
	2458	Cap, 2u2, 20%, 100v, Electrolytic	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
S	2463	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene	2222 479 90042
S	2465	Cap, 15n, 5%, 1600v, Polypropylene	2020 301 90255
	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
	2468	Cap, 27n, 10%, 400v, Polyester	2222 347 90232
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2482	Cap, 120n, 5%, 250v, Metalized Polypropylene	2222 479 90051
	2485	Cap, 4u7, 20%, 250v, Electrolytic	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91374
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2604	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2606	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic	3198 017 21050
	2802	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2807	Cap, 220n, +80/-20%, 25v, Ceramic	3198 023 22240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2816	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
	2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080

S = Safety Part   Be sure to use exact replacement part.

29PT663R85A (continued)

	2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
	2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
	2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
	2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2837	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2840	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2841	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2842	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2843	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2844	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2845	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2846	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
	2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
	2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
	2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
	2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610
	2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910
	2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2902	Cap, 1000u, 20%, 25v, Electrolytic	3198 026 31020
	2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2904	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2906	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2908	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3003	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
	3004	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
	3005	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3101	Res, 68 ohm, 5%, 1/6W, Carbon Film	3198 011 06890
	3102	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3103	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
	3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3105	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
	3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3111	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
	3112	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3113	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
	3114	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3115	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
	3116	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3123	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
	3124	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3125	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
	3126	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3131	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
	3132	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3133	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
	3134	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3135	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
	3136	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
	3154	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620
	3156	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3157	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
	3158	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3159	Res, 1K2, 1%, 1/8W, Metalized Glass.	2322 734 61202
	3200	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3202	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3203	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3204	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
	3205	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3206	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
	3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
	3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
	3218	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
	3219	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3241	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
	3242	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
	3245	Res, 39K, 1%, 1/16W, Metalized Glass	2322 704 63903
	3246	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3248	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
	3250	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3256	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3257	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3332	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3334	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3336	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020
	3340	Res, 10 ohm, 5%, 1/2W, Metal Film.	2306 207 03109
S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
	3343	Res, 1K5, 20%, 1/2W, Carbon Film	3198 013 01520
	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
S	3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
	3401	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3403	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3405	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
	3406	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3410	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3443	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
	3445	Res, 15K, 5%, 1/6W, Carbon Film.	3198 011 01530
	3446	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620
	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film.	3198 011 01810
	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film	3198 011 06890
	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
S	3451	Res, 10 ohm, 5%, 1/3W, Metal Film.	2306 204 03109
	3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102
	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
S	3455	Res, 6R8, 5%, 1 1/3W, Metal Film	3198 012 26880
	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S	3459	Res, 15K, 5%, 1 1/3W, Metal Film	3198 012 21530
	3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
	3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320
	3470	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3471	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
	3472	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
	3473	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208
	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
	3479	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
	3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2120 101 74158
	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
	3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
	3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
S	3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	3198 012 32290
	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3492	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3495	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3498	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
	3499	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
S	3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass.	2322 242 13155
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3523	Res, 100 ohm, 5%, 1/3W, Metal Film	2306 204 03101
	3524	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film.	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030

S = Safety Part   Be sure to use exact replacement part.

29PT663R85A (continued)

	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3565	Res, 220 ohm, 5%, 1W, Metal Film . . .	3198 012 12210
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
S	3591	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3811	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3812	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3813	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3831	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3843	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3901	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198 021 36820
	3903	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3905	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3909	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3910	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3912	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4824	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4837	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4838	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4884	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5202	Wire Jumper.	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5241	Wire Jumper.	3198 036 90010
	5242	Coil, 10u, 5%.	3198 018 11090
	5341	Coil, 22u.	2422 535 97333
	5342	Coil, 22u.	2422 535 97333
	5401	Coil, 1mH, 10%	3198 018 71020
S	5445	Transformer, LOT	2422 531 02574
	5451	Coil, 22u, 10%	3198 018 72290
	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
S	5457	Coil, 25u.	2422 535 91028
	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
	5463	Coil, Choke.	3128 138 37021
	5471	Coil, 6u8, 20%	3198 018 76880
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 27u, 10%	3198 018 22790
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS42202-00 B.	2422 531 02562
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5810	Coil, 10u, 10%	3198 018 51090
	5831	Coil, 6u8, 5%.	3198 018 16880
	5832	Coil, 6u8, 5%.	3198 018 16880
	5833	Coil, 6u8, 5%.	3198 018 16880
	5835	Coil, 12u, 10%	3198 018 31290
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316.	3198 010 10630
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630
	6206	Zener Diode, 6.8 volt.	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316.	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002
	6401	Zener Diode, 47 volt	3198 010 24790
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148.	3198 010 10010
	6448	Zener Diode, 6.2 volt.	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6460	Diode, Rect, BY228/24.	9340 559 50112
	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070

S = Safety Part   Be sure to use exact replacement part.

29PT663R85A (continued)

	Ref	Description	Part No.
	6467	Diode, Signal, BAS316	3198 010 10630
	6468	Diode, Signal, BAS316	3198 010 10630
	6469	Diode, Rect, BYD33J	9337 234 20133
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt	3198 010 25680
	6482	Zener Diode, 9.1 volt	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYD33J	9337 234 20133
	6486	Diode, Rect, EGP20DL-5100	9322 164 42682
	6487	Diode, Rect, BYD33D	9337 234 00133
	6488	Diode, Rect, EGP20DL-5100	9322 164 42682
	6490	Diode, Rect, BYD33J	9337 234 20133
	6500	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6520	Diode, Rect, BYD33D	9337 234 00133
	6523	Diode, Signal, 1N4148	3198 010 10010
	6524	Diode, Rect, 1N5062	3198 010 10120
	6525	Diode, Rect, 1N5062	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500	9340 555 59127
	6563	Diode, Signal, BAS316	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148	3198 010 10010
	6569	Diode, Signal, BAS316	3198 010 10630
	6570	Zener Diode, 6.8 volt	3198 020 56880
	6580	Diode, Signal, BAS316	3198 010 10630
	6582	Diode, Rect, STPS10L60D	9322 175 70667
	6831	Diode, Signal, 1N4148	3198 010 10010
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7102	Transistor, PNP, BC857B(COL)	3198 010 42150
	7103	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9588H/N1/3I/1298	9352 742 85557
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7400	Power FET, STP3NC60FP	9322 157 37687
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7460	Transistor, NPN, BU4508DX	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1	9352 673 56112
	7521	Power FET, FQPF9N50	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, L78L33ACZ	9322 134 92676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C08-WBN6	9322 154 38682
	7606	Transistor, NPN, PDTC143ZT	9340 547 00215
	7802	IC, HEF4053BT	9333 729 60653
	7803	IC, HEF4053BT	9333 729 60653
	7804	Transistor, NPN, BC847B(COL)	3198 010 42030
	7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682
	7901	IC, AN7580	9322 166 29682
	7903	Transistor, NPN, BC847B(COL)	3198 010 42030
	9001	Wire Jumper	3198 036 90010
	9101	Wire Jumper	3198 036 90010
	9102	Wire Jumper	3198 036 90010
	9103	Wire Jumper	3198 036 90010
	9104	Wire Jumper	3198 036 90010
	9123	Wire Jumper	3198 036 90010
	9171	Wire Jumper	3198 036 90010
	9173	Wire Jumper	3198 036 90010
	9175	Wire Jumper	3198 036 90010
	9176	Wire Jumper	3198 036 90010
	9178	Wire Jumper	3198 036 90010
	9179	Wire Jumper	3198 036 90010
	9181	Wire Jumper	3198 036 90010
	9182	Wire Jumper	3198 036 90010
	9183	Wire Jumper	3198 036 90010
	9192	Wire Jumper	3198 036 90010
	9193	Wire Jumper	3198 036 90010
	9311	Wire Jumper	3198 036 90010
	9312	Wire Jumper	3198 036 90010
	9406	Wire Jumper	3198 036 90010
	9407	Wire Jumper	3198 036 90010
	9408	Wire Jumper	3198 036 90010
	9409	Wire Jumper	3198 036 90010
	9410	Wire Jumper	3198 036 90010
	9411	Wire Jumper	3198 036 90010
	9412	Wire Jumper	3198 036 90010
	9413	Wire Jumper	3198 036 90010
	9414	Wire Jumper	3198 036 90010
	9415	Wire Jumper	3198 036 90010
	9416	Wire Jumper	3198 036 90010
	9417	Wire Jumper	3198 036 90010
	9418	Wire Jumper	3198 036 90010
	9419	Wire Jumper	3198 036 90010
	9421	Wire Jumper	3198 036 90010
	9422	Wire Jumper	3198 036 90010
	9424	Wire Jumper	3198 036 90010
	9425	Wire Jumper	3198 036 90010
	9426	Wire Jumper	3198 036 90010
	9427	Wire Jumper	3198 036 90010
	9453	Wire Jumper	3198 036 90010
	9460	Wire Jumper	3198 036 90010
	9463	Wire Jumper	3198 036 90010
	9500	Wire Jumper	3198 036 90010
	9501	Wire Jumper	3198 036 90010
	9503	Wire Jumper	3198 036 90010
	9506	Wire Jumper	3198 036 90010
	9507	Wire Jumper	3198 036 90010
	9511	Wire Jumper	3198 036 90010
	9512	Wire Jumper	3198 036 90010
	9513	Wire Jumper	3198 036 90010
	9514	Wire Jumper	3198 036 90010
	9515	Wire Jumper	3198 036 90010
	9516	Wire Jumper	3198 036 90010
	9518	Wire Jumper	3198 036 90010
	9520	Wire Jumper	3198 036 90010
	9521	Wire Jumper	3198 036 90010
	9522	Wire Jumper	3198 036 90010
	9524	Wire Jumper	3198 036 90010
	9528	Wire Jumper	3198 036 90010
	9530	Wire Jumper	3198 036 90010
	9611	Coil, 27u, 10%	3198 018 22790
	9612	Wire Jumper	3198 036 90010
	9613	Wire Jumper	3198 036 90010
	9614	Wire Jumper	3198 036 90010
	9615	Wire Jumper	3198 036 90010
	9618	Wire Jumper	3198 036 90010
	9619	Wire Jumper	3198 036 90010
	9620	Wire Jumper	3198 036 90010
	9621	Wire Jumper	3198 036 90010
	9622	Wire Jumper	3198 036 90010
	9623	Wire Jumper	3198 036 90010
	9624	Wire Jumper	3198 036 90010
	9626	Wire Jumper	3198 036 90010
	9627	Wire Jumper	3198 036 90010
	9628	Wire Jumper	3198 036 90010
	9629	Wire Jumper	3198 036 90010
	9631	Wire Jumper	3198 036 90010
	9632	Wire Jumper	3198 036 90010
	9633	Wire Jumper	3198 036 90010
	9637	Wire Jumper	3198 036 90010
	9638	Wire Jumper	3198 036 90010
	9639	Wire Jumper	3198 036 90010
	9640	Wire Jumper	3198 036 90010
	9641	Wire Jumper	3198 036 90010
	9642	Wire Jumper	3198 036 90010
	9643	Wire Jumper	3198 036 90010
	9648	Wire Jumper	3198 036 90010
	9650	Wire Jumper	3198 036 90010
	9651	Wire Jumper	3198 036 90010
	9652	Wire Jumper	3198 036 90010
	9654	Wire Jumper	3198 036 90010
	9655	Wire Jumper	3198 036 90010
	9656	Wire Jumper	3198 036 90010
	9657	Wire Jumper	3198 036 90010
	9658	Wire Jumper	3198 036 90010
	9659	Wire Jumper	3198 036 90010
	9660	Wire Jumper	3198 036 90010
	9661	Wire Jumper	3198 036 90010
	9662	Wire Jumper	3198 036 90010
	9663	Wire Jumper	3198 036 90010
	9664	Wire Jumper	3198 036 90010
	9665	Wire Jumper	3198 036 90010
	9666	Wire Jumper	3198 036 90010
	9667	Wire Jumper	3198 036 90010
	9668	Wire Jumper	3198 036 90010
	9669	Wire Jumper	3198 036 90010
	9670	Wire Jumper	3198 036 90010
	9671	Wire Jumper	3198 036 90010
	9672	Coil, 22u, 10%	3198 018 22290
	9674	Wire Jumper	3198 036 90010
	9675	Wire Jumper	3198 036 90010
	9676	Wire Jumper	3198 036 90010
	9678	Coil, 22u, 10%	3198 018 22290
	9679	Wire Jumper	3198 036 90010
	9680	Wire Jumper	3198 036 90010
	9681	Wire Jumper	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

29PT663R85A (continued)

Ref	Description	Part No.
9682	Wire Jumper.	3198 036 90010
9685	Wire Jumper.	3198 036 90010
9686	Wire Jumper.	3198 036 90010
9687	Wire Jumper.	3198 036 90010
9688	Wire Jumper.	3198 036 90010
9689	Wire Jumper.	3198 036 90010
9690	Wire Jumper.	3198 036 90010
9691	Wire Jumper.	3198 036 90010
9694	Wire Jumper.	3198 036 90010
9695	Wire Jumper.	3198 036 90010
9697	Wire Jumper.	3198 036 90010
9698	Wire Jumper.	3198 036 90010
9699	Wire Jumper.	3198 036 90010
9821	Wire Jumper.	3198 036 90010
9822	Wire Jumper.	3198 036 90010
9825	Wire Jumper.	3198 036 90010
9828	Wire Jumper.	3198 036 90010
9829	Wire Jumper.	3198 036 90010
9831	Wire Jumper.	3198 036 90010
9832	Wire Jumper.	3198 036 90010
9837	Wire Jumper.	3198 036 90010
9838	Wire Jumper.	3198 036 90010
9839	Wire Jumper.	3198 036 90010
9846	Wire Jumper.	3198 036 90010
9847	Wire Jumper.	3198 036 90010
9849	Wire Jumper.	3198 036 90010
9851	Wire Jumper.	3198 036 90010
9856	Wire Jumper.	3198 036 90010
9858	Wire Jumper.	3198 036 90010
9859	Wire Jumper.	3198 036 90010
9860	Wire Jumper.	3198 036 90010
9862	Wire Jumper.	3198 036 90010
9863	Wire Jumper.	3198 036 90010
9864	Wire Jumper.	3198 036 90010
9865	Wire Jumper.	3198 036 90010
9867	Wire Jumper.	3198 036 90010
9868	Wire Jumper.	3198 036 90010
9869	Wire Jumper.	3198 036 90010
9870	Wire Jumper.	3198 036 90010
9871	Wire Jumper.	3198 036 90010
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9876	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9878	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010
9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9923	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9993	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9997	Wire Jumper.	3198 036 90010
9998	Wire Jumper.	3198 036 90010
CBA	Main Chassis Assembly.	3141 058 58621

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

Ref	Description	Part No.
0266	6 Pin Connector.	2422 025 16609
2401	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2402	Cap, 4u7, 20%, 35v, Electrolytic	3198 028 44780
2403	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2407	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2408	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2409	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2411	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
2412	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2413	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2414	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2415	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2416	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2419	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2420	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
2425	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2426	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2427	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2428	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2429	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2430	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2431	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2432	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2433	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2434	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2435	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2436	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2440	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
2442	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2443	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2450	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
2452	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2453	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
3401	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3402	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3403	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3404	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3405	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3406	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3407	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3408	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3412	Res, 510K, 5%, 1/10W, Metalized Glass.	2122 118 05951
3419	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3425	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3427	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3431	Res, 8K2, 1%, 1/16W, Metalized Glass	2322 704 68202
3432	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3440	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3441	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3442	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3443	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3444	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3450	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3451	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3452	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3453	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3454	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3455	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3456	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3457	Wire Jumper.	3198 036 90010
3458	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4403	Res, Zero ohm, "Chip" Jumper	3198 021 90030
5401	Coil, 10u, 10%	3198 018 31090
5407	Coil, 33u, 5%.	3198 018 13390
5408	Coil, 33u, 20%	3198 018 33390
5421	Inductor, 100 MHz, 120 ohm	3198 018 90070
5425	Coil, 10u, 10%	3198 018 31090
5428	Coil, 10u, 5%.	3198 018 11090
5429	Coil, 10u, 10%	3198 018 31090
5430	Coil, 10u, 10%	3198 018 31090
5440	Coil, 10u, 10%	3198 018 31090
5442	Coil, 22u, 5%.	3198 018 12290
5450	Coil, 10u, 10%	3198 018 31090
5452	Coil, 33u, 5%.	3198 018 13390
7401	Transistor, PNP, BC857B(COL)	3198 010 42150
7402	Transistor, NPN, BC847B(COL)	3198 010 42030
7403	Transistor, NPN, BC847B(COL)	3198 010 42030
7421	IC, TC90A53N	9322 182 18682
7440	Transistor, NPN, BC847B(COL)	3198 010 42030
7444	Transistor, NPN, BC847B(COL)	3198 010 42030
7450	Transistor, NPN, BC847B(COL)	3198 010 42030
7454	Transistor, NPN, BC847B(COL)	3198 010 42030
9401	Wire Jumper.	3198 036 90010
9402	Wire Jumper.	3198 036 90010
9403	Wire Jumper.	3198 036 90010
CBA	2D 3 Line Comb Filter Assembly	3139 177 26561

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

Ref	Description	Part No.
S 0211	2 Pin Connector.	2422 025 16268
S 0212	2 Pin Connector.	2422 025 16559
0214	5 Pin Connector.	2422 025 06353
1606	Tact Switch.	2422 128 02742
2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2698	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322 242 13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322 242 13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
6691	LED, LTL-10234WHCR	9322 185 69682
6692	IR Receiver, TSOP1836UH3V.	9322 127 54667

29PT663R85A (continued)

```
  9001   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9002   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  CBA    Front Interface Panel Assembly . . . .  3139 177 26211
```

ITV Front Jack Panel Parts

```
         ITV Front Jack Panel Parts
```

Net 1 Panel (part of Scan 4 Card Assembly)

```
         Net 1 Panel (part of Scan 4 Card Assemb
         ly)
```

Scan 4 Card (part of Scan 4 Card Assembly)

```
         Scan 4 Card (part of Scan 4 Card Assemb
         ly)
```

Side Jack Panel Parts

```
         Side Jack Panel Parts
  0232   Headphone Jack . . . . . . . . . . . .  2422 026 04747
  0250   A/V Jack . . . . . . . . . . . . . . .  2422 026 04815
  0251   6 Pin Connector. . . . . . . . . . . .  2422 025 12482
  0254   5 Pin Connector. . . . . . . . . . . .  2422 025 12481
  0255   4 Pin Connector. . . . . . . . . . . .  2422 025 12479
  2171   Cap, 330p, 10%, 50v, Ceramic . . . . .  3198 017 33310
  2172   Cap, 330p, 10%, 50v, Ceramic . . . . .  3198 017 33310
  2173   Cap, 330p, 10%, 50v, Ceramic . . . . .  3198 017 33310
  2174   Cap, 330p, 10%, 50v, Ceramic . . . . .  3198 017 33310
  2176   Cap, 470p, 5%, 50v, Ceramic. . . . . .  3198 016 34710
  2177   Cap, 10u, 20%, 50v, Electrolytic . . .  3198 025 51090
  2178   Cap, 470p, 5%, 50v, Ceramic. . . . . .  3198 016 34710
  2179   Cap, 10u, 20%, 50v, Electrolytic . . .  3198 025 51090
  3150   Res, 47K, 5%, 1/16W, Metalized Glass .  3198 021 34730
  3151   Res, 150 ohm, 5%, 1/6W, Carbon . . . .  3198 011 01510
  3152   Res, 47K, 5%, 1/16W, Metalized Glass .  3198 021 34730
  3153   Res, 150 ohm, 5%, 1/6W, Carbon . . . .  3198 011 01510
  3156   Res, 120 ohm, 5%, 1/16W, Metalized Glas 3198 021 31210
  3157   Res, 120 ohm, 5%, 1/16W, Metalized Glas 3198 021 31210
  4817   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90030
  4819   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90030
  4821   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90020
  4822   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90020
  6161   Zener Diode, 6.8 volt. . . . . . . . .  3198 010 26880
  9151   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9152   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9153   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9170   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  CBA    Side Jack Panel Assembly . . . . . . .  3139 187 15141
```

Subwoofer Panel Parts

```
         Subwoofer Panel Parts
```

Top Control Panel Parts

```
         Top Control Panel Parts
  0215   3 Pin Connector. . . . . . . . . . . .  2422 025 16601
  1091   Tact Switch. . . . . . . . . . . . . .  2422 128 02742
  1092   Tact Switch. . . . . . . . . . . . . .  2422 128 02742
  1093   Tact Switch. . . . . . . . . . . . . .  2422 128 02742
  1094   Tact Switch. . . . . . . . . . . . . .  2422 128 02742
  3091   Res, 560 ohm, 5%, Metalized Glass. . .  3198 021 35610
  3092   Res, 390 ohm, 5%, 1/16W, Metalized Glas 3198 021 33910
  3093   Res, 560 ohm, 5%, Metalized Glass. . .  3198 021 35610
  3094   Res, 390 ohm, 5%, 1/16W, Metalized Glas 3198 021 33910
  3095   Res, 3K3, 5%, 1/16W, Metalized Glass .  3198 021 33320
  3096   Res, 1K5, 5%, 1/16W, Metalized Glass .  3198 021 31520
  4085   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90020
  4089   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90030
  4090   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90030
  6091   Diode, Signal. . . . . . . . . . . . .  9340 453 90115
  CBA    Top Control Panel Assembly . . . . . .  3139 187 15841
```

Cabinet & Accessory Parts

```
         Cabinet & Accessory Parts
S AC01   AC Cord. . . . . . . . . . . . . . . .  3135 010 03831
  AC03   Anode Lead Spacer (3 Used) . . . . . .  3135 014 04471
  AC04   Batteries for Remote Control Transmitte 9299 000 65263
  AC05   Cabinet Back . . . . . . . . . . . . .  3139 124 44711
  AC06   Cabinet Back Screw Cover (2 Used). . .  3139 124 39301
  AC08   Chassis Tray . . . . . . . . . . . . .  3139 124 31324
S AC09   CRT, A68QCU754X73(N) . . . . . . . . .  9301 925 60527
S AC12   Degaussing Coil. . . . . . . . . . . .  2422 549 43967
  AC13   Front Interface Panel Bracket. . . . .  3139 124 32891
  AC15   Holder, Degaussing Coil (4 Used) . . .  3139 124 31122
  AC17   Owner's Manual . . . . . . . . . . . .  3121 235 20831
  AC19   Side Jack Panel Bracket. . . . . . . .  3139 124 37061
  AC20   Cabinet Front Assembly . . . . . . . .  3121 237 53101
  AC20A  Cabinet Front. . . . . . . . . . . . .  3139 177 58401
  AC20C  Light Guide. . . . . . . . . . . . . .  3139 124 39701
  AC20D  Nameplate. . . . . . . . . . . . . . .  3141 050 00161
  AC20E  Power Button . . . . . . . . . . . . .  3139 138 10881
  AC20H  Speaker, 8 ohm, 10W (2 Used) . . . . .  3139 128 76521
  AC20J  Top Control Assembly . . . . . . . . .  3139 138 11451
  AC20J1 Top Control Bracket. . . . . . . . . .  3139 124 39802
  AC20J2 Top Control Buttons. . . . . . . . . .  3139 124 39812
```

S = Safety Part   Be sure to use exact replacement part.

```
REMOTE Remote Control Transmitter, RC19335004/
       01. . . . . . . . . . . . . . . . . . . . 3139 228 86463
```

29PT663R85C - Manual no. 7638

Main Chassis Parts

S	Ref	Description	Part No.
		Main Chassis Parts	
	0211	2 Pin Connector.	2422 025 16374
	0212	2 Pin Connector.	2422 025 16375
	0214	5 Pin Connector.	2422 025 12481
	0219	6 Pin Connector.	2422 025 12482
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0222	2 Pin Connector.	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0239	3 Pin Connector.	2422 025 16382
	0243	6 Pin Connector.	2422 025 04854
	0244	5 Pin Connector.	2422 025 04853
	0245	6 Pin Connector.	2422 025 04854
	0246	5 Pin Connector.	2422 025 12481
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector.	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U PLL	2422 542 90098
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1660	Crystal, 12MHz000	2422 543 01203
	1810	6 Pin Connector.	2422 025 16607
	1831	Crystal, Resonator, 18MHz432, 12 Pin, H C49/U A.	2422 543 00842
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic. . .	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyest er.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic. . .	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic. . .	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic . .	2020 558 90445
	2401	Cap, 2u2, 20%, 50v, Electrolytic . . .	2020 021 90552
	2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic . . .	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2441	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic . . .	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic. . .	2020 021 91139
	2451	Cap, 22n, 10%, 50v, Polyester.	3198 014 02230
	2452	Cap, 180p, 5%, 50v, Ceramic.	3198 016 01810
	2455	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
	2457	Cap, 360n, 5%, 250v, Metalized Polyprop ylene.	2222 479 90019
	2458	Cap, 2u2, 20%, 100v, Electrolytic. . .	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
S	2463	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2464	Cap, 2u2, 5%, 160v, Metalized Polypropy lene	2222 479 90042
	2465	Cap, 15n, 5%, 1600v, Polypropylene . .	2222 375 90158
	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
	2468	Cap, 22n, 10%, 400v, Polyester	2222 347 90223
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic . . .	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 120n, 5%, 250v, Metalized Polyprop ylene.	2222 479 90051
	2485	Cap, 4u7, 20%, 250v, Electrolytic. . .	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic. . .	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic . . .	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic . .	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic. . .	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
	2500	Cap, 470n, 20%, 275v, Metalized Polypro pylene	2222 336 29148
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic . .	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic . . .	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic . .	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic . . .	2020 021 91374
	2567	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic . . .	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic . . .	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic. . .	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic. . .	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2604	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050
	2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2807	Cap, 220n, +80/-20%, 25v, Ceramic. . .	3198 023 22240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
	2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
	2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080

S = Safety Part   Be sure to use exact replacement part.

29PT663R85C (continued)

	Ref	Description	Part No.
	2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
	2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
	2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
	2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2837	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2840	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2841	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2842	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2843	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2844	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2845	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2846	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
	2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
	2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
	2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
	2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610
	2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910
	2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2902	Cap, 1000u, 20%, 25v, Electrolytic	3198 026 31020
	2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2904	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2906	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2908	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3003	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
	3004	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
	3005	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3101	Res, 68 ohm, 5%, 1/6W, Carbon Film	3198 011 06890
	3102	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3103	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
	3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3105	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
	3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3111	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
	3112	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3113	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
	3114	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3115	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
	3116	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3123	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
	3124	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3125	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
	3126	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3131	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
	3132	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3133	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
	3134	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3135	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
	3136	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
	3154	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620
	3156	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3157	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
	3158	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3159	Res, 1K2, 1%, 1/8W, Metalized Glass.	2322 734 61202
	3200	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3202	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3203	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3204	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
	3205	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3206	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
	3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
	3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
	3218	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
	3219	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3241	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
	3242	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
	3245	Res, 39K, 1%, 1/16W, Metalized Glass	2322 704 63903
	3246	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3248	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
	3250	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3256	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3257	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3332	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3334	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3336	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020
	3340	Res, 10 ohm, 5%, 1/2W, Metal Film.	2306 207 03109
S	3341	Res, 1 ohm, 5%, 1/3W, MF for A80QCF340X 34.	2306 204 03108
S	3341	Res, 2R7 ohm, 5%, 1/3W, MF for A80QCF33 0X34	2306 204 03278
S	3342	Res, 1 ohm, 5%, 1/3W, MF for A80ECK340X 34.	2306 204 03108
S	3342	Res, 2R7 ohm, 5%, 1/3W, MF for A80ECK33 0X34	2306 204 03278
	3343	Res, 1K5, 20%, 1/2W, Carbon Film	3198 013 01520
	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
S	3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
	3401	Res, 220K, 5%, 1/6W, Carbon Film	3198 011 02240
	3403	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3405	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
	3406	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3410	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3443	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
	3445	Res, 15K, 5%, 1/6W, Carbon Film.	3198 011 01530
	3446	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620
	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film.	3198 011 01810
	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film	3198 011 06890
	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
S	3451	Res, 10 ohm, 5%, 1/3W, Metal Film.	2306 204 03109
	3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102
	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
S	3455	Res, 6R8, 5%, 1 1/3W, Metal Film	3198 012 26880
	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S	3459	Res, 15K, 5%, 1 1/3W, Metal Film	3198 012 21530
	3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
	3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320
	3470	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
	3472	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
	3473	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208
	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
	3479	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
	3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2122 101 02083
	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
	3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
	3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
S	3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	3198 012 32290
	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3492	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3495	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3498	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
	3499	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
S	3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass.	2322 242 13155
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3523	Res, 100 ohm, 5%, 1/3W, Metal Film	2306 204 03101
	3524	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630

S = Safety Part   Be sure to use exact replacement part.

29PT663R85C (continued)

	Ref	Description	Part No.
	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3565	Res, 220 ohm, 5%, 1W, Metal Film . . .	3198 012 12210
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
S	3591	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3811	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3812	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3813	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3831	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3843	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3901	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198 021 36820
	3903	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3905	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3909	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3910	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3912	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4824	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4837	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4838	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4884	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5202	Wire Jumper.	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5241	Wire Jumper.	3198 036 90010
	5242	Coil, 10u, 5%.	3198 018 11090
	5341	Coil, 22u.	2422 535 97333
	5342	Coil, 22u for A80QCF340X34	2422 535 97333
	5342	Coil, 47u for A80QCF330X34	3198 018 24790
	5401	Coil, 1mH, 10%	3198 018 71020
S	5445	Transformer, LOT	2422 531 02574
	5451	Coil, 22u, 10%	3198 018 72290
	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
S	5457	Coil, 25u.	2422 535 91028
	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
	5463	Coil, Choke.	3128 138 37021
	5471	Coil, 6u8, 20%	3198 018 76880
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 47u, 10%	2422 535 97337
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS42202-00 B.	2422 531 02562
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5810	Coil, 10u, 10%	3198 018 51090
	5831	Coil, 6u8, 5%.	3198 018 16880
	5832	Coil, 6u8, 5%.	3198 018 16880
	5833	Coil, 6u8, 5%.	3198 018 16880
	5835	Coil, 12u, 10%	3198 018 31290
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316.	3198 010 10630
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630
	6206	Zener Diode, 6.8 volt.	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316.	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002
	6401	Zener Diode, 47 volt	3198 010 24790
	6445	Zener Diode, 10 volt	3198 020 51090

S = Safety Part   Be sure to use exact replacement part.

29PT663R85C (continued)

	Ref	Description	Part No.
	6447	Diode, Signal, 1N4148.	3198 010 10010
	6448	Zener Diode, 6.2 volt.	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6460	Diode, Rect, BY228/24.	9340 559 50112
	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316.	3198 010 10630
	6468	Diode, Signal, BAS316.	3198 010 10630
	6469	Diode, Rect, BYD33J.	9337 234 20133
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt.	3198 010 25680
	6482	Zener Diode, 9.1 volt.	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYD33J.	9337 234 20133
	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6487	Diode, Rect, BYD33D.	9337 234 00133
	6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6490	Diode, Rect, BYD33J.	9337 234 20133
	6500	Diode, Bridge Rect, GBU4JL-7002.	9322 132 55667
	6520	Diode, Rect, BYD33D.	9337 234 00133
	6523	Diode, Signal, 1N4148.	3198 010 10010
	6524	Diode, Rect, 1N5062.	3198 010 10120
	6525	Diode, Rect, 1N5062.	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt.	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500.	9340 555 59127
	6563	Diode, Signal, BAS316.	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148.	3198 010 10010
	6569	Diode, Signal, BAS316.	3198 010 10630
	6570	Zener Diode, 6.8 volt.	3198 020 56880
	6580	Diode, Signal, BAS316.	3198 010 10630
	6582	Diode, Rect, STPS10L60D.	9322 175 70667
	6831	Diode, Signal, 1N4148.	3198 010 10010
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7102	Transistor, PNP, BC857B(COL)	3198 010 42150
	7103	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9588H/N1/3I/1298.	9352 742 85557
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7400	Power FET, STP3NC60FP.	9322 157 37687
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7460	Transistor, NPN, BU4508DX.	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2.	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1.	9352 673 56112
	7521	Power FET, FQPF9N50.	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, L78L33ACZ.	9322 134 92676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C08-WBN6.	9322 154 38682
	7606	Transistor, NPN, PDTC143ZT	9340 547 00215
	7802	IC, HEF4053BT.	9333 729 60653
	7803	IC, HEF4053BT.	9333 729 60653
	7804	Transistor, NPN, BC847B(COL)	3198 010 42030
	7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682
	7901	IC, AN7580	9322 166 29682
	7903	Transistor, NPN, BC847B(COL)	3198 010 42030
	9001	Wire Jumper.	3198 036 90010
	9101	Wire Jumper.	3198 036 90010
	9102	Wire Jumper.	3198 036 90010
	9103	Wire Jumper.	3198 036 90010
	9104	Wire Jumper.	3198 036 90010
	9123	Wire Jumper.	3198 036 90010
	9171	Wire Jumper.	3198 036 90010
	9173	Wire Jumper.	3198 036 90010
	9175	Wire Jumper.	3198 036 90010
	9176	Wire Jumper.	3198 036 90010
	9178	Wire Jumper.	3198 036 90010
	9179	Wire Jumper.	3198 036 90010
	9181	Wire Jumper.	3198 036 90010
	9182	Wire Jumper.	3198 036 90010
	9183	Wire Jumper.	3198 036 90010
	9192	Wire Jumper.	3198 036 90010
	9193	Wire Jumper.	3198 036 90010
	9311	Wire Jumper.	3198 036 90010
	9312	Wire Jumper.	3198 036 90010
	9406	Wire Jumper.	3198 036 90010
	9407	Wire Jumper.	3198 036 90010
	9408	Wire Jumper.	3198 036 90010
	9409	Wire Jumper.	3198 036 90010
	9410	Wire Jumper.	3198 036 90010
	9411	Wire Jumper.	3198 036 90010
	9412	Wire Jumper.	3198 036 90010
	9413	Wire Jumper.	3198 036 90010
	9414	Wire Jumper.	3198 036 90010
	9415	Wire Jumper.	3198 036 90010
	9416	Wire Jumper.	3198 036 90010
	9417	Wire Jumper.	3198 036 90010
	9418	Wire Jumper.	3198 036 90010
	9419	Wire Jumper.	3198 036 90010
	9421	Wire Jumper.	3198 036 90010
	9422	Wire Jumper.	3198 036 90010
	9424	Wire Jumper.	3198 036 90010
	9425	Wire Jumper.	3198 036 90010
	9426	Wire Jumper.	3198 036 90010
	9427	Wire Jumper.	3198 036 90010
	9453	Wire Jumper.	3198 036 90010
	9460	Wire Jumper.	3198 036 90010
	9463	Wire Jumper.	3198 036 90010
	9500	Wire Jumper.	3198 036 90010
	9501	Wire Jumper.	3198 036 90010
	9503	Wire Jumper.	3198 036 90010
	9506	Wire Jumper.	3198 036 90010
	9507	Wire Jumper.	3198 036 90010
	9511	Wire Jumper.	3198 036 90010
	9512	Wire Jumper.	3198 036 90010
	9513	Wire Jumper.	3198 036 90010
	9514	Wire Jumper.	3198 036 90010
	9515	Wire Jumper.	3198 036 90010
	9516	Wire Jumper.	3198 036 90010
	9518	Wire Jumper.	3198 036 90010
	9520	Wire Jumper.	3198 036 90010
	9521	Wire Jumper.	3198 036 90010
	9522	Wire Jumper.	3198 036 90010
	9524	Wire Jumper.	3198 036 90010
	9528	Wire Jumper.	3198 036 90010
	9530	Wire Jumper.	3198 036 90010
	9611	Coil, 27u, 10%	3198 018 22790
	9612	Wire Jumper.	3198 036 90010
	9613	Wire Jumper.	3198 036 90010
	9614	Wire Jumper.	3198 036 90010
	9615	Wire Jumper.	3198 036 90010
	9618	Wire Jumper.	3198 036 90010
	9619	Wire Jumper.	3198 036 90010
	9620	Wire Jumper.	3198 036 90010
	9621	Wire Jumper.	3198 036 90010
	9622	Wire Jumper.	3198 036 90010
	9623	Wire Jumper.	3198 036 90010
	9624	Wire Jumper.	3198 036 90010
	9626	Wire Jumper.	3198 036 90010
	9627	Wire Jumper.	3198 036 90010
	9628	Wire Jumper.	3198 036 90010
	9629	Wire Jumper.	3198 036 90010
	9631	Wire Jumper.	3198 036 90010
	9632	Wire Jumper.	3198 036 90010
	9633	Wire Jumper.	3198 036 90010
	9637	Wire Jumper.	3198 036 90010
	9638	Wire Jumper.	3198 036 90010
	9639	Wire Jumper.	3198 036 90010
	9640	Wire Jumper.	3198 036 90010
	9641	Wire Jumper.	3198 036 90010
	9642	Wire Jumper.	3198 036 90010
	9643	Wire Jumper.	3198 036 90010
	9648	Wire Jumper.	3198 036 90010
	9650	Wire Jumper.	3198 036 90010
	9651	Wire Jumper.	3198 036 90010
	9652	Wire Jumper.	3198 036 90010
	9654	Wire Jumper.	3198 036 90010
	9655	Wire Jumper.	3198 036 90010
	9656	Wire Jumper.	3198 036 90010
	9657	Wire Jumper.	3198 036 90010
	9658	Wire Jumper.	3198 036 90010
	9659	Wire Jumper.	3198 036 90010
	9660	Wire Jumper.	3198 036 90010
	9661	Wire Jumper.	3198 036 90010
	9662	Wire Jumper.	3198 036 90010
	9663	Wire Jumper.	3198 036 90010
	9664	Wire Jumper.	3198 036 90010
	9665	Wire Jumper.	3198 036 90010
	9666	Wire Jumper.	3198 036 90010
	9667	Wire Jumper.	3198 036 90010
	9668	Wire Jumper.	3198 036 90010
	9669	Wire Jumper.	3198 036 90010
	9670	Wire Jumper.	3198 036 90010
	9671	Wire Jumper.	3198 036 90010
	9672	Coil, 22u, 10%	3198 018 22290

S = Safety Part   Be sure to use exact replacement part.

29PT663R85C (continued)

Ref	Description	Part No.
9674	Wire Jumper.	3198 036 90010
9675	Wire Jumper.	3198 036 90010
9676	Wire Jumper.	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper.	3198 036 90010
9680	Wire Jumper.	3198 036 90010
9681	Wire Jumper.	3198 036 90010
9682	Wire Jumper.	3198 036 90010
9685	Wire Jumper.	3198 036 90010
9686	Wire Jumper.	3198 036 90010
9687	Wire Jumper.	3198 036 90010
9688	Wire Jumper.	3198 036 90010
9689	Wire Jumper.	3198 036 90010
9690	Wire Jumper.	3198 036 90010
9691	Wire Jumper.	3198 036 90010
9694	Wire Jumper.	3198 036 90010
9695	Wire Jumper.	3198 036 90010
9697	Wire Jumper.	3198 036 90010
9698	Wire Jumper.	3198 036 90010
9699	Wire Jumper.	3198 036 90010
9821	Wire Jumper.	3198 036 90010
9822	Wire Jumper.	3198 036 90010
9825	Wire Jumper.	3198 036 90010
9828	Wire Jumper.	3198 036 90010
9829	Wire Jumper.	3198 036 90010
9831	Wire Jumper.	3198 036 90010
9832	Wire Jumper.	3198 036 90010
9837	Wire Jumper.	3198 036 90010
9838	Wire Jumper.	3198 036 90010
9839	Wire Jumper.	3198 036 90010
9846	Wire Jumper.	3198 036 90010
9847	Wire Jumper.	3198 036 90010
9849	Wire Jumper.	3198 036 90010
9851	Wire Jumper.	3198 036 90010
9856	Wire Jumper.	3198 036 90010
9858	Wire Jumper.	3198 036 90010
9859	Wire Jumper.	3198 036 90010
9860	Wire Jumper.	3198 036 90010
9862	Wire Jumper.	3198 036 90010
9863	Wire Jumper.	3198 036 90010
9864	Wire Jumper.	3198 036 90010
9865	Wire Jumper.	3198 036 90010
9867	Wire Jumper.	3198 036 90010
9868	Wire Jumper.	3198 036 90010
9869	Wire Jumper.	3198 036 90010
9870	Wire Jumper.	3198 036 90010
9871	Wire Jumper.	3198 036 90010
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9876	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9878	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010
9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9923	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9993	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9997	Wire Jumper.	3198 036 90010
9998	Wire Jumper.	3198 036 90010
CBA	Main Chassis Assembly.	3141 058 57991

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

Ref	Description	Part No.
0266	6 Pin Connector.	2422 025 16609
2401	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2402	Cap, 4u7, 20%, 35v, Electrolytic	3198 028 44780
2403	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2407	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2408	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2409	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2411	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
2412	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2413	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2414	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2415	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2416	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2419	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2420	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
2425	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2426	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2427	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2428	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2429	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2430	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2431	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2432	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2433	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2434	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2435	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2436	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2440	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
2442	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2443	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2450	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
2452	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2453	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
3401	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3402	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3403	Res, 1K8, 5%, 1/16W, Metalized Glass .	3198 021 31820
3404	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3405	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3406	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198 021 36820
3407	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3408	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3412	Res, 510K, 5%, 1/10W, Metalized Glass.	2122 118 05951
3419	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3425	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3427	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3431	Res, 8K2, 1%, 1/16W, Metalized Glass .	2322 704 68202
3432	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3440	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3441	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3442	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3443	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198 021 32720
3444	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3450	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3451	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3452	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3453	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198 021 32720
3454	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3455	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3456	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3457	Wire Jumper.	3198 036 90010
3458	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4403	Res, Zero ohm, "Chip" Jumper	3198 021 90030
5401	Coil, 10u, 10%	3198 018 31090
5407	Coil, 33u, 5%.	3198 018 13390
5408	Coil, 33u, 20%	3198 018 33390
5421	Inductor, 100 MHz, 120 ohm	3198 018 90070
5425	Coil, 10u, 10%	3198 018 31090
5428	Coil, 10u, 5%.	3198 018 11090
5429	Coil, 10u, 10%	3198 018 31090
5430	Coil, 10u, 10%	3198 018 31090
5440	Coil, 10u, 10%	3198 018 31090
5442	Coil, 22u, 5%.	3198 018 12290
5450	Coil, 10u, 10%	3198 018 31090
5452	Coil, 33u, 5%.	3198 018 13390
7401	Transistor, PNP, BC857B(COL)	3198 010 42150
7402	Transistor, NPN, BC847B(COL)	3198 010 42030
7403	Transistor, NPN, BC847B(COL)	3198 010 42030
7421	IC, TC90A53N	9322 182 18682
7440	Transistor, NPN, BC847B(COL)	3198 010 42030
7444	Transistor, NPN, BC847B(COL)	3198 010 42030
7450	Transistor, NPN, BC847B(COL)	3198 010 42030
7454	Transistor, NPN, BC847B(COL)	3198 010 42030
9401	Wire Jumper.	3198 036 90010
9402	Wire Jumper.	3198 036 90010
9403	Wire Jumper.	3198 036 90010
CBA	2D 3 Line Comb Filter Assembly	3139 177 26561

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

Ref	Description	Part No.
S 0211	2 Pin Connector.	2422 025 16268
S 0212	2 Pin Connector.	2422 025 16559
0214	5 Pin Connector.	2422 025 06353
1606	Tact Switch.	2422 128 02742
2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2698	Cap, 100n, 10%, 50v, Polyester	3198 014 01040

S = Safety Part   Be sure to use exact replacement part.

29PT663R85C (continued)

```
S 3500   Res, 3M3, 5%, 1/2W, Metalized Glass. .  2322 242 13335
S 3501   Res, 3M3, 5%, 1/2W, Metalized Glass. .  2322 242 13335
  3685   Res, 560 ohm, 5%, 1/6W, Carbon Film. .  3198 011 05610
  3691   Res, 330 ohm, 5%, 1/6W, Carbon Film. .  3198 011 03310
  3693   Res, 220 ohm, 5%, 1/6W, Carbon Film. .  3198 011 02210
  6691   LED, LTL-10234WHCR . . . . . . . . . .  9322 185 69682
  6692   IR Receiver, TSOP1836UH3V. . . . . . .  9322 127 54667
  9001   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9002   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  CBA    Front Interface Panel Assembly . . . .  3139 177 26211
```

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts

```
         Side Jack Panel Parts
  0232   Headphone Jack . . . . . . . . . . . .  2422 026 04747
  0250   A/V Jack . . . . . . . . . . . . . . .  2422 026 04815
  0251   6 Pin Connector. . . . . . . . . . . .  2422 025 12482
  0254   5 Pin Connector. . . . . . . . . . . .  2422 025 12481
  0255   4 Pin Connector. . . . . . . . . . . .  2422 025 12479
  2171   Cap, 330p, 10%, 50v, Ceramic . . . . .  3198 017 33310
  2172   Cap, 330p, 10%, 50v, Ceramic . . . . .  3198 017 33310
  2173   Cap, 330p, 10%, 50v, Ceramic . . . . .  3198 017 33310
  2174   Cap, 330p, 10%, 50v, Ceramic . . . . .  3198 017 33310
  2176   Cap, 470p, 5%, 50v, Ceramic. . . . . .  3198 016 34710
  2177   Cap, 10u, 20%, 50v, Electrolytic . . .  3198 025 51090
  2178   Cap, 470p, 5%, 50v, Ceramic. . . . . .  3198 016 34710
  2179   Cap, 10u, 20%, 50v, Electrolytic . . .  3198 025 51090
  3150   Res, 47K, 5%, 1/16W, Metalized Glass .  3198 021 34730
  3151   Res, 150 ohm, 5%, 1/6W, Carbon . . . .  3198 011 01510
  3152   Res, 47K, 5%, 1/16W, Metalized Glass .  3198 021 34730
  3153   Res, 150 ohm, 5%, 1/6W, Carbon . . . .  3198 011 01510
  3156   Res, 120 ohm, 5%, 1/16W, Metalized Glas 3198 021 31210
  3157   Res, 120 ohm, 5%, 1/16W, Metalized Glas 3198 021 31210
  4817   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90030
  4819   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90030
  4821   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90020
  4822   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90020
  6161   Zener Diode, 6.8 volt. . . . . . . . .  3198 010 26880
  9151   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9152   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9153   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9170   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  CBA    Side Jack Panel Assembly . . . . . . .  3139 187 15141
```

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

```
         Top Control Panel Parts
  0215   3 Pin Connector. . . . . . . . . . . .  2422 025 16601
  1091   Tact Switch. . . . . . . . . . . . . .  2422 128 02742
  1092   Tact Switch. . . . . . . . . . . . . .  2422 128 02742
  1093   Tact Switch. . . . . . . . . . . . . .  2422 128 02742
  1094   Tact Switch. . . . . . . . . . . . . .  2422 128 02742
  3091   Res, 560 ohm, 5%, Metalized Glass. . .  3198 021 35610
  3092   Res, 390 ohm, 5%, 1/16W, Metalized Glas 3198 021 33910
  3093   Res, 560 ohm, 5%, Metalized Glass. . .  3198 021 35610
  3094   Res, 390 ohm, 5%, 1/16W, Metalized Glas 3198 021 33910
  3095   Res, 3K3, 5%, 1/16W, Metalized Glass .  3198 021 33320
  3096   Res, 1K5, 5%, 1/16W, Metalized Glass .  3198 021 31520
  4085   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90020
  4089   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90030
  4090   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90030
  6091   Diode, Signal. . . . . . . . . . . . .  9340 453 90115
  CBA    Top Control Panel Assembly . . . . . .  3139 187 15841
```

Cabinet & Accessory Parts

```
         Cabinet & Accessory Parts
S AC01   AC Cord. . . . . . . . . . . . . . . .  3135 010 03831
  AC03   Anode Lead Spacer (3 Used) . . . . . .  3135 014 04471
  AC04   Batteries for Remote Control Transmitte 9299 000 65263
  AC05   Cabinet Back . . . . . . . . . . . . .  3139 124 44711
  AC06   Cabinet Back Screw Cover (2 Used). . .  3139 124 39301
  AC08   Chassis Tray . . . . . . . . . . . . .  3139 124 31324
S AC09   CRT, A68QCP893X001 . . . . . . . . . .  9322 173 75682
S AC12   Degaussing Coil. . . . . . . . . . . .  2422 549 43967
  AC13   Front Interface Panel Bracket. . . . .  3139 124 32891
  AC15   Holder, Degaussing Coil (4 Used) . . .  3139 124 31122
  AC17   Owner's Manual . . . . . . . . . . . .  3121 235 20831
  AC19   Side Jack Panel Bracket. . . . . . . .  3139 124 37061
  AC20   Cabinet Front Assembly . . . . . . . .  3121 237 53101
  AC20A  Cabinet Front. . . . . . . . . . . . .  3139 177 58401
  AC20C  Light Guide. . . . . . . . . . . . . .  3139 124 39701
  AC20D  Nameplate. . . . . . . . . . . . . . .  3141 050 00161
  AC20E  Power Button . . . . . . . . . . . . .  3139 138 10881
  AC20H  Speaker, 8 ohm, 10W (2 Used) . . . . .  3139 128 76521
  AC20J  Top Control Assembly . . . . . . . . .  3139 138 11451
  AC20J1 Top Control Bracket. . . . . . . . . .  3139 124 39802
  AC20J2 Top Control Buttons. . . . . . . . . .  3139 124 39812
  REMOTE Remote Control Transmitter, RC19335004/
         01. . . . . . . . . . . . . . . . . . . 3139 228 86463
```

S = Safety Part   Be sure to use exact replacement part.

29PT663S85A - Manual no. 7638

Main Chassis Parts

S	Ref	Description	Part No.
		Main Chassis Parts	
	0127	Socket Fuse.	2422 088 00271
	0129	NTC Holder	3139 120 10151
	0136	IC-Spring.	3104 301 22081
	0137	Spring	3139 121 24583
	0138	IC-Spring.	3104 301 22081
	0139	Spring for Bracket	3122 121 24786
	0140	Spring	3139 121 24583
	0141	IC-Spring.	3104 301 22081
	0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421
	0153	Cable, DIPMate, 5 Pin, 480mm	3139 121 07951
	0211	2 Pin Connector.	2422 025 16374
	0212	2 Pin Connector.	2422 025 16375
	0214	5 Pin Connector.	2422 025 12481
	0219	6 Pin Connector.	2422 025 12482
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0222	2 Pin Connector.	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0239	3 Pin Connector.	2422 025 16382
	0243	6 Pin Connector.	2422 025 04854
	0244	5 Pin Connector.	2422 025 04853
	0245	6 Pin Connector.	2422 025 04854
	0246	5 Pin Connector.	2422 025 12481
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector.	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U PLL	2422 542 90141
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1660	Crystal, 12MHz000	2422 543 01203
	1810	6 Pin Connector.	2422 025 16607
	1831	Crystal, Resonator, 18MHz432, 12 Pin, HC49/U A.	2422 543 00842
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
	2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
	2451	Cap, 22n, 10%, 50v, Polyester.	3198 014 02230
	2452	Cap, 180p, 5%, 50v, Ceramic.	3198 016 01810
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 360n, 5%, 250v, Metalized Polypropylene.	2022 333 00163
	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
S	2463	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene	2222 479 90042
S	2465	Cap, 15n, 5%, 1600v, Polypropylene	2020 301 90255
	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
	2468	Cap, 27n, 10%, 400v, Polyester	2222 347 90232
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 120n, 5%, 250v, Metalized Polypropylene.	2222 479 90051
	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91374
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2604	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890

S = Safety Part   Be sure to use exact replacement part.

29PT663S85A (continued)

S	Ref	Description	Part No.
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2807	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2816	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
	2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
	2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
	2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
	2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
	2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2837	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2840	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2841	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2842	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2843	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2844	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2845	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2846	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
	2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
	2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
	2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
	2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610
	2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910
	2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2902	Cap, 1000u, 20%, 25v, Electrolytic	3198 026 31020
	2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2904	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2906	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2908	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3003	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
	3004	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
	3005	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3101	Res, 68 ohm, 5%, 1/6W, Carbon Film	3198 011 06890
	3102	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3103	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
	3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3105	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
	3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3111	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
	3112	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3113	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
	3114	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3115	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
	3116	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3123	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
	3124	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3125	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
	3126	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3131	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
	3132	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3133	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
	3134	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3135	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
	3136	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
	3154	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620
	3156	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3157	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
	3158	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3159	Res, 1K2, 1%, 1/8W, Metalized Glass.	2322 734 61202
	3200	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3202	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3203	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3204	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
	3205	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3206	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
	3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
	3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
	3218	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
	3219	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3241	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
	3242	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
	3245	Res, 39K, 1%, 1/16W, Metalized Glass	2322 704 63903
	3246	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3248	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
	3250	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3256	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3257	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3332	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3334	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3336	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020
	3340	Res, 10 ohm, 5%, 1/2W, Metal Film.	2306 207 03109
S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
	3343	Res, 1K5, 20%, 1/2W, Carbon Film	3198 013 01520
	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
S	3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
	3401	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
	3403	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3405	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
	3406	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3410	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3443	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
	3445	Res, 15K, 5%, 1/6W, Carbon Film.	3198 011 01530
	3446	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620
	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film.	3198 011 01810
	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film	3198 011 06890
	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
S	3451	Res, 10 ohm, 5%, 1/3W, Metal Film.	2306 204 03109
	3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102
	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
S	3455	Res, 6R8, 5%, 1 1/3W, Metal Film	3198 012 26880
	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S	3459	Res, 15K, 5%, 1 1/3W, Metal Film	3198 012 21530
	3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
	3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320
	3470	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3471	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
	3472	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
	3473	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208
	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
	3479	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
	3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2120 101 74158
	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
	3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
	3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
S	3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	3198 012 32290
	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3492	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3495	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3498	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
	3499	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
S	3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass.	2322 242 13155
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220

S = Safety Part   Be sure to use exact replacement part.

29PT663S85A (continued)

S	Ref	Description	Part No.
	3521	Res, 4R7, 5%, 1/6W, Carbon Film	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass	3198 021 53340
	3523	Res, 100 ohm, 5%, 1/3W, Metal Film	2306 204 03101
	3524	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
	3552	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3557	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
S	3591	Res, 10 ohm, 5%, 1/3W, Metal Film	2306 204 03109
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3811	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3812	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
	3813	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
	3814	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3831	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3832	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3843	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
	3901	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
	3903	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3905	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3909	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
	3910	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
	3912	Res, 820 ohm, 5%, 1/6W, Carbon Film	3198 011 08210
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4824	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4837	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4838	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4884	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%	3198 018 18270
	5201	Coil, 6u8, 5%	3198 018 16880
	5202	Wire Jumper	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5241	Wire Jumper	3198 036 90010
	5242	Coil, 10u, 5%	3198 018 11090
	5341	Coil, 22u	2422 535 97333
	5342	Coil, 3u9, 10%	2422 535 97323
	5401	Coil, 1mH, 10%	3198 018 71020
S	5445	Transformer, LOT	2422 531 02574
	5451	Coil, 22u, 10%	3198 018 72290
	5452	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
S	5457	Coil, 25u	2422 535 91028
	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
	5463	Coil, Choke	3128 138 37021
	5471	Coil, 6u8, 20%	3198 018 76880
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 47u, 10%	2422 535 97337
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS42202-00 B	2422 531 02562
	5521	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5561	Coil, 27u, 5%	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5602	Coil, 5u6, 5%	3198 018 15680
	5603	Coil, 5u6, 5%	3198 018 15680
	5604	Coil, 5u6, 5%	3198 018 15680
	5810	Coil, 10u, 10%	3198 018 51090
	5831	Coil, 6u8, 5%	3198 018 16880
	5832	Coil, 6u8, 5%	3198 018 16880
	5833	Coil, 6u8, 5%	3198 018 16880
	5835	Coil, 12u, 10%	3198 018 31290
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316	3198 010 10630
	6201	Diode, Signal, BAS316	3198 010 10630
	6202	Diode, Signal, BAS316	3198 010 10630
	6206	Zener Diode, 6.8 volt	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070

S = Safety Part   Be sure to use exact replacement part.

29PT663S85A (continued)

	Ref	Description	Part No.
	6335	Diode, Signal, BAV21	3198 010 10070
	6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002
	6401	Zener Diode, 47 volt	3198 010 24790
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148.	3198 010 10010
	6448	Zener Diode, 6.2 volt.	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6460	Diode, Rect, BY228/24.	9340 559 50112
	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316.	3198 010 10630
	6468	Diode, Signal, BAS316.	3198 010 10630
	6469	Diode, Rect, BYV95C.	9335 001 80133
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt.	3198 010 25680
	6482	Zener Diode, 9.1 volt.	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYV95C.	9335 001 80133
	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6487	Diode, Rect, BYV95A.	9335 000 90133
	6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6490	Diode, Rect, BYV95C.	9335 001 80133
	6500	Diode, Bridge Rect, GBU4JL-7002.	9322 132 55667
	6520	Diode, Rect, BYV95A.	9335 000 90133
	6523	Diode, Signal, 1N4148.	3198 010 10010
	6524	Diode, Rect, 1N5062.	3198 010 10120
	6525	Diode, Rect, 1N5062.	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt.	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500.	9340 555 59127
	6563	Diode, Signal, BAS316.	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148.	3198 010 10010
	6569	Diode, Signal, BAS316.	3198 010 10630
	6570	Zener Diode, 6.8 volt.	3198 020 56880
	6580	Diode, Signal, BAS316.	3198 010 10630
	6582	Diode, Rect, STPS10L60D.	9322 175 70667
	6831	Diode, Signal, 1N4148.	3198 010 10010
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7102	Transistor, PNP, BC857B(COL)	3198 010 42150
	7103	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9588H/N1/3I/1298.	9352 742 85557
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7400	Power FET, STP3NC60FP.	9322 157 37687
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7460	Transistor, NPN, BU4508DX.	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2.	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1.	9352 673 56112
	7521	Power FET, FQPF9N50.	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, L78L33ACZ.	9322 134 92676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C08-WBN6.	9322 154 38682
	7606	Transistor, NPN, PDTC143ZT	9340 547 00215
	7802	IC, HEF4053BT.	9333 729 60653
	7803	IC, HEF4053BT.	9333 729 60653
	7804	Transistor, NPN, BC847B(COL)	3198 010 42030
	7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682
	7901	IC, AN7580	9322 166 29682
	7903	Transistor, NPN, BC847B(COL)	3198 010 42030
	9001	Wire Jumper.	3198 036 90010
	9101	Wire Jumper.	3198 036 90010
	9102	Wire Jumper.	3198 036 90010
	9103	Wire Jumper.	3198 036 90010
	9104	Wire Jumper.	3198 036 90010
	9123	Wire Jumper.	3198 036 90010
	9171	Wire Jumper.	3198 036 90010
	9173	Wire Jumper.	3198 036 90010
	9175	Wire Jumper.	3198 036 90010
	9176	Wire Jumper.	3198 036 90010
	9178	Wire Jumper.	3198 036 90010
	9179	Wire Jumper.	3198 036 90010
	9181	Wire Jumper.	3198 036 90010
	9182	Wire Jumper.	3198 036 90010
	9183	Wire Jumper.	3198 036 90010
	9192	Wire Jumper.	3198 036 90010
	9193	Wire Jumper.	3198 036 90010
	9311	Wire Jumper.	3198 036 90010
	9312	Wire Jumper.	3198 036 90010
	9406	Wire Jumper.	3198 036 90010
	9407	Wire Jumper.	3198 036 90010
	9408	Wire Jumper.	3198 036 90010
	9409	Wire Jumper.	3198 036 90010
	9410	Wire Jumper.	3198 036 90010
	9411	Wire Jumper.	3198 036 90010
	9412	Wire Jumper.	3198 036 90010
	9413	Wire Jumper.	3198 036 90010
	9414	Wire Jumper.	3198 036 90010
	9415	Wire Jumper.	3198 036 90010
	9416	Wire Jumper.	3198 036 90010
	9417	Wire Jumper.	3198 036 90010
	9418	Wire Jumper.	3198 036 90010
	9419	Wire Jumper.	3198 036 90010
	9421	Wire Jumper.	3198 036 90010
	9422	Wire Jumper.	3198 036 90010
	9424	Wire Jumper.	3198 036 90010
	9425	Wire Jumper.	3198 036 90010
	9426	Wire Jumper.	3198 036 90010
	9427	Wire Jumper.	3198 036 90010
	9453	Wire Jumper.	3198 036 90010
	9460	Wire Jumper.	3198 036 90010
	9463	Wire Jumper.	3198 036 90010
	9500	Wire Jumper.	3198 036 90010
	9501	Wire Jumper.	3198 036 90010
	9503	Wire Jumper.	3198 036 90010
	9506	Wire Jumper.	3198 036 90010
	9507	Wire Jumper.	3198 036 90010
	9511	Wire Jumper.	3198 036 90010
	9512	Wire Jumper.	3198 036 90010
	9513	Wire Jumper.	3198 036 90010
	9514	Wire Jumper.	3198 036 90010
	9515	Wire Jumper.	3198 036 90010
	9516	Wire Jumper.	3198 036 90010
	9518	Wire Jumper.	3198 036 90010
	9520	Wire Jumper.	3198 036 90010
	9521	Wire Jumper.	3198 036 90010
	9522	Wire Jumper.	3198 036 90010
	9524	Wire Jumper.	3198 036 90010
	9528	Wire Jumper.	3198 036 90010
	9530	Wire Jumper.	3198 036 90010
	9611	Coil, 27u, 10%	3198 018 22790
	9612	Wire Jumper.	3198 036 90010
	9613	Wire Jumper.	3198 036 90010
	9614	Wire Jumper.	3198 036 90010
	9615	Wire Jumper.	3198 036 90010
	9618	Wire Jumper.	3198 036 90010
	9619	Wire Jumper.	3198 036 90010
	9620	Wire Jumper.	3198 036 90010
	9621	Wire Jumper.	3198 036 90010
	9622	Wire Jumper.	3198 036 90010
	9623	Wire Jumper.	3198 036 90010
	9624	Wire Jumper.	3198 036 90010
	9626	Wire Jumper.	3198 036 90010
	9627	Wire Jumper.	3198 036 90010
	9628	Wire Jumper.	3198 036 90010
	9629	Wire Jumper.	3198 036 90010
	9631	Wire Jumper.	3198 036 90010
	9632	Wire Jumper.	3198 036 90010
	9633	Wire Jumper.	3198 036 90010
	9637	Wire Jumper.	3198 036 90010
	9638	Wire Jumper.	3198 036 90010
	9640	Wire Jumper.	3198 036 90010
	9641	Wire Jumper.	3198 036 90010
	9642	Wire Jumper.	3198 036 90010
	9643	Wire Jumper.	3198 036 90010
	9648	Wire Jumper.	3198 036 90010
	9650	Wire Jumper.	3198 036 90010
	9651	Wire Jumper.	3198 036 90010
	9652	Wire Jumper.	3198 036 90010
	9654	Wire Jumper.	3198 036 90010
	9655	Wire Jumper.	3198 036 90010
	9656	Wire Jumper.	3198 036 90010
	9657	Wire Jumper.	3198 036 90010
	9658	Wire Jumper.	3198 036 90010
	9659	Wire Jumper.	3198 036 90010
	9660	Wire Jumper.	3198 036 90010
	9661	Wire Jumper.	3198 036 90010
	9662	Wire Jumper.	3198 036 90010
	9663	Wire Jumper.	3198 036 90010
	9664	Wire Jumper.	3198 036 90010
	9665	Wire Jumper.	3198 036 90010
	9666	Wire Jumper.	3198 036 90010
	9667	Wire Jumper.	3198 036 90010
	9668	Wire Jumper.	3198 036 90010
	9669	Wire Jumper.	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

29PT663S85A (continued)

Ref	Description	Part No.
9670	Wire Jumper.	3198 036 90010
9671	Wire Jumper.	3198 036 90010
9672	Coil, 22u, 10%	3198 018 22290
9674	Wire Jumper.	3198 036 90010
9675	Wire Jumper.	3198 036 90010
9676	Wire Jumper.	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper.	3198 036 90010
9680	Wire Jumper.	3198 036 90010
9681	Wire Jumper.	3198 036 90010
9682	Wire Jumper.	3198 036 90010
9685	Wire Jumper.	3198 036 90010
9686	Wire Jumper.	3198 036 90010
9687	Wire Jumper.	3198 036 90010
9688	Wire Jumper.	3198 036 90010
9689	Wire Jumper.	3198 036 90010
9690	Wire Jumper.	3198 036 90010
9691	Wire Jumper.	3198 036 90010
9694	Wire Jumper.	3198 036 90010
9695	Wire Jumper.	3198 036 90010
9697	Wire Jumper.	3198 036 90010
9698	Wire Jumper.	3198 036 90010
9699	Wire Jumper.	3198 036 90010
9821	Wire Jumper.	3198 036 90010
9822	Wire Jumper.	3198 036 90010
9825	Wire Jumper.	3198 036 90010
9828	Wire Jumper.	3198 036 90010
9829	Wire Jumper.	3198 036 90010
9831	Wire Jumper.	3198 036 90010
9832	Wire Jumper.	3198 036 90010
9837	Wire Jumper.	3198 036 90010
9838	Wire Jumper.	3198 036 90010
9839	Wire Jumper.	3198 036 90010
9846	Wire Jumper.	3198 036 90010
9847	Wire Jumper.	3198 036 90010
9849	Wire Jumper.	3198 036 90010
9851	Wire Jumper.	3198 036 90010
9856	Wire Jumper.	3198 036 90010
9858	Wire Jumper.	3198 036 90010
9859	Wire Jumper.	3198 036 90010
9860	Wire Jumper.	3198 036 90010
9862	Wire Jumper.	3198 036 90010
9863	Wire Jumper.	3198 036 90010
9864	Wire Jumper.	3198 036 90010
9865	Wire Jumper.	3198 036 90010
9867	Wire Jumper.	3198 036 90010
9868	Wire Jumper.	3198 036 90010
9869	Wire Jumper.	3198 036 90010
9870	Wire Jumper.	3198 036 90010
9871	Wire Jumper.	3198 036 90010
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9876	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9878	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010
9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9923	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9998	Wire Jumper.	3198 036 90010
CBA	Main Chassis Assembly.	3141 058 58621

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

Ref	Description	Part No.
0266	6 Pin Connector.	2422 025 16609
2401	Cap, 47u, 20%, 16v, Electrolytic . . .	3198 028 24790
2402	Cap, 4u7, 20%, 35v, Electrolytic . . .	3198 028 44780
2403	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2407	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2408	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2409	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2411	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
2412	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2413	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2414	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2415	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2416	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2419	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2420	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
2425	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2426	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
2427	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2428	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2429	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2430	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2431	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2432	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2433	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2434	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2435	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2436	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2440	Cap, 10u, 20%, 16v, Electrolytic . . .	3198 028 21090
2442	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2443	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2450	Cap, 10u, 20%, 16v, Electrolytic . . .	3198 028 21090
2452	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2453	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
3401	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3402	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3403	Res, 1K8, 5%, 1/16W, Metalized Glass .	3198 021 31820
3404	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3405	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3406	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198 021 36820
3407	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3408	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3412	Res, 510K, 5%, 1/10W, Metalized Glass.	2122 118 05951
3419	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3425	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3427	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3431	Res, 8K2, 1%, 1/16W, Metalized Glass .	2322 704 68202
3432	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3440	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3441	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3442	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3443	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198 021 32720
3444	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3450	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3451	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3452	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3453	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198 021 32720
3454	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3455	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3456	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3457	Wire Jumper.	3198 036 90010
3458	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4403	Res, Zero ohm, "Chip" Jumper	3198 021 90030
5401	Coil, 10u, 10%	3198 018 31090
5407	Coil, 33u, 5%.	3198 018 13390
5408	Coil, 33u, 20%	3198 018 33390
5421	Inductor, 100 MHz, 120 ohm	3198 018 90070
5425	Coil, 10u, 10%	3198 018 31090
5428	Coil, 10u, 5%.	3198 018 11090
5429	Coil, 10u, 10%	3198 018 31090
5430	Coil, 10u, 10%	3198 018 31090
5440	Coil, 10u, 10%	3198 018 31090
5442	Coil, 22u, 5%.	3198 018 12290
5450	Coil, 10u, 10%	3198 018 31090
5452	Coil, 33u, 5%.	3198 018 13390
7401	Transistor, PNP, BC857B(COL)	3198 010 42150
7402	Transistor, NPN, BC847B(COL)	3198 010 42030
7403	Transistor, NPN, BC847B(COL)	3198 010 42030
7421	IC, TC90A53N	9322 182 18682
7440	Transistor, NPN, BC847B(COL)	3198 010 42030
7444	Transistor, NPN, BC847B(COL)	3198 010 42030
7450	Transistor, NPN, BC847B(COL)	3198 010 42030
7454	Transistor, NPN, BC847B(COL)	3198 010 42030
9401	Wire Jumper.	3198 036 90010
9402	Wire Jumper.	3198 036 90010
9403	Wire Jumper.	3198 036 90010
CBA	2D 3 Line Comb Filter Assembly	3139 177 26561

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

Ref	Description	Part No.
S 0211	2 Pin Connector.	2422 025 16268
S 0212	2 Pin Connector.	2422 025 16559
0214	5 Pin Connector.	2422 025 06353
1606	Tact Switch.	2422 128 02742
2691	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730

29PT663S85A (continued)

	Ref	Description	Part Number
	2698	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
S	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
	3685	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3691	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
	3693	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
	6691	LED, LTL-10234WHCR	9322 185 69682
	6692	IR Receiver, TSOP1836UH3V.	9322 127 54667
	9001	Wire Jumper.	3198 036 90010
	9002	Wire Jumper.	3198 036 90010
	CBA	Front Interface Panel Assembly	3139 177 26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb ly)

Side Jack Panel Parts

Side Jack Panel Parts

	Ref	Description	Part Number
	0232	Headphone Jack	2422 026 04747
	0250	A/V Jack	2422 026 04815
	0251	6 Pin Connector.	2422 025 12482
	0254	5 Pin Connector.	2422 025 12481
	0255	4 Pin Connector.	2422 025 12479
	2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2176	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
	2177	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2178	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
	2179	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	3150	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
	3152	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
	3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
	3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
	4817	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4819	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4821	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4822	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6161	Zener Diode, 6.8 volt.	3198 010 26880
	9151	Wire Jumper.	3198 036 90010
	9152	Wire Jumper.	3198 036 90010
	9153	Wire Jumper.	3198 036 90010
	9170	Wire Jumper.	3198 036 90010
	CBA	Side Jack Panel Assembly	3139 187 15141

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

	Ref	Description	Part Number
	0215	3 Pin Connector.	2422 025 16601
	1091	Tact Switch.	2422 128 02742
	1092	Tact Switch.	2422 128 02742
	1093	Tact Switch.	2422 128 02742
	1094	Tact Switch.	2422 128 02742
	3091	Res, 560 ohm, 5%, Metalized Glass. . .	3198 021 35610
	3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
	3093	Res, 560 ohm, 5%, Metalized Glass. . .	3198 021 35610
	3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
	3095	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3096	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	4085	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4089	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4090	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	6091	Diode, Signal.	9340 453 90115
	CBA	Top Control Panel Assembly	3139 187 15841

Cabinet & Accessory Parts

Cabinet & Accessory Parts

	Ref	Description	Part Number
S	AC01	AC Cord.	3135 010 03831
	AC03	Anode Lead Spacer (3 Used)	3135 014 04471
	AC04	Batteries for Remote Control Transmitte	9299 000 65263
	AC05	Cabinet Back	3139 124 44711
	AC06	Cabinet Back Screw Cover (2 Used). . .	3139 124 39301
	AC08	Chassis Tray	3139 124 31325
S	AC09	CRT, A68QCU754X73(N)	9301 925 60527
S	AC12	Degaussing Coil.	2422 549 43967
	AC13	Front Interface Panel Bracket.	3139 124 32891
	AC15	Holder, Degaussing Coil (4 Used) . . .	3139 124 31122
	AC17	Owner's Manual	3121 235 20832
	AC19	Side Jack Panel Bracket.	3139 124 37061
	AC20	Cabinet Front Assembly	3121 237 53102
	AC20A	Cabinet Front.	3139 177 58401
	AC20C	Light Guide.	3139 124 39701
	AC20D	Nameplate.	3141 050 00161
	AC20E	Power Button	3139 138 10881
	AC20H	Speaker, 8 ohm, 10W (2 Used)	3139 128 76521
	AC20J	Top Control Assembly	3139 177 56381
	REMOTE	Remote Control Transmitter, RC19335004/ 01.	3139 228 86464

S = Safety Part   Be sure to use exact replacement part.

30DV693R37A - Manual no. 7638

Main Chassis Parts

S	Ref	Description	Part No.
		Main Chassis Parts	
	0211	2 Pin Connector.	2422 025 16374
	0212	2 Pin Connector.	2422 025 16375
	0214	5 Pin Connector.	2422 025 12481
	0217	3 Pin Connector.	2412 020 00725
	0219	6 Pin Connector.	2422 025 12482
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0222	2 Pin Connector.	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0229	7 Pin Connector.	2422 025 11244
	0239	3 Pin Connector.	2422 025 16382
	0240	4 Pin Connector.	2422 025 12479
	0243	6 Pin Connector.	2422 025 04854
	0244	5 Pin Connector.	2422 025 04853
	0245	6 Pin Connector.	2422 025 04854
	0246	5 Pin Connector.	2422 025 12481
	0251	4 Pin Connector.	2422 025 15847
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector.	2412 020 00725
	0268	3 Pin Connector.	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U, PLL	2422 542 90108
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1400	Relay, 5 Amp, 12V.	2422 132 07543
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1660	Crystal, 12MHz000	2422 543 01203
	1810	6 Pin Connector.	2422 025 15849
	1831	Crystal, Resonator, 18MHz432, 12 Pin, HC49/U A.	2422 543 00842
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852
	2172	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2173	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2209	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 2u2, 20%, 10v, Electrolytic	2020 012 93728
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2243	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2247	Cap, 2u2, 20%, 10v, Electrolytic	2020 012 93728
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2401	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
	2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2420	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2421	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
	2451	Cap, 22n, 10%, 50v, Polyester.	3198 014 02230
	2454	Cap, 68n, 5%, 250v, Metalized Polypropylene	2222 479 90133
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 470n, 5%, 250v, Metalized Polypropylene.	2022 333 00086
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
S	2463	Cap, 390p, 10%, 2000v, Ceramic	2020 558 90482
S	2465	Cap, 13n, 5%, 1600v, Polypropylene	2020 301 90254
	2467	Cap, 9n1, 5%, 1000v, Polypropylene	2222 375 90424
	2468	Cap, 9n1, 5%, 1000v, Polypropylene	2222 375 90424
	2469	Cap, 430n, 5%, 250v, Metalized Polypropylene.	2022 333 00164
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2490	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91374
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2604	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020

S = Safety Part   Be sure to use exact replacement part.

30DV693R37A (continued)

Ref	Description	Part No.
2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050
2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2810	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
2837	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
2840	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2841	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2843	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2844	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2846	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2902	Cap, 1000u, 20%, 25v, Electrolytic . .	3198 026 31020
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202
3172	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
3180	Res, 68K, 5%, 1/16W, Metalized Glass .	3198 021 36830
3181	Res, 120K, 5%, Metalized Glass	2322 702 60124
3190	Res, 68K, 5%, 1/16W, Metalized Glass .	3198 021 36830
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3206	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3247	Res, 560K, 5%, Metalized Glass	2322 702 60564
3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3250	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
3401	Res, 82K, 5%, 1/6W, Carbon Film. . . .	3198 011 08230
3403	Res, 100K, 5%, 1/6W, Carbon Film . . .	3198 011 01040
3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3407	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3408	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3451	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
S 3452	Res, 5K6, 1%, 3/5W, Metal Film	2312 915 15602
3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3456	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3457	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3468	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3470	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3473	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
3481	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S 3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 32290
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3489	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3491	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198 021 53320
3492	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
S 3493	Res, 2R2, 5%, 1/3W, Metal Film	2306 204 03228
3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019

S = Safety Part   Be sure to use exact replacement part.

30DV693R37A (continued)

S	Ref	Description	Part No.
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass	2322 242 13155
	3507	Surge Protector	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass	3198 021 53340
S	3523	Res, 47 ohm, 5%, 1/3W, Metal Film	2306 204 03479
	3524	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
	3527	Res, 0R15, 5%, 3/5W, Metal Film	3198 012 11570
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass	2322 734 64702
	3545	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
	3548	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
	3552	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3557	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
	3563	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
S	3565	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
S	3591	Res, 10 ohm, 5%, 1/3W, Metal Film	2306 204 03109
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3614	Res, 4K7, 5%, 1/6W, Carbon Film	3198 011 04720
	3615	Res, 10K, 5%, 1/6W, Carbon Film	3198 011 01030
	3617	Res, 4K7, 5%, 1/6W, Carbon Film	3198 011 04720
	3618	Res, 6K8, 5%, 1/6W, Carbon Film	3198 011 06820
	3619	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3814	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3831	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3832	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3843	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
	3901	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
	3903	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3905	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3909	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
	3910	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
	3912	Res, 820 ohm, 5%, 1/6W, Carbon Film	3198 011 08210

S	Ref	Description	Part No.
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4837	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4838	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%	3198 018 18270
	5201	Coil, 6u8, 5%	3198 018 16880
	5202	Wire Jumper	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5241	Wire Jumper	3198 036 90010
	5242	Coil, 10u, 5%	3198 018 11090
	5341	Coil, 22u	2422 535 97333
	5342	Coil, 22u	2422 535 97333
	5400	Coil, 11u7	2422 535 91027
S	5445	Transformer, LOT	2422 531 02612
	5451	Coil, 22u, 10%	3198 018 72290
	5452	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5453	Coil, 22u, 5%	3198 018 12290
S	5457	Coil, 42u	2422 535 94865
S	5461	Transformer, SD10207-00 B	2422 531 02568
	5464	Coil, Bridge, C946-01 Y	2422 531 02419
	5471	Coil, 6u8, 20%	3198 018 76880
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 10u, 10%	2422 535 97328
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS42204-00 B	2422 531 02563
	5521	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5561	Coil, 27u, 5%	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5602	Coil, 5u6, 5%	3198 018 15680
	5603	Coil, 5u6, 5%	3198 018 15680
	5604	Coil, 5u6, 5%	3198 018 15680
	5831	Coil, 6u8, 5%	3198 018 16880
	5832	Coil, 6u8, 5%	3198 018 16880
	5833	Coil, 6u8, 5%	3198 018 16880
	5835	Coil, 12u, 10%	3198 018 31290
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316	3198 010 10630
	6201	Diode, Signal, BAS316	3198 010 10630
	6202	Diode, Signal, BAS316	3198 010 10630
	6206	Zener Diode, 6.8 volt	3198 020 56880

S = Safety Part   Be sure to use exact replacement part.

30DV693R37A (continued)

	Ref	Description	Part No.
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6400	Res, 1K, 1%, 3/5W, Metal Film	2312 915 11002
	6401	Zener Diode, 68 volt	3198 010 26890
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148	3198 010 10010
	6448	Zener Diode, 6.2 volt	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6452	Diode, Signal, BAS316	3198 010 10630
	6453	Zener Diode, 5.6 volt	3198 020 55680
	6460	Diode, Rect, DG3-7005L	9336 436 10682
	6461	Diode, Rect, RGP30J-L7004	9338 617 60682
	6462	Zener Diode, 12 volt	3198 010 21290
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316	3198 010 10630
	6468	Diode, Signal, BAS316	3198 010 10630
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt	3198 010 25680
	6482	Zener Diode, 9.1 volt	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYV95C	9335 001 80133
	6486	Diode, Rect, EGP20DL-5100	9322 164 42682
	6487	Diode, Rect, BYV95A	9335 000 90133
	6488	Diode, Rect, EGP20DL-5100	9322 164 42682
	6490	Diode, Rect, BYV95C	9335 001 80133
	6500	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6520	Diode, Rect, BYV95A	9335 000 90133
	6523	Diode, Signal, 1N4148	3198 010 10010
	6524	Diode, Rect, 1N5062	3198 010 10120
	6525	Diode, Rect, 1N5062	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500	9340 555 59127
	6563	Diode, Signal, BAS316	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148	3198 010 10010
	6569	Diode, Signal, BAS316	3198 010 10630
	6570	Zener Diode, 6.8 volt	3198 020 56880
	6580	Diode, Signal, BAS316	3198 010 10630
	6582	Diode, Rect, STPS10L60D	9322 175 70667
	6831	Diode, Signal, 1N4148	3198 010 10010
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7000	IC, TDA8941P/N1	9352 628 51112
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7102	Transistor, PNP, BC857B(COL)	3198 010 42150
	7103	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9569H/N1/4I/1313	9352 743 94557
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7400	Power FET, STP3NC60FP	9322 157 37687
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7444	Transistor, NPN, BC547B(COL)	3198 020 40030
	7450	Transistor, PNP, PDTA114ET	3198 010 44010
	7460	Transistor, NPN, BU4508DX	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1	9352 673 56112
	7521	Power FET, FQPF9N50	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, L78L33ACZ	9322 134 92676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C08-WBN6	9322 154 38682
	7606	Transistor, NPN, PDTC143ZT	9340 547 00215
	7802	IC, HEF4053BT	9333 729 60653
	7803	IC, HEF4053BT	9333 729 60653
	7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682
	7901	IC, AN7580	9322 166 29682
	7903	Transistor, NPN, BC847B(COL)	3198 010 42030
	9001	Wire Jumper	3198 036 90010
	9101	Wire Jumper	3198 036 90010
	9102	Wire Jumper	3198 036 90010
	9103	Wire Jumper	3198 036 90010
	9104	Wire Jumper	3198 036 90010
	9123	Wire Jumper	3198 036 90010
	9160	Wire Jumper	3198 036 90010
	9171	Wire Jumper	3198 036 90010
	9173	Wire Jumper	3198 036 90010
	9175	Wire Jumper	3198 036 90010
	9176	Wire Jumper	3198 036 90010
	9178	Wire Jumper	3198 036 90010
	9179	Wire Jumper	3198 036 90010
	9181	Wire Jumper	3198 036 90010
	9182	Wire Jumper	3198 036 90010
	9183	Wire Jumper	3198 036 90010
	9192	Wire Jumper	3198 036 90010
	9193	Wire Jumper	3198 036 90010
	9311	Wire Jumper	3198 036 90010
	9312	Wire Jumper	3198 036 90010
	9406	Wire Jumper	3198 036 90010
	9407	Wire Jumper	3198 036 90010
	9408	Wire Jumper	3198 036 90010
	9409	Wire Jumper	3198 036 90010
	9410	Wire Jumper	3198 036 90010
	9411	Wire Jumper	3198 036 90010
	9412	Wire Jumper	3198 036 90010
	9413	Wire Jumper	3198 036 90010
	9414	Wire Jumper	3198 036 90010
	9415	Wire Jumper	3198 036 90010
	9416	Wire Jumper	3198 036 90010
	9417	Wire Jumper	3198 036 90010
	9418	Wire Jumper	3198 036 90010
	9419	Wire Jumper	3198 036 90010
	9421	Wire Jumper	3198 036 90010
	9422	Wire Jumper	3198 036 90010
	9425	Wire Jumper	3198 036 90010
	9427	Wire Jumper	3198 036 90010
	9453	Wire Jumper	3198 036 90010
	9462	Wire Jumper	3198 036 90010
	9464	Wire Jumper	3198 036 90010
	9500	Wire Jumper	3198 036 90010
	9501	Wire Jumper	3198 036 90010
	9503	Wire Jumper	3198 036 90010
	9506	Wire Jumper	3198 036 90010
	9507	Wire Jumper	3198 036 90010
	9511	Wire Jumper	3198 036 90010
	9512	Wire Jumper	3198 036 90010
	9513	Wire Jumper	3198 036 90010
	9514	Wire Jumper	3198 036 90010
	9515	Wire Jumper	3198 036 90010
	9516	Wire Jumper	3198 036 90010
	9518	Wire Jumper	3198 036 90010
	9520	Wire Jumper	3198 036 90010
	9521	Wire Jumper	3198 036 90010
	9522	Wire Jumper	3198 036 90010
	9524	Wire Jumper	3198 036 90010
	9528	Wire Jumper	3198 036 90010
	9530	Wire Jumper	3198 036 90010
	9611	Coil, 27u, 10%	3198 018 22790
	9612	Wire Jumper	3198 036 90010
	9613	Wire Jumper	3198 036 90010
	9614	Wire Jumper	3198 036 90010
	9615	Wire Jumper	3198 036 90010
	9618	Wire Jumper	3198 036 90010
	9619	Wire Jumper	3198 036 90010
	9620	Wire Jumper	3198 036 90010
	9621	Wire Jumper	3198 036 90010
	9622	Wire Jumper	3198 036 90010
	9623	Wire Jumper	3198 036 90010
	9624	Wire Jumper	3198 036 90010
	9626	Wire Jumper	3198 036 90010
	9627	Wire Jumper	3198 036 90010
	9628	Wire Jumper	3198 036 90010
	9629	Wire Jumper	3198 036 90010
	9631	Wire Jumper	3198 036 90010
	9632	Wire Jumper	3198 036 90010
	9633	Wire Jumper	3198 036 90010
	9635	Wire Jumper	3198 036 90010
	9636	Wire Jumper	3198 036 90010
	9637	Wire Jumper	3198 036 90010
	9638	Wire Jumper	3198 036 90010
	9639	Wire Jumper	3198 036 90010
	9640	Wire Jumper	3198 036 90010
	9641	Wire Jumper	3198 036 90010
	9642	Wire Jumper	3198 036 90010
	9643	Wire Jumper	3198 036 90010
	9644	Wire Jumper	3198 036 90010
	9645	Wire Jumper	3198 036 90010
	9648	Wire Jumper	3198 036 90010
	9650	Wire Jumper	3198 036 90010
	9652	Wire Jumper	3198 036 90010
	9654	Wire Jumper	3198 036 90010
	9655	Wire Jumper	3198 036 90010
	9656	Wire Jumper	3198 036 90010
	9657	Wire Jumper	3198 036 90010
	9658	Wire Jumper	3198 036 90010
	9659	Wire Jumper	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

30DV693R37A (continued)

Ref	Description	Part No.
9660	Wire Jumper.	3198 036 90010
9661	Wire Jumper.	3198 036 90010
9662	Wire Jumper.	3198 036 90010
9663	Wire Jumper.	3198 036 90010
9664	Wire Jumper.	3198 036 90010
9665	Wire Jumper.	3198 036 90010
9666	Wire Jumper.	3198 036 90010
9667	Wire Jumper.	3198 036 90010
9668	Wire Jumper.	3198 036 90010
9669	Wire Jumper.	3198 036 90010
9670	Wire Jumper.	3198 036 90010
9671	Wire Jumper.	3198 036 90010
9672	Coil, 22u, 10%	3198 018 22290
9674	Wire Jumper.	3198 036 90010
9675	Wire Jumper.	3198 036 90010
9676	Wire Jumper.	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper.	3198 036 90010
9680	Wire Jumper.	3198 036 90010
9681	Wire Jumper.	3198 036 90010
9683	Wire Jumper.	3198 036 90010
9685	Wire Jumper.	3198 036 90010
9686	Wire Jumper.	3198 036 90010
9687	Wire Jumper.	3198 036 90010
9688	Wire Jumper.	3198 036 90010
9689	Wire Jumper.	3198 036 90010
9690	Wire Jumper.	3198 036 90010
9691	Wire Jumper.	3198 036 90010
9694	Wire Jumper.	3198 036 90010
9695	Wire Jumper.	3198 036 90010
9697	Wire Jumper.	3198 036 90010
9698	Wire Jumper.	3198 036 90010
9699	Wire Jumper.	3198 036 90010
9821	Wire Jumper.	3198 036 90010
9822	Wire Jumper.	3198 036 90010
9825	Wire Jumper.	3198 036 90010
9828	Wire Jumper.	3198 036 90010
9829	Wire Jumper.	3198 036 90010
9831	Wire Jumper.	3198 036 90010
9832	Wire Jumper.	3198 036 90010
9837	Wire Jumper.	3198 036 90010
9838	Wire Jumper.	3198 036 90010
9839	Wire Jumper.	3198 036 90010
9846	Wire Jumper.	3198 036 90010
9847	Wire Jumper.	3198 036 90010
9848	Wire Jumper.	3198 036 90010
9849	Wire Jumper.	3198 036 90010
9851	Wire Jumper.	3198 036 90010
9855	Wire Jumper.	3198 036 90010
9856	Wire Jumper.	3198 036 90010
9857	Wire Jumper.	3198 036 90010
9858	Wire Jumper.	3198 036 90010
9859	Wire Jumper.	3198 036 90010
9860	Wire Jumper.	3198 036 90010
9862	Wire Jumper.	3198 036 90010
9864	Wire Jumper.	3198 036 90010
9865	Wire Jumper.	3198 036 90010
9867	Wire Jumper.	3198 036 90010
9868	Wire Jumper.	3198 036 90010
9869	Wire Jumper.	3198 036 90010
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9876	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010
9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9923	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9993	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9997	Wire Jumper.	3198 036 90010
9998	Wire Jumper.	3198 036 90010
CBA	Main Chassis Assembly.	3139 187 20801
CBA	DVD Loader SD5.12.	3139 188 55471
CBA	DVD MPEG Assembly SD5.12	3139 188 55481
CBA	DVD Module SD5.12 (contains Loader and MPEG Assembly)	4835 310 57599

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

S = Safety Part   Be sure to use exact replacement part.

DVD Eject Panel Parts

DVD Eject Panel Parts

Ref	Description	Part No.
0267	3 Pin Board Connector.	2422 025 09191
0361	Eject Button	3139 177 63451
1110	Tact Switch.	2422 128 02742
CBA	DVD Eject Panel Assembly	3139 187 23311

DVD Interface Panel Parts

DVD Interface Panel Parts

Ref	Description	Part No.
0226	Connector, 6 Pin	2422 025 12482
0228	Connector, 3 Pin	2412 020 00725
0251	Connector, 4 Pin	2422 025 15847
0253	Connector, 7 Pin	2422 025 11244
0254	Connector, 3 Pin	2422 025 16382
0266	Connector, 6 Pin	2422 025 15849
0269	Connector, 5 Pin	2422 025 15848
1100	Socket, Cinch, 1 Pin	2422 026 04425
1101	Connector, 8 Pin	2422 025 12483
S 1330	Fuse, 2A, 250V	2422 086 10422
S 1331	Fuse, 2A, 250V	2422 086 10422
S 1332	Fuse, 2A, 250V	2422 086 10421
2101	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2102	Cap, 10u, 20%, 16v, Electrolytic . . .	3198 028 21090
2103	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2104	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2110	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2111	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2112	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2113	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2114	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2184	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2185	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2260	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2262	Cap, 4u7, +80/-20%, 10V, Ceramic . . .	2020 552 96305
2300	Cap, 10u, 20%, 250v, Electrolytic. . .	2020 012 93495
2301	Cap, 22n, 10%, 400v, Metalized Polyeste	2222 365 55223
2302	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
2310	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2311	Cap, 470n, 10%, 25v, Ceramic	2020 552 96465
2313	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2315	Cap, 220p, 10%, 1KV, Ceramic	3198 019 62210
2316	Cap, 33n, 10%, 16v, Ceramic.	3198 017 33330
2319	Cap, 220n, +80/-20%, 25v, Ceramic. . .	3198 023 22240
2330	Cap, 2u2, 20%, 25v, Electrolytic . . .	3198 026 32220
2331	Cap, 470u, 20%, 10v, Electrolytic. . .	3198 025 14710
2332	Cap, 2u2, 20%, 25v, Electrolytic . . .	3198 026 32220
2333	Cap, 470u, 20%, 10v, Electrolytic. . .	3198 025 14710
2337	Cap, 1000u, 20%, 25v, Electrolytic . .	3198 026 31020
2338	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
2339	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
2341	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2342	Cap, 47u, 20%, 16v, Electrolytic . . .	3198 028 24790
2350	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2351	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2353	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
3101	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3102	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3110	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3111	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3112	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3113	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3114	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3115	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3116	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3117	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3118	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3180	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3182	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3262	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3263	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
3264	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3265	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3271	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3272	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
S 3300	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S 3301	Power Resistor, 68K, 5%, 2W.	3198 012 26830
3308	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3309	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3310	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3311	Res, 180 ohm, 5%, 1/16W, Metalized Glas	3198 021 31810
3312	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3313	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3314	Res, 1 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01080
3315	Res, 1 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01080
3317	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3318	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3319	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3320	Res, 100K, 1%, 1/16W, Metalized Glass.	2322 704 61004
3339	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3340	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3342	Res, 4K7, 1%, 1/16W, Metalized Glass .	2322 704 64702

30DV693R37A (continued)

	3344	Res, 4K7, 1%, 1/16W, Metalized Glass	2322 704 64702
	3360	Res, 4R7, 5%, 1/16W, Metalized Glass	3198 021 34780
	3361	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	4105	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4106	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4185	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4226	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4261	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4265	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4316	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4342	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4343	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4361	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4363	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	4364	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
	5100	Inductor, Variable, 100uH, 10%	2422 549 41663
	5110	Coil, 220n	3198 018 12270
	5300	Coil, 27u.	3198 018 22790
	5301	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
S	5315	Transformer, SS25113-00.	2422 531 02596
	5331	Coil, 10u, 5%.	2422 535 95363
	5333	Coil, 10u, 5%.	2422 535 95363
	5337	Coil, 10u, 10%	2422 535 97328
	5339	Coil, 10u, 10%	2422 535 97328
	6100	Diode, Signal, BAS316.	3198 010 10630
	6101	Diode, Signal, BAS316.	3198 010 10630
	6300	Diode, Rect, BYD33J	9337 234 20133
	6311	Diode, Signal, BAS316.	3198 010 10630
	6312	Zener Diode, 22 volt	3198 020 52290
	6330	Diode, Rect, EGP20DL-5100	9322 164 42682
	6332	Diode, Rect, SB340L-7024.	9322 161 76682
	6336	Diode, Rect, BYV27-200.	9335 526 80133
	7110	IC, HEF4053BT.	9333 729 60653
	7260	Transistor, NPN, BC847B.	3198 010 42030
	7261	Transistor, NPN, BC847B.	3198 010 42030
	7262	Transistor, NPN, PDTC124ET	9340 310 20215
	7310	Transistor, NPN, PDTC114ET	3198 010 44110
	7311	Transistor, PNP, PDTA114ET	3198 010 44010
	7312	Transistor, PNP, BC857B.	3198 010 42150
	7313	Transistor, NPN, BC847B.	3198 010 42030
	7315	IC, TEA1523P/N2.	9352 699 68112
S	7340	Optical Coupler, TCET1103(G)	9322 140 14667
	7341	IC, TL431CLP	9337 711 00676
	9110	Wire Jumper.	3198 036 90010
	9111	Wire Jumper.	3198 036 90010
	9183	Wire Jumper.	3198 036 90010
	9266	Wire Jumper.	3198 036 90010
	9315	Wire Jumper.	3198 036 90010
	9350	Wire Jumper.	3198 036 90010
	9351	Wire Jumper.	3198 036 90010
	9352	Wire Jumper.	3198 036 90010
	9355	Wire Jumper.	3198 036 90010
	9357	Wire Jumper.	3198 036 90010
	CBA	DVD Interface Panel Assembly	3139 187 20761

Front Interface Panel Parts

Front Interface Panel Parts

S	0211	2 Pin Connector.	2422 025 16268
S	0212	2 Pin Connector.	2422 025 16559
	0214	5 Pin Connector.	2422 025 06353
	1606	Tact Switch.	2422 128 02742
	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2692	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
	2693	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
	2694	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
	2695	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
	2698	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
S	3500	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322 242 13335
S	3501	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322 242 13335
	3685	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
	3691	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
	3693	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
	6691	LED, LTL-10234WHCR	9322 185 69682
	6692	IR Receiver, TSOP1836UH3V.	9322 127 54667
	9001	Wire Jumper.	3198 036 90010
	9002	Wire Jumper.	3198 036 90010
	CBA	Front Interface Panel Assembly	3139 177 26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts

Side Jack Panel Parts

	0232	Headphone Jack	2422 026 04747
	0250	A/V Jack	2422 026 04815
	0251	6 Pin Connector.	2422 025 15849
	0254	5 Pin Connector.	2422 025 12481
	0255	4 Pin Connector.	2422 025 12479
	2171	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
	2172	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
	2173	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
	2174	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
	2176	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
	2177	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2178	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
	2179	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	3150	Res, 47k, 5%, 1/6W, Carbon	3198 011 04730
	3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
	3152	Res, 47k, 5%, 1/6W, Carbon	3198 011 04730
	3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
	3156	Res, 120 ohm, 5%, 1/6W, Carbon Film.	3198 011 01210
	3157	Res, 120 ohm, 5%, 1/6W, Carbon Film.	3198 011 01210
	6161	Zener Diode, 6.8 volt.	3198 010 26880
	9153	Wire Jumper.	3198 036 90010
	9170	Wire Jumper.	3198 036 90010
	9171	Wire Jumper.	3198 036 90010
	CBA	Side Jack Panel Assembly	3139 188 03541

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

	0215	3 Pin Connector.	2422 025 16601
	1091	Tact Switch.	2422 128 02742
	1092	Tact Switch.	2422 128 02742
	1093	Tact Switch.	2422 128 02742
	1094	Tact Switch.	2422 128 02742
	3091	Res, 560 ohm, 5%, Metalized Glass.	3198 021 35610
	3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
	3093	Res, 560 ohm, 5%, Metalized Glass.	3198 021 35610
	3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
	3095	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3096	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
	4085	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4089	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4090	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	6091	Diode, Signal.	9340 453 90115
	CBA	Top Control Panel Assembly	3139 187 15841

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S	AC01	AC Cord.	3135 010 03831
	AC03	Anode Lead Spacer (3 Used)	3135 014 04471
	AC04	Batteries for Remote Control Transmitte	9299 000 65263
	AC05	Cabinet Back	3139 124 44201
	AC06	Cabinet Back Screw Cover (2 Used).	3139 124 45431
	AC07	Canceller Coil	3128 138 60581
	AC08	Chassis Tray	3139 124 31325
S	AC09	CRT, W76ERF942X013	9301 909 10314
	AC13	Front Interface Panel Bracket.	3139 124 32891
	AC15	Holder, Degaussing Coil (4 Used)	3135 013 01661
	AC17	Owner's Manual	3121 235 21131
	AC18	Quick Use Guide.	3121 233 44471
	AC19	Side Jack Panel Bracket.	3139 124 37061
	AC20	Cabinet Front Assembly	3121 237 53511
	AC20A	Cabinet Front.	3139 124 44191
	AC20C	Light Guide.	3139 124 39701
	AC20D	Nameplate.	3141 050 00161
	AC20E	Power Button	3139 138 10881
	AC20H	Speaker, 8 ohm, 10W (2 Used)	3139 128 76081
	AC20J	Top Control Assembly	3139 138 11451
	AC23	DVD Door	3139 177 63441
	AC24	DVD Interface Panel Bracket.	3139 124 43291
	REMOTE	Remote Control Transmitter, RC19042007/ 01.	3128 147 14521

S = Safety Part   Be sure to use exact replacement part.

30PW633F35A - Manual no. 7638

Main Chassis Parts

Main Chassis Parts

S	Ref	Description	Part No.
	0211	2 Pin Connector.	2422 025 16374
	0212	2 Pin Connector.	2422 025 16375
	0214	5 Pin Connector.	2422 025 12481
	0219	6 Pin Connector.	2422 025 12482
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0222	2 Pin Connector.	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0239	3 Pin Connector.	2422 025 16382
	0243	6 Pin Connector.	2422 025 04854
	0244	5 Pin Connector.	2422 025 04853
	0245	6 Pin Connector.	2422 025 04854
	0246	5 Pin Connector.	2422 025 12481
S	0256	9 Pin CRT Socket	2422 500 80053
	0267	3 Pin Connector.	2412 020 00725
	0268	3 Pin Connector.	2412 020 00725
	0269	Jack	2422 026 05182
	0278	3 Pin Connector.	2412 020 00725
S	1000	Tuner, V+U PLL	2422 542 90098
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1400	Relay, 5 Amp, 12V.	2422 132 07543
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1660	Crystal, 12MHz000	2422 543 01203
	1810	6 Pin Connector.	2422 025 16607
	1831	Crystal, Resonator, 18MHz432, 12 Pin, HC49/U A.	2422 543 00842
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852
	2172	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2173	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2209	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 2u2, 20%, 10v, Electrolytic	2020 012 93728
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2243	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2247	Cap, 2u2, 20%, 10v, Electrolytic	2020 012 93728
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
S	2346	Cap, 470p, 10%, 2000v, Ceramic	2020 558 90483
	2360	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2362	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
	2364	Cap, 27p, 5%, 50v, Ceramic	3198 016 32790
	2365	Cap, 27p, 5%, 50v, Ceramic	3198 016 32790
	2366	Cap, 27p, 5%, 50v, Ceramic	3198 016 32790
	2367	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2368	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2369	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2372	Cap, 10u, 20%, 160v, Electrolytic.	2020 012 93318
	2373	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2375	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2378	Cap, 220p, 5%, 50v, Ceramic.	3198 019 02210
	2379	Cap, 10u, 20%, 100v, Electrolytic.	3198 025 71090
	2380	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2381	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2401	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
	2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2420	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2421	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
	2451	Cap, 22n, 10%, 50v, Polyester.	3198 014 02230
	2454	Cap, 68n, 5%, 250v, Metalized Polypropylene	2222 479 90133
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 470n, 5%, 250v, Metalized Polypropylene.	2022 333 00086
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
S	2463	Cap, 390p, 10%, 2000v, Ceramic	2020 558 90482
S	2465	Cap, 13n, 5%, 1600v, Polypropylene	2020 301 90254
	2467	Cap, 9n1, 5%, 1000v, Polypropylene	2222 375 90424
	2468	Cap, 9n1, 5%, 1000v, Polypropylene	2222 375 90424
	2469	Cap, 430n, 5%, 250v, Metalized Polypropylene.	2222 479 90022
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2490	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91374
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290

S = Safety Part   Be sure to use exact replacement part.

30PW633F35A (continued)

Ref	Description	Part No.
2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
2604	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
2807	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2816	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
2837	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
2840	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
2841	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2842	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
2843	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2844	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2845	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
2846	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2902	Cap, 1000u, 20%, 25v, Electrolytic	3198 026 31020
2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2904	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2906	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2908	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3124	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3126	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3132	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3134	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
3154	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620
3156	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3157	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3158	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3159	Res, 1K2, 1%, 1/8W, Metalized Glass.	2322 734 61202
3172	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820
3180	Res, 68K, 5%, 1/16W, Metalized Glass	3198 021 36830
3181	Res, 120K, 5%, Metalized Glass	2322 702 60124
3190	Res, 68K, 5%, 1/16W, Metalized Glass	3198 021 36830
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
3205	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3206	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
3218	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3241	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3242	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
3245	Res, 39K, 1%, 1/16W, Metalized Glass	2322 704 63903
3246	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3247	Res, 560K, 5%, Metalized Glass	2322 702 60564
3248	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
3250	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3257	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020
3340	Res, 10 ohm, 5%, 1/2W, Metal Film.	2306 207 03109
3341	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3342	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3343	Res, 1K5, 20%, 1/2W, Carbon Film	3198 013 01520
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3360	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3361	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3362	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3363	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3367	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3368	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
3369	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3373	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3374	Res, 2R2, 5%, 1/6W, Carbon Film.	3198 011 02280
3375	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3376	Res, 68K, 5%, 1/6W, Carbon Film.	3198 011 06830
3377	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3378	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
3380	Res, 68K, 5%, 1/16W, Metalized Glass	3198 021 36830
3381	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3383	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3384	Res, 2R2, 5%, 1/6W, Carbon Film.	3198 011 02280
3385	Res, 10K, 5%, 5W, Metal Film	2322 257 41103
S 3386	Res, 10 ohm, 5%, 1/3W, Metal Film.	2306 204 03109
3400	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
3401	Res, 82K, 5%, 1/6W, Carbon Film.	3198 011 08230
3403	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3405	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
3406	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
3407	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
3408	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3410	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3443	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3445	Res, 15K, 5%, 1/6W, Carbon Film.	3198 011 01530
3446	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620
3447	Res, 180 ohm, 5%, 1/6W, Carbon Film.	3198 011 01810
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
3449	Res, 68 ohm, 5%, 1/6W, Carbon Film	3198 011 06890
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3451	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
S 3452	Res, 5K6, 1%, 3/5W, Metal Film	2312 915 15602
3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film	3198 012 26880
3456	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3457	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020

S = Safety Part   Be sure to use exact replacement part.

30PW633F35A (continued)

S	Ref	Description	Part No.
S	3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
	3470	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
	3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3473	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
	3481	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
	3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S	3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 32290
	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3489	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3491	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198 021 53320
	3492	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
S	3493	Res, 2R2, 5%, 1/3W, Metal Film	2306 204 03228
	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
S	3504	Res, PTC, 3R0, Degaussing.	2120 661 00025
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
S	3523	Res, 47 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03479
	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
	3527	Res, 0R15, 5%, 3/5W, Metal Film. . . .	3198 012 11570
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 33K, 5%, 1/10W, Metalized Glass .	3198 021 53330
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 8K2, 5%, 1/10W, Metalized Glass .	3198 021 58220
S	3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
S	3591	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3614	Res, 4K7, 5%, 1/6W, Carbon Film. . . .	3198 011 04720
	3615	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
	3617	Res, 4K7, 5%, 1/6W, Carbon Film. . . .	3198 011 04720
	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3619	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3811	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3812	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3813	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3831	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3843	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3901	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198 021 36820
	3903	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3905	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3909	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3910	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3912	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4311	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4312	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4313	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4824	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4837	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4838	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4884	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880

S = Safety Part   Be sure to use exact replacement part.

30PW633F35A (continued)

	Ref	Description	Part No.
	5202	Wire Jumper.	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5241	Wire Jumper.	3198 036 90010
	5242	Coil, 10u, 5%.	3198 018 11090
	5341	Coil, 22u.	2422 535 97333
	5342	Coil, 27u, 10%	3198 018 22790
	5376	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5400	Coil, 11u7	2422 535 91027
S	5445	Transformer, LOT	2422 531 02612
	5451	Coil, 22u, 10%	3198 018 72290
	5452	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5453	Coil, 22u, 5%.	3198 018 12290
S	5457	Coil, 42u.	2422 535 94865
S	5461	Transformer, SD10207-00 B.	2422 531 02568
	5464	Coil, Bridge, C946-01 Y.	2422 531 02419
	5471	Coil, 6u8, 20%	3198 018 76880
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 10u, 10%	2422 535 97328
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS42204-00 B.	2422 531 02563
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5810	Coil, 10u, 10%	3198 018 51090
	5831	Coil, 6u8, 5%.	3198 018 16880
	5832	Coil, 6u8, 5%.	3198 018 16880
	5833	Coil, 6u8, 5%.	3198 018 16880
	5835	Coil, 12u, 10%	3198 018 31290
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316.	3198 010 10630
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630
	6206	Zener Diode, 6.8 volt.	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316.	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6365	Diode, Signal, BAT85	9336 247 60133
	6366	Diode, Signal, BAT85	9336 247 60133
	6367	Diode, Signal, BAV99	3198 010 10620
	6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002
	6401	Zener Diode, 68 volt	3198 010 26890
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148.	3198 010 10010
	6448	Zener Diode, 6.2 volt.	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6452	Diode, Signal, BAS316.	3198 010 10630
	6453	Zener Diode, 5.6 volt.	3198 020 55680
	6460	Diode, Rect, DG3-7005L	9336 436 10682
	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
	6462	Zener Diode, 12 volt	3198 010 21290
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316.	3198 010 10630
	6468	Diode, Signal, BAS316.	3198 010 10630
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt.	3198 010 25680
	6482	Zener Diode, 9.1 volt.	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYV95C.	9335 001 80133
	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6487	Diode, Rect, BYV95A.	9335 000 90133
	6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6490	Diode, Rect, BYV95C.	9335 001 80133
	6500	Diode, Bridge Rect, GBU4JL-7002.	9322 132 55667
	6520	Diode, Rect, BYV95A.	9335 000 90133
	6523	Diode, Signal, 1N4148.	3198 010 10010
	6524	Diode, Rect, 1N5062.	3198 010 10120
	6525	Diode, Rect, 1N5062.	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt.	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500.	9340 555 59127
	6563	Diode, Signal, BAS316.	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148.	3198 010 10010
	6569	Diode, Signal, BAS316.	3198 010 10630
	6570	Zener Diode, 6.8 volt.	3198 020 56880
	6580	Diode, Signal, BAS316.	3198 010 10630
	6582	Diode, Rect, STPS10L60D.	9322 175 70667
	6831	Diode, Signal, 1N4148.	3198 010 10010
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7000	IC, TDA8941P/N1.	9352 628 51112
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7102	Transistor, PNP, BC857B(COL)	3198 010 42150
	7103	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9588H/N1/3I/1299.	9352 742 87557
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7360	Transistor, NPN, BC847B(COL)	3198 010 42030
	7366	Transistor, PNP, 2SA965.	9322 167 18676
	7369	Transistor, PNP, BC857B(COL)	3198 010 42150
	7373	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7380	Transistor, NPN, 2SC2235	9322 167 19676
	7382	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7400	Power FET, STP3NC60FP.	9322 157 37687
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7444	Transistor, NPN, BC547B(COL)	3198 020 40030
	7450	Transistor, PNP, PDTA114ET	3198 010 44010
	7460	Transistor, NPN, BU4508DX.	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2.	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1.	9352 673 56112
	7521	Power FET, FQPF9N50.	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, L78L33ACZ.	9322 134 92676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C08-WBN6.	9322 154 38682
	7606	Transistor, NPN, PDTC143ZT	9340 547 00215
	7802	IC, HEF4053BT.	9333 729 60653
	7803	IC, HEF4053BT.	9333 729 60653
	7804	Transistor, NPN, BC847B(COL)	3198 010 42030
	7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682
	7901	IC, AN7580	9322 166 29682
	7903	Transistor, NPN, BC847B(COL)	3198 010 42030
	9001	Wire Jumper.	3198 036 90010
	9101	Wire Jumper.	3198 036 90010
	9102	Wire Jumper.	3198 036 90010
	9103	Wire Jumper.	3198 036 90010
	9104	Wire Jumper.	3198 036 90010
	9123	Wire Jumper.	3198 036 90010
	9160	Wire Jumper.	3198 036 90010
	9171	Wire Jumper.	3198 036 90010
	9173	Wire Jumper.	3198 036 90010
	9175	Wire Jumper.	3198 036 90010
	9176	Wire Jumper.	3198 036 90010
	9178	Wire Jumper.	3198 036 90010
	9179	Wire Jumper.	3198 036 90010
	9181	Wire Jumper.	3198 036 90010
	9182	Wire Jumper.	3198 036 90010
	9183	Wire Jumper.	3198 036 90010
	9192	Wire Jumper.	3198 036 90010
	9193	Wire Jumper.	3198 036 90010
	9311	Wire Jumper.	3198 036 90010
	9312	Wire Jumper.	3198 036 90010
	9313	Wire Jumper.	3198 036 90010
	9314	Wire Jumper.	3198 036 90010
	9406	Wire Jumper.	3198 036 90010
	9407	Wire Jumper.	3198 036 90010
	9408	Wire Jumper.	3198 036 90010
	9409	Wire Jumper.	3198 036 90010
	9410	Wire Jumper.	3198 036 90010
	9411	Wire Jumper.	3198 036 90010
	9412	Wire Jumper.	3198 036 90010
	9413	Wire Jumper.	3198 036 90010
	9414	Wire Jumper.	3198 036 90010
	9415	Wire Jumper.	3198 036 90010
	9416	Wire Jumper.	3198 036 90010
	9417	Wire Jumper.	3198 036 90010
	9418	Wire Jumper.	3198 036 90010
	9419	Wire Jumper.	3198 036 90010
	9420	Wire Jumper.	3198 036 90010
	9421	Wire Jumper.	3198 036 90010
	9422	Wire Jumper.	3198 036 90010
	9425	Wire Jumper.	3198 036 90010
	9427	Wire Jumper.	3198 036 90010
	9453	Wire Jumper.	3198 036 90010
	9462	Wire Jumper.	3198 036 90010
	9464	Wire Jumper.	3198 036 90010
	9500	Wire Jumper.	3198 036 90010
	9501	Wire Jumper.	3198 036 90010
	9503	Wire Jumper.	3198 036 90010
	9506	Wire Jumper.	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

Ref	Description	Part No.
9507	Wire Jumper	3198 036 90010
9511	Wire Jumper	3198 036 90010
9512	Wire Jumper	3198 036 90010
9513	Wire Jumper	3198 036 90010
9514	Wire Jumper	3198 036 90010
9515	Wire Jumper	3198 036 90010
9516	Wire Jumper	3198 036 90010
9518	Wire Jumper	3198 036 90010
9520	Wire Jumper	3198 036 90010
9521	Wire Jumper	3198 036 90010
9522	Wire Jumper	3198 036 90010
9524	Wire Jumper	3198 036 90010
9528	Wire Jumper	3198 036 90010
9530	Wire Jumper	3198 036 90010
9611	Coil, 27u, 10%	3198 018 22790
9612	Wire Jumper	3198 036 90010
9613	Wire Jumper	3198 036 90010
9614	Wire Jumper	3198 036 90010
9615	Wire Jumper	3198 036 90010
9618	Wire Jumper	3198 036 90010
9619	Wire Jumper	3198 036 90010
9620	Wire Jumper	3198 036 90010
9621	Wire Jumper	3198 036 90010
9622	Wire Jumper	3198 036 90010
9623	Wire Jumper	3198 036 90010
9624	Wire Jumper	3198 036 90010
9626	Wire Jumper	3198 036 90010
9627	Wire Jumper	3198 036 90010
9628	Wire Jumper	3198 036 90010
9629	Wire Jumper	3198 036 90010
9631	Wire Jumper	3198 036 90010
9632	Wire Jumper	3198 036 90010
9633	Wire Jumper	3198 036 90010
9635	Wire Jumper	3198 036 90010
9636	Wire Jumper	3198 036 90010
9637	Wire Jumper	3198 036 90010
9638	Wire Jumper	3198 036 90010
9639	Wire Jumper	3198 036 90010
9640	Wire Jumper	3198 036 90010
9641	Wire Jumper	3198 036 90010
9642	Wire Jumper	3198 036 90010
9643	Wire Jumper	3198 036 90010
9648	Wire Jumper	3198 036 90010
9650	Wire Jumper	3198 036 90010
9651	Wire Jumper	3198 036 90010
9652	Wire Jumper	3198 036 90010
9654	Wire Jumper	3198 036 90010
9655	Wire Jumper	3198 036 90010
9656	Wire Jumper	3198 036 90010
9657	Wire Jumper	3198 036 90010
9658	Wire Jumper	3198 036 90010
9659	Wire Jumper	3198 036 90010
9660	Wire Jumper	3198 036 90010
9661	Wire Jumper	3198 036 90010
9662	Wire Jumper	3198 036 90010
9663	Wire Jumper	3198 036 90010
9664	Wire Jumper	3198 036 90010
9665	Wire Jumper	3198 036 90010
9666	Wire Jumper	3198 036 90010
9667	Wire Jumper	3198 036 90010
9668	Wire Jumper	3198 036 90010
9669	Wire Jumper	3198 036 90010
9670	Wire Jumper	3198 036 90010
9671	Wire Jumper	3198 036 90010
9672	Coil, 22u, 10%	3198 018 22290
9674	Wire Jumper	3198 036 90010
9675	Wire Jumper	3198 036 90010
9676	Wire Jumper	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper	3198 036 90010
9680	Wire Jumper	3198 036 90010
9681	Wire Jumper	3198 036 90010
9682	Wire Jumper	3198 036 90010
9683	Wire Jumper	3198 036 90010
9685	Wire Jumper	3198 036 90010
9686	Wire Jumper	3198 036 90010
9687	Wire Jumper	3198 036 90010
9688	Wire Jumper	3198 036 90010
9689	Wire Jumper	3198 036 90010
9690	Wire Jumper	3198 036 90010
9691	Wire Jumper	3198 036 90010
9694	Wire Jumper	3198 036 90010
9695	Wire Jumper	3198 036 90010
9697	Wire Jumper	3198 036 90010
9698	Wire Jumper	3198 036 90010
9699	Wire Jumper	3198 036 90010
9821	Wire Jumper	3198 036 90010
9822	Wire Jumper	3198 036 90010
9825	Wire Jumper	3198 036 90010
9828	Wire Jumper	3198 036 90010
9829	Wire Jumper	3198 036 90010
9831	Wire Jumper	3198 036 90010
9832	Wire Jumper	3198 036 90010
9837	Wire Jumper	3198 036 90010
9838	Wire Jumper	3198 036 90010
9839	Wire Jumper	3198 036 90010
9846	Wire Jumper	3198 036 90010
9847	Wire Jumper	3198 036 90010
9848	Wire Jumper	3198 036 90010
9849	Wire Jumper	3198 036 90010
9851	Wire Jumper	3198 036 90010
9855	Wire Jumper	3198 036 90010
9856	Wire Jumper	3198 036 90010
9857	Wire Jumper	3198 036 90010
9858	Wire Jumper	3198 036 90010
9859	Wire Jumper	3198 036 90010
9860	Wire Jumper	3198 036 90010
9862	Wire Jumper	3198 036 90010
9863	Wire Jumper	3198 036 90010
9864	Wire Jumper	3198 036 90010
9865	Wire Jumper	3198 036 90010
9867	Wire Jumper	3198 036 90010
9868	Wire Jumper	3198 036 90010
9869	Wire Jumper	3198 036 90010
9870	Wire Jumper	3198 036 90010
9871	Wire Jumper	3198 036 90010
9873	Wire Jumper	3198 036 90010
9874	Wire Jumper	3198 036 90010
9875	Wire Jumper	3198 036 90010
9876	Wire Jumper	3198 036 90010
9877	Wire Jumper	3198 036 90010
9878	Wire Jumper	3198 036 90010
9901	Wire Jumper	3198 036 90010
9902	Wire Jumper	3198 036 90010
9903	Wire Jumper	3198 036 90010
9904	Wire Jumper	3198 036 90010
9911	Wire Jumper	3198 036 90010
9913	Wire Jumper	3198 036 90010
9914	Wire Jumper	3198 036 90010
9915	Wire Jumper	3198 036 90010
9923	Wire Jumper	3198 036 90010
9991	Wire Jumper	3198 036 90010
9993	Wire Jumper	3198 036 90010
9996	Wire Jumper	3198 036 90010
9997	Wire Jumper	3198 036 90010
9998	Wire Jumper	3198 036 90010
CBA	Main Chassis Assembly	3141 058 59221

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

Ref	Description	Part No.
0266	6 Pin Connector	2422 025 16609
2401	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2402	Cap, 4u7, 20%, 35v, Electrolytic	3198 028 44780
2403	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2407	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2408	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2409	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2411	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
2412	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
2413	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2414	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2415	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2416	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2419	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2420	Cap, 180p, 5%, 50v, Ceramic	3198 016 31810
2425	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2426	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2427	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2428	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
2429	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
2430	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2431	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
2432	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2433	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2434	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2435	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2436	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2440	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
2442	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2443	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2450	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
2452	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2453	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
3401	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3402	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3403	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3404	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3405	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3406	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3407	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
3408	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210

30PW633F35A (continued)

	Ref	Description	Part No.
	3412	Res, 510K, 5%, 1/10W, Metalized Glass.	2122 118 05951
	3419	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
	3425	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3427	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3431	Res, 8K2, 1%, 1/16W, Metalized Glass	2322 704 68202
	3432	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
	3440	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
	3441	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3442	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
	3443	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
	3444	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
	3450	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
	3451	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3452	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
	3453	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
	3454	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
	3455	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
	3456	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3457	Wire Jumper.	3198 036 90010
	3458	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4403	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	5401	Coil, 10u, 10%	3198 018 31090
	5407	Coil, 33u, 5%.	3198 018 13390
	5408	Coil, 33u, 20%	3198 018 33390
	5421	Inductor, 100 MHz, 120 ohm	3198 018 90070
	5425	Coil, 10u, 10%	3198 018 31090
	5428	Coil, 10u, 5%.	3198 018 11090
	5429	Coil, 10u, 10%	3198 018 31090
	5430	Coil, 10u, 10%	3198 018 31090
	5440	Coil, 10u, 10%	3198 018 31090
	5442	Coil, 22u, 5%.	3198 018 12290
	5450	Coil, 10u, 10%	3198 018 31090
	5452	Coil, 33u, 5%.	3198 018 13390
	7401	Transistor, PNP, BC857B(COL)	3198 010 42150
	7402	Transistor, NPN, BC847B(COL)	3198 010 42030
	7403	Transistor, NPN, BC847B(COL)	3198 010 42030
	7421	IC, TC90A53N	9322 182 18682
	7440	Transistor, NPN, BC847B(COL)	3198 010 42030
	7444	Transistor, NPN, BC847B(COL)	3198 010 42030
	7450	Transistor, NPN, BC847B(COL)	3198 010 42030
	7454	Transistor, NPN, BC847B(COL)	3198 010 42030
	9401	Wire Jumper.	3198 036 90010
	9402	Wire Jumper.	3198 036 90010
	9403	Wire Jumper.	3198 036 90010
	CBA	2D 3 Line Comb Filter Assembly	3139 177 26561

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

	Ref	Description	Part No.
S	0211	2 Pin Connector.	2422 025 16268
S	0212	2 Pin Connector.	2422 025 16559
	0214	5 Pin Connector.	2422 025 06353
	1606	Tact Switch.	2422 128 02742
	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2692	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
	2693	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
	2694	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
	2695	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
	2698	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
S	3500	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322 242 13335
S	3501	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322 242 13335
	3685	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
	3691	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
	3693	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
	6691	LED, LTL-10234WHCR	9322 185 69682
	6692	IR Receiver, TSOP1836UH3V.	9322 127 54667
	9001	Wire Jumper.	3198 036 90010
	9002	Wire Jumper.	3198 036 90010
	CBA	Front Interface Panel Assembly	3139 177 26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts

Side Jack Panel Parts

	Ref	Description	Part No.
	0232	Headphone Jack	2422 026 04747
	0250	A/V Jack	2422 026 04815
	0251	6 Pin Connector.	2422 025 12482
	0254	5 Pin Connector.	2422 025 12481
	0255	4 Pin Connector.	2422 025 12479
	2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2176	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
	2177	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2178	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
	2179	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
	3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
	3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
	3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
	4817	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4819	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4821	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4822	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6161	Zener Diode, 6.8 volt.	3198 010 26880
	9151	Wire Jumper.	3198 036 90010
	9152	Wire Jumper.	3198 036 90010
	9153	Wire Jumper.	3198 036 90010
	9170	Wire Jumper.	3198 036 90030
	CBA	Side Jack Panel Assembly	3139 187 15141

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

	Ref	Description	Part No.
	0215	3 Pin Connector.	2422 025 16601
	1091	Tact Switch.	2422 128 02742
	1092	Tact Switch.	2422 128 02742
	1093	Tact Switch.	2422 128 02742
	1094	Tact Switch.	2422 128 02742
	3091	Res, 560 ohm, 5%, Metalized Glass.	3198 021 35610
	3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
	3093	Res, 560 ohm, 5%, Metalized Glass.	3198 021 35610
	3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
	3095	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3096	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
	4085	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4089	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4090	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	6091	Diode, Signal.	9340 453 90115
	CBA	Top Control Panel Assembly	3139 187 15841

Cabinet & Accessory Parts

Cabinet & Accessory Parts

	Ref	Description	Part No.
S	AC01	AC Cord.	3135 010 03831
	AC03	Anode Lead Spacer (3 Used)	3135 014 04471
	AC04	Batteries for Remote Control Transmitte	9299 000 65263
	AC05	Cabinet Back	3139 124 46431
	AC06	Cabinet Back Screw Cover (2 Used).	3139 124 45431
	AC07	Canceller Coil	3128 138 60581
	AC08	Chassis Tray	3139 124 31325
S	AC09	CRT, W76ERF942X013	9301 909 10314
	AC13	Front Interface Panel Bracket.	3139 124 32891
	AC15	Holder, Degaussing Coil (4 Used)	3135 013 01661
	AC17	Owner's Manual	3121 235 21291
	AC18	Quick Use Guide.	3121 233 44851
	AC19	Side Jack Panel Bracket.	3139 124 37061
	AC20	Cabinet Front Assembly	3121 237 53521
	AC20A	Cabinet Front.	3139 124 43361
	AC20A	Cabinet Front.	3139 177 56121
	AC20C	Light Guide.	3139 124 39701
	AC20D	Nameplate.	3141 050 00161
	AC20E	Power Button	3139 138 10881
	AC20H	Speaker, 8 ohm, 10W (2 Used)	3139 128 76081
	AC20J	Top Control Assembly	3139 138 11451
	REMOTE	Remote Control Transmitter, RC19036002/ 01A.	3139 238 04313

S = Safety Part   Be sure to use exact replacement part.

30PW633R37A - Manual no. 7638

Main Chassis Parts

Main Chassis Parts

S	Ref	Description	Part No.
	0211	2 Pin Connector	2422 025 16374
	0212	2 Pin Connector	2422 025 16375
	0214	5 Pin Connector	2422 025 12481
	0219	6 Pin Connector	2422 025 12482
	0220	5 Pin Connector	2422 025 04853
	0221	2 Pin Connector	2422 025 15503
	0222	2 Pin Connector	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack	2422 026 04926
	0239	3 Pin Connector	2422 025 16382
	0243	6 Pin Connector	2422 025 04854
	0244	5 Pin Connector	2422 025 04853
	0245	6 Pin Connector	2422 025 04854
	0246	5 Pin Connector	2422 025 12481
S	0256	9 Pin CRT Socket	2422 500 80053
	0267	3 Pin Connector	2412 020 00725
	0268	3 Pin Connector	2412 020 00725
	0269	Jack	2422 026 05182
	0278	3 Pin Connector	2412 020 00725
S	1000	Tuner, V+U, PLL	2422 542 90108
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1400	Relay, 5 Amp, 12V.	2422 132 07543
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1660	Crystal, 12MHz000	2422 543 01203
	1831	Crystal, Resonator, 18MHz432, 12 Pin, HC49/U A.	2422 543 00842
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852
	2172	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2173	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2209	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 2u2, 20%, 10v, Electrolytic	2020 012 93728
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2243	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2247	Cap, 2u2, 20%, 10v, Electrolytic	2020 012 93728
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
S	2346	Cap, 470p, 10%, 2000v, Ceramic	2020 558 90483
	2360	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2362	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
	2364	Cap, 27p, 5%, 50v, Ceramic	3198 016 32790
	2365	Cap, 27p, 5%, 50v, Ceramic	3198 016 32790
	2366	Cap, 27p, 5%, 50v, Ceramic	3198 016 32790
	2367	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2368	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2369	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2372	Cap, 10u, 20%, 160v, Electrolytic.	2020 012 93318
	2373	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2375	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2378	Cap, 220p, 5%, 50v, Ceramic.	3198 019 02210
	2379	Cap, 10u, 20%, 100v, Electrolytic.	3198 025 71090
	2380	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2381	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2401	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
	2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2420	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2421	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
	2451	Cap, 22n, 10%, 50v, Polyester.	3198 014 02230
	2454	Cap, 68n, 5%, 250v, Metalized Polypropylene	2222 479 90133
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 470n, 5%, 250v, Metalized Polypropylene.	2022 333 00086
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
S	2463	Cap, 390p, 10%, 2000v, Ceramic	2020 558 90482
S	2465	Cap, 13n, 5%, 1600v, Polypropylene	2020 301 90254
	2467	Cap, 9n1, 5%, 1000v, Polypropylene	2222 375 90424
	2468	Cap, 9n1, 5%, 1000v, Polypropylene	2222 375 90424
	2469	Cap, 430n, 5%, 250v, Metalized Polypropylene.	2022 333 00164
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2490	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91374
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240

S = Safety Part   Be sure to use exact replacement part.

30PW633R37A (continued)

2602 Cap, 100p, 5%, 50v, Ceramic. 3198 016 31010
2604 Cap, 10u, 20%, 50v, Electrolytic . . . 3198 025 51090
2606 Cap, 1n, 5%, 25v, Ceramic. 3198 016 31020
2607 Cap, 33p, 5%, 50v, Ceramic 3198 016 33390
2608 Cap, 1u, +80/-20%, 10v, Ceramic. . . . 3198 017 41050
2609 Cap, 33p, 5%, 50v, Ceramic 3198 016 33390
2611 Cap, 1u, +80/-20%, 10v, Ceramic. . . . 3198 017 41050
2612 Cap, 68p, 5%, 50v, Ceramic 3198 016 36890
2613 Cap, 68p, 5%, 50v, Ceramic 3198 016 36890
2615 Cap, 1n, 10%, 50v, Ceramic 3198 017 31020
2618 Cap, 1u, +80/-20%, 10v, Ceramic. . . . 3198 017 41050
2619 Cap, 1u, +80/-20%, 16v, Ceramic. . . . 3198 017 21050
2802 Cap, 220n, +80/-20%, 16v, Ceramic. . . 3198 017 42240
2810 Cap, 2u2, +80/-20%, 10v, Ceramic . . . 3198 017 22250
2813 Cap, 2u2, +80/-20%, 10v, Ceramic . . . 3198 017 22250
2831 Cap, 1p, 25%, 50v, Ceramic 3198 016 31080
2832 Cap, 1p, 25%, 50v, Ceramic 3198 016 31080
2833 Cap, 47p, 5%, 50v, Ceramic 3198 016 34790
2834 Cap, 470p, 5%, 50v, Ceramic. 3198 016 34710
2835 Cap, 220p, 5%, 50v, Ceramic. 3198 016 32210
2836 Cap, 1n5, 10%, 50v, Ceramic. 3198 017 31520
2837 Cap, 4u7, 20%, 50v, Electrolytic . . . 3198 025 54780
2840 Cap, 100n, +80/-20%, 25v, Ceramic. . . 3198 023 41040
2841 Cap, 10u, 20%, 50v, Electrolytic . . . 3198 025 51090
2842 Cap, 100n, +80/-20%, 25v, Ceramic. . . 3198 023 41040
2843 Cap, 10u, 20%, 50v, Electrolytic . . . 3198 025 51090
2844 Cap, 10u, 20%, 50v, Electrolytic . . . 3198 025 51090
2845 Cap, 100n, +80/-20%, 25v, Ceramic. . . 3198 023 41040
2846 Cap, 100u, 20%, 25v, Electrolytic. . . 3198 025 31010
2849 Cap, 1n, 5%, 25v, Ceramic. 3198 016 31020
2850 Cap, 1n, 5%, 25v, Ceramic. 3198 016 31020
2852 Cap, 1n, 5%, 25v, Ceramic. 3198 016 31020
2854 Cap, 1n, 5%, 25v, Ceramic. 3198 016 31020
2855 Cap, 33p, 5%, 50v, Ceramic 3198 016 33390
2856 Cap, 47p, 5%, 50v, Ceramic 3198 016 34790
2857 Cap, 150p, 5%, 50v, Ceramic. 3198 016 31510
2860 Cap, 180p, 5%, 50v, Ceramic. 3198 016 31810
2894 Cap, 220p, 5%, 50v, Ceramic. 3198 016 32210
2895 Cap, 560p, 5%, 25v, Ceramic. 3198 016 35610
2897 Cap, 390p, 5%, 50v, Ceramic. 3198 016 33910
2898 Cap, 10n, 10%, 50v, Ceramic. 3198 017 31030
2902 Cap, 1000u, 20%, 25v, Electrolytic . . 3198 026 31020
2903 Cap, 1u, 20%, 50v, Electrolytic. . . . 3198 025 51080
2904 Cap, 470n, +80/-20%, 16v, Ceramic. . . 3198 017 24740
2905 Cap, 1n, 10%, 50v, Ceramic 3198 017 31020
2906 Cap, 470n, +80/-20%, 16v, Ceramic. . . 3198 017 24740
2907 Cap, 1n, 10%, 50v, Ceramic 3198 017 31020
2908 Cap, 10u, 20%, 50v, Electrolytic . . . 3198 025 51090
3000 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3001 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3002 Res, Zero ohm, "Chip" Jumper 3198 021 90030
3003 Res, 1K5, 5%, 1/16W, Metalized Glass . 3198 021 31520
3004 Res, 8K2, 5%, 1/16W, Metalized Glass . 3198 021 38220
3005 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3101 Res, 68 ohm, 5%, 1/6W, Carbon Film . . 3198 011 06890
3102 Res, 1K, 5%, 1/16W, Metalized Glass. . 3198 021 31020
3103 Res, 150 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01510
3104 Res, 220K, 5%, 1/16W, Metalized Glass. 3198 021 32240
3105 Res, 150 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01510
3106 Res, 220K, 5%, 1/16W, Metalized Glass. 3198 021 32240
3111 Res, 75 ohm, 5%, 1/6W, Carbon Film . . 3198 011 07590
3112 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3113 Res, 75 ohm, 5%, 1/6W, Carbon Film . . 3198 011 07590
3114 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3115 Res, 75 ohm, 5%, 1/6W, Carbon Film . . 3198 011 07590
3116 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3123 Res, 150 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01510
3124 Res, 47K, 5%, 1/16W, Metalized Glass . 3198 021 34730
3125 Res, 150 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01510
3126 Res, 47K, 5%, 1/16W, Metalized Glass . 3198 021 34730
3131 Res, 150 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01510
3132 Res, 47K, 5%, 1/16W, Metalized Glass . 3198 021 34730
3133 Res, 150 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01510
3134 Res, 47K, 5%, 1/16W, Metalized Glass . 3198 021 34730
3135 Res, 75 ohm, 5%, 1/6W, Carbon Film . . 3198 011 07590
3136 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3141 Res, 1K, 5%, 1/6W, Carbon Film 3198 011 01020
3149 Res, 100K, 5%, 1/16W, Metalized Glass. 3198 021 31040
3150 Res, 150K, 5%, 1/16W, Metalized Glass. 3198 021 31540
3154 Res, 5K6, 5%, 1/6W, Carbon Film. . . . 3198 011 05620
3156 Res, 10K, 5%, 1/6W, Carbon Film. . . . 3198 011 01030
3157 Res, 1K5, 5%, 1/16W, Metalized Glass . 3198 021 31520
3158 Res, 10K, 5%, 1/16W, Metalized Glass . 3198 021 31030
3159 Res, 1K2, 1%, 1/8W, Metalized Glass. . 2322 734 61202
3172 Res, 6K8, 5%, 1/6W, Carbon Film. . . . 3198 011 06820
3180 Res, 68K, 5%, 1/16W, Metalized Glass . 3198 021 36830
3181 Res, 120K, 5%, Metalized Glass 2322 702 60124
3190 Res, 68K, 5%, 1/16W, Metalized Glass . 3198 021 36830
3200 Res, 390 ohm, 5%, 1/6W, Carbon Film. . 3198 011 03910
3201 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3202 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3203 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3204 Res, 22K, 5%, 1/6W, Carbon Film. . . . 3198 011 02230
3205 Res, 1K, 5%, 1/16W, Metalized Glass. . 3198 021 31020
3206 Res, 220K, 5%, 1/16W, Metalized Glass. 3198 021 32240
3207 Res, 1K, 5%, 1/6W, Carbon Film 3198 011 01020
3208 Res, 220 ohm, 5%, 1/16W, Metalized Glas 3198 021 32210
3209 Res, 68 ohm, 5%, 1/16W, Metalized Glass 3198 021 36890
3212 Res, 470 ohm, 5%, 1/16W, Metalized Glas 3198 021 34710
3213 Res, 560 ohm, 5%, 1/6W, Carbon Film. . 3198 011 05610
3217 Res, 330K, 5%, 1/16W, Metalized Glass. 3198 021 33340
3218 Res, 82K, 5%, 1/16W, Metalized Glass . 3198 021 38230
3219 Res, 2K2, 5%, 1/16W, Metalized Glass . 3198 021 32220
3220 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3221 Res, 560 ohm, 5%, 1/6W, Carbon Film. . 3198 011 05610
3222 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3226 Res, 560 ohm, 5%, 1/16W, Metalized Glas 3198 021 35610
3235 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3241 Res, 22K, 5%, 1/16W, Metalized Glass . 3198 021 32230
3242 Res, 27K, 5%, 1/16W, Metalized Glass . 3198 021 32730
3244 Res, 820 ohm, 5%, 1/6W, Carbon Film. . 3198 011 08210
3245 Res, 39K, 1%, 1/16W, Metalized Glass . 2322 704 63903
3246 Res, 10K, 5%, 1/16W, Metalized Glass . 3198 021 31030
3247 Res, 560K, 5%, Metalized Glass 2322 702 60564
3248 Res, 33K, 5%, 1/16W, Metalized Glass . 3198 021 33330
3249 Res, 820 ohm, 5%, 1/6W, Carbon Film. . 3198 011 08210
3250 Res, 1K, 5%, 1/6W, Carbon Film 3198 011 01020
3251 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3256 Res, 1K, 5%, 1/16W, Metalized Glass. . 3198 021 31020
3257 Res, 10M, 5%, 1/16W, Metalized Glass . 3198 021 31060
3258 Res, 100K, 5%, 1/16W, Metalized Glass. 3198 021 31040
3259 Res, 470K, 5%, 1/16W, Metalized Glass. 3198 021 34740
3331 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3332 Res, 1K, 20%, 1/2W, Carbon Film. . . . 3198 013 01020
3333 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3334 Res, 1K, 20%, 1/2W, Carbon Film. . . . 3198 013 01020
3335 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3336 Res, 1K, 20%, 1/2W, Carbon Film. . . . 3198 013 01020
3340 Res, 10 ohm, 5%, 1/2W, Metal Film. . . 2306 207 03109
3341 Res, 4R7, 5%, 1/3W, Metal Film 2306 204 03478
3342 Res, 4R7, 5%, 1/3W, Metal Film 2306 204 03478
3343 Res, 1K5, 20%, 1/2W, Carbon Film . . . 3198 013 01520
3344 Res, 33 ohm, 5%, 1/6W, Carbon Film . . 3198 011 03390
S 3345 Varactor, 1MA/50V, Max 115V. 2322 593 13507
3346 Res, 33 ohm, 5%, 1/6W, Carbon Film . . 3198 011 03390
3360 Res, 39K, 5%, 1/16W, Metalized Glass . 3198 021 33930
3361 Res, 10K, 5%, 1/16W, Metalized Glass . 3198 021 31030
3362 Res, 39K, 5%, 1/16W, Metalized Glass . 3198 021 33930
3363 Res, 220 ohm, 5%, 1/16W, Metalized Glas 3198 021 32210
3367 Res, 10K, 5%, 1/6W, Carbon Film. . . . 3198 011 01030
3368 Res, 220 ohm, 5%, 1/6W, Carbon Film. . 3198 011 02210
3369 Res, 2K2, 5%, 1/16W, Metalized Glass . 3198 021 32220
3373 Res, 1K, 5%, 1/16W, Metalized Glass. . 3198 021 31020
3374 Res, 2R2, 5%, 1/6W, Carbon Film. . . . 3198 011 02280
3375 Res, 27K, 5%, 1/16W, Metalized Glass . 3198 021 32730
3376 Res, 68K, 5%, 1/6W, Carbon Film. . . . 3198 011 06830
3377 Res, 470 ohm, 5%, 1/6W, Carbon Film. . 3198 011 04710
3378 Res, 470 ohm, 5%, 1/10W, Metalized Glas 3198 021 54710
3380 Res, 68K, 5%, 1/16W, Metalized Glass . 3198 021 36830
3381 Res, 27K, 5%, 1/16W, Metalized Glass . 3198 021 32730
3383 Res, 1K, 5%, 1/16W, Metalized Glass. . 3198 021 31020
3384 Res, 2R2, 5%, 1/6W, Carbon Film. . . . 3198 011 02280
3385 Res, 10K, 5%, 5W, Metal Film 2322 257 41103
S 3386 Res, 10 ohm, 5%, 1/3W, Metal Film. . . 2306 204 03109
3400 Res, 330 ohm, 5%, 1/6W, Carbon Film. . 3198 011 03310
3401 Res, 82K, 5%, 1/6W, Carbon Film. . . . 3198 011 08230
3403 Res, 100K, 5%, 1/6W, Carbon Film . . . 3198 011 01040
3404 Res, 1K, 5%, 1/6W, Carbon Film 3198 011 01020
3405 Res, 4R7, 5%, 1/6W, Carbon Film. . . . 3198 011 04780
3406 Res, 4R7, 5%, 1/6W, Carbon Film. . . . 3198 011 04780
3407 Res, 4R7, 5%, 1/6W, Carbon Film. . . . 3198 011 04780
3408 Res, 10K, 5%, 1/6W, Carbon Film. . . . 3198 011 01030
3410 Res, 10K, 5%, 1/6W, Carbon Film. . . . 3198 011 01030
3411 Res, 4R7, 5%, 1/3W, Metal Film 2306 204 03478
3441 Res, 100 ohm, 5%, 1/10W, Metalized Glas 3198 021 51010
3442 Res, Zero ohm, "Chip" Jumper 3198 021 90030
3443 Res, 1M, 5%, 1/16W, Metalized Glass. . 3198 021 31050
3445 Res, 15K, 5%, 1/6W, Carbon Film. . . . 3198 011 01530
3446 Res, 5K6, 5%, 1/6W, Carbon Film. . . . 3198 011 05620
3447 Res, 180 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01810
3448 Res, 820 ohm, 5%, 1/6W, Carbon Film. . 3198 011 08210
3449 Res, 68 ohm, 5%, 1/6W, Carbon Film . . 3198 011 06890
3450 Res, 33 ohm, 5%, 1/6W, Carbon Film . . 3198 011 03390
3451 Res, 4R7, 5%, 1/3W, Metal Film 2306 204 03478
S 3452 Res, 5K6, 1%, 3/5W, Metal Film 2312 915 15602
3453 Res, 1K, 5%, 1/6W, Carbon Film 3198 011 01020
3454 Res, 2K, 1%, 3/5W, Metal Film. 2312 915 12002
S 3455 Res, 6R8, 5%, 1 1/3W, Metal Film . . . 3198 012 26880
3456 Res, Zero ohm, "Chip" Jumper 3198 021 90030
3457 Res, Zero ohm, "Chip" Jumper 3198 021 90030
3458 Res, 1K, 5%, 1/6W, Carbon Film 3198 011 01020
S 3459 Res, 15K, 5%, 1 1/3W, Metal Film . . . 3198 012 21530
3460 Res, 3K9, 5%, 1/6W, Carbon Film. . . . 3198 011 03920
3463 Res, 33 ohm, 5%, 1/6W, Carbon Film . . 3198 011 03390

S = Safety Part Be sure to use exact replacement part.

30PW633R37A (continued)

S	Ref	Description	Part No.
	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
	3468	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
	3470	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
	3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3473	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
	3481	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
	3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S	3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 32290
	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3489	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3491	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198 021 53320
	3492	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
S	3493	Res, 2R2, 5%, 1/3W, Metal Film	2306 204 03228
	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
S	3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
S	3523	Res, 47 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03479
	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
	3527	Res, 0R15, 5%, 3/5W, Metal Film. . . .	3198 012 11570
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 33K, 5%, 1/10W, Metalized Glass .	3198 021 53330
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 8K2, 5%, 1/10W, Metalized Glass .	3198 021 58220
S	3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
S	3591	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3614	Res, 4K7, 5%, 1/6W, Carbon Film. . . .	3198 011 04720
	3615	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
	3617	Res, 4K7, 5%, 1/6W, Carbon Film. . . .	3198 011 04720
	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3619	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3831	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3843	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3901	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198 021 36820
	3903	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3905	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3909	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3910	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3912	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4311	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4312	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4313	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4837	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4838	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5202	Wire Jumper.	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5241	Wire Jumper.	3198 036 90010
	5242	Coil, 10u, 5%.	3198 018 11090
	5341	Coil, 22u.	2422 535 97333
	5342	Coil, 27u, 10%	3198 018 22790
	5376	Fixed, Inductor, 100MHz, 50R.	3198 018 90010

S = Safety Part   Be sure to use exact replacement part.

30PW633R37A (continued)

S	Ref	Description	Part No.
	5400	Coil, 11u7	2422 535 91027
S	5445	Transformer, LOT	2422 531 02612
	5451	Coil, 22u, 10%	3198 018 72290
	5452	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5453	Coil, 22u, 5%.	3198 018 12290
S	5457	Coil, 42u.	2422 535 94865
S	5461	Transformer, SD10207-00 B.	2422 531 02568
	5464	Coil, Bridge, C946-01 Y.	2422 531 02419
	5471	Coil, 6u8, 20%	3198 018 76880
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 10u, 10%	2422 535 97328
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS42204-00 B.	2422 531 02563
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5831	Coil, 6u8, 5%.	3198 018 16880
	5832	Coil, 6u8, 5%.	3198 018 16880
	5833	Coil, 6u8, 5%.	3198 018 16880
	5835	Coil, 12u, 10%	3198 018 31290
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316.	3198 010 10630
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630
	6206	Zener Diode, 6.8 volt.	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316.	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6365	Diode, Signal, BAT85	9336 247 60133
	6366	Diode, Signal, BAT85	9336 247 60133
	6367	Diode, Signal, BAV99	3198 010 10620
	6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002
	6401	Zener Diode, 68 volt	3198 010 26890
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148.	3198 010 10010
	6448	Zener Diode, 6.2 volt.	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6452	Diode, Signal, BAS316.	3198 010 10630
	6453	Zener Diode, 5.6 volt.	3198 020 55680
	6460	Diode, Rect, DG3-7005L	9336 436 10682
	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
	6462	Zener Diode, 12 volt	3198 010 21290
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316.	3198 010 10630
	6468	Diode, Signal, BAS316.	3198 010 10630
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt.	3198 010 25680
	6482	Zener Diode, 9.1 volt.	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYV95C.	9335 001 80133
	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6487	Diode, Rect, BYV95A.	9335 000 90133
	6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6490	Diode, Rect, BYV95C.	9335 001 80133
	6500	Diode, Bridge Rect, GBU4JL-7002.	9322 132 55667
	6520	Diode, Rect, BYV95A.	9335 000 90133
	6523	Diode, Signal, 1N4148.	3198 010 10010
	6524	Diode, Rect, 1N5062.	3198 010 10120
	6525	Diode, Rect, 1N5062.	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt.	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500.	9340 555 59127
	6563	Diode, Signal, BAS316.	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148.	3198 010 10010
	6569	Diode, Signal, BAS316.	3198 010 10630
	6570	Zener Diode, 6.8 volt.	3198 020 56880
	6580	Diode, Signal, BAS316.	3198 010 10630
	6582	Diode, Rect, STPS10L60D.	9322 175 70667
	6831	Diode, Signal, 1N4148.	3198 010 10010
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7000	IC, TDA8941P/N1.	9352 628 51112
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7102	Transistor, PNP, BC857B(COL)	3198 010 42150
	7103	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9588H/N1/3I/1298.	9352 742 85557
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7360	Transistor, NPN, BC847B(COL)	3198 010 42030
	7366	Transistor, PNP, 2SA965.	9322 167 18676
	7369	Transistor, PNP, BC857B(COL)	3198 010 42150
	7373	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7380	Transistor, NPN, 2SC2235	9322 167 19676
	7382	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7400	Power FET, STP3NC60FP.	9322 157 37687
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7444	Transistor, NPN, BC547B(COL)	3198 020 40030
	7450	Transistor, PNP, PDTA114ET	3198 010 44010
	7460	Transistor, NPN, BU4508DX.	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2.	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1.	9352 673 56112
	7521	Power FET, FQPF9N50.	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, L78L33ACZ.	9322 134 92676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C08-WBN6.	9322 154 38682
	7606	Transistor, NPN, PDTC143ZT	9340 547 00215
	7802	IC, HEF4053BT.	9333 729 60653
	7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682
	7901	IC, AN7580	9322 166 29682
	7903	Transistor, NPN, BC847B(COL)	3198 010 42030
	9001	Wire Jumper.	3198 036 90010
	9101	Wire Jumper.	3198 036 90010
	9102	Wire Jumper.	3198 036 90010
	9103	Wire Jumper.	3198 036 90010
	9104	Wire Jumper.	3198 036 90010
	9123	Wire Jumper.	3198 036 90010
	9160	Wire Jumper.	3198 036 90010
	9171	Wire Jumper.	3198 036 90010
	9173	Wire Jumper.	3198 036 90010
	9175	Wire Jumper.	3198 036 90010
	9176	Wire Jumper.	3198 036 90010
	9178	Wire Jumper.	3198 036 90010
	9179	Wire Jumper.	3198 036 90010
	9181	Wire Jumper.	3198 036 90010
	9182	Wire Jumper.	3198 036 90010
	9183	Wire Jumper.	3198 036 90010
	9192	Wire Jumper.	3198 036 90010
	9193	Wire Jumper.	3198 036 90010
	9311	Wire Jumper.	3198 036 90010
	9312	Wire Jumper.	3198 036 90010
	9313	Wire Jumper.	3198 036 90010
	9314	Wire Jumper.	3198 036 90010
	9406	Wire Jumper.	3198 036 90010
	9407	Wire Jumper.	3198 036 90010
	9408	Wire Jumper.	3198 036 90010
	9409	Wire Jumper.	3198 036 90010
	9410	Wire Jumper.	3198 036 90010
	9411	Wire Jumper.	3198 036 90010
	9412	Wire Jumper.	3198 036 90010
	9413	Wire Jumper.	3198 036 90010
	9414	Wire Jumper.	3198 036 90010
	9415	Wire Jumper.	3198 036 90010
	9416	Wire Jumper.	3198 036 90010
	9417	Wire Jumper.	3198 036 90010
	9418	Wire Jumper.	3198 036 90010
	9419	Wire Jumper.	3198 036 90010
	9420	Wire Jumper.	3198 036 90010
	9421	Wire Jumper.	3198 036 90010
	9422	Wire Jumper.	3198 036 90010
	9425	Wire Jumper.	3198 036 90010
	9427	Wire Jumper.	3198 036 90010
	9453	Wire Jumper.	3198 036 90010
	9462	Wire Jumper.	3198 036 90010
	9464	Wire Jumper.	3198 036 90010
	9500	Wire Jumper.	3198 036 90010
	9501	Wire Jumper.	3198 036 90010
	9503	Wire Jumper.	3198 036 90010
	9506	Wire Jumper.	3198 036 90010
	9507	Wire Jumper.	3198 036 90010
	9511	Wire Jumper.	3198 036 90010
	9512	Wire Jumper.	3198 036 90010
	9513	Wire Jumper.	3198 036 90010
	9514	Wire Jumper.	3198 036 90010
	9515	Wire Jumper.	3198 036 90010
	9516	Wire Jumper.	3198 036 90010
	9518	Wire Jumper.	3198 036 90010
	9520	Wire Jumper.	3198 036 90010
	9521	Wire Jumper.	3198 036 90010
	9522	Wire Jumper.	3198 036 90010
	9524	Wire Jumper.	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

30PW633R37A (continued)

Ref	Description	Part No.
9528	Wire Jumper	3198 036 90010
9530	Wire Jumper	3198 036 90010
9611	Coil, 27u, 10%	3198 018 22790
9612	Wire Jumper	3198 036 90010
9613	Wire Jumper	3198 036 90010
9614	Wire Jumper	3198 036 90010
9615	Wire Jumper	3198 036 90010
9618	Wire Jumper	3198 036 90010
9619	Wire Jumper	3198 036 90010
9620	Wire Jumper	3198 036 90010
9621	Wire Jumper	3198 036 90010
9622	Wire Jumper	3198 036 90010
9623	Wire Jumper	3198 036 90010
9626	Wire Jumper	3198 036 90010
9627	Wire Jumper	3198 036 90010
9628	Wire Jumper	3198 036 90010
9629	Wire Jumper	3198 036 90010
9631	Wire Jumper	3198 036 90010
9632	Wire Jumper	3198 036 90010
9633	Wire Jumper	3198 036 90010
9635	Wire Jumper	3198 036 90010
9636	Wire Jumper	3198 036 90010
9637	Wire Jumper	3198 036 90010
9638	Wire Jumper	3198 036 90010
9639	Wire Jumper	3198 036 90010
9640	Wire Jumper	3198 036 90010
9641	Wire Jumper	3198 036 90010
9642	Wire Jumper	3198 036 90010
9643	Wire Jumper	3198 036 90010
9648	Wire Jumper	3198 036 90010
9650	Wire Jumper	3198 036 90010
9652	Wire Jumper	3198 036 90010
9654	Wire Jumper	3198 036 90010
9655	Wire Jumper	3198 036 90010
9656	Wire Jumper	3198 036 90010
9657	Wire Jumper	3198 036 90010
9658	Wire Jumper	3198 036 90010
9659	Wire Jumper	3198 036 90010
9660	Wire Jumper	3198 036 90010
9661	Wire Jumper	3198 036 90010
9662	Wire Jumper	3198 036 90010
9663	Wire Jumper	3198 036 90010
9664	Wire Jumper	3198 036 90010
9665	Wire Jumper	3198 036 90010
9666	Wire Jumper	3198 036 90010
9667	Wire Jumper	3198 036 90010
9668	Wire Jumper	3198 036 90010
9669	Wire Jumper	3198 036 90010
9670	Wire Jumper	3198 036 90010
9671	Wire Jumper	3198 036 90010
9672	Coil, 22u, 10%	3198 018 22290
9674	Wire Jumper	3198 036 90010
9675	Wire Jumper	3198 036 90010
9676	Wire Jumper	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper	3198 036 90010
9680	Wire Jumper	3198 036 90010
9681	Wire Jumper	3198 036 90010
9683	Wire Jumper	3198 036 90010
9685	Wire Jumper	3198 036 90010
9686	Wire Jumper	3198 036 90010
9687	Wire Jumper	3198 036 90010
9688	Wire Jumper	3198 036 90010
9689	Wire Jumper	3198 036 90010
9690	Wire Jumper	3198 036 90010
9691	Wire Jumper	3198 036 90010
9694	Wire Jumper	3198 036 90010
9695	Wire Jumper	3198 036 90010
9697	Wire Jumper	3198 036 90010
9698	Wire Jumper	3198 036 90010
9699	Wire Jumper	3198 036 90010
9821	Wire Jumper	3198 036 90010
9822	Wire Jumper	3198 036 90010
9825	Wire Jumper	3198 036 90010
9828	Wire Jumper	3198 036 90010
9829	Wire Jumper	3198 036 90010
9831	Wire Jumper	3198 036 90010
9832	Wire Jumper	3198 036 90010
9837	Wire Jumper	3198 036 90010
9838	Wire Jumper	3198 036 90010
9839	Wire Jumper	3198 036 90010
9846	Wire Jumper	3198 036 90010
9847	Wire Jumper	3198 036 90010
9848	Wire Jumper	3198 036 90010
9849	Wire Jumper	3198 036 90010
9851	Wire Jumper	3198 036 90010
9855	Wire Jumper	3198 036 90010
9856	Wire Jumper	3198 036 90010
9857	Wire Jumper	3198 036 90010
9858	Wire Jumper	3198 036 90010
9859	Wire Jumper	3198 036 90010
9860	Wire Jumper	3198 036 90010
9862	Wire Jumper	3198 036 90010
9864	Wire Jumper	3198 036 90010
9865	Wire Jumper	3198 036 90010
9867	Wire Jumper	3198 036 90010
9868	Wire Jumper	3198 036 90010
9869	Wire Jumper	3198 036 90010
9873	Wire Jumper	3198 036 90010
9874	Wire Jumper	3198 036 90010
9875	Wire Jumper	3198 036 90010
9877	Wire Jumper	3198 036 90010
9901	Wire Jumper	3198 036 90010
9902	Wire Jumper	3198 036 90010
9903	Wire Jumper	3198 036 90010
9904	Wire Jumper	3198 036 90010
9911	Wire Jumper	3198 036 90010
9913	Wire Jumper	3198 036 90010
9914	Wire Jumper	3198 036 90010
9915	Wire Jumper	3198 036 90010
9923	Wire Jumper	3198 036 90010
9991	Wire Jumper	3198 036 90010
9993	Wire Jumper	3198 036 90010
9996	Wire Jumper	3198 036 90010
9997	Wire Jumper	3198 036 90010
9998	Wire Jumper	3198 036 90010
CBA	Main Chassis Assembly	3141 058 59081

Channel One Card Parts
Channel One Card Parts

2D 3 Line Comb Filter Parts
2D 3 Line Comb Filter Parts

DAF Panel Parts
DAF Panel Parts

DVD Eject Panel Parts
DVD Eject Panel Parts

DVD Interface Panel Parts
DVD Interface Panel Parts

Front Interface Panel Parts
Front Interface Panel Parts

Ref	Description	Part No.
S 0211	2 Pin Connector	2422 025 16268
S 0212	2 Pin Connector	2422 025 16559
0214	5 Pin Connector	2422 025 06353
1606	Tact Switch	2422 128 02742
2691	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
2692	Cap, 47n, 10%, 25v, Ceramic	3198 023 04730
2693	Cap, 47n, 10%, 25v, Ceramic	3198 023 04730
2694	Cap, 47n, 10%, 25v, Ceramic	3198 023 04730
2695	Cap, 47n, 10%, 25v, Ceramic	3198 023 04730
2698	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass	2322 242 13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass	2322 242 13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film	3198 011 05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film	3198 011 03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film	3198 011 02210
6691	LED, LTL-10234WHCR	9322 185 69682
6692	IR Receiver, TSOP1836UH3V	9322 127 54667
9001	Wire Jumper	3198 036 90010
9002	Wire Jumper	3198 036 90010
CBA	Front Interface Panel Assembly	3139 177 26211

ITV Front Jack Panel Parts
ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)
Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)
Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts
Side Jack Panel Parts

Ref	Description	Part No.
0232	Headphone Jack	2422 026 04747
0250	A/V Jack	2422 026 04815
0251	6 Pin Connector	2422 025 12482
0254	5 Pin Connector	2422 025 12481
0255	4 Pin Connector	2422 025 12479
2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2176	Cap, 470p, 5%, 50v, Ceramic	3198 016 34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2178	Cap, 470p, 5%, 50v, Ceramic	3198 016 34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510

S = Safety Part   Be sure to use exact replacement part.

30PW633R37A (continued)

```
  3152   Res, 47K, 5%, 1/16W, Metalized Glass .  3198 021 34730
  3153   Res, 150 ohm, 5%, 1/6W, Carbon . . . .  3198 011 01510
  3156   Res, 120 ohm, 5%, 1/16W, Metalized Glas 3198 021 31210
  3157   Res, 120 ohm, 5%, 1/16W, Metalized Glas 3198 021 31210
  4817   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90030
  4819   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90030
  4821   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90020
  4822   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90020
  6161   Zener Diode, 6.8 volt. . . . . . . . .  3198 010 26880
  9151   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9152   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9153   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9170   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  CBA    Side Jack Panel Assembly . . . . . . .  3139 187 15141
```

Subwoofer Panel Parts

```
         Subwoofer Panel Parts
```

Top Control Panel Parts

```
         Top Control Panel Parts
  0215   3 Pin Connector. . . . . . . . . . . .  2422 025 16601
  1091   Tact Switch. . . . . . . . . . . . . .  2422 128 02742
  1092   Tact Switch. . . . . . . . . . . . . .  2422 128 02742
  1093   Tact Switch. . . . . . . . . . . . . .  2422 128 02742
  1094   Tact Switch. . . . . . . . . . . . . .  2422 128 02742
  3091   Res, 560 ohm, 5%, Metalized Glass. . .  3198 021 35610
  3092   Res, 390 ohm, 5%, 1/16W, Metalized Glas 3198 021 33910
  3093   Res, 560 ohm, 5%, Metalized Glass. . .  3198 021 35610
  3094   Res, 390 ohm, 5%, 1/16W, Metalized Glas 3198 021 33910
  3095   Res, 3K3, 5%, 1/16W, Metalized Glass .  3198 021 33320
  3096   Res, 1K5, 5%, 1/16W, Metalized Glass .  3198 021 31520
  4085   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90020
  4089   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90030
  4090   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90030
  6091   Diode, Signal. . . . . . . . . . . . .  9340 453 90115
  CBA    Top Control Panel Assembly . . . . . .  3139 187 15841
```

Cabinet & Accessory Parts

```
         Cabinet & Accessory Parts
S AC01   AC Cord. . . . . . . . . . . . . . . .  3135 010 03831
  AC03   Anode Lead Spacer (3 Used) . . . . . .  3135 014 04471
  AC04   Batteries for Remote Control Transmitte 9299 000 65263
  AC05   Cabinet Back . . . . . . . . . . . . .  3139 124 46431
  AC06   Cabinet Back Screw Cover (2 Used). . .  3139 124 45431
  AC07   Canceller Coil . . . . . . . . . . . .  3128 138 60581
  AC08   Chassis Tray . . . . . . . . . . . . .  3139 124 31325
S AC09   CRT, W76ERF942X013 . . . . . . . . . .  9301 909 10314
  AC13   Front Interface Panel Bracket. . . . .  3139 124 32891
  AC15   Holder, Degaussing Coil (4 Used) . . .  3135 013 01661
  AC17   Owner's Manual . . . . . . . . . . . .  3121 235 21151
  AC18   Quick Use Guide. . . . . . . . . . . .  3121 233 44531
  AC19   Side Jack Panel Bracket. . . . . . . .  3139 124 37061
  AC20   Cabinet Front Assembly . . . . . . . .  3121 237 53521
  AC20A  Cabinet Front. . . . . . . . . . . . .  3139 124 43361
  AC20C  Light Guide. . . . . . . . . . . . . .  3139 124 39701
  AC20D  Nameplate. . . . . . . . . . . . . . .  3141 050 00161
  AC20E  Power Button . . . . . . . . . . . . .  3139 138 10881
  AC20H  Speaker, 8 ohm, 10W (2 Used) . . . . .  3139 128 76081
  AC20J  Top Control Assembly . . . . . . . . .  3139 138 11451
  REMOTE Remote Control Transmitter, RC19036002/
         01A. . . . . . . . . . . . . . . . . .  3139 238 04311
```

S = Safety Part   Be sure to use exact replacement part.

30PW633R37C - Manual no. 7638

Main Chassis Parts

Main Chassis Parts

S	Ref	Description	Part No.
	0211	2 Pin Connector	2422 025 16374
	0212	2 Pin Connector	2422 025 16375
	0214	5 Pin Connector	2422 025 12481
	0219	6 Pin Connector	2422 025 12482
	0220	5 Pin Connector	2422 025 04853
	0221	2 Pin Connector	2422 025 15503
	0222	2 Pin Connector	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack	2422 026 04926
	0239	3 Pin Connector	2422 025 16382
	0243	6 Pin Connector	2422 025 04854
	0244	5 Pin Connector	2422 025 04853
	0245	6 Pin Connector	2422 025 04854
	0246	5 Pin Connector	2422 025 12481
S	0256	9 Pin CRT Socket	2422 500 80053
	0267	3 Pin Connector	2412 020 00725
	0268	3 Pin Connector	2412 020 00725
	0269	Jack	2422 026 05182
	0278	3 Pin Connector	2412 020 00725
S	1000	Tuner, V+U, PLL	2422 542 90108
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1400	Relay, 5 Amp, 12V.	2422 132 07543
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1660	Crystal, 12MHz000	2422 543 01203
	1831	Crystal, Resonator, 18MHz432, 12 Pin, HC49/U A.	2422 543 00842
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852
	2172	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2173	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2209	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 2u2, 20%, 10v, Electrolytic	2020 012 93728
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2243	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2247	Cap, 2u2, 20%, 10v, Electrolytic	2020 012 93728
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
S	2346	Cap, 470p, 10%, 2000v, Ceramic	2020 558 90483
	2360	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2362	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
	2364	Cap, 27p, 5%, 50v, Ceramic	3198 016 32790
	2365	Cap, 27p, 5%, 50v, Ceramic	3198 016 32790
	2366	Cap, 27p, 5%, 50v, Ceramic	3198 016 32790
	2367	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2368	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2369	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2372	Cap, 10u, 20%, 160v, Electrolytic.	2020 012 93318
	2373	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2375	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2378	Cap, 220p, 5%, 50v, Ceramic.	3198 019 02210
	2379	Cap, 10u, 20%, 100v, Electrolytic.	3198 025 71090
	2380	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2381	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2401	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
	2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2420	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2421	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
	2451	Cap, 22n, 10%, 50v, Polyester.	3198 014 02230
	2454	Cap, 68n, 5%, 250v, Metalized Polypropylene	2222 479 90133
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 470n, 5%, 250v, Metalized Polypropylene.	2022 333 00086
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
S	2463	Cap, 390p, 10%, 2000v, Ceramic	2020 558 90482
S	2465	Cap, 13n, 5%, 1600v, Polypropylene	2020 301 90254
	2467	Cap, 9n1, 5%, 1000v, Polypropylene	2222 375 90424
	2468	Cap, 9n1, 5%, 1000v, Polypropylene	2222 375 90424
	2469	Cap, 430n, 5%, 250v, Metalized Polypropylene.	2022 333 00164
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2490	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91374
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240

S = Safety Part   Be sure to use exact replacement part.

30PW633R37C (continued)

Ref	Description	Part No.
2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
2604	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2608	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2611	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050
2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2810	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
2837	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
2840	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2841	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2843	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2844	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2846	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2902	Cap, 1000u, 20%, 25v, Electrolytic . .	3198 026 31020
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202
3172	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
3180	Res, 68K, 5%, 1/16W, Metalized Glass .	3198 021 36830
3181	Res, 120K, 5%, Metalized Glass	2322 702 60124
3190	Res, 68K, 5%, 1/16W, Metalized Glass .	3198 021 36830
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3206	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3247	Res, 560K, 5%, Metalized Glass	2322 702 60564
3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3250	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
3341	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3342	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3360	Res, 39K, 5%, 1/16W, Metalized Glass .	3198 021 33930
3361	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3362	Res, 39K, 5%, 1/16W, Metalized Glass .	3198 021 33930
3363	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3367	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3368	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
3369	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3373	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3374	Res, 2R2, 5%, 1/6W, Carbon Film. . . .	3198 011 02280
3375	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3376	Res, 68K, 5%, 1/6W, Carbon Film. . . .	3198 011 06830
3377	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
3378	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
3380	Res, 68K, 5%, 1/16W, Metalized Glass .	3198 021 36830
3381	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3383	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3384	Res, 2R2, 5%, 1/6W, Carbon Film. . . .	3198 011 02280
3385	Res, 10K, 5%, 5W, Metal Film	2322 257 41103
S 3386	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
3401	Res, 82K, 5%, 1/6W, Carbon Film. . . .	3198 011 08230
3403	Res, 100K, 5%, 1/6W, Carbon Film . . .	3198 011 01040
3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3407	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3408	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3451	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
S 3452	Res, 5K6, 1%, 3/5W, Metal Film	2312 915 15602
3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3456	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3457	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390

S = Safety Part   Be sure to use exact replacement part.

30PW633R37C (continued)

	Ref	Description	Part No.
	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
	3468	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
	3470	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
	3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3473	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
	3481	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
	3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S	3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 32290
	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3489	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3491	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198 021 53320
	3492	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
S	3493	Res, 2R2, 5%, 1/3W, Metal Film	2306 204 03228
	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
S	3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
S	3523	Res, 47 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03479
	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
	3527	Res, 0R15, 5%, 3/5W, Metal Film. . . .	3198 012 11570
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 33K, 5%, 1/10W, Metalized Glass .	3198 021 53330
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 8K2, 5%, 1/10W, Metalized Glass .	3198 021 58220
S	3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
S	3591	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3614	Res, 4K7, 5%, 1/6W, Carbon Film. . . .	3198 011 04720
	3615	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
	3617	Res, 4K7, 5%, 1/6W, Carbon Film. . . .	3198 011 04720
	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3619	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3831	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3843	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3901	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198 021 36820
	3903	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3905	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3909	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3910	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3912	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4311	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4312	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4313	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4837	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4838	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5202	Wire Jumper.	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5241	Wire Jumper.	3198 036 90010
	5242	Coil, 10u, 5%.	3198 018 11090
	5341	Coil, 22u.	2422 535 97333
	5342	Coil, 27u, 10%	3198 018 22790
	5376	Fixed, Inductor, 100MHz, 50R.	3198 018 90010

S = Safety Part   Be sure to use exact replacement part.

30PW633R37C (continued)

	Ref	Description	Part No.
	5400	Coil, 11u7	2422 535 91027
S	5445	Transformer, LOT	2422 531 02612
	5451	Coil, 22u, 10%	3198 018 72290
	5452	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5453	Coil, 22u, 5%.	3198 018 12290
S	5457	Coil, 42u.	2422 535 94865
S	5461	Transformer, SD10207-00 B.	2422 531 02568
	5464	Coil, Bridge, C946-01 Y.	2422 531 02419
	5471	Coil, 6u8, 20%	3198 018 76880
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 10u, 10%	2422 535 97328
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS42204-00 B.	2422 531 02563
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5831	Coil, 6u8, 5%.	3198 018 16880
	5832	Coil, 6u8, 5%.	3198 018 16880
	5833	Coil, 6u8, 5%.	3198 018 16880
	5835	Coil, 12u, 10%	3198 018 31290
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316.	3198 010 10630
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630
	6206	Zener Diode, 6.8 volt.	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316.	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6365	Diode, Signal, BAT85	9336 247 60133
	6366	Diode, Signal, BAT85	9336 247 60133
	6367	Diode, Signal, BAV99	3198 010 10620
	6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002
	6401	Zener Diode, 68 volt	3198 010 26890
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148.	3198 010 10010
	6448	Zener Diode, 6.2 volt.	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6452	Diode, Signal, BAS316.	3198 010 10630
	6453	Zener Diode, 5.6 volt.	3198 020 55680
	6460	Diode, Rect, DG3-7005L	9336 436 10682
	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
	6462	Zener Diode, 12 volt	3198 010 21290
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316.	3198 010 10630
	6468	Diode, Signal, BAS316.	3198 010 10630
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt.	3198 010 25680
	6482	Zener Diode, 9.1 volt.	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYV95C.	9335 001 80133
	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6487	Diode, Rect, BYV95A.	9335 000 90133
	6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6490	Diode, Rect, BYV95C.	9335 001 80133
	6500	Diode, Bridge Rect, GBU4JL-7002.	9322 132 55667
	6520	Diode, Rect, BYV95A.	9335 000 90133
	6523	Diode, Signal, 1N4148.	3198 010 10010
	6524	Diode, Rect, 1N5062.	3198 010 10120
	6525	Diode, Rect, 1N5062.	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt.	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500.	9340 555 59127
	6563	Diode, Signal, BAS316.	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148.	3198 010 10010
	6569	Diode, Signal, BAS316.	3198 010 10630
	6570	Zener Diode, 6.8 volt.	3198 020 56880
	6580	Diode, Signal, BAS316.	3198 010 10630
	6582	Diode, Rect, STPS10L60D.	9322 175 70667
	6831	Diode, Signal, 1N4148.	3198 010 10010
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7000	IC, TDA8941P/N1.	9352 628 51112
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7102	Transistor, PNP, BC857B(COL)	3198 010 42150
	7103	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9588H/N1/3I/1298.	9352 742 85557
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7360	Transistor, NPN, BC847B(COL)	3198 010 42030
	7366	Transistor, PNP, 2SA965.	9322 167 18676

	Ref	Description	Part No.
	7369	Transistor, PNP, BC857B(COL)	3198 010 42150
	7373	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7380	Transistor, NPN, 2SC2235	9322 167 19676
	7382	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7400	Power FET, STP3NC60FP.	9322 157 37687
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7444	Transistor, NPN, BC547B(COL)	3198 020 40030
	7450	Transistor, PNP, PDTA114ET	3198 010 44010
	7460	Transistor, NPN, BU4508DX.	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2.	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1.	9352 673 56112
	7521	Power FET, FQPF9N50.	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, L78L33ACZ.	9322 134 92676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C08-WBN6.	9322 154 38682
	7606	Transistor, NPN, PDTC143ZT	9340 547 00215
	7802	IC, HEF4053BT.	9333 729 60653
	7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682
	7901	IC, AN7580	9322 166 29682
	7903	Transistor, NPN, BC847B(COL)	3198 010 42030
	9001	Wire Jumper.	3198 036 90010
	9101	Wire Jumper.	3198 036 90010
	9102	Wire Jumper.	3198 036 90010
	9103	Wire Jumper.	3198 036 90010
	9104	Wire Jumper.	3198 036 90010
	9123	Wire Jumper.	3198 036 90010
	9160	Wire Jumper.	3198 036 90010
	9171	Wire Jumper.	3198 036 90010
	9173	Wire Jumper.	3198 036 90010
	9175	Wire Jumper.	3198 036 90010
	9176	Wire Jumper.	3198 036 90010
	9178	Wire Jumper.	3198 036 90010
	9179	Wire Jumper.	3198 036 90010
	9181	Wire Jumper.	3198 036 90010
	9182	Wire Jumper.	3198 036 90010
	9183	Wire Jumper.	3198 036 90010
	9192	Wire Jumper.	3198 036 90010
	9193	Wire Jumper.	3198 036 90010
	9311	Wire Jumper.	3198 036 90010
	9312	Wire Jumper.	3198 036 90010
	9313	Wire Jumper.	3198 036 90010
	9314	Wire Jumper.	3198 036 90010
	9406	Wire Jumper.	3198 036 90010
	9407	Wire Jumper.	3198 036 90010
	9408	Wire Jumper.	3198 036 90010
	9409	Wire Jumper.	3198 036 90010
	9410	Wire Jumper.	3198 036 90010
	9411	Wire Jumper.	3198 036 90010
	9412	Wire Jumper.	3198 036 90010
	9413	Wire Jumper.	3198 036 90010
	9414	Wire Jumper.	3198 036 90010
	9415	Wire Jumper.	3198 036 90010
	9416	Wire Jumper.	3198 036 90010
	9417	Wire Jumper.	3198 036 90010
	9418	Wire Jumper.	3198 036 90010
	9419	Wire Jumper.	3198 036 90010
	9420	Wire Jumper.	3198 036 90010
	9421	Wire Jumper.	3198 036 90010
	9422	Wire Jumper.	3198 036 90010
	9425	Wire Jumper.	3198 036 90010
	9427	Wire Jumper.	3198 036 90010
	9453	Wire Jumper.	3198 036 90010
	9462	Wire Jumper.	3198 036 90010
	9464	Wire Jumper.	3198 036 90010
	9500	Wire Jumper.	3198 036 90010
	9501	Wire Jumper.	3198 036 90010
	9503	Wire Jumper.	3198 036 90010
	9506	Wire Jumper.	3198 036 90010
	9507	Wire Jumper.	3198 036 90010
	9511	Wire Jumper.	3198 036 90010
	9512	Wire Jumper.	3198 036 90010
	9513	Wire Jumper.	3198 036 90010
	9514	Wire Jumper.	3198 036 90010
	9515	Wire Jumper.	3198 036 90010
	9516	Wire Jumper.	3198 036 90010
	9518	Wire Jumper.	3198 036 90010
	9520	Wire Jumper.	3198 036 90010
	9521	Wire Jumper.	3198 036 90010
	9522	Wire Jumper.	3198 036 90010
	9524	Wire Jumper.	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

30PW633R37C (continued)

Ref	Description	Part No.
9528	Wire Jumper.	3198 036 90010
9530	Wire Jumper.	3198 036 90010
9611	Coil, 27u, 10%	3198 018 22790
9612	Wire Jumper.	3198 036 90010
9613	Wire Jumper.	3198 036 90010
9614	Wire Jumper.	3198 036 90010
9615	Wire Jumper.	3198 036 90010
9618	Wire Jumper.	3198 036 90010
9619	Wire Jumper.	3198 036 90010
9620	Wire Jumper.	3198 036 90010
9621	Wire Jumper.	3198 036 90010
9622	Wire Jumper.	3198 036 90010
9623	Wire Jumper.	3198 036 90010
9626	Wire Jumper.	3198 036 90010
9627	Wire Jumper.	3198 036 90010
9628	Wire Jumper.	3198 036 90010
9629	Wire Jumper.	3198 036 90010
9631	Wire Jumper.	3198 036 90010
9632	Wire Jumper.	3198 036 90010
9633	Wire Jumper.	3198 036 90010
9635	Wire Jumper.	3198 036 90010
9636	Wire Jumper.	3198 036 90010
9637	Wire Jumper.	3198 036 90010
9638	Wire Jumper.	3198 036 90010
9639	Wire Jumper.	3198 036 90010
9640	Wire Jumper.	3198 036 90010
9641	Wire Jumper.	3198 036 90010
9642	Wire Jumper.	3198 036 90010
9643	Wire Jumper.	3198 036 90010
9648	Wire Jumper.	3198 036 90010
9650	Wire Jumper.	3198 036 90010
9652	Wire Jumper.	3198 036 90010
9654	Wire Jumper.	3198 036 90010
9655	Wire Jumper.	3198 036 90010
9656	Wire Jumper.	3198 036 90010
9657	Wire Jumper.	3198 036 90010
9658	Wire Jumper.	3198 036 90010
9659	Wire Jumper.	3198 036 90010
9660	Wire Jumper.	3198 036 90010
9661	Wire Jumper.	3198 036 90010
9662	Wire Jumper.	3198 036 90010
9663	Wire Jumper.	3198 036 90010
9664	Wire Jumper.	3198 036 90010
9665	Wire Jumper.	3198 036 90010
9666	Wire Jumper.	3198 036 90010
9667	Wire Jumper.	3198 036 90010
9668	Wire Jumper.	3198 036 90010
9669	Wire Jumper.	3198 036 90010
9670	Wire Jumper.	3198 036 90010
9671	Wire Jumper.	3198 036 90010
9672	Coil, 22u, 10%	3198 018 22290
9674	Wire Jumper.	3198 036 90010
9675	Wire Jumper.	3198 036 90010
9676	Wire Jumper.	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper.	3198 036 90010
9680	Wire Jumper.	3198 036 90010
9681	Wire Jumper.	3198 036 90010
9683	Wire Jumper.	3198 036 90010
9685	Wire Jumper.	3198 036 90010
9686	Wire Jumper.	3198 036 90010
9687	Wire Jumper.	3198 036 90010
9688	Wire Jumper.	3198 036 90010
9689	Wire Jumper.	3198 036 90010
9690	Wire Jumper.	3198 036 90010
9691	Wire Jumper.	3198 036 90010
9694	Wire Jumper.	3198 036 90010
9695	Wire Jumper.	3198 036 90010
9697	Wire Jumper.	3198 036 90010
9698	Wire Jumper.	3198 036 90010
9699	Wire Jumper.	3198 036 90010
9821	Wire Jumper.	3198 036 90010
9822	Wire Jumper.	3198 036 90010
9825	Wire Jumper.	3198 036 90010
9828	Wire Jumper.	3198 036 90010
9829	Wire Jumper.	3198 036 90010
9831	Wire Jumper.	3198 036 90010
9832	Wire Jumper.	3198 036 90010
9837	Wire Jumper.	3198 036 90010
9838	Wire Jumper.	3198 036 90010
9839	Wire Jumper.	3198 036 90010
9846	Wire Jumper.	3198 036 90010
9847	Wire Jumper.	3198 036 90010
9848	Wire Jumper.	3198 036 90010
9849	Wire Jumper.	3198 036 90010
9851	Wire Jumper.	3198 036 90010
9855	Wire Jumper.	3198 036 90010
9856	Wire Jumper.	3198 036 90010
9857	Wire Jumper.	3198 036 90010
9858	Wire Jumper.	3198 036 90010
9859	Wire Jumper.	3198 036 90010
9860	Wire Jumper.	3198 036 90010
9862	Wire Jumper.	3198 036 90010
9864	Wire Jumper.	3198 036 90010
9865	Wire Jumper.	3198 036 90010
9867	Wire Jumper.	3198 036 90010
9868	Wire Jumper.	3198 036 90010
9869	Wire Jumper.	3198 036 90010
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010
9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9923	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9993	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9997	Wire Jumper.	3198 036 90010
9998	Wire Jumper.	3198 036 90010
CBA	Main Chassis Assembly.	3141 058 59081

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

Ref	Description	Part No.
S 0211	2 Pin Connector.	2422 025 16268
S 0212	2 Pin Connector.	2422 025 16559
0214	5 Pin Connector.	2422 025 06353
1606	Tact Switch.	2422 128 02742
2691	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2698	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
6691	LED, LTL-10234WHCR	9322 185 69682
6692	IR Receiver, TSOP1836UH3V.	9322 127 54667
9001	Wire Jumper.	3198 036 90010
9002	Wire Jumper.	3198 036 90010
CBA	Front Interface Panel Assembly	3139 177 26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts

Side Jack Panel Parts

Ref	Description	Part No.
0232	Headphone Jack	2422 026 04747
0250	A/V Jack	2422 026 04815
0251	6 Pin Connector.	2422 025 12482
0254	5 Pin Connector.	2422 025 12481
0255	4 Pin Connector.	2422 025 12479
2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2177	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2179	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
3150	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510

30PW633R37C (continued)

```
  3152   Res, 47K, 5%, 1/16W, Metalized Glass .  3198 021 34730
  3153   Res, 150 ohm, 5%, 1/6W, Carbon . . . .  3198 011 01510
  3156   Res, 120 ohm, 5%, 1/16W, Metalized Glas 3198 021 31210
  3157   Res, 120 ohm, 5%, 1/16W, Metalized Glas 3198 021 31210
  4817   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90030
  4819   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90030
  4821   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90020
  4822   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90020
  6161   Zener Diode, 6.8 volt. . . . . . . . .  3198 010 26880
  9151   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9152   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9153   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  9170   Wire Jumper. . . . . . . . . . . . . .  3198 036 90010
  CBA    Side Jack Panel Assembly . . . . . . .  3139 187 15141
```

Subwoofer Panel Parts

```
         Subwoofer Panel Parts
```

Top Control Panel Parts

```
         Top Control Panel Parts
  0215   3 Pin Connector. . . . . . . . . . . .  2422 025 16601
  1091   Tact Switch. . . . . . . . . . . . . .  2422 128 02742
  1092   Tact Switch. . . . . . . . . . . . . .  2422 128 02742
  1093   Tact Switch. . . . . . . . . . . . . .  2422 128 02742
  1094   Tact Switch. . . . . . . . . . . . . .  2422 128 02742
  3091   Res, 560 ohm, 5%, Metalized Glass. . .  3198 021 35610
  3092   Res, 390 ohm, 5%, 1/16W, Metalized Glas 3198 021 33910
  3093   Res, 560 ohm, 5%, Metalized Glass. . .  3198 021 35610
  3094   Res, 390 ohm, 5%, 1/16W, Metalized Glas 3198 021 33910
  3095   Res, 3K3, 5%, 1/16W, Metalized Glass .  3198 021 33320
  3096   Res, 1K5, 5%, 1/16W, Metalized Glass .  3198 021 31520
  4085   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90020
  4089   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90030
  4090   Res, Zero ohm, "Chip" Jumper . . . . .  3198 021 90030
  6091   Diode, Signal. . . . . . . . . . . . .  9340 453 90115
  CBA    Top Control Panel Assembly . . . . . .  3139 187 15841
```

Cabinet & Accessory Parts

```
         Cabinet & Accessory Parts
S AC01   AC Cord. . . . . . . . . . . . . . . .  3135 010 03831
  AC04   Batteries for Remote Control Transmitte 9299 000 65263
  AC05   Cabinet Back . . . . . . . . . . . . .  3139 124 46431
  AC06   Cabinet Back Screw Cover (2 Used). . .  3139 124 45431
  AC07   Canceller Coil . . . . . . . . . . . .  3128 138 60581
  AC08   Chassis Tray . . . . . . . . . . . . .  3139 124 31325
S AC09   CRT, W76ERF942X013 . . . . . . . . . .  9301 909 10314
  AC13   Front Interface Panel Bracket. . . . .  3139 124 32891
  AC15   Holder, Degaussing Coil (2 Used) . . .  3104 304 14414
  AC15   Holder, Degaussing Coil (2 Used) . . .  3104 304 14713
  AC17   Owner's Manual . . . . . . . . . . . .  3121 235 21151
  AC18   Quick Use Guide. . . . . . . . . . . .  3121 233 44531
  AC19   Side Jack Panel Bracket. . . . . . . .  3139 124 37061
  AC20   Cabinet Front Assembly . . . . . . . .  3121 237 53521
  AC20A  Cabinet Front. . . . . . . . . . . . .  3139 124 43361
  AC20A  Cabinet Front. . . . . . . . . . . . .  3139 177 56121
  AC20C  Light Guide. . . . . . . . . . . . . .  3139 124 39701
  AC20D  Nameplate. . . . . . . . . . . . . . .  3141 050 00161
  AC20E  Power Button . . . . . . . . . . . . .  3139 138 10881
  AC20H  Speaker, 8 ohm, 10W (2 Used) . . . . .  3139 128 76081
  AC20J  Top Control Assembly . . . . . . . . .  3139 138 11451
  REMOTE Remote Control Transmitter, RC19036002/
         01A. . . . . . . . . . . . . . . . . .  3139 238 04311
```

Main Chassis Parts

Main Chassis Parts

	0211	2 Pin Connector	2422 025 16374
	0212	2 Pin Connector	2422 025 16375
	0214	5 Pin Connector	2422 025 12481
	0219	6 Pin Connector	2422 025 12482
	0220	5 Pin Connector	2422 025 04853
	0221	2 Pin Connector	2422 025 15503
	0222	2 Pin Connector	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack	2422 026 04926
	0239	3 Pin Connector	2422 025 16382
	0240	7 Pin Connector	2422 025 11244
	0243	6 Pin Connector	2422 025 04854
	0244	5 Pin Connector	2422 025 04853
	0245	6 Pin Connector	2422 025 04854
	0246	5 Pin Connector	2422 025 12481
	0251	3 Pin Connector	2412 020 00725
S	0256	10 Pin CRT Socket	2422 500 80063
	0259	5 Pin Connector	2422 025 15848
	0262	3 Pin Connector	2422 025 16937
	0267	3 Pin Connector	2412 020 00725
	0268	3 Pin Connector	2412 020 00725
	0278	3 Pin Connector	2412 020 00725
S	1000	Tuner, V+U, PLL	2422 542 90108
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC	2422 086 10914
S	1515	Relay, 5 Amp, 12V	2422 132 07444
	1660	Crystal, 12MHz000	2422 543 01203
	1810	6 Pin Connector	2422 025 16607
	1831	Crystal, Resonator, 18MHz432, 12 Pin, H C49/U A	2422 543 00842
	2004	Cap, 47n, 10%, 50v, Ceramic	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2123	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2125	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2172	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2173	Cap, 220p, 5%, 50v, Ceramic	3198 016 32210
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2241	Cap, 1n5, 10%, 50v, Ceramic	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2243	Cap, 6n8, 50v, Ceramic	3198 017 36820
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2360	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
	2362	Cap, 220p, 5%, 50v, Ceramic	3198 016 32210
	2364	Cap, 27p, 5%, 50v, Ceramic	3198 016 32790
	2365	Cap, 27p, 5%, 50v, Ceramic	3198 016 32790
	2366	Cap, 27p, 5%, 50v, Ceramic	3198 016 32790
	2367	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
	2368	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2369	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2372	Cap, 10u, 20%, 160v, Electrolytic	2020 012 93318
	2373	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
	2375	Cap, 560p, 5%, 50v, Ceramic	3198 016 05610
	2378	Cap, 220p, 5%, 50v, Ceramic	3198 019 02210
	2379	Cap, 10u, 20%, 100v, Electrolytic	3198 025 71090
	2380	Cap, 560p, 5%, 50v, Ceramic	3198 016 05610
	2381	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
	2402	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic	3198 016 03310
	2441	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
S	2448	Cap, 100p, 10%, 500v, Ceramic	3198 019 41010
	2450	Cap, 47u, 20%, 160v, Electrolytic	2020 021 91139
	2451	Cap, 22n, 10%, 50v, Polyester	3198 014 02230
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 270n, 5%, 250v, Metalized Polypropylene	2222 479 90016
	2458	Cap, 2u2, 20%, 100v, Electrolytic	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
	2463	Cap, 820p, 10%, 2000v, Ceramic	2020 558 90486
	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene	2222 479 90042
S	2465	Cap, 12n, 5%, 1600v, Polypropylene	2020 301 90252
	2466	Cap, 18n, 10%, 400v, Polyester	2222 347 90222
	2468	Cap, 18n, 10%, 400v, Polyester	2222 347 90222
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91374
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2601	Cap, 220n, +80/-20%, 25v, Ceramic	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2604	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2606	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050

S = Safety Part Be sure to use exact replacement part.

32LT621L/17 (continued)

Ref	Description	Part No.
2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2611	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2616	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050
2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2807	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2810	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
2837	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
2840	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2841	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2843	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2844	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2846	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2902	Cap, 1000u, 20%, 25v, Electrolytic . .	3198 026 31020
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3121	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3123	Wire Jumper.	3198 036 90010
3124	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3125	Wire Jumper.	3198 036 90010
3126	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3172	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3180	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3181	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3190	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3250	Res, 4K7, 5%, 1/6W, Carbon Film. . . .	3198 011 04720
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
3258	Res, 180K, 5%, 1/10W, Metalized Glass.	2120 108 91721
3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3360	Res, 39K, 5%, 1/16W, Metalized Glass .	3198 021 33930
3361	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3362	Res, 39K, 5%, 1/16W, Metalized Glass .	3198 021 33930
3363	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3367	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3368	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
3369	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3373	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3374	Res, 2R2, 5%, 1/6W, Carbon Film. . . .	3198 011 02280
3375	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3376	Res, 68K, 5%, 1/6W, Carbon Film. . . .	3198 011 06830
3377	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
3378	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
3380	Res, 68K, 5%, 1/16W, Metalized Glass .	3198 021 36830
3381	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3383	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3384	Res, 2R2, 5%, 1/6W, Carbon Film. . . .	3198 011 02280
3385	Res, 10K, 5%, 5W, Metal Film	2322 257 41103
S 3386	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
3403	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3451	Res, 3R9, 5%, 1/3W, Metal Film	2306 204 03398
3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102
3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3456	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3457	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3469	Res, 100K, 5%, 1/6W, Carbon Film . . .	3198 011 01040
3470	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203

S = Safety Part   Be sure to use exact replacement part.

Safety	Ref.	Description	Part No.
	3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
	3484	Res, 3K9, 5%, 1/6W, Carbon Film	3198 011 03920
S	3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film	3198 012 32290
	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3490	Res, 2K2, 5%, 1/6W, Carbon Film	3198 011 02220
	3491	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
S	3493	Res, 10 ohm, 5%, 1/3W, Metal Film	2306 204 03109
	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3495	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
	3496	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3497	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3498	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
	3499	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
S	3504	Res, PTC, 3 ohm, 144V	2122 663 00019
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass	2322 242 13155
	3507	Surge Protector	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass	3198 021 53340
	3523	Res, 100 ohm, 5%, 1/3W, Metal Film	2306 204 03101
	3524	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
	3552	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3557	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
S	3591	Res, 10 ohm, 5%, 1/3W, Metal Film	2306 204 03109
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3617	Res, 33K, 5%, 1/6W, Carbon Film	3198 011 03330
	3618	Res, 6K8, 5%, 1/6W, Carbon Film	3198 011 06820
	3619	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3636	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3811	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3812	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
	3813	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
	3814	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3831	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3832	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3843	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
	3901	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
	3903	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3905	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3909	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
	3910	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
	3912	Res, 820 ohm, 5%, 1/6W, Carbon Film	3198 011 08210
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4101	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4102	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4104	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4128	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4311	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4312	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4313	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4604	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4824	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4884	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%	3198 018 18270
	5201	Coil, 6u8, 5%	3198 018 16880
	5202	Wire Jumper	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5241	Wire Jumper	3198 036 90010
	5242	Coil, 10u, 5%	3198 018 11090
	5341	Coil, 22u	2422 535 97333
	5342	Coil, 27u, 10%	3198 018 22790
	5376	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5401	Coil, 1mH, 10%	3198 018 71020
S	5445	Transformer, LOT	2422 531 02602
	5451	Coil, 22u, 10%	3198 018 72290
	5452	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
S	5457	Coil, 42u	2422 535 94865
S	5461	Transformer, SC10009-03 B	2422 531 02446
	5463	Coil, Choke	3128 138 37021
	5471	Coil, 6u8, 20%	3198 018 76880
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 18u	2422 535 97332
S	5501	Mains Filter	2422 549 43432

S = Safety Part   Be sure to use exact replacement part.

32LT621L/17 (continued)

Ref	Description	Part No.
S 5520	Transformer, SS42202-00 B.	2422 531 02562
5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5561	Coil, 27u, 5%.	2422 535 95366
5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5602	Coil, 5u6, 5%.	3198 018 15680
5603	Coil, 5u6, 5%.	3198 018 15680
5604	Coil, 5u6, 5%.	3198 018 15680
5810	Coil, 10u, 10%	3198 018 51090
5831	Coil, 6u8, 5%.	3198 018 16880
5832	Coil, 6u8, 5%.	3198 018 16880
5833	Coil, 6u8, 5%.	3198 018 16880
5835	Coil, 12u, 10%	3198 018 31290
6001	Zener Diode, 33 volt	3198 010 23390
6201	Diode, Signal, BAS316.	3198 010 10630
6202	Diode, Signal, BAS316.	3198 010 10630
6206	Zener Diode, 6.8 volt.	3198 020 56880
6331	Diode, Signal, BAV21	3198 010 10070
6332	Diode, Signal, BAS316.	3198 010 10630
6333	Diode, Signal, BAV21	3198 010 10070
6335	Diode, Signal, BAV21	3198 010 10070
6365	Diode, Signal, BAT85	9336 247 60133
6366	Diode, Signal, BAT85	9336 247 60133
6367	Diode, Signal, BAV99	3198 010 10620
6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002
6401	Zener Diode, 47 volt	3198 010 24790
6445	Zener Diode, 10 volt	3198 020 51090
6447	Diode, Signal, 1N4148.	3198 010 10010
6448	Zener Diode, 6.2 volt.	9331 668 30133
6449	Diode, Signal, BAV99	3198 010 10620
6453	Zener Diode, 6.8 volt.	3198 020 56880
6460	Diode, Rect, BY228/24.	9340 559 50112
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
6464	Diode, Signal, BAS316.	3198 010 10630
6465	Diode, Signal, BAV21	3198 010 10070
6466	Diode, Signal, BAV21	3198 010 10070
6467	Diode, Signal, BAS316.	3198 010 10630
6468	Diode, Signal, BAS316.	3198 010 10630
6469	Diode, Rect, BYV95C.	9335 001 80133
6470	Diode, Signal, BAV99	3198 010 10620
6476	Zener Diode, 18 volt	3198 010 21890
6481	Zener Diode, 5.6 volt.	3198 010 25680
6482	Zener Diode, 9.1 volt.	9331 177 80133
6483	Zener Diode, 33 volt	3198 010 23390
6485	Diode, Rect, BYV95C.	9335 001 80133
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
6487	Diode, Rect, BYV95A.	9335 000 90133
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
6490	Diode, Rect, BYV95C.	9335 001 80133
6500	Diode, Bridge Rect, GBU4JL-7002. . . .	9322 132 55667
6520	Diode, Rect, BYV95A.	9335 000 90133
6523	Diode, Signal, 1N4148.	3198 010 10010
6524	Diode, Rect, 1N5062.	3198 010 10120
6525	Diode, Rect, 1N5062.	3198 010 10120
6526	Zener Diode, 22 volt	3198 020 52290
6540	Zener Diode, 6.2 volt.	9331 668 30133
6541	Zener Diode, 10 volt	3198 020 51090
6560	Diode, Rect, BYV29X-500.	9340 555 59127
6563	Diode, Signal, BAS316.	3198 010 10630
6565	Diode, Signal, BAV70	9331 849 10215
6566	Diode, Signal, 1N4148.	3198 010 10010
6569	Diode, Signal, BAS316.	3198 010 10630
6570	Zener Diode, 6.8 volt.	3198 020 56880
6580	Diode, Signal, BAS316.	3198 010 10630
6582	Diode, Rect, STPS10L60D.	9322 175 70667
6831	Diode, Signal, 1N4148.	3198 010 10010
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
7000	IC, TDA8941P/N1.	9352 628 51112
7101	Transistor, NPN, BC847B(COL)	3198 010 42030
7200	IC, TDA9588H/N1/3I	4835 310 57626
7201	Transistor, NPN, BC847B(COL)	3198 010 42030
7204	Transistor, PNP, BC857B(COL)	3198 010 42150
7205	Transistor, PNP, BC857B(COL)	3198 010 42150
7330	IC, TDA6107JF/N3	9352 713 37112
7360	Transistor, NPN, BC847B(COL)	3198 010 42030
7366	Transistor, PNP, 2SA965.	9322 167 18676
7369	Transistor, PNP, BC857B(COL)	3198 010 42150
7373	Transistor, PNP, BC327-25(COL)	3198 020 43430
7380	Transistor, NPN, 2SC2235	9322 167 19676
7382	Transistor, NPN, BC337-25(COL)	3198 020 43530
7400	Power FET, STP3NC60FP.	9322 157 37687
7441	Transistor, PNP, BC857B(COL)	3198 010 42150
7443	Transistor, PNP, BC557B(COL)	3198 020 40110
7450	Transistor, PNP, PDTA114ET	3198 010 44010
7460	Transistor, NPN, BU4508DX.	9340 550 92127
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
7462	Transistor, NPN, PDTC143ZT	9340 547 00215
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
7471	IC, TDA8359J/N2.	9352 701 64112
7480	Transistor, NPN, BD135	3198 020 41010
7482	Transistor, NPN, BD135	3198 020 41010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667
7520	IC, TEA1507P/N1.	9352 673 56112
7521	Power FET, FQPF9N50.	9322 187 16687
7522	Transistor, NPN, BC847B(COL)	3198 010 42030
7540	Transistor, NPN, BC547B(COL)	3198 020 40030
7541	Transistor, NPN, PDTC114ET	9340 310 10215
7542	Transistor, PNP, BC857B(COL)	3198 010 42150
7560	IC, LE33CZ	9322 106 11676
7561	Transistor, NPN, PDTC143ZT	9340 547 00215
7580	Transistor, PNP, BC857B(COL)	3198 010 42150
7602	IC, M24C16-WBN6.	9322 147 25682
7606	Transistor, NPN, PDTC143ZT	9340 547 00215
7802	IC, HEF4053BT.	9333 729 60653
7803	IC, HEF4053BT.	9333 729 60653
7804	Transistor, NPN, BC847B(COL)	3198 010 42030
7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682
7901	IC, AN7580	9322 166 29682
7903	Transistor, NPN, BC847B(COL)	3198 010 42030
9001	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010
9160	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010
9182	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010
9192	Wire Jumper.	3198 036 90010
9193	Wire Jumper.	3198 036 90010
9311	Wire Jumper.	3198 036 90010
9312	Wire Jumper.	3198 036 90010
9313	Wire Jumper.	3198 036 90010
9314	Wire Jumper.	3198 036 90010
9406	Wire Jumper.	3198 036 90010
9407	Wire Jumper.	3198 036 90010
9408	Wire Jumper.	3198 036 90010
9409	Wire Jumper.	3198 036 90010
9410	Wire Jumper.	3198 036 90010
9411	Wire Jumper.	3198 036 90010
9412	Wire Jumper.	3198 036 90010
9413	Wire Jumper.	3198 036 90010
9414	Wire Jumper.	3198 036 90010
9415	Wire Jumper.	3198 036 90010
9416	Wire Jumper.	3198 036 90010
9417	Wire Jumper.	3198 036 90010
9418	Wire Jumper.	3198 036 90010
9419	Wire Jumper.	3198 036 90010
9420	Wire Jumper.	3198 036 90010
9421	Wire Jumper.	3198 036 90010
9422	Wire Jumper.	3198 036 90010
9424	Wire Jumper.	3198 036 90010
9425	Wire Jumper.	3198 036 90010
9426	Wire Jumper.	3198 036 90010
9427	Wire Jumper.	3198 036 90010
9453	Wire Jumper.	3198 036 90010
9460	Wire Jumper.	3198 036 90010
9463	Wire Jumper.	3198 036 90010
9500	Wire Jumper.	3198 036 90010
9501	Wire Jumper.	3198 036 90010
9503	Wire Jumper.	3198 036 90010
9506	Wire Jumper.	3198 036 90010
9507	Wire Jumper.	3198 036 90010
9511	Wire Jumper.	3198 036 90010
9512	Wire Jumper.	3198 036 90010
9513	Wire Jumper.	3198 036 90010
9514	Wire Jumper.	3198 036 90010
9515	Wire Jumper.	3198 036 90010
9516	Wire Jumper.	3198 036 90010
9518	Wire Jumper.	3198 036 90010
9520	Wire Jumper.	3198 036 90010
9521	Wire Jumper.	3198 036 90010
9522	Wire Jumper.	3198 036 90010
9524	Wire Jumper.	3198 036 90010
9528	Wire Jumper.	3198 036 90010
9530	Wire Jumper.	3198 036 90010
9611	Coil, 27u, 10%	3198 018 22790
9612	Wire Jumper.	3198 036 90010
9613	Wire Jumper.	3198 036 90010
9614	Wire Jumper.	3198 036 90010
9615	Wire Jumper.	3198 036 90010
9618	Wire Jumper.	3198 036 90010
9619	Wire Jumper.	3198 036 90010
9622	Wire Jumper.	3198 036 90010
9623	Wire Jumper.	3198 036 90010
9624	Wire Jumper.	3198 036 90010
9626	Wire Jumper.	3198 036 90010
9627	Wire Jumper.	3198 036 90010
9628	Wire Jumper.	3198 036 90010
9629	Wire Jumper.	3198 036 90010
9631	Wire Jumper.	3198 036 90010
9632	Wire Jumper.	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

Ref	Description	Part No.
9635	Wire Jumper.	3198 036 90010
9636	Wire Jumper.	3198 036 90010
9637	Wire Jumper.	3198 036 90010
9638	Wire Jumper.	3198 036 90010
9639	Wire Jumper.	3198 036 90010
9640	Wire Jumper.	3198 036 90010
9641	Wire Jumper.	3198 036 90010
9642	Wire Jumper.	3198 036 90010
9643	Wire Jumper.	3198 036 90010
9647	Wire Jumper.	3198 036 90010
9648	Wire Jumper.	3198 036 90010
9650	Wire Jumper.	3198 036 90010
9651	Wire Jumper.	3198 036 90010
9652	Wire Jumper.	3198 036 90010
9654	Wire Jumper.	3198 036 90010
9655	Wire Jumper.	3198 036 90010
9656	Wire Jumper.	3198 036 90010
9657	Wire Jumper.	3198 036 90010
9658	Wire Jumper.	3198 036 90010
9659	Wire Jumper.	3198 036 90010
9660	Wire Jumper.	3198 036 90010
9661	Wire Jumper.	3198 036 90010
9662	Wire Jumper.	3198 036 90010
9663	Wire Jumper.	3198 036 90010
9664	Wire Jumper.	3198 036 90010
9665	Wire Jumper.	3198 036 90010
9666	Wire Jumper.	3198 036 90010
9667	Wire Jumper.	3198 036 90010
9668	Wire Jumper.	3198 036 90010
9669	Wire Jumper.	3198 036 90010
9670	Wire Jumper.	3198 036 90010
9671	Wire Jumper.	3198 036 90010
9672	Coil, 22u, 10%	3198 018 22290
9674	Wire Jumper.	3198 036 90010
9675	Wire Jumper.	3198 036 90010
9676	Wire Jumper.	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper.	3198 036 90010
9680	Wire Jumper.	3198 036 90010
9681	Wire Jumper.	3198 036 90010
9682	Wire Jumper.	3198 036 90010
9683	Wire Jumper.	3198 036 90010
9685	Wire Jumper.	3198 036 90010
9686	Wire Jumper.	3198 036 90010
9687	Wire Jumper.	3198 036 90010
9688	Wire Jumper.	3198 036 90010
9689	Wire Jumper.	3198 036 90010
9690	Wire Jumper.	3198 036 90010
9691	Wire Jumper.	3198 036 90010
9694	Wire Jumper.	3198 036 90010
9695	Wire Jumper.	3198 036 90010
9697	Wire Jumper.	3198 036 90010
9698	Wire Jumper.	3198 036 90010
9699	Wire Jumper.	3198 036 90010
9821	Wire Jumper.	3198 036 90010
9822	Wire Jumper.	3198 036 90010
9825	Wire Jumper.	3198 036 90010
9828	Wire Jumper.	3198 036 90010
9829	Wire Jumper.	3198 036 90010
9831	Wire Jumper.	3198 036 90010
9832	Wire Jumper.	3198 036 90010
9837	Wire Jumper.	3198 036 90010
9838	Wire Jumper.	3198 036 90010
9839	Wire Jumper.	3198 036 90010
9846	Wire Jumper.	3198 036 90010
9847	Wire Jumper.	3198 036 90010
9848	Wire Jumper.	3198 036 90010
9849	Wire Jumper.	3198 036 90010
9851	Wire Jumper.	3198 036 90010
9855	Wire Jumper.	3198 036 90010
9856	Wire Jumper.	3198 036 90010
9857	Wire Jumper.	3198 036 90010
9858	Wire Jumper.	3198 036 90010
9859	Wire Jumper.	3198 036 90010
9860	Wire Jumper.	3198 036 90010
9862	Wire Jumper.	3198 036 90010
9863	Wire Jumper.	3198 036 90010
9864	Wire Jumper.	3198 036 90010
9865	Wire Jumper.	3198 036 90010
9867	Wire Jumper.	3198 036 90010
9868	Wire Jumper.	3198 036 90010
9869	Wire Jumper.	3198 036 90010
9870	Wire Jumper.	3198 036 90010
9871	Wire Jumper.	3198 036 90010
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9876	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9878	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010
9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9923	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9993	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9997	Wire Jumper.	3198 036 90010
9998	Wire Jumper.	3198 036 90010
CBA	SP/LS Module (Vertical) (ITV).	3139 127 27374
CBA	Main Chassis Assembly.	3139 188 04111

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

Ref	Description	Part No.
0266	6 Pin Connector.	2422 025 16609
2401	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2402	Cap, 4u7, 20%, 35v, Electrolytic	3198 028 44780
2403	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2407	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2408	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2409	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2411	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
2412	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2413	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2414	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2415	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2416	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2419	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2420	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
2425	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2426	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2427	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2428	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2429	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2430	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2431	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2432	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2433	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2434	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2435	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2436	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2440	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
2442	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2443	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2450	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
2452	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2453	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
3401	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3402	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3403	Res, 1K8, 5%, 1/16W, Metalized Glass .	3198 021 31820
3404	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3405	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3406	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198 021 36820
3407	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3408	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3412	Res, 510K, 5%, 1/10W, Metalized Glass.	2122 118 05951
3419	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3425	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3427	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3431	Res, 8K2, 1%, 1/16W, Metalized Glass .	2322 704 68202
3432	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3440	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3441	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3442	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3443	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198 021 32720
3444	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3450	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3451	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3452	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3453	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198 021 32720
3454	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3455	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3456	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3457	Wire Jumper.	3198 036 90010
3458	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4403	Res, Zero ohm, "Chip" Jumper	3198 021 90030
5401	Coil, 10u, 10%	3198 018 31090
5407	Coil, 33u, 5%.	3198 018 13390
5408	Coil, 33u, 20%	3198 018 33390
5421	Inductor, 100 MHz, 120 ohm	3198 018 90070
5425	Coil, 10u, 10%	3198 018 31090
5428	Coil, 10u, 5%.	3198 018 11090
5429	Coil, 10u, 10%	3198 018 31090
5430	Coil, 10u, 10%	3198 018 31090

32LT621L/17 (continued)

Ref	Description	Part No.
5440	Coil, 10u, 10%	3198 018 31090
5442	Coil, 22u, 5%.	3198 018 12290
5450	Coil, 10u, 10%	3198 018 31090
5452	Coil, 33u, 5%.	3198 018 13390
7401	Transistor, PNP, BC857B(COL)	3198 010 42150
7402	Transistor, NPN, BC847B(COL)	3198 010 42030
7403	Transistor, NPN, BC847B(COL)	3198 010 42030
7421	IC, TC90A53N	9322 182 18682
7440	Transistor, NPN, BC847B(COL)	3198 010 42030
7444	Transistor, NPN, BC847B(COL)	3198 010 42030
7450	Transistor, NPN, BC847B(COL)	3198 010 42030
7454	Transistor, NPN, BC847B(COL)	3198 010 42030
9401	Wire Jumper.	3198 036 90010
9402	Wire Jumper.	3198 036 90010
9403	Wire Jumper.	3198 036 90010
CBA	2D 3 Line Comb Filter Assembly	3139 177 26561

DAF Panel Parts

DAF Panel Parts

Ref	Description	Part No.
0221	2 Pin Connector.	2422 025 15503
0258	2 Pin Connector.	2422 025 15503
0261	1 Pin Connector.	2422 034 20021
0262	1 Pin Connector.	2422 034 20021
2492	Cap, 390p, 10%, 2000v, Ceramic	2020 558 90482
2493	Cap, 390p, 10%, 2000v, Ceramic	2020 558 90482
3498	Varactor, 1MA/612V, Max 1100V.	2322 592 14217
3499	Varactor, 1MA/612V, Max 1100V.	2322 592 14217
5493	Transformer, Signal, DAF	3128 138 34581
CBA	DAF Panel Assembly	3139 187 10081

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

Ref	Description	Part No.
S 0211	2 Pin Connector.	2422 025 16268
S 0212	2 Pin Connector.	2422 025 16559
0214	5 Pin Connector.	2422 025 06353
1606	Tact Switch.	2422 128 02742
2691	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2698	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
6691	LED, LTL-10234WHCR	9322 185 69682
6692	IR Receiver, TSOP1836UH3V.	9322 127 54667
9001	Wire Jumper.	3198 036 90010
9002	Wire Jumper.	3198 036 90010
CBA	Front Interface Panel Assembly	3139 187 28041

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts

Side Jack Panel Parts

Ref	Description	Part No.
0232	Headphone Jack	2422 026 04747
0250	A/V Jack	2422 026 04815
0251	6 Pin Connector.	2422 025 12482
0254	5 Pin Connector.	2422 025 12481
0255	4 Pin Connector.	2422 025 12479
2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2177	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2179	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
3150	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
4817	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4819	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4821	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4822	Res, Zero ohm, "Chip" Jumper	3198 021 90020
6161	Zener Diode, 6.8 volt.	3198 010 26880
9151	Wire Jumper.	3198 036 90010
9152	Wire Jumper.	3198 036 90010
9153	Wire Jumper.	3198 036 90010
9170	Wire Jumper.	3198 036 90010
CBA	Side Jack Panel Assembly	3139 187 15141

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Ref	Description	Part No.
0215	3 Pin Connector.	2422 025 09191
1091	Tact Switch.	2422 128 02742
1092	Tact Switch.	2422 128 02742
1093	Tact Switch.	2422 128 02742
1094	Tact Switch.	2422 128 02742
3088	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3089	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3091	Res, 560 ohm, 5%, Metalized Glass. . .	3198 021 35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3093	Res, 560 ohm, 5%, Metalized Glass. . .	3198 021 35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
4092	Res, Zero ohm, "Chip" Jumper	3198 021 90030
6092	Diode, Signal.	9340 453 90115
CBA	Top Control Panel.	3139 187 10251

Cabinet & Accessory Parts

Cabinet & Accessory Parts

Ref	Description	Part No.
S AC01	AC Cord.	3135 010 07161
AC03	Anode Lead Spacer (3 Used)	3135 014 04471
AC05	Cabinet Back	3139 124 45231
AC07	Canceller Coil	2422 549 45605
AC08	Chassis Tray	3139 124 31325
S AC09	CRT, A80ERF042X14.	9301 927 10539
S AC12	Degaussing Coil.	2422 549 44676
AC13	Front Interface Panel Bracket.	3139 124 32891
AC15	Holder, Degaussing Coil (4 Used) . . .	3135 013 01661
AC19	Side Jack Panel Bracket.	3139 124 37061
AC20	Cabinet Front Assembly	3121 237 53541
AC20A	Cabinet Front.	3139 177 51891
AC20C	Light Guide.	3139 124 30411
AC20D	Nameplate.	3104 300 11991
AC20F	Power Button Cover	3139 124 32921
AC20G	Power Button Shaft	3139 124 32791
AC20H	Speaker, 8 ohm, 10W (2 Used)	3139 128 76521
AC20J1	Top Control Bracket.	3139 124 33941
AC20J3	Top Control Cover.	3139 124 31131
AC20J4	Top Control Rubber	3139 124 30391
AC32	Yoke Wedge (2 Used).	3135 013 00311

S = Safety Part   Be sure to use exact replacement part.

Main Chassis Parts

S	Ref	Description	Part No.
		Main Chassis Parts	
	1000	Tuner, V+U PLL	2422 542 90141
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Ceramic Filter 4.5 MHZ	2422 549 44609
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1600	Tact Switch.	2422 128 02742
	1601	Tact Switch.	2422 128 02742
	1602	Tact Switch.	2422 128 02742
	1603	Tact Switch.	2422 128 02742
	1606	Tact Switch.	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1811	3 Pin Connector.	2412 020 00725
	1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	211	Connector, 2 Pin	2422 025 16269
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	212	Connector, 2 Pin	2422 025 16375
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic. . .	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	219	Connector, 6 Pin	2422 025 12482
	220	Connector, 5 Pin	2422 025 04853
	2201	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2209	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	221	Connector, 4 Pin	2422 025 15503
	2210	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	222	Connector, 2 Pin	2422 025 10646
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	223	Socket 9 Pin.	2422 026 05236
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
	2247	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	225	Socket 10 Pin	2422 026 04926
	2250	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	229	Connector, 3 Pin	2412 020 00725
	2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic. . .	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic. . .	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	3198 019 72220
	2344	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic . .	2020 558 90445
	2401	Cap, 2u2, 20%, 50V, Electrolytic . . .	3198 037 52280
	2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic . . .	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	243	Connector, 6 Pin	2422 025 04854
	244	Connector, 5 Pin	2422 025 04853
	2441	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic . . .	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	245	Connector, 6 Pin	2422 025 04854
	2450	Cap, 47u, 20%, 160v, Electrolytic. . .	2020 021 91139
	2451	Cap, 15n, 10%, 50v, Polyester.	3198 014 01530
	2455	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
	2457	Cap, 470n, 5%, 250v, Metalized Polypropylene.	2022 333 00086
	2458	Cap, 2u2, 20%, 100V, Electrolytic. . .	3198 037 72280
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	246	Connector, 5 Pin	2422 025 12481
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
	2463	Cap, 1n2, 10%, 2000v, Ceramic.	2020 558 90488
	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene	2222 479 90042
	2465	Cap, 13n, 5%, 1600v, Polypropylene . .	2020 301 90254
	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
	2468	Cap, 10n, 10%, 400v, Polyester	2222 347 90218
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25V, Electrolytic . . .	3198 037 34790
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic. . .	2020 021 90856
	2486	Cap, 470u, 20%, 16V Electrolytic . . .	3198 037 24710
	2487	Cap, 47u, 20%, 50V Electrolytic. . . .	3198 037 54790
S	2488	Cap, 1000uF, 20%, 16V, Electrolytic. .	3198 038 21020
	2489	Cap, 470u, 20%, 16V Electrolytic . . .	3198 037 24710
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic . .	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, v, Ceramic.	2020 554 90172
	2520	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
	2521	Cap, 22u, 20%, 50v, Electrolytic . . .	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
	2523	Cap, 1n5, 10%, 2000v, Ceramic.	3198 019 71520
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	254	SOC CRT V 9P F.	2422 500 80087
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	3198 019 66810
	2561	Cap, 100u, 20%, 160v, Electrolytic . .	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2200uF, 20%, 25V Electrolytic . .	3198 038 32220
	2567	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic . . .	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic . . .	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic. . .	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic. . .	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050
	267	Connector, 3 Pin	2412 020 00725
	269	Socket 3 Pin.	2422 026 05182
	2691	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
	2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2803	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240

S = Safety Part   Be sure to use exact replacement part.

Ref	Description	Part No.
2810	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
2862	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3206	Res, 270K, 5%, 1/16W, Metalized Glass.	2322 702 60274
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
3341	Res, 2R7, 5%, 1/3W, Metal Film	2306 204 03278
3342	Res, 2R7, 5%, 1/3W, Metal Film	2306 204 03278
3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
3403	Res, 100K, 5%, 1/6W, Carbon Film . . .	3198 011 01040
3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3451	Res, 2R7, 5%, 1/3W, Metal Film	2306 204 03278
3452	Res, 5K6, 1%, 1/16W, Metal Film . . .	3198 039 56020
3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3454	Res, 2K, 1%, 1/16W, Metal Film	3198 039 20020
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3465	Res, 27K, 1%, 1/16W, Metal Film . . .	3198 039 27030
3468	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3470	Res, 390K, 5%, 1/8W, Metalized Glass .	2322 730 61394
3471	Res, 3R9, 1%, 1/16W. Metal Film. . . .	3198 039 39080
3472	Res, 3R9, 1%, 1/16W. Metal Film. . . .	3198 039 39080
3473	Res, 5R6, 1%, 1/16W, Metal Film. . . .	3198 039 56080
3474	Res, 2K2, 1%, 1/16W, Metal Film. . . .	3198 039 22020
3475	Res, 2K2, 1%, 1/16W, Metal Film. . . .	3198 039 22020
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
3481	Res, 15K, 1%, 1/16W, Metal Film. . . .	3198 039 15030
3482	Res, 6K8, 1%, 1/16W, Metal Film. . . .	3198 039 68020
3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 33390
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3493	Res, 2R2, 5%, 1/3W, Metal Film	2306 204 03228
3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3498	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S 3504	Res, PTC, 3R0, Degaussing.	2120 661 00025
3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3507	Surge Protector.	2422 549 43073
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S 3510	NTC, 4R7, 20%.	2122 612 00065
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220

S = Safety Part   Be sure to use exact replacement part.

Ref	Description	Part No.
3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
3543	Res, 82k ohm, 1%, 1/16W, Metal Film. .	3198 039 82030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198 021 53320
3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198 021 31530
3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198 021 31220
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4122	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4123	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4127	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4876	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4879	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
5001	Coil, 27u, 10%	3198 018 22790
5002	Coil, 820n, 10%.	3198 018 18270
5201	Coil, 6u8, 5%.	3198 018 16880
5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
5242	Coil, 10u, 5%.	3198 018 11090
5342	Coil, 47u.	3198 018 24790
5401	Coil, 1mH, 10%	3198 018 71020
5445	Transformer, LOT	3128 138 21421
5451	Coil, 33u.	3198 018 73390
5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
5457	Choke.	3128 138 55881
5461	Transformer, Driver.	2422 531 02478
5463	Coil, Choke.	3128 138 37021
5471	Coil, 3u3.	3198 018 73380
5472	Coil, 3u3, 10%	3198 018 23380
5480	Coil, 4u7, 5%.	2422 535 94213
S 5501	Mains Filter	2422 549 43432
S 5520	Transformer, SS39009-04.	2422 531 02459
5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5561	Coil, 27u, 5%.	2422 535 95366
5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5602	Coil, 5u6, 5%.	3198 018 15680
5603	Coil, 5u6, 5%.	3198 018 15680
5604	Coil, 5u6, 5%.	3198 018 15680
5861	Coil, 10u, 5%.	3198 018 11090
6001	Zener Diode, 33 volt	3198 010 23390
6150	Diode, Signal, BAS316.	3198 010 10630
6201	Diode, Signal, BAS316.	3198 010 10630

S = Safety Part   Be sure to use exact replacement part.

Ref	Description	Part No.
6202	Diode, Signal, BAS316	3198 010 10630
6206	Zener Diode, 6.8 volt	3198 020 56880
6331	Diode, Signal, BAV21	3198 010 10070
6332	Diode, Signal, BAS316	3198 010 10630
6333	Diode, Signal, BAV21	3198 010 10070
6335	Diode, Signal, BAV21	3198 010 10070
6400	Res, 1K, 1%, 1/16W. Metal Film	3198 039 10020
6401	Zener Diode, 47 volt	3198 010 24790
6445	Zener Diode, 10 volt	3198 020 51090
6447	Diode, Signal, 1N4148	3198 010 10010
6448	Zener Diode, 6.2 volt	9331 668 30133
6449	Diode, Signal, BAV99	3198 010 10620
6460	Diode, Rect, DG3-7005L	9336 436 10682
6461	Diode, Rect, RGP30J-L7004	9338 617 60682
6462	Zener Diode, 9.1 volt	9331 177 80133
6465	Diode, Signal, BAV21	3198 010 10070
6466	Diode, Signal, BAV21	3198 010 10070
6467	Diode, Signal, BAS316	3198 010 10630
6468	Diode, Signal, BAS316	3198 010 10630
6469	Diode, Rect, BYV95C	9335 001 80133
6470	Diode, Signal, BAV99	3198 010 10620
6476	Zener Diode, 15 volt	3198 010 21590
6481	Zener Diode, 5.6 volt	3198 010 25680
6482	Zener Diode, 9.1 volt	9331 177 80133
6483	Zener Diode, 33 volt	3198 010 23390
6485	Diode, Rect, BYV95C	9335 001 80133
6486	Diode, Rect, EGP20DL-5100	9322 164 42682
6487	Diode, Rect, BYV95A	9335 000 90133
6488	Diode, Rect, EGP20DL-5100	9322 164 42682
6500	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
6520	Diode, Rect, BYV95A	9335 000 90133
6523	Diode, Signal, 1N4148	3198 010 10010
6524	Diode, Rect, 1N5062	3198 010 10120
6525	Diode, Rect, 1N5062	3198 010 10120
6526	Zener Diode, 22 volt	3198 020 52290
6540	Zener Diode, 6.2 volt	9331 668 30133
6541	Zener Diode, 10 volt	3198 020 51090
6560	Diode, Rect, BYV29X-500	9340 555 59127
6562	Diode, Rect, EGP20DL-5100	9322 164 42682
6563	Diode, Signal, BAS316	3198 010 10630
6565	Diode, Signal, BAV70	9331 849 10215
6566	Diode, Signal, 1N4148	3198 010 10010
6569	Diode, Signal, BAS316	3198 010 10630
6570	Zener Diode, 6.8 volt	3198 020 56880
6580	Diode, Signal, BAS316	3198 010 10630
6681	Diode, Signal, BAT85	9336 247 60133
6691	LED, LTL-10234WHCR	9322 185 69682
6692	IR Receiver	9322 206 78667
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
7101	Transistor, NPN, BC847B(COL)	3198 010 42030
7102	Transistor, PNP, BC857B(COL)	3198 010 42150
7103	Transistor, NPN, BC847B(COL)	3198 010 42030
7200	IC, TDA9588H/N1/3I/1129	9352 731 49557
7201	Transistor, NPN, BC847B(COL)	3198 010 42030
7204	Transistor, PNP, BC857B(COL)	3198 010 42150
7205	Transistor, PNP, BC857B(COL)	3198 010 42150
7330	IC, TDA6107JF/N3	9352 713 37112
7400	Power FET, IR	9322 053 35687
7441	Transistor, PNP, BC857B(COL)	3198 010 42150
7443	Transistor, PNP, BC557B(COL)	3198 020 40110
7460	Transistor, NPN, BU4508DX	9340 550 92127
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
7462	Transistor, NPN, PDTC143ZT	9340 547 00215
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
7471	IC, TDA8359J/N2	9352 701 64112
7480	Transistor, NPN, BD135	3198 020 41010
7482	Transistor, NPN, BD135	3198 020 41010
7515	Optic Coupler, TCET1103(G)	9322 140 14667
7520	IC, TEA1507P/N1	9352 673 56112
7521	Transistor, FET, FQPF9N50	9322 187 16687
7522	Transistor, NPN, BC847B(COL)	3198 010 42030
7540	Transistor, NPN, BC547B(COL)	3198 020 40030
7541	Transistor, NPN, PDTC114ET	3198 010 44110
7542	Transistor, PNP, BC857B(COL)	3198 010 42150
7560	IC, L78L33ACZ	9322 134 92676
7561	Transistor, NPN, PDTC143ZT	9340 547 00215
7580	Transistor, PNP, BC857B(COL)	3198 010 42150
7602	IC, M24C08-WBN6P	9322 154 38682
7606	Transistor, NPN, PDTC143ZT	9340 547 00215
7802	IC, HEF4053BT	9333 729 60653
7861	IC, TDA9853H/V1	9352 671 19557
7891	Transistor, NPN, BC847B(COL)	3198 010 42030
7892	Transistor, NPN, BC847B(COL)	3198 010 42030
7901	IC, AN7522N PH	9322 181 41682
9611	Coil, 27u, 10%	3198 018 22790
9672	Coil, 22u, 10%	3198 018 22290
9678	Coil, 22u, 10%	3198 018 22290
CBA	Main Chassis Assy	3141 058 58232

Channel One Card Parts

Channel One Card Parts

Ref	Description	Part No.
CBA	2D 3 Line Comb Filter Parts	3139 177 26561

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side A/V Panel

Side A/V Panel

Ref	Description	Part No.
1810	3 Pin Connector	2412 020 00725
1811	3 Pin Connector	2412 020 00725
2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2176	Cap, 470p, 5%, 50v, Ceramic	3198 016 34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2178	Cap, 470p, 5%, 50v, Ceramic	3198 016 34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
6161	Zener Diode, 6.8 volt	3198 010 26880
7802	IC, HEF4053BT	9333 729 60653
CBA	Side Jack Panel Assembly	3139 177 26231

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

Ref	Description	Part No.
AC01	AC Cord	3135 010 03831
AC04	Batteries for Remote Control Transmitte	2422 526 00163
AC09	CRT A80QCF330X34(N)	9301 955 90463
AC12	Degaussing Coil	2422 549 45334
AC17	Owner's Manual, English	3121 235 22421
AC17	Owner's Manual, Spanish	3121 235 22441
AC20	Cabinet Front	3139 177 53591
AC20C	Light Guide	3139 124 43141
AC20D	Nameplate	3141 050 00431
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00411
CBA	Side Jack Panell	3139 177 26231
CBA	Main Chassis Assy	3141 058 58232
REMOTE	Remote Control Transmitter, RC1112813/1	3139 238 05781

S = Safety Part   Be sure to use exact replacement part.

32PT541S37G - Manual no. 7638

Main Chassis Parts

		Main Chassis Parts	
	0211	2 Pin Connector.	2422 025 16269
	0212	2 Pin Connector.	2422 025 16375
	0219	6 Pin Connector.	2422 025 12482
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0222	2 Pin Connector.	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0229	3 Pin Connector.	2412 020 00725
	0243	6 Pin Connector.	2422 025 04854
	0244	5 Pin Connector.	2422 025 04853
	0245	6 Pin Connector.	2422 025 04854
	0246	5 Pin Connector.	2422 025 12481
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector.	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U PLL	2422 542 90141
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1600	Tact Switch.	2422 128 02742
	1601	Tact Switch.	2422 128 02742
	1602	Tact Switch.	2422 128 02742
	1603	Tact Switch.	2422 128 02742
	1606	Tact Switch.	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1811	3 Pin Connector.	2412 020 00725
	1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2209	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
	2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
	2451	Cap, 15n, 10%, 50v, Polyester.	3198 014 01530
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 470n, 5%, 250v, Metalized Polypropylene.	2022 333 00086
	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
S	2463	Cap, 1n2, 10%, 2000v, Ceramic.	2020 558 90488
	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene	2222 479 90042
S	2465	Cap, 13n, 5%, 1600v, Polypropylene	2020 301 90254
	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
	2468	Cap, 10n, 10%, 400v, Polyester	2222 347 90218
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2803	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250

S = Safety Part   Be sure to use exact replacement part.

Ref	Description	Part No.
2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
2862	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3206	Res, 270K, 5%, 1/16W, Metalized Glass.	2322 702 60274
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
3403	Res, 100K, 5%, 1/6W, Carbon Film . . .	3198 011 01040
3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3451	Res, 2R7, 5%, 1/3W, Metal Film	2306 204 03278
S 3452	Res, 5K6, 1%, 3/5W, Metal Film	2312 915 15602
3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3468	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3470	Res, 390K, 5%, 1/8W, Metalized Glass .	2322 730 61394
3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
3472	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
3473	Res, 5R6, 1%, 3/5W, Metal Film	2312 915 15608
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
3481	Res, 15K, 1%, 3/5W, Metal Film	2312 915 11503
3482	Res, 6K8, 1%, 3/5W, Metal Film	2312 915 16802
3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 33390
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
S 3493	Res, 2R2, 5%, 1/3W, Metal Film	2306 204 03228
3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3498	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S 3504	Res, PTC, 3R0, Degaussing.	2120 661 00025
3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3507	Surge Protector.	2422 549 43073
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780

S = Safety Part   Be sure to use exact replacement part.

32PT541S37G (continued)

S	Ref	Description	Part No.
	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3523	Res, 100 ohm, 5%, 1/3W, Metal Film	2306 204 03101
	3524	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film.	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass.	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3682	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
	3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3686	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
	3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3862	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
	3863	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
	3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3865	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3866	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3867	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3901	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4122	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4123	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4127	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5202	Wire Jumper.	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5241	Wire Jumper.	3198 036 90010
	5242	Coil, 10u, 5%.	3198 018 11090
	5342	Coil, 22u.	2422 535 97333
	5401	Coil, 1mH, 10%	3198 018 71020
S	5445	Transformer, PSLOT	3128 138 21421
	5451	Coil, 33u, 10%	3198 018 73390
	5452	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5457	Coil, Linear, DC12	3128 138 55881
	5461	Transformer, Signal Driver, SC10027-00	2422 531 02478
	5463	Coil, Choke.	3128 138 37021
	5471	Coil, 3u3, 20%	3198 018 73380
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 4u7, 5%.	2422 535 94213
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04.	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5861	Coil, 10u, 5%.	3198 018 11090
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316.	3198 010 10630

S = Safety Part   Be sure to use exact replacement part.

32PT541S37G (continued)

Ref	Description	Part No.
6201	Diode, Signal, BAS316	3198 010 10630
6202	Diode, Signal, BAS316	3198 010 10630
6206	Zener Diode, 6.8 volt	3198 020 56880
6331	Diode, Signal, BAV21	3198 010 10070
6332	Diode, Signal, BAS316	3198 010 10630
6333	Diode, Signal, BAV21	3198 010 10070
6335	Diode, Signal, BAV21	3198 010 10070
6400	Res, 1K, 1%, 3/5W, Metal Film	2312 915 11002
6401	Zener Diode, 47 volt	3198 010 24790
6445	Zener Diode, 10 volt	3198 020 51090
6447	Diode, Signal, 1N4148	3198 010 10010
6448	Zener Diode, 6.2 volt	9331 668 30133
6449	Diode, Signal, BAV99	3198 010 10620
6460	Diode, Rect, DG3-7005L	9336 436 10682
6461	Diode, Rect, RGP30J-L7004	9338 617 60682
6462	Zener Diode, 9.1 volt	9331 177 80133
6465	Diode, Signal, BAV21	3198 010 10070
6466	Diode, Signal, BAV21	3198 010 10070
6467	Diode, Signal, BAS316	3198 010 10630
6468	Diode, Signal, BAS316	3198 010 10630
6469	Diode, Rect, BYV95C	9335 001 80133
6470	Diode, Signal, BAV99	3198 010 10620
6476	Zener Diode, 15 volt	3198 010 21590
6481	Zener Diode, 5.6 volt	3198 010 25680
6482	Zener Diode, 9.1 volt	9331 177 80133
6483	Zener Diode, 33 volt	3198 010 23390
6485	Diode, Rect, BYV95C	9335 001 80133
6486	Diode, Rect, EGP20DL-5100	9322 164 42682
6487	Diode, Rect, BYV95A	9335 000 90133
6488	Diode, Rect, EGP20DL-5100	9322 164 42682
6500	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
6520	Diode, Rect, BYV95A	9335 000 90133
6523	Diode, Signal, 1N4148	3198 010 10010
6524	Diode, Rect, 1N5062	3198 010 10120
6525	Diode, Rect, 1N5062	3198 010 10120
6526	Zener Diode, 22 volt	3198 020 52290
6540	Zener Diode, 6.2 volt	9331 668 30133
6541	Zener Diode, 10 volt	3198 020 51090
6560	Diode, Rect, BYV29X-500	9340 555 59127
6562	Diode, Rect, EGP20DL-5100	9322 164 42682
6563	Diode, Signal, BAS316	3198 010 10630
6565	Diode, Signal, BAV70	9331 849 10215
6566	Diode, Signal, 1N4148	3198 010 10010
6569	Diode, Signal, BAS316	3198 010 10630
6570	Zener Diode, 6.8 volt	3198 020 56880
6580	Diode, Signal, BAS316	3198 010 10630
6681	Diode, Signal, BAT85	9336 247 60133
6691	LED, LTL-10234WHCR	9322 185 69682
6692	IR Receiver	9322 127 54667
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
7101	Transistor, NPN, BC847B(COL)	3198 010 42030
7102	Transistor, PNP, BC857B(COL)	3198 010 42150
7103	Transistor, NPN, BC847B(COL)	3198 010 42030
7200	IC, TDA9588H/N1/3I/1053	9352 728 40557
7201	Transistor, NPN, BC847B(COL)	3198 010 42030
7204	Transistor, PNP, BC857B(COL)	3198 010 42150
7205	Transistor, PNP, BC857B(COL)	3198 010 42150
7330	IC, TDA6107JF/N3	9352 713 37112
7400	Power FET, STP3NC60FP	9322 157 37687
7441	Transistor, PNP, BC857B(COL)	3198 010 42150
7443	Transistor, PNP, BC557B(COL)	3198 020 40110
7460	Transistor, NPN, BU4508DX	9340 550 92127
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
7462	Transistor, NPN, PDTC143ZT	9340 547 00215
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
7471	IC, TDA8359J/N2	9352 701 64112
7480	Transistor, NPN, BD135	3198 020 41010
7482	Transistor, NPN, BD135	3198 020 41010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667
7520	IC, TEA1507P/N1	9352 673 56112
7521	Power FET, FQPF9N50	9322 187 16687
7522	Transistor, NPN, BC847B(COL)	3198 010 42030
7540	Transistor, NPN, BC547B(COL)	3198 020 40030
7541	Transistor, NPN, PDTC114ET	9340 310 10215
7542	Transistor, PNP, BC857B(COL)	3198 010 42150
7560	IC, L78L33ACZ	9322 134 92676
7561	Transistor, NPN, PDTC143ZT	9340 547 00215
7580	Transistor, PNP, BC857B(COL)	3198 010 42150
7602	IC, M24C08-WBN6	9322 154 38682
7606	Transistor, NPN, PDTC143ZT	9340 547 00215
7802	IC, HEF4053BT	9333 729 60653
7861	IC, TDA9853H/V1	9352 671 19557
7891	Transistor, NPN, BC847B(COL)	3198 010 42030
7892	Transistor, NPN, BC847B(COL)	3198 010 42030
7901	IC, AN7522N PH	9322 181 41682
9001	Wire Jumper	3198 036 90010
9101	Wire Jumper	3198 036 90010
9102	Wire Jumper	3198 036 90010
9103	Wire Jumper	3198 036 90010
9104	Wire Jumper	3198 036 90010
9123	Wire Jumper	3198 036 90010
9171	Wire Jumper	3198 036 90010
9173	Wire Jumper	3198 036 90010
9175	Wire Jumper	3198 036 90010
9176	Wire Jumper	3198 036 90010
9178	Wire Jumper	3198 036 90010
9179	Wire Jumper	3198 036 90010
9181	Wire Jumper	3198 036 90010
9182	Wire Jumper	3198 036 90010
9183	Wire Jumper	3198 036 90010
9192	Wire Jumper	3198 036 90010
9193	Wire Jumper	3198 036 90010
9311	Wire Jumper	3198 036 90010
9312	Wire Jumper	3198 036 90010
9406	Wire Jumper	3198 036 90010
9407	Wire Jumper	3198 036 90010
9408	Wire Jumper	3198 036 90010
9409	Wire Jumper	3198 036 90010
9410	Wire Jumper	3198 036 90010
9411	Wire Jumper	3198 036 90010
9412	Wire Jumper	3198 036 90010
9413	Wire Jumper	3198 036 90010
9414	Wire Jumper	3198 036 90010
9415	Wire Jumper	3198 036 90010
9416	Wire Jumper	3198 036 90010
9417	Wire Jumper	3198 036 90010
9418	Wire Jumper	3198 036 90010
9419	Wire Jumper	3198 036 90010
9421	Wire Jumper	3198 036 90010
9422	Wire Jumper	3198 036 90010
9423	Wire Jumper	3198 036 90010
9424	Wire Jumper	3198 036 90010
9425	Wire Jumper	3198 036 90010
9426	Wire Jumper	3198 036 90010
9427	Wire Jumper	3198 036 90010
9453	Wire Jumper	3198 036 90010
9460	Wire Jumper	3198 036 90010
9463	Wire Jumper	3198 036 90010
9500	Wire Jumper	3198 036 90010
9501	Wire Jumper	3198 036 90010
9503	Wire Jumper	3198 036 90010
9506	Wire Jumper	3198 036 90010
9507	Wire Jumper	3198 036 90010
9510	Wire Jumper	3198 036 90010
9511	Wire Jumper	3198 036 90010
9512	Wire Jumper	3198 036 90010
9513	Wire Jumper	3198 036 90010
9514	Wire Jumper	3198 036 90010
9515	Wire Jumper	3198 036 90010
9516	Wire Jumper	3198 036 90010
9518	Wire Jumper	3198 036 90010
9520	Wire Jumper	3198 036 90010
9521	Wire Jumper	3198 036 90010
9522	Wire Jumper	3198 036 90010
9524	Wire Jumper	3198 036 90010
9528	Wire Jumper	3198 036 90010
9530	Wire Jumper	3198 036 90010
9611	Coil, 27u, 10%	3198 018 22790
9612	Wire Jumper	3198 036 90010
9613	Wire Jumper	3198 036 90010
9614	Wire Jumper	3198 036 90010
9615	Wire Jumper	3198 036 90010
9617	Wire Jumper	3198 036 90010
9618	Wire Jumper	3198 036 90010
9619	Wire Jumper	3198 036 90010
9620	Wire Jumper	3198 036 90010
9621	Wire Jumper	3198 036 90010
9622	Wire Jumper	3198 036 90010
9623	Wire Jumper	3198 036 90010
9624	Wire Jumper	3198 036 90010
9626	Wire Jumper	3198 036 90010
9627	Wire Jumper	3198 036 90010
9628	Wire Jumper	3198 036 90010
9629	Wire Jumper	3198 036 90010
9631	Wire Jumper	3198 036 90010
9632	Wire Jumper	3198 036 90010
9633	Wire Jumper	3198 036 90010
9637	Wire Jumper	3198 036 90010
9638	Wire Jumper	3198 036 90010
9639	Wire Jumper	3198 036 90010
9640	Wire Jumper	3198 036 90010
9641	Wire Jumper	3198 036 90010
9642	Wire Jumper	3198 036 90010
9643	Wire Jumper	3198 036 90010
9648	Wire Jumper	3198 036 90010
9650	Wire Jumper	3198 036 90010
9651	Wire Jumper	3198 036 90010
9652	Wire Jumper	3198 036 90010
9654	Wire Jumper	3198 036 90010
9655	Wire Jumper	3198 036 90010
9656	Wire Jumper	3198 036 90010
9657	Wire Jumper	3198 036 90010
9658	Wire Jumper	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

32PT541S37G (continued)

Ref	Description	Part No.
9659	Wire Jumper.	3198 036 90010
9660	Wire Jumper.	3198 036 90010
9661	Wire Jumper.	3198 036 90010
9662	Wire Jumper.	3198 036 90010
9663	Wire Jumper.	3198 036 90010
9664	Wire Jumper.	3198 036 90010
9665	Wire Jumper.	3198 036 90010
9666	Wire Jumper.	3198 036 90010
9667	Wire Jumper.	3198 036 90010
9668	Wire Jumper.	3198 036 90010
9669	Wire Jumper.	3198 036 90010
9670	Wire Jumper.	3198 036 90010
9671	Wire Jumper.	3198 036 90010
9672	Coil, 22u, 10%	3198 018 22290
9674	Wire Jumper.	3198 036 90010
9675	Wire Jumper.	3198 036 90010
9676	Wire Jumper.	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper.	3198 036 90010
9680	Wire Jumper.	3198 036 90010
9681	Wire Jumper.	3198 036 90010
9685	Wire Jumper.	3198 036 90010
9686	Wire Jumper.	3198 036 90010
9687	Wire Jumper.	3198 036 90010
9688	Wire Jumper.	3198 036 90010
9689	Wire Jumper.	3198 036 90010
9690	Wire Jumper.	3198 036 90010
9691	Wire Jumper.	3198 036 90010
9694	Wire Jumper.	3198 036 90010
9695	Wire Jumper.	3198 036 90010
9697	Wire Jumper.	3198 036 90010
9698	Wire Jumper.	3198 036 90010
9699	Wire Jumper.	3198 036 90010
9821	Wire Jumper.	3198 036 90010
9822	Wire Jumper.	3198 036 90010
9825	Wire Jumper.	3198 036 90010
9828	Wire Jumper.	3198 036 90010
9829	Wire Jumper.	3198 036 90010
9831	Wire Jumper.	3198 036 90010
9832	Wire Jumper.	3198 036 90010
9837	Wire Jumper.	3198 036 90010
9838	Wire Jumper.	3198 036 90010
9839	Wire Jumper.	3198 036 90010
9846	Wire Jumper.	3198 036 90010
9847	Wire Jumper.	3198 036 90010
9849	Wire Jumper.	3198 036 90010
9850	Wire Jumper.	3198 036 90010
9851	Wire Jumper.	3198 036 90010
9852	Wire Jumper.	3198 036 90010
9853	Wire Jumper.	3198 036 90010
9856	Wire Jumper.	3198 036 90010
9860	Wire Jumper.	3198 036 90010
9861	Wire Jumper.	3198 036 90010
9862	Wire Jumper.	3198 036 90010
9864	Wire Jumper.	3198 036 90010
9865	Wire Jumper.	3198 036 90010
9868	Wire Jumper.	3198 036 90010
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9891	Wire Jumper.	3198 036 90010
9892	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010
9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9905	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9918	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9993	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9997	Wire Jumper.	3198 036 90010
9998	Wire Jumper.	3198 036 90010
CBA	Main Chassis Assembly.	3141 058 58231

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts

Side Jack Panel Parts

Ref	Description	Part No.
0232	Headphone Jack	2422 026 04747
0250	A/V Jack	2422 026 04815
0251	6 Pin Connector.	2422 025 12482
0254	5 Pin Connector.	2422 025 12481
0255	4 Pin Connector.	2422 025 12479
1810	3 Pin Connector.	2412 020 00725
1811	3 Pin Connector.	2412 020 00725
2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2177	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2179	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4823	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4824	Res, Zero ohm, "Chip" Jumper	3198 021 90030
6161	Zener Diode, 6.8 volt.	3198 010 26880
7802	IC, HEF4053BT.	9333 729 60653
9150	Wire Jumper.	3198 036 90010
9151	Wire Jumper.	3198 036 90010
9152	Wire Jumper.	3198 036 90010
9153	Wire Jumper.	3198 036 90010
9154	Wire Jumper.	3198 036 90010
9155	Wire Jumper.	3198 036 90010
9170	Wire Jumper.	3198 036 90010
CBA	Side Jack Panel Assembly	3139 187 28141

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

Ref	Description	Part No.
S AC01	AC Cord.	3135 010 03831
AC03	Anode Lead Spacer (3 Used)	3135 014 04471
AC04	Batteries for Remote Control Transmitte	9299 000 65263
AC05	Cabinet Back	3139 124 47111
AC08	Chassis Tray	3139 124 31325
S AC09	CRT, A80QCF340X34(N)	9301 904 59463
AC10	Customer Control Buttons	3139 124 32711
S AC12	Degaussing Coil.	2422 549 45334
AC15	Holder, Degaussing Coil (4 Used) . . .	3135 013 01661
AC17	Owner's Manual	3121 235 21361
AC19	Side Jack Panel Bracket.	3139 124 40481
AC20	Cabinet Front Assembly	3121 237 53611
AC20A	Cabinet Front.	3139 137 71501
AC20C	Light Guide.	3139 124 32681
AC20D	Nameplate.	3139 120 01301
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00401
REMOTE	Remote Control Transmitter, RC19335004/ 01.	3139 228 86464

32PT543S37A - Manual no. 7638

Main Chassis Parts

S	Ref	Description	Part No.
		Main Chassis Parts	
	0211	2 Pin Connector.	2422 025 16269
	0212	2 Pin Connector.	2422 025 16375
	0219	6 Pin Connector.	2422 025 12482
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0222	2 Pin Connector.	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0229	3 Pin Connector.	2412 020 00725
	0243	6 Pin Connector.	2422 025 04854
	0244	5 Pin Connector.	2422 025 04853
	0245	6 Pin Connector.	2422 025 04854
	0246	5 Pin Connector.	2422 025 12481
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector.	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U PLL	2422 542 90098
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1600	Tact Switch.	2422 128 02742
	1601	Tact Switch.	2422 128 02742
	1602	Tact Switch.	2422 128 02742
	1603	Tact Switch.	2422 128 02742
	1606	Tact Switch.	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1811	3 Pin Connector.	2412 020 00725
	1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
	2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
	2451	Cap, 15n, 10%, 50v, Polyester.	3198 014 01530
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 430n, 5%, 250v, Metalized Polypropylene.	2222 479 90022
	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
	2463	Cap, 680p, 10%, 2000v, Ceramic	2020 558 90485
	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene	2222 479 90042
S	2465	Cap, 13n, 5%, 1600v, Polypropylene	2020 301 90254
	2466	Cap, 10n, 10%, 400v, Polyester	2222 347 90218
	2468	Cap, 18n, 10%, 400v, Polyester	2222 347 90222
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2803	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250

S = Safety Part   Be sure to use exact replacement part.

32PT543S37A (continued)

2813 Cap, 2u2, +80/-20%, 10v, Ceramic . . . 3198 017 22250
2816 Cap, 470n, +80/-20%, 10v, Ceramic. . . 3198 017 44740
2862 Cap, 2u2, +80/-20%, 10v, Ceramic . . . 3198 017 22250
2864 Cap, 2u2, 20%, 50v, Electrolytic . . . 3198 025 52280
2865 Cap, 2u2, 20%, 50v, Electrolytic . . . 3198 025 52280
2866 Cap, 2u2, +80/-20%, 10v, Ceramic . . . 3198 017 22250
2867 Cap, 1n8, 10%, 50v, Ceramic. 2238 586 15626
2868 Cap, 150p, 5%, 50v, Ceramic. 3198 016 31510
2869 Cap, 68n, 10%, 50v, Polyester. 3198 014 06830
2870 Cap, 68n, 10%, 50v, Polyester. 3198 014 06830
2871 Cap, 150p, 5%, 50v, Ceramic. 3198 016 31510
2872 Cap, 1n8, 10%, 50v, Ceramic. 2238 586 15626
2873 Cap, 2u2, +80/-20%, 10v, Ceramic . . . 3198 017 22250
2874 Cap, 100u, 20%, 25v, Electrolytic. . . 3198 025 31010
2875 Cap, 100u, 20%, 25v, Electrolytic. . . 3198 025 31010
2876 Cap, 4u7, 20%, 50v, Electrolytic . . . 3198 025 54780
2877 Cap, 10u, 20%, 50v, Electrolytic . . . 3198 025 51090
2878 Cap, 1u, 20%, 50v, Electrolytic. . . . 3198 025 51080
2879 Cap, 4n7, 10%, 50v, Ceramic. 3198 017 34720
2880 Cap, 22n, 10%, 25v, Ceramic. 3198 017 32230
2883 Cap, 470u, 20%, 16v, Electrolytic. . . 3198 025 24710
2884 Cap, 2u2, 20%, 50v, Electrolytic . . . 3198 025 52280
2885 Cap, 220n, 10%, 50v, Polyester 3198 014 02240
2886 Cap, 220n, +80/-20%, 16v, Ceramic. . . 3198 017 42240
2892 Cap, 100n, +80/-20%, 25v, Ceramic. . . 3198 023 41040
2893 Cap, 100n, +80/-20%, 25v, Ceramic. . . 3198 023 41040
2902 Cap, 1000u, 20%, 16v, Electrolytic . . 3198 026 21020
2903 Cap, 1u, 20%, 50v, Electrolytic. . . . 3198 025 51080
2904 Cap, 27n, 10%, 50v, Ceramic. 2238 580 15642
2905 Cap, 1n2, 10%, 50v, Ceramic. 2238 586 15624
2906 Cap, 27n, 10%, 50v, Ceramic. 2238 580 15642
2907 Cap, 1n2, 10%, 50v, Ceramic. 2238 586 15624
2908 Cap, 10u, 20%, 50v, Electrolytic . . . 3198 025 51090
2910 Cap, 10n, 10%, 50v, Ceramic. 3198 017 31030
2911 Cap, 10n, 10%, 50v, Ceramic. 3198 017 31030
2950 Cap, 330p, 5%, 50v, Ceramic. 3198 016 33310
3000 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3001 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3002 Res, Zero ohm, "Chip" Jumper 3198 021 90030
3003 Res, 1K5, 5%, 1/16W, Metalized Glass . 3198 021 31520
3004 Res, 8K2, 5%, 1/16W, Metalized Glass . 3198 021 38220
3005 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3101 Res, 68 ohm, 5%, 1/6W, Carbon Film . . 3198 011 06890
3102 Res, 1K, 5%, 1/16W, Metalized Glass. . 3198 021 31020
3103 Res, 150 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01510
3104 Res, 220K, 5%, 1/16W, Metalized Glass. 3198 021 32240
3105 Res, 150 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01510
3106 Res, 220K, 5%, 1/16W, Metalized Glass. 3198 021 32240
3111 Res, 75 ohm, 5%, 1/6W, Carbon Film . . 3198 011 07590
3112 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3113 Res, 75 ohm, 5%, 1/6W, Carbon Film . . 3198 011 07590
3114 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3115 Res, 75 ohm, 5%, 1/6W, Carbon Film . . 3198 011 07590
3116 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3123 Res, 150 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01510
3124 Res, 47K, 5%, 1/16W, Metalized Glass . 3198 021 34730
3125 Res, 150 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01510
3126 Res, 47K, 5%, 1/16W, Metalized Glass . 3198 021 34730
3131 Res, 150 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01510
3132 Res, 47K, 5%, 1/16W, Metalized Glass . 3198 021 34730
3133 Res, 150 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01510
3134 Res, 47K, 5%, 1/16W, Metalized Glass . 3198 021 34730
3135 Res, 75 ohm, 5%, 1/6W, Carbon Film . . 3198 011 07590
3136 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3141 Res, 1K, 5%, 1/6W, Carbon Film 3198 011 01020
3149 Res, 100K, 5%, 1/16W, Metalized Glass. 3198 021 31040
3150 Res, 150K, 5%, 1/16W, Metalized Glass. 3198 021 31540
3154 Res, 5K6, 5%, 1/6W, Carbon Film. . . . 3198 011 05620
3156 Res, 10K, 5%, 1/6W, Carbon Film. . . . 3198 011 01030
3157 Res, 1K5, 5%, 1/16W, Metalized Glass . 3198 021 31520
3158 Res, 10K, 5%, 1/16W, Metalized Glass . 3198 021 31030
3159 Res, 1K2, 1%, 1/8W, Metalized Glass. . 2322 734 61202
3200 Res, 390 ohm, 5%, 1/6W, Carbon Film. . 3198 011 03910
3201 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3202 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3203 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3204 Res, 22K, 5%, 1/6W, Carbon Film. . . . 3198 011 02230
3205 Res, 1K, 5%, 1/16W, Metalized Glass. . 3198 021 31020
3206 Res, 33K, 5%, 1/16W, Metalized Glass . 3198 021 33330
3207 Res, 1K, 5%, 1/6W, Carbon Film 3198 011 01020
3208 Res, 220 ohm, 5%, 1/16W, Metalized Glas 3198 021 32210
3209 Res, 68 ohm, 5%, 1/16W, Metalized Glass 3198 021 36890
3212 Res, 470 ohm, 5%, 1/16W, Metalized Glas 3198 021 34710
3213 Res, 560 ohm, 5%, 1/6W, Carbon Film. . 3198 011 05610
3217 Res, 330K, 5%, 1/16W, Metalized Glass. 3198 021 33340
3218 Res, 82K, 5%, 1/16W, Metalized Glass . 3198 021 38230
3219 Res, 2K2, 5%, 1/16W, Metalized Glass . 3198 021 32220
3220 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3221 Res, 560 ohm, 5%, 1/6W, Carbon Film. . 3198 011 05610
3222 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3226 Res, 560 ohm, 5%, 1/16W, Metalized Glas 3198 021 35610
3232 Res, 2K2, 5%, 1/16W, Metalized Glass . 3198 021 32220

3235 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3241 Res, 22K, 5%, 1/16W, Metalized Glass . 3198 021 32230
3242 Res, 27K, 5%, 1/16W, Metalized Glass . 3198 021 32730
3244 Res, 820 ohm, 5%, 1/6W, Carbon Film. . 3198 011 08210
3245 Res, 39K, 1%, 1/16W, Metalized Glass . 2322 704 63903
3246 Res, 10K, 5%, 1/16W, Metalized Glass . 3198 021 31030
3247 Res, 680K, 5%, 1/16W, Metalized Glass. 3198 021 36840
3248 Res, 33K, 5%, 1/16W, Metalized Glass . 3198 021 33330
3249 Res, 820 ohm, 5%, 1/6W, Carbon Film. . 3198 011 08210
3250 Res, 8K2, 5%, 1/6W, Carbon Film. . . . 3198 011 08220
3251 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3256 Res, 1K, 5%, 1/16W, Metalized Glass. . 3198 021 31020
3257 Res, 10M, 5%, 1/16W, Metalized Glass . 3198 021 31060
3258 Res, 100K, 5%, 1/16W, Metalized Glass. 3198 021 31040
3259 Res, 470K, 5%, 1/16W, Metalized Glass. 3198 021 34740
3331 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3332 Res, 1K, 20%, 1/2W, Carbon Film. . . . 3198 013 01020
3333 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3334 Res, 1K, 20%, 1/2W, Carbon Film. . . . 3198 013 01020
3335 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3336 Res, 1K, 20%, 1/2W, Carbon Film. . . . 3198 013 01020
3340 Res, 10 ohm, 5%, 1/2W, Metal Film. . . 2306 207 03109
S 3341 Res, 1 ohm, 5%, 1/3W, Metal Film . . . 2306 204 03108
S 3342 Res, 1 ohm, 5%, 1/3W, Metal Film . . . 2306 204 03108
3343 Res, 1K5, 20%, 1/2W, Carbon Film . . . 3198 013 01520
3344 Res, 33 ohm, 5%, 1/6W, Carbon Film . . 3198 011 03390
S 3345 Varactor, 1MA/50V, Max 115V. 2322 593 13507
3346 Res, 33 ohm, 5%, 1/6W, Carbon Film . . 3198 011 03390
3400 Res, 330 ohm, 5%, 1/6W, Carbon Film. . 3198 011 03310
3401 Res, 33K, 5%, 1/6W, Carbon Film. . . . 3198 011 03330
3403 Res, 100K, 5%, 1/6W, Carbon Film . . . 3198 011 01040
3404 Res, 1K, 5%, 1/6W, Carbon Film 3198 011 01020
3405 Res, 4R7, 5%, 1/6W, Carbon Film. . . . 3198 011 04780
3406 Res, 4R7, 5%, 1/6W, Carbon Film. . . . 3198 011 04780
3408 Res, 100 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01010
3410 Res, 10K, 5%, 1/6W, Carbon Film. . . . 3198 011 01030
3411 Res, 4R7, 5%, 1/3W, Metal Film 2306 204 03478
3441 Res, 100 ohm, 5%, 1/10W, Metalized Glas 3198 021 51010
3442 Res, Zero ohm, "Chip" Jumper 3198 021 90030
3443 Res, 1M, 5%, 1/16W, Metalized Glass. . 3198 021 31050
3445 Res, 15K, 5%, 1/6W, Carbon Film. . . . 3198 011 01530
3446 Res, 5K6, 5%, 1/6W, Carbon Film. . . . 3198 011 05620
3447 Res, 180 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01810
3448 Res, 820 ohm, 5%, 1/6W, Carbon Film. . 3198 011 08210
3449 Res, 68 ohm, 5%, 1/6W, Carbon Film . . 3198 011 06890
3450 Res, 33 ohm, 5%, 1/6W, Carbon Film . . 3198 011 03390
S 3451 Res, 10 ohm, 5%, 1/3W, Metal Film. . . 2306 204 03109
S 3452 Res, 5K6, 1%, 3/5W, Metal Film 2312 915 15602
3453 Res, 1K, 5%, 1/6W, Carbon Film 3198 011 01020
3454 Res, 2K, 1%, 3/5W, Metal Film. 2312 915 12002
S 3455 Res, 6R8, 5%, 1 1/3W, Metal Film . . . 3198 012 26880
3458 Res, 1K, 5%, 1/6W, Carbon Film 3198 011 01020
S 3459 Res, 15K, 5%, 1 1/3W, Metal Film . . . 3198 012 21530
3460 Res, 3K9, 5%, 1/6W, Carbon Film. . . . 3198 011 03920
3463 Res, 33 ohm, 5%, 1/6W, Carbon Film . . 3198 011 03390
3465 Res, 27K, 1%, 3/5W, Metal Film 2312 915 12703
3468 Res, 180 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01810
3469 Res, 3K3, 5%, 1/6W, Carbon Film. . . . 3198 011 03320
3470 Res, 390K, 5%, 1/8W, Metalized Glass . 2322 730 61394
3471 Res, 4R7, 1%, 3/5W, Metal Film 2312 915 14708
3472 Res, 2R2, 1%, 3/5W, Metal Film 2312 915 12208
3473 Res, 3R3, 1%, 3/5W, Metal Film 2312 915 13308
3474 Res, 2K2, 1%, 3/5W, Metal Film 2312 915 12202
3475 Res, 2K2, 1%, 3/5W, Metal Film 2312 915 12202
3477 Res, 150 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01510
3478 Res, 150 ohm, 5%, 1/6W, Carbon Film. . 3198 011 01510
3479 Res, 2K7, 5%, 1/10W, Metalized Glass . 3198 021 52720
3480 Res, 1R5, 5%, 1/4W, Carbon Film. . . . 2122 101 02083
3481 Res, 15K, 1%, 3/5W, Metal Film 2312 915 11503
3482 Res, 6K8, 1%, 3/5W, Metal Film 2312 915 16802
3484 Res, 3K9, 5%, 1/6W, Carbon Film. . . . 3198 011 03920
S 3486 Res, 33 ohm, 5%, 2 1/2W, Metal Film. . 3198 012 33390
3488 Res, 4R7, 5%, 1/2W, Metal Film 2306 207 03478
3490 Res, 8K2, 5%, 1/6W, Carbon Film. . . . 3198 011 08220
3492 Res, 1K, 5%, 1/10W, Metalized Glass. . 3198 021 51020
S 3493 Res, 2R2, 5%, 1/3W, Metal Film 2306 204 03228
3494 Res, 4R7, 5%, 1/2W, Metal Film 2306 207 03478
3495 Res, 22K, 5%, 1/16W, Metalized Glass . 3198 021 32230
3496 Res, 100K, 5%, 1/16W, Metalized Glass. 3198 021 31040
3497 Res, 100K, 5%, 1/16W, Metalized Glass. 3198 021 31040
3498 Res, 12K, 5%, 1/16W, Metalized Glass . 3198 021 31230
3499 Res, 10K, 5%, 1/10W, Metalized Glass . 3198 021 51030
3500 Res, 3M3, 5%, 1/2W, Metalized Glass. . 2322 242 13335
3501 Res, 3M3, 5%, 1/2W, Metalized Glass. . 2322 242 13335
S 3504 Res, PTC, 3 ohm, 144V. 2122 663 00019
3506 Res, 1M5, 5%, 1/2W, Metalized Glass. . 2322 242 13155
3507 Surge Protector. 2422 549 43073
3508 Res, 220 ohm, 20%, 1/2W, Carbon Film . 3198 013 02210
S 3510 Res, NTC, 4R7, 20%, 3W1. . . . . 2122 612 00056
3519 Res, 270 ohm, 5%, 1/6W, Carbon Film. . 3198 011 02710
3520 Res, 1K2, 5%, 1/10W, Metalized Glass . 3198 021 51220
3521 Res, 4R7, 5%, 1/6W, Carbon Film. . . . 3198 011 04780

S = Safety Part   Be sure to use exact replacement part.

32PT543S37A (continued)

	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198 021 53320
	3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198 021 31530
	3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198 021 31220
	3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320

	3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4122	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4123	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4127	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5202	Wire Jumper.	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5241	Wire Jumper.	3198 036 90010
	5242	Coil, 10u, 5%.	3198 018 11090
	5342	Coil, 22u.	2422 535 97333
	5401	Coil, 1mH, 10%	3198 018 71020
S	5445	Transformer, PSLOT	3128 138 21421
	5451	Coil, 33u, 10%	3198 018 73390
	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
S	5457	Coil, 25u.	2422 535 91028
	5461	Transformer, Signal Driver, SC10027-00	2422 531 02478
	5463	Coil, Choke.	3128 138 37021
	5471	Coil, 3u3, 20%	3198 018 73380
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 47u, 10%	2422 535 97337
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04.	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5861	Coil, 10u, 5%.	3198 018 11090
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316.	3198 010 10630

S = Safety Part   Be sure to use exact replacement part.

32PT543S37A (continued)

Ref	Description	Part No.
6201	Diode, Signal, BAS316	3198 010 10630
6202	Diode, Signal, BAS316	3198 010 10630
6206	Zener Diode, 6.8 volt	3198 020 56880
6331	Diode, Signal, BAV21	3198 010 10070
6332	Diode, Signal, BAS316	3198 010 10630
6333	Diode, Signal, BAV21	3198 010 10070
6335	Diode, Signal, BAV21	3198 010 10070
6400	Res, 1K, 1%, 3/5W, Metal Film	2312 915 11002
6401	Zener Diode, 47 volt	3198 010 24790
6445	Zener Diode, 10 volt	3198 020 51090
6447	Diode, Signal, 1N4148	3198 010 10010
6448	Zener Diode, 6.2 volt	9331 668 30133
6449	Diode, Signal, BAV99	3198 010 10620
6460	Diode, Rect, DG3-7005L	9336 436 10682
6461	Diode, Rect, RGP30J-L7004	9338 617 60682
6462	Zener Diode, 9.1 volt	9331 177 80133
6465	Diode, Signal, BAV21	3198 010 10070
6466	Diode, Signal, BAV21	3198 010 10070
6467	Diode, Signal, BAS316	3198 010 10630
6468	Diode, Signal, BAS316	3198 010 10630
6469	Diode, Rect, BYD33J	9337 234 20133
6470	Diode, Signal, BAV99	3198 010 10620
6476	Zener Diode, 15 volt	3198 010 21590
6481	Zener Diode, 5.6 volt	3198 010 25680
6482	Zener Diode, 9.1 volt	9331 177 80133
6483	Zener Diode, 33 volt	3198 010 23390
6485	Diode, Rect, BYD33J	9337 234 20133
6486	Diode, Rect, EGP20DL-5100	9322 164 42682
6487	Diode, Rect, BYD33D	9337 234 00133
6488	Diode, Rect, EGP20DL-5100	9322 164 42682
6500	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
6520	Diode, Rect, BYD33D	9337 234 00133
6523	Diode, Signal, 1N4148	3198 010 10010
6524	Diode, Rect, 1N5062	3198 010 10120
6525	Diode, Rect, 1N5062	3198 010 10120
6526	Zener Diode, 22 volt	3198 020 52290
6540	Zener Diode, 6.2 volt	9331 668 30133
6541	Zener Diode, 10 volt	3198 020 51090
6560	Diode, Rect, BYV29X-500	9340 555 59127
6562	Diode, Rect, EGP20DL-5100	9322 164 42682
6563	Diode, Signal, BAS316	3198 010 10630
6565	Diode, Signal, BAV70	9331 849 10215
6566	Diode, Signal, 1N4148	3198 010 10010
6569	Diode, Signal, BAS316	3198 010 10630
6570	Zener Diode, 6.8 volt	3198 020 56880
6580	Diode, Signal, BAS316	3198 010 10630
6681	Diode, Signal, BAT85	9336 247 60133
6691	LED, LTL-10234WHCR	9322 185 69682
6692	IR Receiver	9322 127 54667
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
7101	Transistor, NPN, BC847B(COL)	3198 010 42030
7102	Transistor, PNP, BC857B(COL)	3198 010 42150
7103	Transistor, NPN, BC847B(COL)	3198 010 42030
7200	IC, TDA9588H/N1/3I/1053	9352 728 40557
7201	Transistor, NPN, BC847B(COL)	3198 010 42030
7204	Transistor, PNP, BC857B(COL)	3198 010 42150
7205	Transistor, PNP, BC857B(COL)	3198 010 42150
7330	IC, TDA6107JF/N3	9352 713 37112
7400	Power FET, STP3NC60FP	9322 157 37687
7441	Transistor, PNP, BC857B(COL)	3198 010 42150
7443	Transistor, PNP, BC557B(COL)	3198 020 40110
7460	Transistor, NPN, BU4508DX	9340 550 92127
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
7462	Transistor, NPN, PDTC143ZT	9340 547 00215
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
7471	IC, TDA8359J/N2	9352 701 64112
7480	Transistor, NPN, BD135	3198 020 41010
7482	Transistor, NPN, BD135	3198 020 41010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667
7520	IC, TEA1507P/N1	9352 673 56112
7521	Power FET, FQPF9N50	9322 187 16687
7522	Transistor, NPN, BC847B(COL)	3198 010 42030
7540	Transistor, NPN, BC547B(COL)	3198 020 40030
7541	Transistor, NPN, PDTC114ET	9340 310 10215
7542	Transistor, PNP, BC857B(COL)	3198 010 42150
7560	IC, L78L33ACZ	9322 134 92676
7561	Transistor, NPN, PDTC143ZT	9340 547 00215
7580	Transistor, PNP, BC857B(COL)	3198 010 42150
7602	IC, M24C08-WBN6	9322 154 38682
7606	Transistor, NPN, PDTC143ZT	9340 547 00215
7802	IC, HEF4053BT	9333 729 60653
7861	IC, TDA9853H/V1	9352 671 19557
7891	Transistor, NPN, BC847B(COL)	3198 010 42030
7892	Transistor, NPN, BC847B(COL)	3198 010 42030
7901	IC, AN7522N PH	9322 181 41682
9001	Wire Jumper	3198 036 90010
9101	Wire Jumper	3198 036 90010
9102	Wire Jumper	3198 036 90010
9103	Wire Jumper	3198 036 90010
9104	Wire Jumper	3198 036 90010
9123	Wire Jumper	3198 036 90010
9171	Wire Jumper	3198 036 90010
9173	Wire Jumper	3198 036 90010
9175	Wire Jumper	3198 036 90010
9176	Wire Jumper	3198 036 90010
9178	Wire Jumper	3198 036 90010
9179	Wire Jumper	3198 036 90010
9181	Wire Jumper	3198 036 90010
9182	Wire Jumper	3198 036 90010
9183	Wire Jumper	3198 036 90010
9192	Wire Jumper	3198 036 90010
9193	Wire Jumper	3198 036 90010
9311	Wire Jumper	3198 036 90010
9312	Wire Jumper	3198 036 90010
9406	Wire Jumper	3198 036 90010
9407	Wire Jumper	3198 036 90010
9408	Wire Jumper	3198 036 90010
9409	Wire Jumper	3198 036 90010
9410	Wire Jumper	3198 036 90010
9411	Wire Jumper	3198 036 90010
9412	Wire Jumper	3198 036 90010
9413	Wire Jumper	3198 036 90010
9414	Wire Jumper	3198 036 90010
9415	Wire Jumper	3198 036 90010
9416	Wire Jumper	3198 036 90010
9417	Wire Jumper	3198 036 90010
9418	Wire Jumper	3198 036 90010
9419	Wire Jumper	3198 036 90010
9421	Wire Jumper	3198 036 90010
9422	Wire Jumper	3198 036 90010
9423	Wire Jumper	3198 036 90010
9424	Wire Jumper	3198 036 90010
9425	Wire Jumper	3198 036 90010
9426	Wire Jumper	3198 036 90010
9427	Wire Jumper	3198 036 90010
9453	Wire Jumper	3198 036 90010
9460	Wire Jumper	3198 036 90010
9463	Wire Jumper	3198 036 90010
9500	Wire Jumper	3198 036 90010
9501	Wire Jumper	3198 036 90010
9503	Wire Jumper	3198 036 90010
9506	Wire Jumper	3198 036 90010
9507	Wire Jumper	3198 036 90010
9510	Wire Jumper	3198 036 90010
9511	Wire Jumper	3198 036 90010
9512	Wire Jumper	3198 036 90010
9513	Wire Jumper	3198 036 90010
9514	Wire Jumper	3198 036 90010
9515	Wire Jumper	3198 036 90010
9516	Wire Jumper	3198 036 90010
9518	Wire Jumper	3198 036 90010
9520	Wire Jumper	3198 036 90010
9521	Wire Jumper	3198 036 90010
9522	Wire Jumper	3198 036 90010
9524	Wire Jumper	3198 036 90010
9528	Wire Jumper	3198 036 90010
9530	Wire Jumper	3198 036 90010
9611	Coil, 27u, 10%	3198 018 22790
9612	Wire Jumper	3198 036 90010
9613	Wire Jumper	3198 036 90010
9614	Wire Jumper	3198 036 90010
9615	Wire Jumper	3198 036 90010
9617	Wire Jumper	3198 036 90010
9618	Wire Jumper	3198 036 90010
9619	Wire Jumper	3198 036 90010
9620	Wire Jumper	3198 036 90010
9621	Wire Jumper	3198 036 90010
9622	Wire Jumper	3198 036 90010
9623	Wire Jumper	3198 036 90010
9624	Wire Jumper	3198 036 90010
9626	Wire Jumper	3198 036 90010
9627	Wire Jumper	3198 036 90010
9628	Wire Jumper	3198 036 90010
9629	Wire Jumper	3198 036 90010
9631	Wire Jumper	3198 036 90010
9632	Wire Jumper	3198 036 90010
9633	Wire Jumper	3198 036 90010
9637	Wire Jumper	3198 036 90010
9638	Wire Jumper	3198 036 90010
9639	Wire Jumper	3198 036 90010
9640	Wire Jumper	3198 036 90010
9641	Wire Jumper	3198 036 90010
9642	Wire Jumper	3198 036 90010
9643	Wire Jumper	3198 036 90010
9648	Wire Jumper	3198 036 90010
9650	Wire Jumper	3198 036 90010
9651	Wire Jumper	3198 036 90010
9652	Wire Jumper	3198 036 90010
9654	Wire Jumper	3198 036 90010
9655	Wire Jumper	3198 036 90010
9656	Wire Jumper	3198 036 90010
9657	Wire Jumper	3198 036 90010
9658	Wire Jumper	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

32PT543S37A (continued)

Ref	Description	Part No.
9659	Wire Jumper	3198 036 90010
9660	Wire Jumper	3198 036 90010
9661	Wire Jumper	3198 036 90010
9662	Wire Jumper	3198 036 90010
9663	Wire Jumper	3198 036 90010
9664	Wire Jumper	3198 036 90010
9665	Wire Jumper	3198 036 90010
9666	Wire Jumper	3198 036 90010
9667	Wire Jumper	3198 036 90010
9668	Wire Jumper	3198 036 90010
9669	Wire Jumper	3198 036 90010
9670	Wire Jumper	3198 036 90010
9671	Wire Jumper	3198 036 90010
9672	Coil, 22u, 10%	3198 018 22290
9674	Wire Jumper	3198 036 90010
9675	Wire Jumper	3198 036 90010
9676	Wire Jumper	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper	3198 036 90010
9680	Wire Jumper	3198 036 90010
9681	Wire Jumper	3198 036 90010
9685	Wire Jumper	3198 036 90010
9686	Wire Jumper	3198 036 90010
9687	Wire Jumper	3198 036 90010
9688	Wire Jumper	3198 036 90010
9689	Wire Jumper	3198 036 90010
9690	Wire Jumper	3198 036 90010
9691	Wire Jumper	3198 036 90010
9694	Wire Jumper	3198 036 90010
9695	Wire Jumper	3198 036 90010
9697	Wire Jumper	3198 036 90010
9698	Wire Jumper	3198 036 90010
9699	Wire Jumper	3198 036 90010
9821	Wire Jumper	3198 036 90010
9822	Wire Jumper	3198 036 90010
9825	Wire Jumper	3198 036 90010
9828	Wire Jumper	3198 036 90010
9829	Wire Jumper	3198 036 90010
9831	Wire Jumper	3198 036 90010
9832	Wire Jumper	3198 036 90010
9837	Wire Jumper	3198 036 90010
9838	Wire Jumper	3198 036 90010
9839	Wire Jumper	3198 036 90010
9846	Wire Jumper	3198 036 90010
9847	Wire Jumper	3198 036 90010
9849	Wire Jumper	3198 036 90010
9850	Wire Jumper	3198 036 90010
9851	Wire Jumper	3198 036 90010
9852	Wire Jumper	3198 036 90010
9853	Wire Jumper	3198 036 90010
9856	Wire Jumper	3198 036 90010
9860	Wire Jumper	3198 036 90010
9861	Wire Jumper	3198 036 90010
9862	Wire Jumper	3198 036 90010
9864	Wire Jumper	3198 036 90010
9865	Wire Jumper	3198 036 90010
9868	Wire Jumper	3198 036 90010
9873	Wire Jumper	3198 036 90010
9874	Wire Jumper	3198 036 90010
9875	Wire Jumper	3198 036 90010
9877	Wire Jumper	3198 036 90010
9891	Wire Jumper	3198 036 90010
9892	Wire Jumper	3198 036 90010
9901	Wire Jumper	3198 036 90010
9902	Wire Jumper	3198 036 90010
9903	Wire Jumper	3198 036 90010
9904	Wire Jumper	3198 036 90010
9905	Wire Jumper	3198 036 90010
9911	Wire Jumper	3198 036 90010
9913	Wire Jumper	3198 036 90010
9914	Wire Jumper	3198 036 90010
9915	Wire Jumper	3198 036 90010
9918	Wire Jumper	3198 036 90010
9991	Wire Jumper	3198 036 90010
9993	Wire Jumper	3198 036 90010
9994	Wire Jumper	3198 036 90010
9996	Wire Jumper	3198 036 90010
9997	Wire Jumper	3198 036 90010
9998	Wire Jumper	3198 036 90010
CBA	Main Chassis Assembly	3139 187 23241

Channel One Card Parts
Channel One Card Parts

2D 3 Line Comb Filter Parts
2D 3 Line Comb Filter Parts

DAF Panel Parts
DAF Panel Parts

DVD Eject Panel Parts
DVD Eject Panel Parts

DVD Interface Panel Parts
DVD Interface Panel Parts

Front Interface Panel Parts
Front Interface Panel Parts

ITV Front Jack Panel Parts
ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)
Net 1 Panel (part of Scan 4 Card Assemb ly)

Scan 4 Card (part of Scan 4 Card Assembly)
Scan 4 Card (part of Scan 4 Card Assemb ly)

Side Jack Panel Parts
Side Jack Panel Parts

Ref	Description	Part No.
0232	Headphone Jack	2422 026 04747
0250	A/V Jack	2422 026 04815
0251	6 Pin Connector	2422 025 12482
0254	5 Pin Connector	2422 025 12481
0255	4 Pin Connector	2422 025 12479
1810	3 Pin Connector	2412 020 00725
1811	3 Pin Connector	2412 020 00725
2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2176	Cap, 470p, 5%, 50v, Ceramic	3198 016 34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2178	Cap, 470p, 5%, 50v, Ceramic	3198 016 34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4823	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4824	Res, Zero ohm, "Chip" Jumper	3198 021 90030
6161	Zener Diode, 6.8 volt	3198 010 26880
7802	IC, HEF4053BT	9333 729 60653
9150	Wire Jumper	3198 036 90010
9151	Wire Jumper	3198 036 90010
9152	Wire Jumper	3198 036 90010
9153	Wire Jumper	3198 036 90010
9154	Wire Jumper	3198 036 90010
9155	Wire Jumper	3198 036 90010
9170	Wire Jumper	3198 036 90010
CBA	Side Jack Panel Assembly	3139 187 28141

Subwoofer Panel Parts
Subwoofer Panel Parts

Top Control Panel Parts
Top Control Panel Parts

Cabinet & Accessory Parts
Cabinet & Accessory Parts

Ref	Description	Part No.
S AC01	AC Cord	3135 010 03831
AC03	Anode Lead Spacer (3 Used)	3135 014 04471
AC04	Batteries for Remote Control Transmitte	9299 000 65263
AC05	Cabinet Back	3139 124 44871
AC08	Chassis Tray	3139 124 31324
S AC09	CRT, A80ECK272X56	9301 795 00428
AC10	Customer Control Buttons	3139 124 32711
S AC12	Degaussing Coil	2422 549 43977
AC15	Holder, Degaussing Coil (4 Used)	3135 013 01661
AC17	Owner's Manual	3121 235 20681
AC19	Side Jack Panel Bracket	3139 124 40481
AC20	Cabinet Front Assembly	3121 237 53111
AC20A	Cabinet Front	3139 177 59541
AC20C	Light Guide	3139 124 32681
AC20D	Nameplate	3141 050 00141
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00401
REMOTE	Remote Control Transmitter, RC19335004/ 01	3139 228 86463

S = Safety Part   Be sure to use exact replacement part.

32PT543S37G - Manual no. 7638

Main Chassis Parts

S	Ref	Description	Part No.
		Main Chassis Parts	
	0211	2 Pin Connector.	2422 025 16269
	0212	2 Pin Connector.	2422 025 16375
	0219	6 Pin Connector.	2422 025 12482
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0222	2 Pin Connector.	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0229	3 Pin Connector.	2412 020 00725
	0243	6 Pin Connector.	2422 025 04854
	0244	5 Pin Connector.	2422 025 04853
	0245	6 Pin Connector.	2422 025 04854
	0246	5 Pin Connector.	2422 025 12481
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector.	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U PLL	2422 542 90098
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1600	Tact Switch.	2422 128 02742
	1601	Tact Switch.	2422 128 02742
	1602	Tact Switch.	2422 128 02742
	1603	Tact Switch.	2422 128 02742
	1606	Tact Switch.	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1811	3 Pin Connector.	2412 020 00725
	1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2209	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
	2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
	2451	Cap, 15n, 10%, 50v, Polyester.	3198 014 01530
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 470n, 5%, 250v, Metalized Polypropylene.	2022 333 00086
	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
S	2463	Cap, 1n2, 10%, 2000v, Ceramic.	2020 558 90488
	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene	2222 479 90042
S	2465	Cap, 13n, 5%, 1600v, Polypropylene	2020 301 90254
	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
	2468	Cap, 10n, 10%, 400v, Polyester	2222 347 90218
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2803	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250

S = Safety Part   Be sure to use exact replacement part.

32PT543S37G (continued)

Safety	Ref	Description	Part No.
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
	2862	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
	2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
	2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
	2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
	2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
	2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
	2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240
	2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
	2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
	2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
	2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
	2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
	3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
	3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
	3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202
	3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
	3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3206	Res, 270K, 5%, 1/16W, Metalized Glass.	2322 702 60274
	3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
	3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
	3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
	3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S	3341	Res, 1 ohm, 5%, 1/3W, MF for A80QCF340X34.	2306 204 03108
S	3341	Res, 2R7 ohm, 5%, 1/3W, MF for A80QCF330X34	2306 204 03278
S	3342	Res, 1 ohm, 5%, 1/3W, MF for A80ECK340X34.	2306 204 03108
S	3342	Res, 2R7 ohm, 5%, 1/3W, MF for A80ECK330X34	2306 204 03278
	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
	3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
	3403	Res, 100K, 5%, 1/6W, Carbon Film . . .	3198 011 01040
	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3451	Res, 2R7, 5%, 1/3W, Metal Film	2306 204 03278
S	3452	Res, 5K6, 1%, 3/5W, Metal Film	2312 915 15602
	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
S	3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S	3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
	3468	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
	3470	Res, 390K, 5%, 1/8W, Metalized Glass .	2322 730 61394
	3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
	3472	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
	3473	Res, 5R6, 1%, 3/5W, Metal Film	2312 915 15608
	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
	3481	Res, 15K, 1%, 3/5W, Metal Film	2312 915 11503
	3482	Res, 6K8, 1%, 3/5W, Metal Film	2312 915 16802
	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S	3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 33390
	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
S	3493	Res, 2R2, 5%, 1/3W, Metal Film	2306 204 03228
	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3498	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S	3504	Res, PTC, 3R0, Degaussing.	2120 661 00025
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155

S = Safety Part   Be sure to use exact replacement part.

	Ref	Description	Part No.
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198 021 53320
	3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198 021 31530
	3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198 021 31220
	3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4122	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4123	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4127	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5202	Wire Jumper.	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5241	Wire Jumper.	3198 036 90010
	5242	Coil, 10u, 5%.	3198 018 11090
	5342	Coil, 22u for A80QCF340X34	2422 535 97333
	5342	Coil, 47u for A80QCF330X34	3198 018 24790
	5401	Coil, 1mH, 10%	3198 018 71020
S	5445	Transformer, PSLOT	3128 138 21421
	5451	Coil, 33u, 10%	3198 018 73390
	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5457	Coil, Linear, DC12	3128 138 55881
	5461	Transformer, Signal Driver, SC10027-00	2422 531 02478
	5463	Coil, Choke.	3128 138 37021
	5471	Coil, 3u3, 20%	3198 018 73380
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 4u7, 5%.	2422 535 94213
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04.	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010

32PT543S37G (continued)

Ref	Description	Part No.
5564	Fixed, Inductor, 100MHz, 50R	3198 018 90010
5602	Coil, 5u6, 5%	3198 018 15680
5603	Coil, 5u6, 5%	3198 018 15680
5604	Coil, 5u6, 5%	3198 018 15680
5861	Coil, 10u, 5%	3198 018 11090
6001	Zener Diode, 33 volt	3198 010 23390
6150	Diode, Signal, BAS316	3198 010 10630
6201	Diode, Signal, BAS316	3198 010 10630
6202	Diode, Signal, BAS316	3198 010 10630
6206	Zener Diode, 6.8 volt	3198 020 56880
6331	Diode, Signal, BAV21	3198 010 10070
6332	Diode, Signal, BAS316	3198 010 10630
6333	Diode, Signal, BAV21	3198 010 10070
6335	Diode, Signal, BAV21	3198 010 10070
6400	Res, 1K, 1%, 3/5W, Metal Film	2312 915 11002
6401	Zener Diode, 47 volt	3198 010 24790
6445	Zener Diode, 10 volt	3198 020 51090
6447	Diode, Signal, 1N4148	3198 010 10010
6448	Zener Diode, 6.2 volt	9331 668 30133
6449	Diode, Signal, BAV99	3198 010 10620
6460	Diode, Rect, DG3-7005L	9336 436 10682
6461	Diode, Rect, RGP30J-L7004	9338 617 60682
6462	Zener Diode, 9.1 volt	9331 177 80133
6465	Diode, Signal, BAV21	3198 010 10070
6466	Diode, Signal, BAV21	3198 010 10070
6467	Diode, Signal, BAS316	3198 010 10630
6468	Diode, Signal, BAS316	3198 010 10630
6469	Diode, Rect, BYD33J	9337 234 20133
6470	Diode, Signal, BAV99	3198 010 10620
6476	Zener Diode, 15 volt	3198 010 21590
6481	Zener Diode, 5.6 volt	3198 010 25680
6482	Zener Diode, 9.1 volt	9331 177 80133
6483	Zener Diode, 33 volt	3198 010 23390
6485	Diode, Rect, BYD33J	9337 234 20133
6486	Diode, Rect, EGP20DL-5100	9322 164 42682
6487	Diode, Rect, BYD33D	9337 234 00133
6488	Diode, Rect, EGP20DL-5100	9322 164 42682
6500	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
6520	Diode, Rect, BYD33D	9337 234 00133
6523	Diode, Signal, 1N4148	3198 010 10010
6524	Diode, Rect, 1N5062	3198 010 10120
6525	Diode, Rect, 1N5062	3198 010 10120
6526	Zener Diode, 22 volt	3198 020 52290
6540	Zener Diode, 6.2 volt	9331 668 30133
6541	Zener Diode, 10 volt	3198 020 51090
6560	Diode, Rect, BYV29X-500	9340 555 59127
6562	Diode, Rect, EGP20DL-5100	9322 164 42682
6563	Diode, Signal, BAS316	3198 010 10630
6565	Diode, Signal, BAV70	9331 849 10215
6566	Diode, Signal, 1N4148	3198 010 10010
6569	Diode, Signal, BAS316	3198 010 10630
6570	Zener Diode, 6.8 volt	3198 020 56880
6580	Diode, Signal, BAS316	3198 010 10630
6681	Diode, Signal, BAT85	9336 247 60133
6691	LED, LTL-10234WHCR	9322 185 69682
6692	IR Receiver	9322 127 54667
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
7101	Transistor, NPN, BC847B(COL)	3198 010 42030
7102	Transistor, PNP, BC857B(COL)	3198 010 42150
7103	Transistor, NPN, BC847B(COL)	3198 010 42030
7200	IC, TDA9588H/N1/3I/1053	9352 728 40557
7201	Transistor, NPN, BC847B(COL)	3198 010 42030
7204	Transistor, PNP, BC857B(COL)	3198 010 42150
7205	Transistor, PNP, BC857B(COL)	3198 010 42150
7330	IC, TDA6107JF/N3	9352 713 37112
7400	Power FET, STP3NC60FP	9322 157 37687
7441	Transistor, PNP, BC857B(COL)	3198 010 42150
7443	Transistor, PNP, BC557B(COL)	3198 020 40110
7460	Transistor, NPN, BU4508DX	9340 550 92127
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
7462	Transistor, NPN, PDTC143ZT	9340 547 00215
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
7471	IC, TDA8359J/N2	9352 701 64112
7480	Transistor, NPN, BD135	3198 020 41010
7482	Transistor, NPN, BD135	3198 020 41010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667
7520	IC, TEA1507P/N1	9352 673 56112
7521	Power FET, FQPF9N50	9322 187 16687
7522	Transistor, NPN, BC847B(COL)	3198 010 42030
7540	Transistor, NPN, BC547B(COL)	3198 020 40030
7541	Transistor, NPN, PDTC114ET	9340 310 10215
7542	Transistor, PNP, BC857B(COL)	3198 010 42150
7560	IC, L78L33ACZ	9322 134 92676
7561	Transistor, NPN, PDTC143ZT	9340 547 00215
7580	Transistor, PNP, BC857B(COL)	3198 010 42150
7602	IC, M24C08-WBN6	9322 154 38682
7606	Transistor, NPN, PDTC143ZT	9340 547 00215
7802	IC, HEF4053BT	9333 729 60653
7861	IC, TDA9853H/V1	9352 671 19557
7891	Transistor, NPN, BC847B(COL)	3198 010 42030
7892	Transistor, NPN, BC847B(COL)	3198 010 42030
7901	IC, AN7522N PH	9322 181 41682
9001	Wire Jumper	3198 036 90010
9101	Wire Jumper	3198 036 90010
9102	Wire Jumper	3198 036 90010
9103	Wire Jumper	3198 036 90010
9104	Wire Jumper	3198 036 90010
9123	Wire Jumper	3198 036 90010
9171	Wire Jumper	3198 036 90010
9173	Wire Jumper	3198 036 90010
9175	Wire Jumper	3198 036 90010
9176	Wire Jumper	3198 036 90010
9178	Wire Jumper	3198 036 90010
9179	Wire Jumper	3198 036 90010
9181	Wire Jumper	3198 036 90010
9182	Wire Jumper	3198 036 90010
9183	Wire Jumper	3198 036 90010
9192	Wire Jumper	3198 036 90010
9193	Wire Jumper	3198 036 90010
9311	Wire Jumper	3198 036 90010
9312	Wire Jumper	3198 036 90010
9406	Wire Jumper	3198 036 90010
9407	Wire Jumper	3198 036 90010
9408	Wire Jumper	3198 036 90010
9409	Wire Jumper	3198 036 90010
9410	Wire Jumper	3198 036 90010
9411	Wire Jumper	3198 036 90010
9412	Wire Jumper	3198 036 90010
9413	Wire Jumper	3198 036 90010
9414	Wire Jumper	3198 036 90010
9415	Wire Jumper	3198 036 90010
9416	Wire Jumper	3198 036 90010
9417	Wire Jumper	3198 036 90010
9418	Wire Jumper	3198 036 90010
9419	Wire Jumper	3198 036 90010
9421	Wire Jumper	3198 036 90010
9422	Wire Jumper	3198 036 90010
9423	Wire Jumper	3198 036 90010
9424	Wire Jumper	3198 036 90010
9425	Wire Jumper	3198 036 90010
9426	Wire Jumper	3198 036 90010
9427	Wire Jumper	3198 036 90010
9453	Wire Jumper	3198 036 90010
9460	Wire Jumper	3198 036 90010
9463	Wire Jumper	3198 036 90010
9500	Wire Jumper	3198 036 90010
9501	Wire Jumper	3198 036 90010
9503	Wire Jumper	3198 036 90010
9506	Wire Jumper	3198 036 90010
9507	Wire Jumper	3198 036 90010
9510	Wire Jumper	3198 036 90010
9511	Wire Jumper	3198 036 90010
9512	Wire Jumper	3198 036 90010
9513	Wire Jumper	3198 036 90010
9514	Wire Jumper	3198 036 90010
9515	Wire Jumper	3198 036 90010
9516	Wire Jumper	3198 036 90010
9518	Wire Jumper	3198 036 90010
9520	Wire Jumper	3198 036 90010
9521	Wire Jumper	3198 036 90010
9522	Wire Jumper	3198 036 90010
9524	Wire Jumper	3198 036 90010
9528	Wire Jumper	3198 036 90010
9530	Wire Jumper	3198 036 90010
9611	Coil, 27u, 10%	3198 018 22790
9612	Wire Jumper	3198 036 90010
9613	Wire Jumper	3198 036 90010
9614	Wire Jumper	3198 036 90010
9615	Wire Jumper	3198 036 90010
9617	Wire Jumper	3198 036 90010
9618	Wire Jumper	3198 036 90010
9619	Wire Jumper	3198 036 90010
9620	Wire Jumper	3198 036 90010
9621	Wire Jumper	3198 036 90010
9622	Wire Jumper	3198 036 90010
9623	Wire Jumper	3198 036 90010
9624	Wire Jumper	3198 036 90010
9626	Wire Jumper	3198 036 90010
9627	Wire Jumper	3198 036 90010
9628	Wire Jumper	3198 036 90010
9629	Wire Jumper	3198 036 90010
9631	Wire Jumper	3198 036 90010
9632	Wire Jumper	3198 036 90010
9633	Wire Jumper	3198 036 90010
9637	Wire Jumper	3198 036 90010
9638	Wire Jumper	3198 036 90010
9639	Wire Jumper	3198 036 90010
9640	Wire Jumper	3198 036 90010
9641	Wire Jumper	3198 036 90010
9642	Wire Jumper	3198 036 90010
9643	Wire Jumper	3198 036 90010
9648	Wire Jumper	3198 036 90010
9650	Wire Jumper	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

32PT543S37G (continued)

Ref	Description	Part No.
9651	Wire Jumper.	3198 036 90010
9652	Wire Jumper.	3198 036 90010
9654	Wire Jumper.	3198 036 90010
9655	Wire Jumper.	3198 036 90010
9656	Wire Jumper.	3198 036 90010
9657	Wire Jumper.	3198 036 90010
9658	Wire Jumper.	3198 036 90010
9659	Wire Jumper.	3198 036 90010
9660	Wire Jumper.	3198 036 90010
9661	Wire Jumper.	3198 036 90010
9662	Wire Jumper.	3198 036 90010
9663	Wire Jumper.	3198 036 90010
9664	Wire Jumper.	3198 036 90010
9665	Wire Jumper.	3198 036 90010
9666	Wire Jumper.	3198 036 90010
9667	Wire Jumper.	3198 036 90010
9668	Wire Jumper.	3198 036 90010
9669	Wire Jumper.	3198 036 90010
9670	Wire Jumper.	3198 036 90010
9671	Wire Jumper.	3198 036 90010
9672	Coil, 22u, 10%	3198 018 22290
9674	Wire Jumper.	3198 036 90010
9675	Wire Jumper.	3198 036 90010
9676	Wire Jumper.	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper.	3198 036 90010
9680	Wire Jumper.	3198 036 90010
9681	Wire Jumper.	3198 036 90010
9685	Wire Jumper.	3198 036 90010
9686	Wire Jumper.	3198 036 90010
9687	Wire Jumper.	3198 036 90010
9688	Wire Jumper.	3198 036 90010
9689	Wire Jumper.	3198 036 90010
9690	Wire Jumper.	3198 036 90010
9691	Wire Jumper.	3198 036 90010
9694	Wire Jumper.	3198 036 90010
9695	Wire Jumper.	3198 036 90010
9697	Wire Jumper.	3198 036 90010
9698	Wire Jumper.	3198 036 90010
9699	Wire Jumper.	3198 036 90010
9821	Wire Jumper.	3198 036 90010
9822	Wire Jumper.	3198 036 90010
9825	Wire Jumper.	3198 036 90010
9828	Wire Jumper.	3198 036 90010
9829	Wire Jumper.	3198 036 90010
9831	Wire Jumper.	3198 036 90010
9832	Wire Jumper.	3198 036 90010
9837	Wire Jumper.	3198 036 90010
9838	Wire Jumper.	3198 036 90010
9839	Wire Jumper.	3198 036 90010
9846	Wire Jumper.	3198 036 90010
9847	Wire Jumper.	3198 036 90010
9849	Wire Jumper.	3198 036 90010
9850	Wire Jumper.	3198 036 90010
9851	Wire Jumper.	3198 036 90010
9852	Wire Jumper.	3198 036 90010
9853	Wire Jumper.	3198 036 90010
9856	Wire Jumper.	3198 036 90010
9860	Wire Jumper.	3198 036 90010
9861	Wire Jumper.	3198 036 90010
9862	Wire Jumper.	3198 036 90010
9864	Wire Jumper.	3198 036 90010
9865	Wire Jumper.	3198 036 90010
9868	Wire Jumper.	3198 036 90010
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9891	Wire Jumper.	3198 036 90010
9892	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010
9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9905	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9918	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9993	Wire Jumper.	3198 036 90010
9994	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9997	Wire Jumper.	3198 036 90010
9998	Wire Jumper.	3198 036 90010
CBA	Main Chassis Assembly.	3141 058 58231

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts

Side Jack Panel Parts

Ref	Description	Part No.
0232	Headphone Jack	2422 026 04747
0250	A/V Jack	2422 026 04815
0251	6 Pin Connector.	2422 025 12482
0254	5 Pin Connector.	2422 025 12481
0255	4 Pin Connector.	2422 025 12479
1810	3 Pin Connector.	2412 020 00725
1811	3 Pin Connector.	2412 020 00725
2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2177	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2179	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4823	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4824	Res, Zero ohm, "Chip" Jumper	3198 021 90030
6161	Zener Diode, 6.8 volt.	3198 010 26880
7802	IC, HEF4053BT.	9333 729 60653
9150	Wire Jumper.	3198 036 90010
9151	Wire Jumper.	3198 036 90010
9152	Wire Jumper.	3198 036 90010
9153	Wire Jumper.	3198 036 90010
9154	Wire Jumper.	3198 036 90010
9155	Wire Jumper.	3198 036 90010
9170	Wire Jumper.	3198 036 90010
CBA	Side Jack Panel Assembly	3139 187 28141

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

Ref	Description	Part No.
S AC01	AC Cord.	3135 010 03831
AC03	Anode Lead Spacer (3 Used)	3135 014 04471
AC04	Batteries for Remote Control Transmitte	9299 000 65263
AC05	Cabinet Back	3139 124 44871
AC08	Chassis Tray	3139 124 31324
S AC09	CRT, A80QCF340X34(N)	9301 904 59463
AC10	Customer Control Buttons	3139 124 32711
S AC12	Degaussing Coil.	2422 549 43977
AC15	Holder, Degaussing Coil (4 Used) . . .	3135 013 01661
AC17	Owner's Manual	3121 235 20681
AC19	Side Jack Panel Bracket.	3139 124 40481
AC20	Cabinet Front Assembly	3121 237 53111

S = Safety Part   Be sure to use exact replacement part.

32PT543S37G (continued)

```
AC20A  Cabinet Front. . . . . . . . . . . . . .  3139 177 59541
AC20C  Light Guide. . . . . . . . . . . . . . .  3139 124 32681
AC20D  Nameplate. . . . . . . . . . . . . . . .  3141 050 00141
AC20H  Speaker, 16 ohm, 5W (2 Used) . . . . . .  2422 264 00401
REMOTE Remote Control Transmitter, RC19335004/
       01. . . . . . . . . . . . . . . . . . . . 3139 228 86463
```

32PT553S37A - Manual no. 7638

Main Chassis Parts

		Main Chassis Parts	
	0211	2 Pin Connector	2422 025 16269
	0212	2 Pin Connector	2422 025 16375
	0219	6 Pin Connector	2422 025 12482
	0220	5 Pin Connector	2422 025 04853
	0221	2 Pin Connector	2422 025 15503
	0222	2 Pin Connector	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack	2422 026 04926
	0229	3 Pin Connector	2412 020 00725
	0239	3 Pin Connector	2422 025 16382
	0243	6 Pin Connector	2422 025 04854
	0244	5 Pin Connector	2422 025 04853
	0245	6 Pin Connector	2422 025 04854
	0246	5 Pin Connector	2422 025 12481
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U PLL	2422 542 90098
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC	2422 086 10914
S	1515	Relay, 5 Amp, 12V	2422 132 07444
	1606	Tact Switch	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1811	3 Pin Connector	2412 020 00725
	1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344
	2004	Cap, 47n, 10%, 50v, Ceramic	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2226	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2241	Cap, 1n5, 10%, 50v, Ceramic	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
	2402	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2441	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic	2020 021 91139
	2451	Cap, 15n, 10%, 50v, Polyester	3198 014 01530
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 430n, 5%, 250v, Metalized Polypropylene	2222 479 90022
	2458	Cap, 2u2, 20%, 100v, Electrolytic	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
	2463	Cap, 680p, 10%, 2000v, Ceramic	2020 558 90485
	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene	2222 479 90042
S	2465	Cap, 13n, 5%, 1600v, Polypropylene	2020 301 90254
	2466	Cap, 10n, 10%, 400v, Polyester	2222 347 90218
	2468	Cap, 18n, 10%, 400v, Polyester	2222 347 90222
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic	3198 017 21050
	2691	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2802	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2803	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2816	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2862	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250

S = Safety Part   Be sure to use exact replacement part.

32PT553S37A (continued)

S	Ref	Description	Part Number
	2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
	2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
	2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
	2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
	2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
	2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
	2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240
	2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
	2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
	2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
	2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
	2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
	3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3134	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
	3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
	3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202
	3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
	3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
	3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
	3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
	3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840
	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
	3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
	3403	Res, 100K, 5%, 1/6W, Carbon Film . . .	3198 011 01040
	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
S	3452	Res, 5K6, 1%, 3/5W, Metal Film	2312 915 15602
	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
S	3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S	3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
	3468	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
	3470	Res, 390K, 5%, 1/8W, Metalized Glass .	2322 730 61394
	3471	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
	3472	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208
	3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
	3481	Res, 15K, 1%, 3/5W, Metal Film	2312 915 11503
	3482	Res, 6K8, 1%, 3/5W, Metal Film	2312 915 16802
	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S	3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 33390
	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
S	3493	Res, 2R2, 5%, 1/3W, Metal Film	2306 204 03228
	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S	3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630

S = Safety Part   Be sure to use exact replacement part.

32PT553S37A (continued)

	Ref	Description	Part No.
	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3685	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
	3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198 021 31530
	3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198 021 31220
	3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4122	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4123	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4127	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030

	Ref	Description	Part No.
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5202	Wire Jumper.	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5241	Wire Jumper.	3198 036 90010
	5242	Coil, 10u, 5%.	3198 018 11090
	5342	Coil, 22u.	2422 535 97333
	5401	Coil, 1mH, 10%	3198 018 71020
S	5445	Transformer, PSLOT	3128 138 21421
	5451	Coil, 33u, 10%	3198 018 73390
	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
S	5457	Coil, 25u.	2422 535 91028
	5461	Transformer, Signal Driver, SC10027-00	2422 531 02478
	5463	Coil, Choke.	3128 138 37021
	5471	Coil, 3u3, 20%	3198 018 73380
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 47u, 10%	2422 535 97337
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04.	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5861	Coil, 10u, 5%.	3198 018 11090
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316.	3198 010 10630
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630
	6206	Zener Diode, 6.8 volt.	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316.	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002
	6401	Zener Diode, 47 volt	3198 010 24790

S = Safety Part   Be sure to use exact replacement part.

32PT553S37A (continued)

	Ref	Description	Part No.
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148	3198 010 10010
	6448	Zener Diode, 6.2 volt	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6460	Diode, Rect, DG3-7005L	9336 436 10682
	6461	Diode, Rect, RGP30J-L7004	9338 617 60682
	6462	Zener Diode, 9.1 volt	9331 177 80133
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316	3198 010 10630
	6468	Diode, Signal, BAS316	3198 010 10630
	6469	Diode, Rect, BYD33J	9337 234 20133
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt	3198 010 25680
	6482	Zener Diode, 9.1 volt	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYD33J	9337 234 20133
	6486	Diode, Rect, EGP20DL-5100	9322 164 42682
	6487	Diode, Rect, BYD33D	9337 234 00133
	6488	Diode, Rect, EGP20DL-5100	9322 164 42682
	6500	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
	6520	Diode, Rect, BYD33D	9337 234 00133
	6523	Diode, Signal, 1N4148	3198 010 10010
	6524	Diode, Rect, 1N5062	3198 010 10120
	6525	Diode, Rect, 1N5062	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500	9340 555 59127
	6562	Diode, Rect, EGP20DL-5100	9322 164 42682
	6563	Diode, Signal, BAS316	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148	3198 010 10010
	6569	Diode, Signal, BAS316	3198 010 10630
	6570	Zener Diode, 6.8 volt	3198 020 56880
	6580	Diode, Signal, BAS316	3198 010 10630
	6691	LED, LTL-10234WHCR	9322 185 69682
	6692	IR Receiver	9322 127 54667
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7102	Transistor, PNP, BC857B(COL)	3198 010 42150
	7103	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9588H/N1/3I/1053	9352 728 40557
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7400	Power FET, STP3NC60FP	9322 157 37687
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7460	Transistor, NPN, BU4508DX	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1	9352 673 56112
	7521	Power FET, FQPF9N50	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, L78L33ACZ	9322 134 92676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C08-WBN6	9322 154 38682
	7606	Transistor, NPN, PDTC143ZT	9340 547 00215
	7802	IC, HEF4053BT	9333 729 60653
	7861	IC, TDA9853H/V1	9352 671 19557
	7891	Transistor, NPN, BC847B(COL)	3198 010 42030
	7892	Transistor, NPN, BC847B(COL)	3198 010 42030
	7901	IC, AN7522N PH	9322 181 41682
	9001	Wire Jumper	3198 036 90010
	9101	Wire Jumper	3198 036 90010
	9102	Wire Jumper	3198 036 90010
	9103	Wire Jumper	3198 036 90010
	9104	Wire Jumper	3198 036 90010
	9123	Wire Jumper	3198 036 90010
	9171	Wire Jumper	3198 036 90010
	9173	Wire Jumper	3198 036 90010
	9175	Wire Jumper	3198 036 90010
	9176	Wire Jumper	3198 036 90010
	9178	Wire Jumper	3198 036 90010
	9179	Wire Jumper	3198 036 90010
	9181	Wire Jumper	3198 036 90010
	9182	Wire Jumper	3198 036 90010
	9183	Wire Jumper	3198 036 90010
	9192	Wire Jumper	3198 036 90010
	9193	Wire Jumper	3198 036 90010
	9311	Wire Jumper	3198 036 90010
	9312	Wire Jumper	3198 036 90010
	9406	Wire Jumper	3198 036 90010
	9407	Wire Jumper	3198 036 90010
	9408	Wire Jumper	3198 036 90010
	9409	Wire Jumper	3198 036 90010
	9410	Wire Jumper	3198 036 90010
	9411	Wire Jumper	3198 036 90010
	9412	Wire Jumper	3198 036 90010
	9413	Wire Jumper	3198 036 90010
	9414	Wire Jumper	3198 036 90010
	9415	Wire Jumper	3198 036 90010
	9416	Wire Jumper	3198 036 90010
	9417	Wire Jumper	3198 036 90010
	9418	Wire Jumper	3198 036 90010
	9419	Wire Jumper	3198 036 90010
	9421	Wire Jumper	3198 036 90010
	9422	Wire Jumper	3198 036 90010
	9423	Wire Jumper	3198 036 90010
	9424	Wire Jumper	3198 036 90010
	9425	Wire Jumper	3198 036 90010
	9426	Wire Jumper	3198 036 90010
	9427	Wire Jumper	3198 036 90010
	9453	Wire Jumper	3198 036 90010
	9460	Wire Jumper	3198 036 90010
	9463	Wire Jumper	3198 036 90010
	9500	Wire Jumper	3198 036 90010
	9501	Wire Jumper	3198 036 90010
	9503	Wire Jumper	3198 036 90010
	9506	Wire Jumper	3198 036 90010
	9507	Wire Jumper	3198 036 90010
	9510	Wire Jumper	3198 036 90010
	9511	Wire Jumper	3198 036 90010
	9512	Wire Jumper	3198 036 90010
	9513	Wire Jumper	3198 036 90010
	9514	Wire Jumper	3198 036 90010
	9515	Wire Jumper	3198 036 90010
	9516	Wire Jumper	3198 036 90010
	9518	Wire Jumper	3198 036 90010
	9520	Wire Jumper	3198 036 90010
	9521	Wire Jumper	3198 036 90010
	9522	Wire Jumper	3198 036 90010
	9524	Wire Jumper	3198 036 90010
	9528	Wire Jumper	3198 036 90010
	9530	Wire Jumper	3198 036 90010
	9611	Coil, 27u, 10%	3198 018 22790
	9612	Wire Jumper	3198 036 90010
	9613	Wire Jumper	3198 036 90010
	9614	Wire Jumper	3198 036 90010
	9615	Wire Jumper	3198 036 90010
	9617	Wire Jumper	3198 036 90010
	9618	Wire Jumper	3198 036 90010
	9619	Wire Jumper	3198 036 90010
	9620	Wire Jumper	3198 036 90010
	9621	Wire Jumper	3198 036 90010
	9622	Wire Jumper	3198 036 90010
	9623	Wire Jumper	3198 036 90010
	9624	Wire Jumper	3198 036 90010
	9626	Wire Jumper	3198 036 90010
	9627	Wire Jumper	3198 036 90010
	9628	Wire Jumper	3198 036 90010
	9629	Wire Jumper	3198 036 90010
	9631	Wire Jumper	3198 036 90010
	9632	Wire Jumper	3198 036 90010
	9633	Wire Jumper	3198 036 90010
	9637	Wire Jumper	3198 036 90010
	9638	Wire Jumper	3198 036 90010
	9639	Wire Jumper	3198 036 90010
	9640	Wire Jumper	3198 036 90010
	9641	Wire Jumper	3198 036 90010
	9642	Wire Jumper	3198 036 90010
	9643	Wire Jumper	3198 036 90010
	9648	Wire Jumper	3198 036 90010
	9650	Wire Jumper	3198 036 90010
	9651	Wire Jumper	3198 036 90010
	9652	Wire Jumper	3198 036 90010
	9654	Wire Jumper	3198 036 90010
	9655	Wire Jumper	3198 036 90010
	9656	Wire Jumper	3198 036 90010
	9657	Wire Jumper	3198 036 90010
	9658	Wire Jumper	3198 036 90010
	9659	Wire Jumper	3198 036 90010
	9660	Wire Jumper	3198 036 90010
	9661	Wire Jumper	3198 036 90010
	9662	Wire Jumper	3198 036 90010
	9663	Wire Jumper	3198 036 90010
	9664	Wire Jumper	3198 036 90010
	9665	Wire Jumper	3198 036 90010
	9666	Wire Jumper	3198 036 90010
	9667	Wire Jumper	3198 036 90010
	9668	Wire Jumper	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

32PT553S37A (continued)

Ref	Description	Part No.
9669	Wire Jumper.	3198 036 90010
9670	Wire Jumper.	3198 036 90010
9671	Wire Jumper.	3198 036 90010
9672	Coil, 22u, 10%	3198 018 22290
9674	Wire Jumper.	3198 036 90010
9675	Wire Jumper.	3198 036 90010
9676	Wire Jumper.	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper.	3198 036 90010
9680	Wire Jumper.	3198 036 90010
9681	Wire Jumper.	3198 036 90010
9685	Wire Jumper.	3198 036 90010
9686	Wire Jumper.	3198 036 90010
9687	Wire Jumper.	3198 036 90010
9688	Wire Jumper.	3198 036 90010
9689	Wire Jumper.	3198 036 90010
9690	Wire Jumper.	3198 036 90010
9691	Wire Jumper.	3198 036 90010
9694	Wire Jumper.	3198 036 90010
9695	Wire Jumper.	3198 036 90010
9697	Wire Jumper.	3198 036 90010
9698	Wire Jumper.	3198 036 90010
9699	Wire Jumper.	3198 036 90010
9821	Wire Jumper.	3198 036 90010
9822	Wire Jumper.	3198 036 90010
9825	Wire Jumper.	3198 036 90010
9828	Wire Jumper.	3198 036 90010
9829	Wire Jumper.	3198 036 90010
9831	Wire Jumper.	3198 036 90010
9832	Wire Jumper.	3198 036 90010
9837	Wire Jumper.	3198 036 90010
9838	Wire Jumper.	3198 036 90010
9839	Wire Jumper.	3198 036 90010
9846	Wire Jumper.	3198 036 90010
9847	Wire Jumper.	3198 036 90010
9849	Wire Jumper.	3198 036 90010
9850	Wire Jumper.	3198 036 90010
9851	Wire Jumper.	3198 036 90010
9852	Wire Jumper.	3198 036 90010
9853	Wire Jumper.	3198 036 90010
9856	Wire Jumper.	3198 036 90010
9860	Wire Jumper.	3198 036 90010
9861	Wire Jumper.	3198 036 90010
9862	Wire Jumper.	3198 036 90010
9864	Wire Jumper.	3198 036 90010
9865	Wire Jumper.	3198 036 90010
9868	Wire Jumper.	3198 036 90010
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9891	Wire Jumper.	3198 036 90010
9892	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010
9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9905	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9918	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9993	Wire Jumper.	3198 036 90010
9994	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9997	Wire Jumper.	3198 036 90010
9998	Wire Jumper.	3198 036 90010
CBA	Main Chassis Assembly.	3139 187 21111

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

S = Safety Part. Be sure to use exact replacement part.

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

Ref	Description	Part No.
0232	Headphone Jack	2422 026 04747
0250	A/V Jack	2422 026 04815
0251	6 Pin Connector.	2422 025 12482
0254	5 Pin Connector.	2422 025 12481
0255	4 Pin Connector.	2422 025 12479
1810	3 Pin Connector.	2412 020 00725
1811	3 Pin Connector.	2412 020 00725
2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2177	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2179	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4823	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4824	Res, Zero ohm, "Chip" Jumper	3198 021 90030
6161	Zener Diode, 6.8 volt.	3198 010 26880
7802	IC, HEF4053BT.	9333 729 60653
9150	Wire Jumper.	3198 036 90010
9151	Wire Jumper.	3198 036 90010
9152	Wire Jumper.	3198 036 90010
9153	Wire Jumper.	3198 036 90010
9154	Wire Jumper.	3198 036 90010
9155	Wire Jumper.	3198 036 90010
9170	Wire Jumper.	3198 036 90010
CBA	Side Jack Panel Assembly	3139 187 21501

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Ref	Description	Part No.
0215	3 Pin Connector.	2422 025 09191
1091	Tact Switch.	2422 128 02742
1092	Tact Switch.	2422 128 02742
1093	Tact Switch.	2422 128 02742
1094	Tact Switch.	2422 128 02742
3091	Res, 560 ohm, 5%, Metalized Glass. . .	3198 021 35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3093	Res, 560 ohm, 5%, Metalized Glass. . .	3198 021 35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
4092	Res, Zero ohm, "Chip" Jumper	3198 021 90030
6091	Diode, Signal.	9340 453 90115
CBA	Top Control Panel Assembly	3139 187 20991

Cabinet & Accessory Parts

Cabinet & Accessory Parts

Ref	Description	Part No.
S AC01	AC Cord.	2422 070 98202
AC02	AC Cord Strain Relief.	3139 124 26301
AC03	Anode Lead Spacer (3 Used)	3135 014 04471
AC04	Batteries for Remote Control Transmitte	9299 000 65263
AC05	Cabinet Back	3139 124 42311
AC08	Chassis Tray	3139 124 31324
S AC09	CRT, A80ECK272X56.	9301 795 00428
S AC12	Degaussing Coil.	2422 549 43977
AC15	Holder, Degaussing Coil (4 Used) . . .	3135 013 01661
AC16	Jack Panel Bracket	3139 124 42321
AC17	Owner's Manual	3121 235 20691
AC18	Quick Use Guide.	3121 233 43511
AC19	Side Jack Panel Bracket.	3139 124 40481
AC20	Cabinet Front Assembly	3121 237 53121
AC20A	Cabinet Front.	3139 177 56061
AC20C	Light Guide.	3139 124 26361
AC20D	Nameplate.	3141 050 00141

32PT553S37A (continued)

```
AC20E  Power Button . . . . . . . . . . . . .  3139 124 29441
AC20H  Speaker, 16 ohm, 5W (2 Used) . . . . .  2422 264 00401
AC20J  Top Control Assembly . . . . . . . . .  3139 137 95721
AC20J1 Top Control Bracket. . . . . . . . . .  3139 124 22802
AC20J3 Top Control Cover. . . . . . . . . . .  3139 137 77561
REMOTE Remote Control Transmitter, RC19036001/
       01. . . . . . . . . . . . . . . . . . . 3139 228 86493
```

32PT553S37G - Manual no. 7638

Main Chassis Parts

	Ref	Description	Part No.
		Main Chassis Parts	
	0211	2 Pin Connector	2422 025 16269
	0212	2 Pin Connector	2422 025 16375
	0219	6 Pin Connector	2422 025 12482
	0220	5 Pin Connector	2422 025 04853
	0221	2 Pin Connector	2422 025 15503
	0222	2 Pin Connector	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack	2422 026 04926
	0229	3 Pin Connector	2412 020 00725
	0239	3 Pin Connector	2422 025 16382
	0243	6 Pin Connector	2422 025 04854
	0244	5 Pin Connector	2422 025 04853
	0245	6 Pin Connector	2422 025 04854
	0246	5 Pin Connector	2422 025 12481
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U PLL	2422 542 90098
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC	2422 086 10914
S	1515	Relay, 5 Amp, 12V	2422 132 07444
	1606	Tact Switch	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1811	3 Pin Connector	2412 020 00725
	1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344
	2004	Cap, 47n, 10%, 50v, Ceramic	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2209	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2226	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2241	Cap, 1n5, 10%, 50v, Ceramic	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
	2402	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2441	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic	2020 021 91139
	2451	Cap, 15n, 10%, 50v, Polyester	3198 014 01530
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 470n, 5%, 250v, Metalized Polypropylene	2022 333 00086
	2458	Cap, 2u2, 20%, 100v, Electrolytic	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
S	2463	Cap, 1n2, 10%, 2000v, Ceramic	2020 558 90488
	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene	2222 479 90042
S	2465	Cap, 13n, 5%, 1600v, Polypropylene	2020 301 90254
	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
	2468	Cap, 10n, 10%, 400v, Polyester	2222 347 90218
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic	3198 017 21050
	2691	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2802	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2803	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2816	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2862	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250

S = Safety Part   Be sure to use exact replacement part.

32PT553S37G (continued)

Ref	Description	Part No.
2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3206	Res, 270K, 5%, 1/16W, Metalized Glass.	2322 702 60274
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730

Ref	Description	Part No.
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
3403	Res, 100K, 5%, 1/6W, Carbon Film . . .	3198 011 01040
3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3451	Res, 2R7, 5%, 1/3W, Metal Film	2306 204 03278
S 3452	Res, 5K6, 1%, 3/5W, Metal Film	2312 915 15602
3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3468	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3470	Res, 390K, 5%, 1/8W, Metalized Glass .	2322 730 61394
3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
3472	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
3473	Res, 5R6, 1%, 3/5W, Metal Film	2312 915 15608
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
3481	Res, 15K, 1%, 3/5W, Metal Film	2312 915 11503
3482	Res, 6K8, 1%, 3/5W, Metal Film	2312 915 16802
3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 33390
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
S 3493	Res, 2R2, 5%, 1/3W, Metal Film	2306 204 03228
3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3498	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S 3504	Res, PTC, 3R0, Degaussing.	2120 661 00025
3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3507	Surge Protector.	2422 549 43073
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630

S = Safety Part   Be sure to use exact replacement part.

32PT553S37G (continued)

S	Ref	Description	Part No.
	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3685	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
	3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198 021 31530
	3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198 021 31220
	3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4122	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4123	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4127	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5202	Wire Jumper.	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5241	Wire Jumper.	3198 036 90010
	5242	Coil, 10u, 5%.	3198 018 11090
	5342	Coil, 22u.	2422 535 97333
	5401	Coil, 1mH, 10%	3198 018 71020
S	5445	Transformer, PSLOT	3128 138 21421
	5451	Coil, 33u, 10%	3198 018 73390
	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5457	Coil, Linear, DC12	3128 138 55881
	5461	Transformer, Signal Driver, SC10027-00	2422 531 02478
	5463	Coil, Choke.	3128 138 37021
	5471	Coil, 3u3, 20%	3198 018 73380
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 4u7, 5%.	2422 535 94213
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04.	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5861	Coil, 10u, 5%.	3198 018 11090
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316.	3198 010 10630
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630
	6206	Zener Diode, 6.8 volt.	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316.	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002
	6401	Zener Diode, 47 volt	3198 010 24790

S = Safety Part   Be sure to use exact replacement part.

32PT553S37G (continued)

Ref	Description	Part No.
6445	Zener Diode, 10 volt	3198 020 51090
6447	Diode, Signal, 1N4148.	3198 010 10010
6448	Zener Diode, 6.2 volt.	9331 668 30133
6449	Diode, Signal, BAV99	3198 010 10620
6460	Diode, Rect, DG3-7005L	9336 436 10682
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
6462	Zener Diode, 9.1 volt.	9331 177 80133
6465	Diode, Signal, BAV21	3198 010 10070
6466	Diode, Signal, BAV21	3198 010 10070
6467	Diode, Signal, BAS316.	3198 010 10630
6468	Diode, Signal, BAS316.	3198 010 10630
6469	Diode, Rect, BYD33J.	9337 234 20133
6470	Diode, Signal, BAV99	3198 010 10620
6476	Zener Diode, 15 volt	3198 010 21590
6481	Zener Diode, 5.6 volt.	3198 010 25680
6482	Zener Diode, 9.1 volt.	9331 177 80133
6483	Zener Diode, 33 volt	3198 010 23390
6485	Diode, Rect, BYD33J.	9337 234 20133
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
6487	Diode, Rect, BYD33D.	9337 234 00133
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667
6520	Diode, Rect, BYD33D.	9337 234 00133
6523	Diode, Signal, 1N4148.	3198 010 10010
6524	Diode, Rect, 1N5062.	3198 010 10120
6525	Diode, Rect, 1N5062.	3198 010 10120
6526	Zener Diode, 22 volt	3198 020 52290
6540	Zener Diode, 6.2 volt.	9331 668 30133
6541	Zener Diode, 10 volt	3198 020 51090
6560	Diode, Rect, BYV29X-500.	9340 555 59127
6562	Diode, Rect, EGP20DL-5100.	9322 164 42682
6563	Diode, Signal, BAS316.	3198 010 10630
6565	Diode, Signal, BAV70	9331 849 10215
6566	Diode, Signal, 1N4148.	3198 010 10010
6569	Diode, Signal, BAS316.	3198 010 10630
6570	Zener Diode, 6.8 volt.	3198 020 56880
6580	Diode, Signal, BAS316.	3198 010 10630
6691	LED, LTL-10234WHCR	9322 185 69682
6692	IR Receiver.	9322 127 54667
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
7101	Transistor, NPN, BC847B(COL)	3198 010 42030
7102	Transistor, PNP, BC857B(COL)	3198 010 42150
7103	Transistor, NPN, BC847B(COL)	3198 010 42030
7200	IC, TDA9588H/N1/3I/1053.	9352 728 40557
7201	Transistor, NPN, BC847B(COL)	3198 010 42030
7204	Transistor, PNP, BC857B(COL)	3198 010 42150
7205	Transistor, PNP, BC857B(COL)	3198 010 42150
7330	IC, TDA6107JF/N3	9352 713 37112
7400	Power FET, STP3NC60FP.	9322 157 37687
7441	Transistor, PNP, BC857B(COL)	3198 010 42150
7443	Transistor, PNP, BC557B(COL)	3198 020 40110
7460	Transistor, NPN, BU4508DX.	9340 550 92127
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
7462	Transistor, NPN, PDTC143ZT	9340 547 00215
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
7471	IC, TDA8359J/N2.	9352 701 64112
7480	Transistor, NPN, BD135	3198 020 41010
7482	Transistor, NPN, BD135	3198 020 41010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667
7520	IC, TEA1507P/N1.	9352 673 56112
7521	Power FET, FQPF9N50.	9322 187 16687
7522	Transistor, NPN, BC847B(COL)	3198 010 42030
7540	Transistor, NPN, BC547B(COL)	3198 020 40030
7541	Transistor, NPN, PDTC114ET	9340 310 10215
7542	Transistor, PNP, BC857B(COL)	3198 010 42150
7560	IC, L78L33ACZ.	9322 134 92676
7561	Transistor, NPN, PDTC143ZT	9340 547 00215
7580	Transistor, PNP, BC857B(COL)	3198 010 42150
7602	IC, M24C08-WBN6.	9322 154 38682
7606	Transistor, NPN, PDTC143ZT	9340 547 00215
7802	IC, HEF4053BT.	9333 729 60653
7861	IC, TDA9853H/V1.	9352 671 19557
7891	Transistor, NPN, BC847B(COL)	3198 010 42030
7892	Transistor, NPN, BC847B(COL)	3198 010 42030
7901	IC, AN7522N PH	9322 181 41682
9001	Wire Jumper.	3198 036 90010
9101	Wire Jumper.	3198 036 90010
9102	Wire Jumper.	3198 036 90010
9103	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010
9175	Wire Jumper.	3198 036 90010
9176	Wire Jumper.	3198 036 90010
9178	Wire Jumper.	3198 036 90010
9179	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010
9182	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010
9192	Wire Jumper.	3198 036 90010
9193	Wire Jumper.	3198 036 90010
9311	Wire Jumper.	3198 036 90010
9312	Wire Jumper.	3198 036 90010
9406	Wire Jumper.	3198 036 90010
9407	Wire Jumper.	3198 036 90010
9408	Wire Jumper.	3198 036 90010
9409	Wire Jumper.	3198 036 90010
9410	Wire Jumper.	3198 036 90010
9411	Wire Jumper.	3198 036 90010
9412	Wire Jumper.	3198 036 90010
9413	Wire Jumper.	3198 036 90010
9414	Wire Jumper.	3198 036 90010
9415	Wire Jumper.	3198 036 90010
9416	Wire Jumper.	3198 036 90010
9417	Wire Jumper.	3198 036 90010
9418	Wire Jumper.	3198 036 90010
9419	Wire Jumper.	3198 036 90010
9421	Wire Jumper.	3198 036 90010
9422	Wire Jumper.	3198 036 90010
9423	Wire Jumper.	3198 036 90010
9424	Wire Jumper.	3198 036 90010
9425	Wire Jumper.	3198 036 90010
9426	Wire Jumper.	3198 036 90010
9427	Wire Jumper.	3198 036 90010
9453	Wire Jumper.	3198 036 90010
9460	Wire Jumper.	3198 036 90010
9463	Wire Jumper.	3198 036 90010
9500	Wire Jumper.	3198 036 90010
9501	Wire Jumper.	3198 036 90010
9503	Wire Jumper.	3198 036 90010
9506	Wire Jumper.	3198 036 90010
9507	Wire Jumper.	3198 036 90010
9510	Wire Jumper.	3198 036 90010
9511	Wire Jumper.	3198 036 90010
9512	Wire Jumper.	3198 036 90010
9513	Wire Jumper.	3198 036 90010
9514	Wire Jumper.	3198 036 90010
9515	Wire Jumper.	3198 036 90010
9516	Wire Jumper.	3198 036 90010
9518	Wire Jumper.	3198 036 90010
9520	Wire Jumper.	3198 036 90010
9521	Wire Jumper.	3198 036 90010
9522	Wire Jumper.	3198 036 90010
9524	Wire Jumper.	3198 036 90010
9528	Wire Jumper.	3198 036 90010
9530	Wire Jumper.	3198 036 90010
9611	Coil, 27u, 10%	3198 018 22790
9612	Wire Jumper.	3198 036 90010
9613	Wire Jumper.	3198 036 90010
9614	Wire Jumper.	3198 036 90010
9615	Wire Jumper.	3198 036 90010
9617	Wire Jumper.	3198 036 90010
9618	Wire Jumper.	3198 036 90010
9619	Wire Jumper.	3198 036 90010
9620	Wire Jumper.	3198 036 90010
9621	Wire Jumper.	3198 036 90010
9622	Wire Jumper.	3198 036 90010
9623	Wire Jumper.	3198 036 90010
9624	Wire Jumper.	3198 036 90010
9626	Wire Jumper.	3198 036 90010
9627	Wire Jumper.	3198 036 90010
9628	Wire Jumper.	3198 036 90010
9629	Wire Jumper.	3198 036 90010
9631	Wire Jumper.	3198 036 90010
9632	Wire Jumper.	3198 036 90010
9633	Wire Jumper.	3198 036 90010
9637	Wire Jumper.	3198 036 90010
9638	Wire Jumper.	3198 036 90010
9639	Wire Jumper.	3198 036 90010
9640	Wire Jumper.	3198 036 90010
9641	Wire Jumper.	3198 036 90010
9642	Wire Jumper.	3198 036 90010
9643	Wire Jumper.	3198 036 90010
9648	Wire Jumper.	3198 036 90010
9650	Wire Jumper.	3198 036 90010
9651	Wire Jumper.	3198 036 90010
9652	Wire Jumper.	3198 036 90010
9654	Wire Jumper.	3198 036 90010
9655	Wire Jumper.	3198 036 90010
9656	Wire Jumper.	3198 036 90010
9657	Wire Jumper.	3198 036 90010
9658	Wire Jumper.	3198 036 90010
9659	Wire Jumper.	3198 036 90010
9660	Wire Jumper.	3198 036 90010
9661	Wire Jumper.	3198 036 90010
9662	Wire Jumper.	3198 036 90010
9663	Wire Jumper.	3198 036 90010
9664	Wire Jumper.	3198 036 90010
9665	Wire Jumper.	3198 036 90010
9666	Wire Jumper.	3198 036 90010
9667	Wire Jumper.	3198 036 90010
9668	Wire Jumper.	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

32PT553S37G (continued)

9669	Wire Jumper.	3198 036 90010
9670	Wire Jumper.	3198 036 90010
9671	Wire Jumper.	3198 036 90010
9672	Coil, 22u, 10%	3198 018 22290
9674	Wire Jumper.	3198 036 90010
9675	Wire Jumper.	3198 036 90010
9676	Wire Jumper.	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper.	3198 036 90010
9680	Wire Jumper.	3198 036 90010
9681	Wire Jumper.	3198 036 90010
9685	Wire Jumper.	3198 036 90010
9686	Wire Jumper.	3198 036 90010
9687	Wire Jumper.	3198 036 90010
9688	Wire Jumper.	3198 036 90010
9689	Wire Jumper.	3198 036 90010
9690	Wire Jumper.	3198 036 90010
9691	Wire Jumper.	3198 036 90010
9694	Wire Jumper.	3198 036 90010
9695	Wire Jumper.	3198 036 90010
9697	Wire Jumper.	3198 036 90010
9698	Wire Jumper.	3198 036 90010
9699	Wire Jumper.	3198 036 90010
9821	Wire Jumper.	3198 036 90010
9822	Wire Jumper.	3198 036 90010
9825	Wire Jumper.	3198 036 90010
9828	Wire Jumper.	3198 036 90010
9829	Wire Jumper.	3198 036 90010
9831	Wire Jumper.	3198 036 90010
9832	Wire Jumper.	3198 036 90010
9837	Wire Jumper.	3198 036 90010
9838	Wire Jumper.	3198 036 90010
9839	Wire Jumper.	3198 036 90010
9846	Wire Jumper.	3198 036 90010
9847	Wire Jumper.	3198 036 90010
9849	Wire Jumper.	3198 036 90010
9850	Wire Jumper.	3198 036 90010
9851	Wire Jumper.	3198 036 90010
9852	Wire Jumper.	3198 036 90010
9853	Wire Jumper.	3198 036 90010
9856	Wire Jumper.	3198 036 90010
9860	Wire Jumper.	3198 036 90010
9861	Wire Jumper.	3198 036 90010
9862	Wire Jumper.	3198 036 90010
9864	Wire Jumper.	3198 036 90010
9865	Wire Jumper.	3198 036 90010
9868	Wire Jumper.	3198 036 90010
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9891	Wire Jumper.	3198 036 90010
9892	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010
9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9905	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9918	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9993	Wire Jumper.	3198 036 90010
9994	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9997	Wire Jumper.	3198 036 90010
9998	Wire Jumper.	3198 036 90010
CBA	Main Chassis Assembly.	3141 058 58241

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

S = Safety Part. Be sure to use exact replacement part.

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422 026 04747
0250	A/V Jack	2422 026 04815
0251	6 Pin Connector.	2422 025 12482
0254	5 Pin Connector.	2422 025 12481
0255	4 Pin Connector.	2422 025 12479
1810	3 Pin Connector.	2412 020 00725
1811	3 Pin Connector.	2412 020 00725
2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2177	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2179	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4823	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4824	Res, Zero ohm, "Chip" Jumper	3198 021 90030
6161	Zener Diode, 6.8 volt.	3198 010 26880
7802	IC, HEF4053BT.	9333 729 60653
9150	Wire Jumper.	3198 036 90010
9151	Wire Jumper.	3198 036 90010
9152	Wire Jumper.	3198 036 90010
9153	Wire Jumper.	3198 036 90010
9154	Wire Jumper.	3198 036 90010
9155	Wire Jumper.	3198 036 90010
9170	Wire Jumper.	3198 036 90010
CBA	Side Jack Panel Assembly	3139 187 21501

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

0215	3 Pin Connector.	2422 025 09191
1091	Tact Switch.	2422 128 02742
1092	Tact Switch.	2422 128 02742
1093	Tact Switch.	2422 128 02742
1094	Tact Switch.	2422 128 02742
3091	Res, 560 ohm, 5%, Metalized Glass. . .	3198 021 35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3093	Res, 560 ohm, 5%, Metalized Glass. . .	3198 021 35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
4092	Res, Zero ohm, "Chip" Jumper	3198 021 90030
6091	Diode, Signal.	9340 453 90115
CBA	Top Control Panel Assembly	3139 187 20991

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S	AC01	AC Cord.	2422 070 98202
	AC02	AC Cord Strain Relief.	3139 124 26301
	AC03	Anode Lead Spacer (3 Used)	3135 014 04471
	AC04	Batteries for Remote Control Transmitte	9299 000 65263
	AC05	Cabinet Back	3139 124 42311
	AC08	Chassis Tray	3139 124 31324
S	AC09	CRT, A80QCF340X34(N)	9301 904 59463
S	AC12	Degaussing Coil.	2422 549 43977
	AC15	Holder, Degaussing Coil (4 Used) . . .	3135 013 01661
	AC16	Jack Panel Bracket	3139 124 42321
	AC17	Owner's Manual	3121 235 20691
	AC18	Quick Use Guide.	3121 233 43511
	AC19	Side Jack Panel Bracket.	3139 124 40481
	AC20	Cabinet Front Assembly	3121 237 53121
	AC20A	Cabinet Front.	3139 177 56061
	AC20C	Light Guide.	3139 124 26361
	AC20D	Nameplate.	3141 050 00141

32PT553S37G (continued)

```
AC20E  Power Button . . . . . . . . . . . . .  3139 177 66921
AC20H  Speaker, 16 ohm, 5W (2 Used) . . . . .  2422 264 00401
AC20J  Top Control Assembly . . . . . . . . .  3139 137 95721
AC20J1 Top Control Bracket. . . . . . . . . .  3139 124 22802
AC20J3 Top Control Cover. . . . . . . . . . .  3139 137 77561
REMOTE Remote Control Transmitter, RC19036001/
       01. . . . . . . . . . . . . . . . . . . 3139 228 86493
```

32PT563R85G - Manual no. 7638

Main Chassis Parts

S	Ref	Description	Part No.
		Main Chassis Parts	
	0127	Socket Fuse	2422 088 00271
	0129	NTC Holder	3139 120 10151
	0136	IC-Spring	3104 301 22081
	0137	Spring	3139 121 24583
	0138	IC-Spring	3104 301 22081
	0139	Spring for Bracket	3122 121 24786
	0140	Spring	3139 121 24583
	0141	IC-Spring	3104 301 22081
	0152	Cable, DIPMate, 6 Pin, 560mm	3139 121 08951
	0153	Cable, 5 Pin, 560mm	3139 121 09041
	0211	2 Pin Connector	2422 025 16269
	0212	2 Pin Connector	2422 025 16375
	0219	6 Pin Connector	2422 025 12482
	0220	5 Pin Connector	2422 025 04853
	0221	2 Pin Connector	2422 025 15503
	0222	2 Pin Connector	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack	2422 026 04926
	0243	6 Pin Connector	2422 025 04854
	0244	5 Pin Connector	2422 025 04853
	0245	6 Pin Connector	2422 025 04854
	0246	5 Pin Connector	2422 025 12481
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U, PLL	2422 542 90108
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC	2422 086 10914
S	1515	Relay, 5 Amp, 12V	2422 132 07444
	1600	Tact Switch	2422 128 02742
	1601	Tact Switch	2422 128 02742
	1602	Tact Switch	2422 128 02742
	1603	Tact Switch	2422 128 02742
	1606	Tact Switch	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1810	6 Pin Connector	2422 025 16607
	1831	Crystal, Resonator, 18MHz432, 12 Pin, HC49/U A.	2422 543 00842
	2004	Cap, 47n, 10%, 50v, Ceramic	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2209	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2241	Cap, 1n5, 10%, 50v, Ceramic	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
	2402	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic	3198 016 03310
	2441	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic	2020 021 91139
	2451	Cap, 15n, 10%, 50v, Polyester	3198 014 01530
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 470n, 5%, 250v, Metalized Polypropylene	2022 333 00086
	2458	Cap, 2u2, 20%, 100v, Electrolytic	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
S	2463	Cap, 1n2, 10%, 2000v, Ceramic	2020 558 90488
	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene	2222 479 90042
S	2465	Cap, 13n, 5%, 1600v, Polypropylene	2020 301 90254
	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
	2468	Cap, 10n, 10%, 400v, Polyester	2222 347 90218
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890

S = Safety Part   Be sure to use exact replacement part.

32PT563R85G (continued)

	Ref	Description	Part No.
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050
	2691	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
	2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2807	Cap, 220n, +80/-20%, 25v, Ceramic. . .	3198 023 22240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
	2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
	2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
	2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
	2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
	2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
	2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2837	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
	2840	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2841	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2843	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2844	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2846	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
	2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
	2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
	2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610
	2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910
	2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
	2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
	2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2910	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320
	2911	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320
	2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
	3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
	3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
	3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202
	3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
	3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3206	Res, 270K, 5%, 1/16W, Metalized Glass.	2322 702 60274
	3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
	3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
	3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
	3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
	3403	Res, 100K, 5%, 1/6W, Carbon Film . . .	3198 011 01040
	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3451	Res, 2R7, 5%, 1/3W, Metal Film	2306 204 03278
S	3452	Res, 5K6, 1%, 3/5W, Metal Film	2312 915 15602
	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
S	3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S	3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
	3468	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
	3470	Res, 390K, 5%, 1/8W, Metalized Glass .	2322 730 61394
	3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
	3472	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
	3473	Res, 5R6, 1%, 3/5W, Metal Film	2312 915 15608
	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
	3481	Res, 15K, 1%, 3/5W, Metal Film	2312 915 11503
	3482	Res, 6K8, 1%, 3/5W, Metal Film	2312 915 16802
	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S	3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 33390
	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
S	3493	Res, 2R2, 5%, 1/3W, Metal Film	2306 204 03228
	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3498	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335

S = Safety Part   Be sure to use exact replacement part.

32PT563R85G (continued)

S	Ref	Description	Part No.
S	3504	Res, PTC, 3 ohm, 144V	2122 663 00019
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass	2322 242 13155
	3507	Surge Protector	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass	3198 021 53340
	3523	Res, 100 ohm, 5%, 1/3W, Metal Film	2306 204 03101
	3524	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
	3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3682	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
	3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3686	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
	3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3811	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3812	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
	3813	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
	3814	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3831	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3832	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
	3843	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
	3901	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4824	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4837	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4838	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4884	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%	3198 018 18270
	5201	Coil, 6u8, 5%	3198 018 16880
	5202	Wire Jumper	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5241	Wire Jumper	3198 036 90010
	5242	Coil, 10u, 5%	3198 018 11090
	5342	Coil, 22u	2422 535 97333
	5401	Coil, 1mH, 10%	3198 018 71020
S	5445	Transformer, PSLOT	3128 138 21421
	5451	Coil, 33u, 10%	3198 018 73390
	5452	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5457	Coil, Linear, DC12	3128 138 55881
	5461	Transformer, Signal Driver, SC10027-00	2422 531 02478
	5463	Coil, Choke	3128 138 37021
	5471	Coil, 3u3, 20%	3198 018 73380
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 4u7, 5%	2422 535 94213
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5561	Coil, 27u, 5%	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R	3198 018 90010

S = Safety Part   Be sure to use exact replacement part.

32PT563R85G (continued)

Ref	Description	Part No.
5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5602	Coil, 5u6, 5%.	3198 018 15680
5603	Coil, 5u6, 5%.	3198 018 15680
5604	Coil, 5u6, 5%.	3198 018 15680
5810	Coil, 10u, 10%	3198 018 51090
5831	Coil, 6u8, 5%.	3198 018 16880
5832	Coil, 6u8, 5%.	3198 018 16880
5833	Coil, 6u8, 5%.	3198 018 16880
5835	Coil, 12u, 10%	3198 018 31290
6001	Zener Diode, 33 volt	3198 010 23390
6150	Diode, Signal, BAS316.	3198 010 10630
6201	Diode, Signal, BAS316.	3198 010 10630
6202	Diode, Signal, BAS316.	3198 010 10630
6206	Zener Diode, 6.8 volt.	3198 020 56880
6331	Diode, Signal, BAV21	3198 010 10070
6332	Diode, Signal, BAS316.	3198 010 10630
6333	Diode, Signal, BAV21	3198 010 10070
6335	Diode, Signal, BAV21	3198 010 10070
6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002
6401	Zener Diode, 47 volt	3198 010 24790
6445	Zener Diode, 10 volt	3198 020 51090
6447	Diode, Signal, 1N4148.	3198 010 10010
6448	Zener Diode, 6.2 volt.	9331 668 30133
6449	Diode, Signal, BAV99	3198 010 10620
6460	Diode, Rect, DG3-7005L	9336 436 10682
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
6462	Zener Diode, 9.1 volt.	9331 177 80133
6465	Diode, Signal, BAV21	3198 010 10070
6466	Diode, Signal, BAV21	3198 010 10070
6467	Diode, Signal, BAS316.	3198 010 10630
6468	Diode, Signal, BAS316.	3198 010 10630
6469	Diode, Rect, BYV95C.	9335 001 80133
6470	Diode, Signal, BAV99	3198 010 10620
6476	Zener Diode, 15 volt	3198 010 21590
6481	Zener Diode, 5.6 volt.	3198 010 25680
6482	Zener Diode, 9.1 volt.	9331 177 80133
6483	Zener Diode, 33 volt	3198 010 23390
6485	Diode, Rect, BYV95C.	9335 001 80133
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
6487	Diode, Rect, BYV95A.	9335 000 90133
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667
6520	Diode, Rect, BYV95A.	9335 000 90133
6523	Diode, Signal, 1N4148.	3198 010 10010
6524	Diode, Rect, 1N5062.	3198 010 10120
6525	Diode, Rect, 1N5062.	3198 010 10120
6526	Zener Diode, 22 volt	3198 020 52290
6540	Zener Diode, 6.2 volt.	9331 668 30133
6541	Zener Diode, 10 volt	3198 020 51090
6560	Diode, Rect, BYV29X-500.	9340 555 59127
6562	Diode, Rect, EGP20DL-5100.	9322 164 42682
6563	Diode, Signal, BAS316.	3198 010 10630
6565	Diode, Signal, BAV70	9331 849 10215
6566	Diode, Signal, 1N4148.	3198 010 10010
6569	Diode, Signal, BAS316.	3198 010 10630
6570	Zener Diode, 6.8 volt.	3198 020 56880
6580	Diode, Signal, BAS316.	3198 010 10630
6681	Diode, Signal, BAT85	9336 247 60133
6691	LED, LTL-10234WHCR	9322 185 69682
6692	IR Receiver.	9322 127 54667
6831	Diode, Signal, 1N4148.	3198 010 10010
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
7101	Transistor, NPN, BC847B(COL)	3198 010 42030
7102	Transistor, PNP, BC857B(COL)	3198 010 42150
7103	Transistor, NPN, BC847B(COL)	3198 010 42030
7200	IC, TDA9588H/N1/3I/1298.	9352 742 85557
7201	Transistor, NPN, BC847B(COL)	3198 010 42030
7204	Transistor, PNP, BC857B(COL)	3198 010 42150
7205	Transistor, PNP, BC857B(COL)	3198 010 42150
7330	IC, TDA6107JF/N3	9352 713 37112
7400	Power FET, STP3NC60FP.	9322 157 37687
7441	Transistor, PNP, BC857B(COL)	3198 010 42150
7443	Transistor, PNP, BC557B(COL)	3198 020 40110
7460	Transistor, NPN, BU4508DX.	9340 550 92127
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
7462	Transistor, NPN, PDTC143ZT	9340 547 00215
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
7471	IC, TDA8359J/N2.	9352 701 64112
7480	Transistor, NPN, BD135	3198 020 41010
7482	Transistor, NPN, BD135	3198 020 41010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667
7520	IC, TEA1507P/N1.	9352 673 56112
7521	Power FET, FQPF9N50.	9322 187 16687
7522	Transistor, NPN, BC847B(COL)	3198 010 42030
7540	Transistor, NPN, BC547B(COL)	3198 020 40030
7541	Transistor, NPN, PDTC114ET	9340 310 10215
7542	Transistor, PNP, BC857B(COL)	3198 010 42150
7560	IC, L78L33ACZ.	9322 134 92676
7561	Transistor, NPN, PDTC143ZT	9340 547 00215
7580	Transistor, PNP, BC857B(COL)	3198 010 42150
7602	IC, M24C08-WBN6.	9322 154 38682

Ref	Description	Part No.
7606	Transistor, NPN, PDTC143ZT	9340 547 00215
7802	IC, HEF4053BT.	9333 729 60653
7803	IC, HEF4053BT.	9333 729 60653
7804	Transistor, NPN, BC847B(COL)	3198 010 42030
7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682
7901	IC, AN7522N PH	9322 181 41682
9001	Wire Jumper.	3198 036 90010
9101	Wire Jumper.	3198 036 90010
9102	Wire Jumper.	3198 036 90010
9103	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010
9175	Wire Jumper.	3198 036 90010
9176	Wire Jumper.	3198 036 90010
9178	Wire Jumper.	3198 036 90010
9179	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010
9182	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010
9192	Wire Jumper.	3198 036 90010
9193	Wire Jumper.	3198 036 90010
9311	Wire Jumper.	3198 036 90010
9312	Wire Jumper.	3198 036 90010
9406	Wire Jumper.	3198 036 90010
9407	Wire Jumper.	3198 036 90010
9408	Wire Jumper.	3198 036 90010
9409	Wire Jumper.	3198 036 90010
9410	Wire Jumper.	3198 036 90010
9411	Wire Jumper.	3198 036 90010
9412	Wire Jumper.	3198 036 90010
9413	Wire Jumper.	3198 036 90010
9414	Wire Jumper.	3198 036 90010
9415	Wire Jumper.	3198 036 90010
9416	Wire Jumper.	3198 036 90010
9417	Wire Jumper.	3198 036 90010
9418	Wire Jumper.	3198 036 90010
9419	Wire Jumper.	3198 036 90010
9421	Wire Jumper.	3198 036 90010
9422	Wire Jumper.	3198 036 90010
9423	Wire Jumper.	3198 036 90010
9424	Wire Jumper.	3198 036 90010
9425	Wire Jumper.	3198 036 90010
9426	Wire Jumper.	3198 036 90010
9427	Wire Jumper.	3198 036 90010
9453	Wire Jumper.	3198 036 90010
9460	Wire Jumper.	3198 036 90010
9463	Wire Jumper.	3198 036 90010
9500	Wire Jumper.	3198 036 90010
9501	Wire Jumper.	3198 036 90010
9503	Wire Jumper.	3198 036 90010
9506	Wire Jumper.	3198 036 90010
9507	Wire Jumper.	3198 036 90010
9510	Wire Jumper.	3198 036 90010
9511	Wire Jumper.	3198 036 90010
9512	Wire Jumper.	3198 036 90010
9513	Wire Jumper.	3198 036 90010
9514	Wire Jumper.	3198 036 90010
9515	Wire Jumper.	3198 036 90010
9516	Wire Jumper.	3198 036 90010
9518	Wire Jumper.	3198 036 90010
9520	Wire Jumper.	3198 036 90010
9521	Wire Jumper.	3198 036 90010
9522	Wire Jumper.	3198 036 90010
9524	Wire Jumper.	3198 036 90010
9528	Wire Jumper.	3198 036 90010
9530	Wire Jumper.	3198 036 90010
9611	Coil, 27u, 10%	3198 018 22790
9612	Wire Jumper.	3198 036 90010
9613	Wire Jumper.	3198 036 90010
9614	Wire Jumper.	3198 036 90010
9615	Wire Jumper.	3198 036 90010
9618	Wire Jumper.	3198 036 90010
9619	Wire Jumper.	3198 036 90010
9620	Wire Jumper.	3198 036 90010
9621	Wire Jumper.	3198 036 90010
9622	Wire Jumper.	3198 036 90010
9623	Wire Jumper.	3198 036 90010
9624	Wire Jumper.	3198 036 90010
9626	Wire Jumper.	3198 036 90010
9627	Wire Jumper.	3198 036 90010
9628	Wire Jumper.	3198 036 90010
9629	Wire Jumper.	3198 036 90010
9631	Wire Jumper.	3198 036 90010
9632	Wire Jumper.	3198 036 90010
9633	Wire Jumper.	3198 036 90010
9637	Wire Jumper.	3198 036 90010
9638	Wire Jumper.	3198 036 90010
9639	Wire Jumper.	3198 036 90010
9640	Wire Jumper.	3198 036 90010
9641	Wire Jumper.	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

32PT563R85G (continued)

9642	Wire Jumper.	3198 036 90010
9643	Wire Jumper.	3198 036 90010
9648	Wire Jumper.	3198 036 90010
9650	Wire Jumper.	3198 036 90010
9651	Wire Jumper.	3198 036 90010
9652	Wire Jumper.	3198 036 90010
9654	Wire Jumper.	3198 036 90010
9655	Wire Jumper.	3198 036 90010
9656	Wire Jumper.	3198 036 90010
9657	Wire Jumper.	3198 036 90010
9658	Wire Jumper.	3198 036 90010
9659	Wire Jumper.	3198 036 90010
9660	Wire Jumper.	3198 036 90010
9661	Wire Jumper.	3198 036 90010
9662	Wire Jumper.	3198 036 90010
9663	Wire Jumper.	3198 036 90010
9664	Wire Jumper.	3198 036 90010
9665	Wire Jumper.	3198 036 90010
9666	Wire Jumper.	3198 036 90010
9667	Wire Jumper.	3198 036 90010
9668	Wire Jumper.	3198 036 90010
9669	Wire Jumper.	3198 036 90010
9670	Wire Jumper.	3198 036 90010
9671	Wire Jumper.	3198 036 90010
9672	Coil, 22u, 10%	3198 018 22290
9674	Wire Jumper.	3198 036 90010
9675	Wire Jumper.	3198 036 90010
9676	Wire Jumper.	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper.	3198 036 90010
9680	Wire Jumper.	3198 036 90010
9681	Wire Jumper.	3198 036 90010
9682	Wire Jumper.	3198 036 90010
9685	Wire Jumper.	3198 036 90010
9686	Wire Jumper.	3198 036 90010
9687	Wire Jumper.	3198 036 90010
9688	Wire Jumper.	3198 036 90010
9689	Wire Jumper.	3198 036 90010
9690	Wire Jumper.	3198 036 90010
9691	Wire Jumper.	3198 036 90010
9694	Wire Jumper.	3198 036 90010
9695	Wire Jumper.	3198 036 90010
9697	Wire Jumper.	3198 036 90010
9698	Wire Jumper.	3198 036 90010
9699	Wire Jumper.	3198 036 90010
9821	Wire Jumper.	3198 036 90010
9822	Wire Jumper.	3198 036 90010
9825	Wire Jumper.	3198 036 90010
9828	Wire Jumper.	3198 036 90010
9829	Wire Jumper.	3198 036 90010
9831	Wire Jumper.	3198 036 90010
9832	Wire Jumper.	3198 036 90010
9837	Wire Jumper.	3198 036 90010
9838	Wire Jumper.	3198 036 90010
9839	Wire Jumper.	3198 036 90010
9846	Wire Jumper.	3198 036 90010
9847	Wire Jumper.	3198 036 90010
9849	Wire Jumper.	3198 036 90010
9851	Wire Jumper.	3198 036 90010
9856	Wire Jumper.	3198 036 90010
9858	Wire Jumper.	3198 036 90010
9859	Wire Jumper.	3198 036 90010
9860	Wire Jumper.	3198 036 90010
9862	Wire Jumper.	3198 036 90010
9863	Wire Jumper.	3198 036 90010
9864	Wire Jumper.	3198 036 90010
9865	Wire Jumper.	3198 036 90010
9867	Wire Jumper.	3198 036 90010
9868	Wire Jumper.	3198 036 90010
9869	Wire Jumper.	3198 036 90010
9870	Wire Jumper.	3198 036 90010
9871	Wire Jumper.	3198 036 90010
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9876	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9878	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010
9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9905	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9993	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9997	Wire Jumper.	3198 036 90010
9998	Wire Jumper.	3198 036 90010
CBA	Main Chassis Assembly.	3141 058 59431

Channel One Card Parts
Channel One Card Parts

2D 3 Line Comb Filter Parts
2D 3 Line Comb Filter Parts

0266	6 Pin Connector.	2422 025 16609
2401	Cap, 47u, 20%, 16v, Electrolytic . . .	3198 028 24790
2402	Cap, 4u7, 20%, 35v, Electrolytic . . .	3198 028 44780
2403	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2407	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2408	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2409	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2411	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
2412	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2413	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2414	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2415	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2416	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2419	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2420	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
2425	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2426	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
2427	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2428	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2429	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2430	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2431	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2432	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2433	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2434	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2435	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2436	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2440	Cap, 10u, 20%, 16v, Electrolytic . . .	3198 028 21090
2442	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2443	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2450	Cap, 10u, 20%, 16v, Electrolytic . . .	3198 028 21090
2452	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2453	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
3401	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3402	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3403	Res, 1K8, 5%, 1/16W, Metalized Glass .	3198 021 31820
3404	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3405	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3406	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198 021 36820
3407	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3408	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3412	Res, 510K, 5%, 1/10W, Metalized Glass.	2122 118 05951
3419	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3425	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3427	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3431	Res, 8K2, 1%, 1/16W, Metalized Glass .	2322 704 68202
3432	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3440	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3441	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3442	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3443	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198 021 32720
3444	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3450	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3451	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3452	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3453	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198 021 32720
3454	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3455	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3456	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3457	Wire Jumper.	3198 036 90010
3458	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4403	Res, Zero ohm, "Chip" Jumper	3198 021 90030
5401	Coil, 10u, 10%	3198 018 31090
5407	Coil, 33u, 5%.	3198 018 13390
5408	Coil, 33u, 20%	3198 018 33390
5421	Inductor, 100 MHz, 120 ohm	3198 018 90070
5425	Coil, 10u, 10%	3198 018 31090
5428	Coil, 10u, 5%.	3198 018 11090
5429	Coil, 10u, 10%	3198 018 31090
5430	Coil, 10u, 10%	3198 018 31090
5440	Coil, 10u, 10%	3198 018 31090
5442	Coil, 22u, 5%.	3198 018 12290
5450	Coil, 10u, 10%	3198 018 31090
5452	Coil, 33u, 5%.	3198 018 13390
7401	Transistor, PNP, BC857B(COL)	3198 010 42150
7402	Transistor, NPN, BC847B(COL)	3198 010 42030
7403	Transistor, NPN, BC847B(COL)	3198 010 42030
7421	IC, TC90A53N	9322 182 18682
7440	Transistor, NPN, BC847B(COL)	3198 010 42030
7444	Transistor, NPN, BC847B(COL)	3198 010 42030
7450	Transistor, NPN, BC847B(COL)	3198 010 42030
7454	Transistor, NPN, BC847B(COL)	3198 010 42030
9401	Wire Jumper.	3198 036 90010

9402	Wire Jumper.	3198 036 90010
9403	Wire Jumper.	3198 036 90010
CBA	2D 3 Line Comb Filter Assembly	3139 177 26561

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb ly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422 026 04747
0250	A/V Jack	2422 026 04815
0251	6 Pin Connector.	2422 025 12482
0254	5 Pin Connector.	2422 025 12481
0255	4 Pin Connector.	2422 025 12479
2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2177	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2179	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
3150	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
4817	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4819	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4821	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4822	Res, Zero ohm, "Chip" Jumper	3198 021 90020
6161	Zener Diode, 6.8 volt.	3198 010 26880
9151	Wire Jumper.	3198 036 90010
9152	Wire Jumper.	3198 036 90010
9153	Wire Jumper.	3198 036 90010
9170	Wire Jumper.	3198 036 90010
CBA	Side Jack Panel Assembly	3139 187 15141

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S	AC01	AC Cord.	3139 128 75281
	AC03	Anode Lead Spacer (3 Used)	3135 014 04471
	AC04	Batteries for Remote Control Transmitte	9299 000 65263
	AC05	Cabinet Back	3139 124 43611
S	AC09	CRT, A80QCF340X34(N)	9301 904 59463
S	AC12	Degaussing Coil.	2422 549 45334
	AC15	Holder, Degaussing Coil (4 Used) . . .	3135 013 01661
	AC17	Owner's Manual	3121 235 21371
	AC19	Side Jack Panel Bracket.	3139 124 37061
	AC20	Cabinet Front Assembly	3121 237 53131
	AC20A	Cabinet Front.	3139 177 53591
	AC20B	Chassis Guide (2 Used)	3139 124 31381
	AC20C	Light Guide.	3139 124 43141
	AC20D	Nameplate.	3141 050 00141
	AC20E	Power Button	3121 237 53341
	AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00411
	AC29	Plastic Facade	3139 177 60071
	REMOTE	Remote Control Transmitter, RC19335004/ 01.	3139 228 86464

32PT563S37A - Manual no. 7638

Main Chassis Parts

Main Chassis Parts

S	Ref	Description	Part No.
	0211	2 Pin Connector	2422 025 16269
	0212	2 Pin Connector	2422 025 16375
	0219	6 Pin Connector	2422 025 12482
	0220	5 Pin Connector	2422 025 04853
	0221	2 Pin Connector	2422 025 15503
	0222	2 Pin Connector	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack	2422 026 04926
	0243	6 Pin Connector	2422 025 04854
	0244	5 Pin Connector	2422 025 04853
	0245	6 Pin Connector	2422 025 04854
	0246	5 Pin Connector	2422 025 12481
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U PLL	2422 542 90098
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1600	Tact Switch.	2422 128 02742
	1601	Tact Switch.	2422 128 02742
	1602	Tact Switch.	2422 128 02742
	1603	Tact Switch.	2422 128 02742
	1606	Tact Switch.	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1810	6 Pin Connector	2422 025 16607
	1831	Crystal, Resonator, 18MHz432, 12 Pin, HC49/U A.	2422 543 00842
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
	2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
	2451	Cap, 15n, 10%, 50v, Polyester.	3198 014 01530
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 430n, 5%, 250v, Metalized Polypropylene.	2222 479 90022
	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
	2463	Cap, 680p, 10%, 2000v, Ceramic	2020 558 90485
	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene	2222 479 90042
S	2465	Cap, 13n, 5%, 1600v, Polypropylene	2020 301 90254
	2466	Cap, 10n, 10%, 400v, Polyester	2222 347 90218
	2468	Cap, 18n, 10%, 400v, Polyester	2222 347 90222
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2807	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2816	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
	2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
	2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
	2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710

S = Safety Part   Be sure to use exact replacement part.

32PT563S37A (continued)

S	Ref	Description	Part No.
	2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
	2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2837	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
	2840	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2841	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2843	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2844	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2846	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
	2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
	2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
	2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610
	2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910
	2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
	2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
	2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2910	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320
	2911	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320
	2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
	3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3124	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3126	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3132	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3134	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
	3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
	3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202
	3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
	3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
	3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
	3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840
	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
	3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
	3403	Res, 100K, 5%, 1/6W, Carbon Film . . .	3198 011 01040
	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
S	3452	Res, 5K6, 1%, 3/5W, Metal Film	2312 915 15602
	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
S	3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S	3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
	3468	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
	3470	Res, 390K, 5%, 1/8W, Metalized Glass .	2322 730 61394
	3471	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
	3472	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208
	3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
	3481	Res, 15K, 1%, 3/5W, Metal Film	2312 915 11503
	3482	Res, 6K8, 1%, 3/5W, Metal Film	2312 915 16802
	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S	3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 33390
	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
S	3493	Res, 2R2, 5%, 1/3W, Metal Film	2306 204 03228
	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S	3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070

S = Safety Part   Be sure to use exact replacement part.

32PT563S37A (continued)

S	Ref	Description	Part No.
S	3527	Res, 0R33, 5%, 3/5W, Metal Film.	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass.	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
	3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3682	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
	3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3686	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
	3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3811	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3812	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3813	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3831	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3832	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3843	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
	3901	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4824	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4837	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4838	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4884	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5202	Wire Jumper.	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5241	Wire Jumper.	3198 036 90010
	5242	Coil, 10u, 5%.	3198 018 11090
	5342	Coil, 22u.	2422 535 97333
	5401	Coil, 1mH, 10%	3198 018 71020
S	5445	Transformer, PSLOT	3128 138 21421
	5451	Coil, 33u, 10%	3198 018 73390
	5452	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
S	5457	Coil, 25u.	2422 535 91028
	5461	Transformer, Signal Driver, SC10027-00	2422 531 02478
	5463	Coil, Choke.	3128 138 37021
	5471	Coil, 3u3, 20%	3198 018 73380
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 47u, 10%	2422 535 97337
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04.	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5810	Coil, 10u, 10%	3198 018 51090
	5831	Coil, 6u8, 5%.	3198 018 16880
	5832	Coil, 6u8, 5%.	3198 018 16880
	5833	Coil, 6u8, 5%.	3198 018 16880
	5835	Coil, 12u, 10%	3198 018 31290
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316.	3198 010 10630
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630

S = Safety Part   Be sure to use exact replacement part.

32PT563S37A (continued)

Ref	Description	Part Number
6206	Zener Diode, 6.8 volt	3198 020 56880
6331	Diode, Signal, BAV21	3198 010 10070
6332	Diode, Signal, BAS316	3198 010 10630
6333	Diode, Signal, BAV21	3198 010 10070
6335	Diode, Signal, BAV21	3198 010 10070
6400	Res, 1K, 1%, 3/5W, Metal Film	2312 915 11002
6401	Zener Diode, 47 volt	3198 010 24790
6445	Zener Diode, 10 volt	3198 020 51090
6447	Diode, Signal, 1N4148	3198 010 10010
6448	Zener Diode, 6.2 volt	9331 668 30133
6449	Diode, Signal, BAV99	3198 010 10620
6460	Diode, Rect, DG3-7005L	9336 436 10682
6461	Diode, Rect, RGP30J-L7004	9338 617 60682
6462	Zener Diode, 9.1 volt	9331 177 80133
6465	Diode, Signal, BAV21	3198 010 10070
6466	Diode, Signal, BAV21	3198 010 10070
6467	Diode, Signal, BAS316	3198 010 10630
6468	Diode, Signal, BAS316	3198 010 10630
6469	Diode, Rect, BYV95C	9335 001 80133
6470	Diode, Signal, BAV99	3198 010 10620
6476	Zener Diode, 15 volt	3198 010 21590
6481	Zener Diode, 5.6 volt	3198 010 25680
6482	Zener Diode, 9.1 volt	9331 177 80133
6483	Zener Diode, 33 volt	3198 010 23390
6485	Diode, Rect, BYV95C	9335 001 80133
6486	Diode, Rect, EGP20DL-5100	9322 164 42682
6487	Diode, Rect, BYV95A	9335 000 90133
6488	Diode, Rect, EGP20DL-5100	9322 164 42682
6500	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
6520	Diode, Rect, BYV95A	9335 000 90133
6523	Diode, Signal, 1N4148	3198 010 10010
6524	Diode, Rect, 1N5062	3198 010 10120
6525	Diode, Rect, 1N5062	3198 010 10120
6526	Zener Diode, 22 volt	3198 020 52290
6540	Zener Diode, 6.2 volt	9331 668 30133
6541	Zener Diode, 10 volt	3198 020 51090
6560	Diode, Rect, BYV29X-500	9340 555 59127
6562	Diode, Rect, EGP20DL-5100	9322 164 42682
6563	Diode, Signal, BAS316	3198 010 10630
6565	Diode, Signal, BAV70	9331 849 10215
6566	Diode, Signal, 1N4148	3198 010 10010
6569	Diode, Signal, BAS316	3198 010 10630
6570	Zener Diode, 6.8 volt	3198 020 56880
6580	Diode, Signal, BAS316	3198 010 10630
6681	Diode, Signal, BAT85	9336 247 60133
6691	LED, LTL-10234WHCR	9322 185 69682
6692	IR Receiver	9322 127 54667
6831	Diode, Signal, 1N4148	3198 010 10010
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
7101	Transistor, NPN, BC847B(COL)	3198 010 42030
7102	Transistor, PNP, BC857B(COL)	3198 010 42150
7103	Transistor, NPN, BC847B(COL)	3198 010 42030
7200	IC, TDA9588H/N1/3I/1298	9352 742 85557
7201	Transistor, NPN, BC847B(COL)	3198 010 42030
7204	Transistor, PNP, BC857B(COL)	3198 010 42150
7205	Transistor, PNP, BC857B(COL)	3198 010 42150
7330	IC, TDA6107JF/N3	9352 713 37112
7400	Power FET, STP3NC60FP	9322 157 37687
7441	Transistor, PNP, BC857B(COL)	3198 010 42150
7443	Transistor, PNP, BC557B(COL)	3198 020 40110
7460	Transistor, NPN, BU4508DX	9340 550 92127
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
7462	Transistor, NPN, PDTC143ZT	9340 547 00215
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
7471	IC, TDA8359J/N2	9352 701 64112
7480	Transistor, NPN, BD135	3198 020 41010
7482	Transistor, NPN, BD135	3198 020 41010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667
7520	IC, TEA1507P/N1	9352 673 56112
7521	Power FET, FQPF9N50	9322 187 16687
7522	Transistor, NPN, BC847B(COL)	3198 010 42030
7540	Transistor, NPN, BC547B(COL)	3198 020 40030
7541	Transistor, NPN, PDTC114ET	9340 310 10215
7542	Transistor, PNP, BC857B(COL)	3198 010 42150
7560	IC, L78L33ACZ	9322 134 92676
7561	Transistor, NPN, PDTC143ZT	9340 547 00215
7580	Transistor, PNP, BC857B(COL)	3198 010 42150
7602	IC, M24C08-WBN6	9322 154 38682
7606	Transistor, NPN, PDTC143ZT	9340 547 00215
7802	IC, HEF4053BT	9333 729 60653
7803	IC, HEF4053BT	9333 729 60653
7804	Transistor, NPN, BC847B(COL)	3198 010 42030
7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682
7901	IC, AN7522N PH	9322 181 41682
9001	Wire Jumper	3198 036 90010
9101	Wire Jumper	3198 036 90010
9102	Wire Jumper	3198 036 90010
9103	Wire Jumper	3198 036 90010
9104	Wire Jumper	3198 036 90010
9123	Wire Jumper	3198 036 90010
9171	Wire Jumper	3198 036 90010
9173	Wire Jumper	3198 036 90010
9175	Wire Jumper	3198 036 90010
9176	Wire Jumper	3198 036 90010
9178	Wire Jumper	3198 036 90010
9179	Wire Jumper	3198 036 90010
9181	Wire Jumper	3198 036 90010
9182	Wire Jumper	3198 036 90010
9183	Wire Jumper	3198 036 90010
9192	Wire Jumper	3198 036 90010
9193	Wire Jumper	3198 036 90010
9311	Wire Jumper	3198 036 90010
9312	Wire Jumper	3198 036 90010
9406	Wire Jumper	3198 036 90010
9407	Wire Jumper	3198 036 90010
9408	Wire Jumper	3198 036 90010
9409	Wire Jumper	3198 036 90010
9410	Wire Jumper	3198 036 90010
9411	Wire Jumper	3198 036 90010
9412	Wire Jumper	3198 036 90010
9413	Wire Jumper	3198 036 90010
9414	Wire Jumper	3198 036 90010
9415	Wire Jumper	3198 036 90010
9416	Wire Jumper	3198 036 90010
9417	Wire Jumper	3198 036 90010
9418	Wire Jumper	3198 036 90010
9419	Wire Jumper	3198 036 90010
9421	Wire Jumper	3198 036 90010
9422	Wire Jumper	3198 036 90010
9423	Wire Jumper	3198 036 90010
9424	Wire Jumper	3198 036 90010
9425	Wire Jumper	3198 036 90010
9426	Wire Jumper	3198 036 90010
9427	Wire Jumper	3198 036 90010
9453	Wire Jumper	3198 036 90010
9460	Wire Jumper	3198 036 90010
9463	Wire Jumper	3198 036 90010
9500	Wire Jumper	3198 036 90010
9501	Wire Jumper	3198 036 90010
9503	Wire Jumper	3198 036 90010
9506	Wire Jumper	3198 036 90010
9507	Wire Jumper	3198 036 90010
9510	Wire Jumper	3198 036 90010
9511	Wire Jumper	3198 036 90010
9512	Wire Jumper	3198 036 90010
9513	Wire Jumper	3198 036 90010
9514	Wire Jumper	3198 036 90010
9515	Wire Jumper	3198 036 90010
9516	Wire Jumper	3198 036 90010
9518	Wire Jumper	3198 036 90010
9520	Wire Jumper	3198 036 90010
9521	Wire Jumper	3198 036 90010
9522	Wire Jumper	3198 036 90010
9524	Wire Jumper	3198 036 90010
9528	Wire Jumper	3198 036 90010
9530	Wire Jumper	3198 036 90010
9611	Coil, 27u, 10%	3198 018 22790
9612	Wire Jumper	3198 036 90010
9613	Wire Jumper	3198 036 90010
9614	Wire Jumper	3198 036 90010
9615	Wire Jumper	3198 036 90010
9618	Wire Jumper	3198 036 90010
9619	Wire Jumper	3198 036 90010
9620	Wire Jumper	3198 036 90010
9621	Wire Jumper	3198 036 90010
9622	Wire Jumper	3198 036 90010
9623	Wire Jumper	3198 036 90010
9624	Wire Jumper	3198 036 90010
9626	Wire Jumper	3198 036 90010
9627	Wire Jumper	3198 036 90010
9628	Wire Jumper	3198 036 90010
9629	Wire Jumper	3198 036 90010
9631	Wire Jumper	3198 036 90010
9632	Wire Jumper	3198 036 90010
9633	Wire Jumper	3198 036 90010
9637	Wire Jumper	3198 036 90010
9638	Wire Jumper	3198 036 90010
9639	Wire Jumper	3198 036 90010
9640	Wire Jumper	3198 036 90010
9641	Wire Jumper	3198 036 90010
9642	Wire Jumper	3198 036 90010
9643	Wire Jumper	3198 036 90010
9648	Wire Jumper	3198 036 90010
9650	Wire Jumper	3198 036 90010
9651	Wire Jumper	3198 036 90010
9652	Wire Jumper	3198 036 90010
9654	Wire Jumper	3198 036 90010
9655	Wire Jumper	3198 036 90010
9656	Wire Jumper	3198 036 90010
9657	Wire Jumper	3198 036 90010
9658	Wire Jumper	3198 036 90010
9659	Wire Jumper	3198 036 90010
9660	Wire Jumper	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

32PT563S37A (continued)

Ref	Description	Part No.
9661	Wire Jumper.	3198 036 90010
9662	Wire Jumper.	3198 036 90010
9663	Wire Jumper.	3198 036 90010
9664	Wire Jumper.	3198 036 90010
9665	Wire Jumper.	3198 036 90010
9666	Wire Jumper.	3198 036 90010
9667	Wire Jumper.	3198 036 90010
9668	Wire Jumper.	3198 036 90010
9669	Wire Jumper.	3198 036 90010
9670	Wire Jumper.	3198 036 90010
9671	Wire Jumper.	3198 036 90010
9672	Coil, 22u, 10%	3198 018 22290
9674	Wire Jumper.	3198 036 90010
9675	Wire Jumper.	3198 036 90010
9676	Wire Jumper.	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper.	3198 036 90010
9680	Wire Jumper.	3198 036 90010
9681	Wire Jumper.	3198 036 90010
9682	Wire Jumper.	3198 036 90010
9685	Wire Jumper.	3198 036 90010
9686	Wire Jumper.	3198 036 90010
9687	Wire Jumper.	3198 036 90010
9688	Wire Jumper.	3198 036 90010
9689	Wire Jumper.	3198 036 90010
9690	Wire Jumper.	3198 036 90010
9691	Wire Jumper.	3198 036 90010
9694	Wire Jumper.	3198 036 90010
9695	Wire Jumper.	3198 036 90010
9697	Wire Jumper.	3198 036 90010
9698	Wire Jumper.	3198 036 90010
9699	Wire Jumper.	3198 036 90010
9821	Wire Jumper.	3198 036 90010
9822	Wire Jumper.	3198 036 90010
9825	Wire Jumper.	3198 036 90010
9828	Wire Jumper.	3198 036 90010
9829	Wire Jumper.	3198 036 90010
9831	Wire Jumper.	3198 036 90010
9832	Wire Jumper.	3198 036 90010
9837	Wire Jumper.	3198 036 90010
9838	Wire Jumper.	3198 036 90010
9839	Wire Jumper.	3198 036 90010
9846	Wire Jumper.	3198 036 90010
9847	Wire Jumper.	3198 036 90010
9849	Wire Jumper.	3198 036 90010
9851	Wire Jumper.	3198 036 90010
9856	Wire Jumper.	3198 036 90010
9858	Wire Jumper.	3198 036 90010
9859	Wire Jumper.	3198 036 90010
9860	Wire Jumper.	3198 036 90010
9862	Wire Jumper.	3198 036 90010
9863	Wire Jumper.	3198 036 90010
9864	Wire Jumper.	3198 036 90010
9865	Wire Jumper.	3198 036 90010
9867	Wire Jumper.	3198 036 90010
9868	Wire Jumper.	3198 036 90010
9869	Wire Jumper.	3198 036 90010
9870	Wire Jumper.	3198 036 90010
9871	Wire Jumper.	3198 036 90010
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9876	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9878	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010
9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9905	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9993	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9997	Wire Jumper.	3198 036 90010
9998	Wire Jumper.	3198 036 90010
CBA	Main Chassis Assembly.	3139 177 26261

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

Ref	Description	Part No.
0266	6 Pin Connector.	2422 025 16609
2401	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2402	Cap, 4u7, 20%, 35v, Electrolytic	3198 028 44780
2403	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2407	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2408	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2409	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2411	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
2412	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2413	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2414	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2415	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2416	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2419	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2420	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
2425	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2426	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2427	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2428	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2429	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2430	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2431	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2432	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2433	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2434	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2435	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2436	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2440	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
2442	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2443	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2450	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
2452	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2453	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
3401	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3402	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3403	Res, 1K8, 5%, 1/16W, Metalized Glass .	3198 021 31820
3404	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3405	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3406	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198 021 36820
3407	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3408	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3412	Res, 510K, 5%, 1/10W, Metalized Glass.	2122 118 05951
3419	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3425	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3427	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3431	Res, 8K2, 1%, 1/16W, Metalized Glass .	2322 704 68202
3432	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3440	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3441	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3442	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3443	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198 021 32720
3444	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3450	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3451	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3452	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3453	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198 021 32720
3454	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3455	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3456	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3457	Wire Jumper.	3198 036 90010
3458	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4403	Res, Zero ohm, "Chip" Jumper	3198 021 90030
5401	Coil, 10u, 10%	3198 018 31090
5407	Coil, 33u, 5%.	3198 018 13390
5408	Coil, 33u, 20%	3198 018 33390
5421	Inductor, 100 MHz, 120 ohm	3198 018 90070
5425	Coil, 10u, 10%	3198 018 31090
5428	Coil, 10u, 5%.	3198 018 11090
5429	Coil, 10u, 10%	3198 018 31090
5430	Coil, 10u, 10%	3198 018 31090
5440	Coil, 10u, 10%	3198 018 31090
5442	Coil, 22u, 5%.	3198 018 12290
5450	Coil, 10u, 10%	3198 018 31090
5452	Coil, 33u, 5%.	3198 018 13390
7401	Transistor, PNP, BC857B(COL)	3198 010 42150
7402	Transistor, NPN, BC847B(COL)	3198 010 42030
7403	Transistor, NPN, BC847B(COL)	3198 010 42030
7421	IC, TC90A53N	9322 182 18682
7440	Transistor, NPN, BC847B(COL)	3198 010 42030
7444	Transistor, NPN, BC847B(COL)	3198 010 42030
7450	Transistor, NPN, BC847B(COL)	3198 010 42030
7454	Transistor, NPN, BC847B(COL)	3198 010 42030
9401	Wire Jumper.	3198 036 90010
9402	Wire Jumper.	3198 036 90010
9403	Wire Jumper.	3198 036 90010
CBA	2D 3 Line Comb Filter Assembly	3139 177 26561

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

32PT563S37A (continued)

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb ly)

Side Jack Panel Parts

Side Jack Panel Parts

Ref	Description	Part No.
0232	Headphone Jack	2422 026 04747
0250	A/V Jack	2422 026 04815
0251	6 Pin Connector.	2422 025 12482
0254	5 Pin Connector.	2422 025 12481
0255	4 Pin Connector.	2422 025 12479
2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2177	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2179	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
3150	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
4817	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4819	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4821	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4822	Res, Zero ohm, "Chip" Jumper	3198 021 90020
6161	Zener Diode, 6.8 volt.	3198 010 26880
9151	Wire Jumper.	3198 036 90010
9152	Wire Jumper.	3198 036 90010
9153	Wire Jumper.	3198 036 90010
9170	Wire Jumper.	3198 036 90010
CBA	Side Jack Panel Assembly	3139 187 15141

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

Ref	Description	Part No.
S AC01	AC Cord.	3135 010 03831
AC02	AC Cord Strain Relief.	3122 224 04623
AC03	Anode Lead Spacer (3 Used)	3135 014 04471
AC04	Batteries for Remote Control Transmitte	9299 000 65263
AC05	Cabinet Back	3139 124 43611
S AC09	CRT, A80ECK272X56.	9301 795 00428
S AC12	Degaussing Coil.	2422 549 43977
AC15	Holder, Degaussing Coil (4 Used) . . .	3135 013 01661
AC17	Owner's Manual	3121 235 20701
AC18	Quick Use Guide.	3121 233 43521
AC19	Side Jack Panel Bracket.	3139 124 37061
AC20	Cabinet Front Assembly	3121 237 53131
AC20A	Cabinet Front.	3139 177 53591
AC20B	Chassis Guide (2 Used)	3139 124 31381
AC20C	Light Guide.	3139 124 43141
AC20D	Nameplate.	3141 050 00141
AC20E	Power Button	3121 237 53341
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00411
AC29	Plastic Facade	3139 177 60071
REMOTE	Remote Control Transmitter, RC19036001/ 01.	3139 228 86493

32PT563S37G - Manual no. 7638

Main Chassis Parts

Main Chassis Parts

	Ref	Description	Part No.
	0211	2 Pin Connector.	2422 025 16269
	0212	2 Pin Connector.	2422 025 16375
	0219	6 Pin Connector.	2422 025 12482
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0222	2 Pin Connector.	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0243	6 Pin Connector.	2422 025 04854
	0244	5 Pin Connector.	2422 025 04853
	0245	6 Pin Connector.	2422 025 04854
	0246	5 Pin Connector.	2422 025 12481
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector.	2412 020 00725
	0269	Jack	2422 026 05182
S	1000	Tuner, V+U PLL	2422 542 90141
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1600	Tact Switch.	2422 128 02742
	1601	Tact Switch.	2422 128 02742
	1602	Tact Switch.	2422 128 02742
	1603	Tact Switch.	2422 128 02742
	1606	Tact Switch.	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1810	6 Pin Connector.	2422 025 16607
	1831	Crystal, Resonator, 18MHz432, 12 Pin, H C49/U A.	2422 543 00842
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic. . .	2238 786 19852
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2209	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2210	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
	2247	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyest er.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic. . .	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic. . .	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic . .	2020 558 90445
	2401	Cap, 2u2, 20%, 50v, Electrolytic . . .	2020 021 90552
	2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic . . .	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2441	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic . . .	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic. . .	2020 021 91139
	2451	Cap, 15n, 10%, 50v, Polyester.	3198 014 01530
	2455	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
	2457	Cap, 470n, 5%, 250v, Metalized Polyprop ylene.	2022 333 00086
	2458	Cap, 2u2, 20%, 100v, Electrolytic. . .	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
S	2463	Cap, 1n2, 10%, 2000v, Ceramic.	2020 558 90488
	2464	Cap, 2u2, 5%, 160v, Metalized Polypropy lene	2222 479 90042
S	2465	Cap, 13n, 5%, 1600v, Polypropylene . .	2020 301 90254
	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
	2468	Cap, 10n, 10%, 400v, Polyester	2222 347 90218
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic . . .	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic. . .	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic. . .	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic . . .	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic . .	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic. . .	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypro pylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic . .	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic . . .	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic . .	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic . . .	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic . . .	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic . . .	3198 025 52290
	2601	Cap, 220n, +80/-20%, 25v, Ceramic. . .	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050
	2691	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
	2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2807	Cap, 220n, +80/-20%, 25v, Ceramic. . .	3198 023 22240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
	2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
	2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
	2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790

S = Safety Part   Be sure to use exact replacement part.

32PT563S37G (continued)

S	Ref	Description	Part No.
	2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
	2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
	2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2837	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
	2840	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2841	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2843	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2844	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2846	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
	2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
	2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
	2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610
	2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910
	2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
	2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
	2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2910	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320
	2911	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320
	2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
	3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
	3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
	3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202
	3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
	3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3206	Res, 270K, 5%, 1/16W, Metalized Glass.	2322 702 60274
	3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
	3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
	3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S	3341	Res, 1 ohm, 5%, 1/3W, MF for A80QCF340X 34.	2306 204 03108
S	3341	Res, 2R7 ohm, 5%, 1/3W, MF for A80QCF33 0X34	2306 204 03278
S	3342	Res, 1 ohm, 5%, 1/3W, MF for A80ECK340X 34.	2306 204 03108
S	3342	Res, 2R7 ohm, 5%, 1/3W, MF for A80ECK33 0X34	2306 204 03278
	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
	3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
	3403	Res, 100K, 5%, 1/6W, Carbon Film . . .	3198 011 01040
	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3451	Res, 2R7, 5%, 1/3W, Metal Film	2306 204 03278
S	3452	Res, 5K6, 1%, 3/5W, Metal Film	2312 915 15602
	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
S	3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S	3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
	3468	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
	3470	Res, 390K, 5%, 1/8W, Metalized Glass .	2322 730 61394
	3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
	3472	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
	3473	Res, 5R6, 1%, 3/5W, Metal Film	2312 915 15608
	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
	3481	Res, 15K, 1%, 3/5W, Metal Film	2312 915 11503
	3482	Res, 6K8, 1%, 3/5W, Metal Film	2312 915 16802
	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S	3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 33390
	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
S	3493	Res, 2R2, 5%, 1/3W, Metal Film	2306 204 03228
	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3498	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S	3504	Res, PTC, 3R0, Degaussing.	2120 661 00025
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710

S = Safety Part   Be sure to use exact replacement part.

32PT563S37G (continued)

S	Ref	Description	Part No.
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198 021 53320
	3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3811	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3812	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3813	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3831	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3843	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4824	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4837	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4838	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4884	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5202	Wire Jumper.	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5241	Wire Jumper.	3198 036 90010
	5242	Coil, 10u, 5%.	3198 018 11090
	5342	Coil, 22u for A80QCF340X34	2422 535 97333
	5342	Coil, 47u for A80QCF330X34	3198 018 24790
	5401	Coil, 1mH, 10%	3198 018 71020
S	5445	Transformer, PSLOT	3128 138 21421
	5451	Coil, 33u, 10%	3198 018 73390
	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5457	Coil, Linear, DC12	3128 138 55881
	5461	Transformer, Signal Driver, SC10027-00	2422 531 02478
	5463	Coil, Choke.	3128 138 37021
	5471	Coil, 3u3, 20%	3198 018 73380
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 4u7, 5%.	2422 535 94213
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04.	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5810	Coil, 10u, 10%	3198 018 51090

S = Safety Part   Be sure to use exact replacement part.

32PT563S37G (continued)

Ref	Description	Part No.
5831	Coil, 6u8, 5%.	3198 018 16880
5832	Coil, 6u8, 5%.	3198 018 16880
5833	Coil, 6u8, 5%.	3198 018 16880
5835	Coil, 12u, 10%	3198 018 31290
6001	Zener Diode, 33 volt	3198 010 23390
6150	Diode, Signal, BAS316.	3198 010 10630
6201	Diode, Signal, BAS316.	3198 010 10630
6202	Diode, Signal, BAS316.	3198 010 10630
6206	Zener Diode, 6.8 volt.	3198 020 56880
6331	Diode, Signal, BAV21	3198 010 10070
6332	Diode, Signal, BAS316.	3198 010 10630
6333	Diode, Signal, BAV21	3198 010 10070
6335	Diode, Signal, BAV21	3198 010 10070
6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002
6401	Zener Diode, 47 volt	3198 010 24790
6445	Zener Diode, 10 volt	3198 020 51090
6447	Diode, Signal, 1N4148.	3198 010 10010
6448	Zener Diode, 6.2 volt.	9331 668 30133
6449	Diode, Signal, BAV99	3198 010 10620
6460	Diode, Rect, DG3-7005L	9336 436 10682
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
6462	Zener Diode, 9.1 volt.	9331 177 80133
6465	Diode, Signal, BAV21	3198 010 10070
6466	Diode, Signal, BAV21	3198 010 10070
6467	Diode, Signal, BAS316.	3198 010 10630
6468	Diode, Signal, BAS316.	3198 010 10630
6469	Diode, Rect, BYV95C.	9335 001 80133
6470	Diode, Signal, BAV99	3198 010 10620
6476	Zener Diode, 15 volt	3198 010 21590
6481	Zener Diode, 5.6 volt.	3198 010 25680
6482	Zener Diode, 9.1 volt.	9331 177 80133
6483	Zener Diode, 33 volt	3198 010 23390
6485	Diode, Rect, BYV95C.	9335 001 80133
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
6487	Diode, Rect, BYV95A.	9335 000 90133
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667
6520	Diode, Rect, BYV95A.	9335 000 90133
6523	Diode, Signal, 1N4148.	3198 010 10010
6524	Diode, Rect, 1N5062.	3198 010 10120
6525	Diode, Rect, 1N5062.	3198 010 10120
6526	Zener Diode, 22 volt	3198 020 52290
6540	Zener Diode, 6.2 volt.	9331 668 30133
6541	Zener Diode, 10 volt	3198 020 51090
6560	Diode, Rect, BYV29X-500.	9340 555 59127
6562	Diode, Rect, EGP20DL-5100.	9322 164 42682
6563	Diode, Signal, BAS316.	3198 010 10630
6565	Diode, Signal, BAV70	9331 849 10215
6566	Diode, Signal, 1N4148.	3198 010 10010
6569	Diode, Signal, BAS316.	3198 010 10630
6570	Zener Diode, 6.8 volt.	3198 020 56880
6580	Diode, Signal, BAS316.	3198 010 10630
6681	Diode, Signal, BAT85	9336 247 60133
6691	LED, LTL-10234WHCR	9322 185 69682
6692	IR Receiver.	9322 127 54667
6831	Diode, Signal, 1N4148.	3198 010 10010
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
7101	Transistor, NPN, BC847B(COL)	3198 010 42030
7102	Transistor, PNP, BC857B(COL)	3198 010 42150
7103	Transistor, NPN, BC847B(COL)	3198 010 42030
7200	IC, TDA9588H/N1/3I/1298.	9352 742 85557
7201	Transistor, NPN, BC847B(COL)	3198 010 42030
7204	Transistor, PNP, BC857B(COL)	3198 010 42150
7205	Transistor, PNP, BC857B(COL)	3198 010 42150
7330	IC, TDA6107JF/N3	9352 713 37112
7400	Power FET, STP3NC60FP.	9322 157 37687
7441	Transistor, PNP, BC857B(COL)	3198 010 42150
7443	Transistor, PNP, BC557B(COL)	3198 020 40110
7460	Transistor, NPN, BU4508DX.	9340 550 92127
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
7462	Transistor, NPN, PDTC143ZT	9340 547 00215
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
7471	IC, TDA8359J/N2.	9352 701 64112
7480	Transistor, NPN, BD135	3198 020 41010
7482	Transistor, NPN, BD135	3198 020 41010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667
7520	IC, TEA1507P/N1.	9352 673 56112
7521	Power FET, FQPF9N50.	9322 187 16687
7522	Transistor, NPN, BC847B(COL)	3198 010 42030
7540	Transistor, NPN, BC547B(COL)	3198 020 40030
7541	Transistor, NPN, PDTC114ET	9340 310 10215
7542	Transistor, PNP, BC857B(COL)	3198 010 42150
7560	IC, L78L33ACZ.	9322 134 92676
7561	Transistor, NPN, PDTC143ZT	9340 547 00215
7580	Transistor, PNP, BC857B(COL)	3198 010 42150
7602	IC, M24C08-WBN6.	9322 154 38682
7606	Transistor, NPN, PDTC143ZT	9340 547 00215
7802	IC, HEF4053BT.	9333 729 60653
7803	IC, HEF4053BT.	9333 729 60653
7804	Transistor, NPN, BC847B(COL)	3198 010 42030
7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682
7901	IC, AN7522N PH	9322 181 41682
9001	Wire Jumper.	3198 036 90010
9101	Wire Jumper.	3198 036 90010
9102	Wire Jumper.	3198 036 90010
9103	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010
9175	Wire Jumper.	3198 036 90010
9176	Wire Jumper.	3198 036 90010
9178	Wire Jumper.	3198 036 90010
9179	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010
9182	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010
9192	Wire Jumper.	3198 036 90010
9193	Wire Jumper.	3198 036 90010
9311	Wire Jumper.	3198 036 90010
9312	Wire Jumper.	3198 036 90010
9406	Wire Jumper.	3198 036 90010
9407	Wire Jumper.	3198 036 90010
9408	Wire Jumper.	3198 036 90010
9409	Wire Jumper.	3198 036 90010
9410	Wire Jumper.	3198 036 90010
9411	Wire Jumper.	3198 036 90010
9412	Wire Jumper.	3198 036 90010
9413	Wire Jumper.	3198 036 90010
9414	Wire Jumper.	3198 036 90010
9415	Wire Jumper.	3198 036 90010
9416	Wire Jumper.	3198 036 90010
9417	Wire Jumper.	3198 036 90010
9418	Wire Jumper.	3198 036 90010
9419	Wire Jumper.	3198 036 90010
9421	Wire Jumper.	3198 036 90010
9422	Wire Jumper.	3198 036 90010
9423	Wire Jumper.	3198 036 90010
9424	Wire Jumper.	3198 036 90010
9425	Wire Jumper.	3198 036 90010
9426	Wire Jumper.	3198 036 90010
9427	Wire Jumper.	3198 036 90010
9453	Wire Jumper.	3198 036 90010
9460	Wire Jumper.	3198 036 90010
9463	Wire Jumper.	3198 036 90010
9500	Wire Jumper.	3198 036 90010
9501	Wire Jumper.	3198 036 90010
9503	Wire Jumper.	3198 036 90010
9506	Wire Jumper.	3198 036 90010
9507	Wire Jumper.	3198 036 90010
9510	Wire Jumper.	3198 036 90010
9511	Wire Jumper.	3198 036 90010
9512	Wire Jumper.	3198 036 90010
9513	Wire Jumper.	3198 036 90010
9514	Wire Jumper.	3198 036 90010
9515	Wire Jumper.	3198 036 90010
9516	Wire Jumper.	3198 036 90010
9518	Wire Jumper.	3198 036 90010
9520	Wire Jumper.	3198 036 90010
9521	Wire Jumper.	3198 036 90010
9522	Wire Jumper.	3198 036 90010
9524	Wire Jumper.	3198 036 90010
9528	Wire Jumper.	3198 036 90010
9530	Wire Jumper.	3198 036 90010
9611	Coil, 27u, 10%	3198 018 22790
9612	Wire Jumper.	3198 036 90010
9613	Wire Jumper.	3198 036 90010
9614	Wire Jumper.	3198 036 90010
9615	Wire Jumper.	3198 036 90010
9618	Wire Jumper.	3198 036 90010
9619	Wire Jumper.	3198 036 90010
9620	Wire Jumper.	3198 036 90010
9621	Wire Jumper.	3198 036 90010
9622	Wire Jumper.	3198 036 90010
9623	Wire Jumper.	3198 036 90010
9624	Wire Jumper.	3198 036 90010
9626	Wire Jumper.	3198 036 90010
9627	Wire Jumper.	3198 036 90010
9628	Wire Jumper.	3198 036 90010
9629	Wire Jumper.	3198 036 90010
9631	Wire Jumper.	3198 036 90010
9632	Wire Jumper.	3198 036 90010
9633	Wire Jumper.	3198 036 90010
9637	Wire Jumper.	3198 036 90010
9638	Wire Jumper.	3198 036 90010
9639	Wire Jumper.	3198 036 90010
9640	Wire Jumper.	3198 036 90010
9641	Wire Jumper.	3198 036 90010
9642	Wire Jumper.	3198 036 90010
9643	Wire Jumper.	3198 036 90010
9648	Wire Jumper.	3198 036 90010
9650	Wire Jumper.	3198 036 90010
9651	Wire Jumper.	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

Ref	Description	Part No.
9652	Wire Jumper.	3198 036 90010
9654	Wire Jumper.	3198 036 90010
9655	Wire Jumper.	3198 036 90010
9656	Wire Jumper.	3198 036 90010
9657	Wire Jumper.	3198 036 90010
9658	Wire Jumper.	3198 036 90010
9659	Wire Jumper.	3198 036 90010
9660	Wire Jumper.	3198 036 90010
9661	Wire Jumper.	3198 036 90010
9662	Wire Jumper.	3198 036 90010
9663	Wire Jumper.	3198 036 90010
9664	Wire Jumper.	3198 036 90010
9665	Wire Jumper.	3198 036 90010
9666	Wire Jumper.	3198 036 90010
9667	Wire Jumper.	3198 036 90010
9668	Wire Jumper.	3198 036 90010
9669	Wire Jumper.	3198 036 90010
9670	Wire Jumper.	3198 036 90010
9671	Wire Jumper.	3198 036 90010
9672	Coil, 22u, 10%	3198 018 22290
9674	Wire Jumper.	3198 036 90010
9675	Wire Jumper.	3198 036 90010
9676	Wire Jumper.	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper.	3198 036 90010
9680	Wire Jumper.	3198 036 90010
9681	Wire Jumper.	3198 036 90010
9682	Wire Jumper.	3198 036 90010
9685	Wire Jumper.	3198 036 90010
9686	Wire Jumper.	3198 036 90010
9687	Wire Jumper.	3198 036 90010
9688	Wire Jumper.	3198 036 90010
9689	Wire Jumper.	3198 036 90010
9690	Wire Jumper.	3198 036 90010
9691	Wire Jumper.	3198 036 90010
9694	Wire Jumper.	3198 036 90010
9695	Wire Jumper.	3198 036 90010
9697	Wire Jumper.	3198 036 90010
9698	Wire Jumper.	3198 036 90010
9699	Wire Jumper.	3198 036 90010
9821	Wire Jumper.	3198 036 90010
9822	Wire Jumper.	3198 036 90010
9825	Wire Jumper.	3198 036 90010
9828	Wire Jumper.	3198 036 90010
9829	Wire Jumper.	3198 036 90010
9831	Wire Jumper.	3198 036 90010
9832	Wire Jumper.	3198 036 90010
9837	Wire Jumper.	3198 036 90010
9838	Wire Jumper.	3198 036 90010
9839	Wire Jumper.	3198 036 90010
9846	Wire Jumper.	3198 036 90010
9847	Wire Jumper.	3198 036 90010
9849	Wire Jumper.	3198 036 90010
9851	Wire Jumper.	3198 036 90010
9856	Wire Jumper.	3198 036 90010
9858	Wire Jumper.	3198 036 90010
9859	Wire Jumper.	3198 036 90010
9860	Wire Jumper.	3198 036 90010
9862	Wire Jumper.	3198 036 90010
9863	Wire Jumper.	3198 036 90010
9864	Wire Jumper.	3198 036 90010
9865	Wire Jumper.	3198 036 90010
9867	Wire Jumper.	3198 036 90010
9868	Wire Jumper.	3198 036 90010
9869	Wire Jumper.	3198 036 90010
9870	Wire Jumper.	3198 036 90010
9871	Wire Jumper.	3198 036 90010
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9876	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9878	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010
9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9905	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9993	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9997	Wire Jumper.	3198 036 90010
9998	Wire Jumper.	3198 036 90010
CBA	Main Chassis Assembly.	3141 058 58251

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

Ref	Description	Part No.
0266	6 Pin Connector.	2422 025 16609
2401	Cap, 47u, 20%, 16v, Electrolytic . . .	3198 028 24790
2402	Cap, 4u7, 20%, 35v, Electrolytic . . .	3198 028 44780
2403	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2407	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2408	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2409	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2411	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
2412	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2413	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2414	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2415	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2416	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2419	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2420	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
2425	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2426	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
2427	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2428	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2429	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2430	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2431	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2432	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2433	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2434	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2435	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2436	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2440	Cap, 10u, 20%, 16v, Electrolytic . . .	3198 028 21090
2442	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2443	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2450	Cap, 10u, 20%, 16v, Electrolytic . . .	3198 028 21090
2452	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2453	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
3401	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3402	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3403	Res, 1K8, 5%, 1/16W, Metalized Glass .	3198 021 31820
3404	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3405	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3406	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198 021 36820
3407	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3408	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3412	Res, 510K, 5%, 1/10W, Metalized Glass.	2122 118 05951
3419	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3425	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3427	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3431	Res, 8K2, 1%, 1/16W, Metalized Glass .	2322 704 68202
3432	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3440	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3441	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3442	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3443	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198 021 32720
3444	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3450	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3451	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3452	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3453	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198 021 32720
3454	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3455	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3456	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3457	Wire Jumper.	3198 036 90010
3458	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4403	Res, Zero ohm, "Chip" Jumper	3198 021 90030
5401	Coil, 10u, 10%	3198 018 31090
5407	Coil, 33u, 5%.	3198 018 13390
5408	Coil, 33u, 20%	3198 018 33390
5421	Inductor, 100 MHz, 120 ohm	3198 018 90070
5425	Coil, 10u, 10%	3198 018 31090
5428	Coil, 10u, 5%.	3198 018 11090
5429	Coil, 10u, 10%	3198 018 31090
5430	Coil, 10u, 10%	3198 018 31090
5440	Coil, 10u, 10%	3198 018 31090
5442	Coil, 22u, 5%.	3198 018 12290
5450	Coil, 10u, 10%	3198 018 31090
5452	Coil, 33u, 5%.	3198 018 13390
7401	Transistor, PNP, BC857B(COL)	3198 010 42150
7402	Transistor, NPN, BC847B(COL)	3198 010 42030
7403	Transistor, NPN, BC847B(COL)	3198 010 42030
7421	IC, TC90A53N	9322 182 18682
7440	Transistor, NPN, BC847B(COL)	3198 010 42030
7444	Transistor, NPN, BC847B(COL)	3198 010 42030
7450	Transistor, NPN, BC847B(COL)	3198 010 42030
7454	Transistor, NPN, BC847B(COL)	3198 010 42030
9401	Wire Jumper.	3198 036 90010
9402	Wire Jumper.	3198 036 90010
9403	Wire Jumper.	3198 036 90010
CBA	2D 3 Line Comb Filter Assembly	3139 177 26561

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

32PT563S37G (continued)

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

Ref	Description	Part No.
0232	Headphone Jack	2422 026 04747
0250	A/V Jack	2422 026 04815
0251	6 Pin Connector.	2422 025 12482
0254	5 Pin Connector.	2422 025 12481
0255	4 Pin Connector.	2422 025 12479
2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2177	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2179	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
3150	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
4817	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4819	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4821	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4822	Res, Zero ohm, "Chip" Jumper	3198 021 90020
6161	Zener Diode, 6.8 volt.	3198 010 26880
9151	Wire Jumper.	3198 036 90010
9152	Wire Jumper.	3198 036 90010
9153	Wire Jumper.	3198 036 90010
9170	Wire Jumper.	3198 036 90010
CBA	Side Jack Panel Assembly	3139 187 15141

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

Ref	Description	Part No.
S AC01	AC Cord.	3135 010 03831
AC03	Anode Lead Spacer (3 Used)	3135 014 04471
AC04	Batteries for Remote Control Transmitte	9299 000 65263
AC05	Cabinet Back	3139 124 43611
S AC09	CRT, A80QCF340X34(N)	9301 904 59463
S AC12	Degaussing Coil.	2422 549 45334
AC15	Holder, Degaussing Coil (4 Used) . . .	3135 013 01661
AC17	Owner's Manual	3121 235 20701
AC18	Quick Use Guide.	3121 233 43521
AC19	Side Jack Panel Bracket.	3139 124 37061
AC20	Cabinet Front Assembly	3121 237 53131
AC20A	Cabinet Front.	3139 177 53591
AC20B	Chassis Guide (2 Used)	3139 124 31381
AC20C	Light Guide.	3139 124 43141
AC20D	Nameplate.	3141 050 00141
AC20E	Power Button	3121 237 53341
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00411
AC29	Plastic Facade	3139 177 60071
REMOTE	Remote Control Transmitter, RC19036001/01.	3139 228 86493

32PT633R37D - Manual no. 7638

Main Chassis Parts

S	Ref	Description	Part No.
		Main Chassis Parts	
	0211	2 Pin Connector.	2422 025 16374
	0212	2 Pin Connector.	2422 025 16375
	0214	5 Pin Connector.	2422 025 12481
	0219	6 Pin Connector.	2422 025 12482
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0222	2 Pin Connector.	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0239	3 Pin Connector.	2422 025 16382
	0243	6 Pin Connector.	2422 025 04854
	0244	5 Pin Connector.	2422 025 04853
	0245	6 Pin Connector.	2422 025 04854
	0246	5 Pin Connector.	2422 025 12481
S	0254	9 Pin CRT Socket	2422 500 80058
S	0256	10 Pin CRT Socket.	2422 500 80063
	0267	3 Pin Connector.	2412 020 00725
	0268	3 Pin Connector.	2412 020 00725
	0269	Jack	2422 026 05182
	0278	3 Pin Connector.	2412 020 00725
S	1000	Tuner, V+U PLL	2422 542 90098
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1660	Crystal, 12MHz000	2422 543 01203
	1810	6 Pin Connector.	2422 025 16607
	1831	Crystal, Resonator, 18MHz432, 12 Pin, H	
		C49/U A.	2422 543 00842
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852
	2172	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2173	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyest	
		er.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2360	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2362	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
	2364	Cap, 27p, 5%, 50v, Ceramic	3198 016 32790
	2365	Cap, 27p, 5%, 50v, Ceramic	3198 016 32790
	2366	Cap, 27p, 5%, 50v, Ceramic	3198 016 32790
	2367	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2368	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2369	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2372	Cap, 10u, 20%, 160v, Electrolytic.	2020 012 93318
	2373	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2375	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2378	Cap, 220p, 5%, 50v, Ceramic.	3198 019 02210
	2379	Cap, 10u, 20%, 100v, Electrolytic.	3198 025 71090
	2380	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2381	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
	2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
	2451	Cap, 22n, 10%, 50v, Polyester.	3198 014 02230
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 470n, 5%, 250v, Metalized Polyprop	
		ylene.	2022 333 00086
	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
S	2463	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2464	Cap, 2u2, 5%, 160v, Metalized Polypropy	
		lene	2222 479 90042
S	2465	Cap, 15n, 5%, 1600v, Polypropylene	2020 301 90255
	2468	Cap, 33n, 10%, 400v, Polyester	2222 347 90227
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 120n, 5%, 250v, Metalized Polyprop	
		ylene.	2222 479 90051
	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypro	
		pylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91374
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2604	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090

S = Safety Part   Be sure to use exact replacement part.

32PT633R37D (continued)

	Ref	Description	Part No.
	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050
	2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2807	Cap, 220n, +80/-20%, 25v, Ceramic. . .	3198 023 22240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
	2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
	2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
	2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
	2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
	2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
	2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2837	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
	2840	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2841	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2843	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2844	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2846	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
	2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
	2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
	2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610
	2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910
	2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2902	Cap, 1000u, 20%, 25v, Electrolytic . .	3198 026 31020
	2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
	2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
	2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
	3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
	3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202
	3172	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3180	Res, 68K, 5%, 1/16W, Metalized Glass .	3198 021 36830
	3181	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3190	Res, 68K, 5%, 1/16W, Metalized Glass .	3198 021 36830
	3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
	3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
	3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
	3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840
	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3360	Res, 39K, 5%, 1/16W, Metalized Glass .	3198 021 33930
	3361	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3362	Res, 39K, 5%, 1/16W, Metalized Glass .	3198 021 33930
	3363	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3367	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
	3368	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
	3369	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3373	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3374	Res, 2R2, 5%, 1/6W, Carbon Film. . . .	3198 011 02280
	3375	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3376	Res, 68K, 5%, 1/6W, Carbon Film. . . .	3198 011 06830
	3377	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3378	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3380	Res, 68K, 5%, 1/16W, Metalized Glass .	3198 021 36830
	3381	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3383	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3384	Res, 2R2, 5%, 1/6W, Carbon Film. . . .	3198 011 02280
	3385	Res, 10K, 5%, 5W, Metal Film	2322 257 41103
S	3386	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
	3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
	3403	Res, 100K, 5%, 1/6W, Carbon Film . . .	3198 011 01040
	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3451	Res, 3R9, 5%, 1/3W, Metal Film	2306 204 03398
	3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102
	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3454	Res, 1K8, 1%, 3/5W, Metal Film	2312 915 11802
S	3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S	3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
	3468	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320

S = Safety Part   Be sure to use exact replacement part.

32PT633R37D (continued)

S	Ref	Description	Part No.
	3470	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3472	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208
	3473	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208
	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
	3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S	3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 32290
	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3491	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
S	3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
S	3523	Res, 47 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03479
	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
	3527	Res, 0R15, 5%, 3/5W, Metal Film. . . .	3198 012 11570
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 33K, 5%, 1/10W, Metalized Glass .	3198 021 53330
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 8K2, 5%, 1/10W, Metalized Glass .	3198 021 58220
S	3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
S	3591	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3614	Res, 4K7, 5%, 1/6W, Carbon Film. . . .	3198 011 04720
	3615	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3811	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3812	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3813	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3831	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3843	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3901	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198 021 36820
	3903	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3905	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3909	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3910	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3912	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4311	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4312	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4313	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4824	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4837	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4838	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4884	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5202	Wire Jumper.	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5241	Wire Jumper.	3198 036 90010
	5242	Coil, 10u, 5%.	3198 018 11090

S = Safety Part   Be sure to use exact replacement part.

32PT633R37D (continued)

	Ref	Description	Part No.
	5341	Coil, 22u.	2422 535 97333
	5342	Coil, 22u.	2422 535 97333
	5376	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5401	Coil, 1mH, 10%	3198 018 71020
S	5445	Transformer, LOT	2422 531 02573
	5451	Coil, 22u, 10%	3198 018 72290
	5452	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
S	5457	Coil, 33u.	2422 535 91021
	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
	5463	Coil, Choke.	3128 138 37021
	5471	Coil, 6u8, 20%	3198 018 76880
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 22u.	2422 535 97333
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS42204-00 B.	2422 531 02563
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5810	Coil, 10u, 10%	3198 018 51090
	5831	Coil, 6u8, 5%.	3198 018 16880
	5832	Coil, 6u8, 5%.	3198 018 16880
	5833	Coil, 6u8, 5%.	3198 018 16880
	5835	Coil, 12u, 10%	3198 018 31290
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316.	3198 010 10630
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630
	6206	Zener Diode, 6.8 volt.	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316.	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6365	Diode, Signal, BAT85	9336 247 60133
	6366	Diode, Signal, BAT85	9336 247 60133
	6367	Diode, Signal, BAV99	3198 010 10620
	6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002
	6401	Zener Diode, 47 volt	3198 010 24790
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148.	3198 010 10010
	6448	Zener Diode, 6.2 volt.	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6460	Diode, Rect, BY228/24.	9340 559 50112
	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
	6462	Zener Diode, 9.1 volt.	9331 177 80133
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316.	3198 010 10630
	6468	Diode, Signal, BAS316.	3198 010 10630
	6469	Diode, Rect, BYD33J.	9337 234 20133
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt.	3198 010 25680
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYD33J.	9337 234 20133
	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6487	Diode, Rect, BYD33D.	9337 234 00133
	6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6490	Diode, Rect, BYD33J.	9337 234 20133
	6500	Diode, Bridge Rect, GBU4JL-7002.	9322 132 55667
	6520	Diode, Rect, BYD33D.	9337 234 00133
	6523	Diode, Signal, 1N4148.	3198 010 10010
	6524	Diode, Rect, 1N5062.	3198 010 10120
	6525	Diode, Rect, 1N5062.	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt.	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500.	9340 555 59127
	6563	Diode, Signal, BAS316.	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148.	3198 010 10010
	6569	Diode, Signal, BAS316.	3198 010 10630
	6570	Zener Diode, 6.8 volt.	3198 020 56880
	6580	Diode, Signal, BAS316.	3198 010 10630
	6582	Diode, Rect, STPS10L60D.	9322 175 70667
	6831	Diode, Signal, 1N4148.	3198 010 10010
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7000	IC, TDA8941P/N1.	9352 628 51112
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7102	Transistor, PNP, BC857B(COL)	3198 010 42150
	7103	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9588H/N1/3I/1298.	9352 742 85557
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7360	Transistor, NPN, BC847B(COL)	3198 010 42030
	7366	Transistor, PNP, 2SA965.	9322 167 18676
	7369	Transistor, PNP, BC857B(COL)	3198 010 42150
	7373	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7380	Transistor, NPN, 2SC2235	9322 167 19676
	7382	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7400	Power FET, STP3NC60FP.	9322 157 37687
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7460	Transistor, NPN, BU4522AX.	9340 547 93127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2.	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1.	9352 673 56112
	7521	Power FET, FQPF9N50.	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, L78L33ACZ.	9322 134 92676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C08-WBN6.	9322 154 38682
	7606	Transistor, NPN, PDTC143ZT	9340 547 00215
	7802	IC, HEF4053BT.	9333 729 60653
	7803	IC, HEF4053BT.	9333 729 60653
	7804	Transistor, NPN, BC847B(COL)	3198 010 42030
	7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682
	7901	IC, AN7580	9322 166 29682
	7903	Transistor, NPN, BC847B(COL)	3198 010 42030
	9001	Wire Jumper.	3198 036 90010
	9101	Wire Jumper.	3198 036 90010
	9102	Wire Jumper.	3198 036 90010
	9103	Wire Jumper.	3198 036 90010
	9104	Wire Jumper.	3198 036 90010
	9123	Wire Jumper.	3198 036 90010
	9160	Wire Jumper.	3198 036 90010
	9171	Wire Jumper.	3198 036 90010
	9173	Wire Jumper.	3198 036 90010
	9175	Wire Jumper.	3198 036 90010
	9176	Wire Jumper.	3198 036 90010
	9178	Wire Jumper.	3198 036 90010
	9179	Wire Jumper.	3198 036 90010
	9181	Wire Jumper.	3198 036 90010
	9182	Wire Jumper.	3198 036 90010
	9183	Wire Jumper.	3198 036 90010
	9192	Wire Jumper.	3198 036 90010
	9193	Wire Jumper.	3198 036 90010
	9311	Wire Jumper.	3198 036 90010
	9312	Wire Jumper.	3198 036 90010
	9313	Wire Jumper.	3198 036 90010
	9314	Wire Jumper.	3198 036 90010
	9406	Wire Jumper.	3198 036 90010
	9407	Wire Jumper.	3198 036 90010
	9408	Wire Jumper.	3198 036 90010
	9409	Wire Jumper.	3198 036 90010
	9410	Wire Jumper.	3198 036 90010
	9411	Wire Jumper.	3198 036 90010
	9412	Wire Jumper.	3198 036 90010
	9413	Wire Jumper.	3198 036 90010
	9414	Wire Jumper.	3198 036 90010
	9415	Wire Jumper.	3198 036 90010
	9416	Wire Jumper.	3198 036 90010
	9417	Wire Jumper.	3198 036 90010
	9418	Wire Jumper.	3198 036 90010
	9419	Wire Jumper.	3198 036 90010
	9420	Wire Jumper.	3198 036 90010
	9421	Wire Jumper.	3198 036 90010
	9422	Wire Jumper.	3198 036 90010
	9424	Wire Jumper.	3198 036 90010
	9425	Wire Jumper.	3198 036 90010
	9426	Wire Jumper.	3198 036 90010
	9427	Wire Jumper.	3198 036 90010
	9453	Wire Jumper.	3198 036 90010
	9460	Wire Jumper.	3198 036 90010
	9463	Wire Jumper.	3198 036 90010
	9500	Wire Jumper.	3198 036 90010
	9501	Wire Jumper.	3198 036 90010
	9503	Wire Jumper.	3198 036 90010
	9506	Wire Jumper.	3198 036 90010
	9507	Wire Jumper.	3198 036 90010
	9511	Wire Jumper.	3198 036 90010
	9512	Wire Jumper.	3198 036 90010
	9513	Wire Jumper.	3198 036 90010
	9514	Wire Jumper.	3198 036 90010
	9515	Wire Jumper.	3198 036 90010
	9516	Wire Jumper.	3198 036 90010
	9518	Wire Jumper.	3198 036 90010
	9520	Wire Jumper.	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

32PT633R37D (continued)

9521 Wire Jumper. 3198 036 90010
9522 Wire Jumper. 3198 036 90010
9524 Wire Jumper. 3198 036 90010
9528 Wire Jumper. 3198 036 90010
9530 Wire Jumper. 3198 036 90010
9611 Coil, 27u, 10% 3198 018 22790
9612 Wire Jumper. 3198 036 90010
9613 Wire Jumper. 3198 036 90010
9614 Wire Jumper. 3198 036 90010
9615 Wire Jumper. 3198 036 90010
9618 Wire Jumper. 3198 036 90010
9619 Wire Jumper. 3198 036 90010
9620 Wire Jumper. 3198 036 90010
9621 Wire Jumper. 3198 036 90010
9622 Wire Jumper. 3198 036 90010
9623 Wire Jumper. 3198 036 90010
9624 Wire Jumper. 3198 036 90010
9626 Wire Jumper. 3198 036 90010
9627 Wire Jumper. 3198 036 90010
9628 Wire Jumper. 3198 036 90010
9629 Wire Jumper. 3198 036 90010
9631 Wire Jumper. 3198 036 90010
9632 Wire Jumper. 3198 036 90010
9633 Wire Jumper. 3198 036 90010
9637 Wire Jumper. 3198 036 90010
9638 Wire Jumper. 3198 036 90010
9639 Wire Jumper. 3198 036 90010
9640 Wire Jumper. 3198 036 90010
9641 Wire Jumper. 3198 036 90010
9642 Wire Jumper. 3198 036 90010
9643 Wire Jumper. 3198 036 90010
9648 Wire Jumper. 3198 036 90010
9650 Wire Jumper. 3198 036 90010
9651 Wire Jumper. 3198 036 90010
9652 Wire Jumper. 3198 036 90010
9654 Wire Jumper. 3198 036 90010
9655 Wire Jumper. 3198 036 90010
9656 Wire Jumper. 3198 036 90010
9657 Wire Jumper. 3198 036 90010
9658 Wire Jumper. 3198 036 90010
9659 Wire Jumper. 3198 036 90010
9660 Wire Jumper. 3198 036 90010
9661 Wire Jumper. 3198 036 90010
9662 Wire Jumper. 3198 036 90010
9663 Wire Jumper. 3198 036 90010
9664 Wire Jumper. 3198 036 90010
9665 Wire Jumper. 3198 036 90010
9666 Wire Jumper. 3198 036 90010
9667 Wire Jumper. 3198 036 90010
9668 Wire Jumper. 3198 036 90010
9669 Wire Jumper. 3198 036 90010
9670 Wire Jumper. 3198 036 90010
9671 Wire Jumper. 3198 036 90010
9672 Coil, 22u, 10% 3198 018 22290
9674 Wire Jumper. 3198 036 90010
9675 Wire Jumper. 3198 036 90010
9676 Wire Jumper. 3198 036 90010
9678 Coil, 22u, 10% 3198 018 22290
9679 Wire Jumper. 3198 036 90010
9680 Wire Jumper. 3198 036 90010
9681 Wire Jumper. 3198 036 90010
9682 Wire Jumper. 3198 036 90010
9683 Wire Jumper. 3198 036 90010
9685 Wire Jumper. 3198 036 90010
9686 Wire Jumper. 3198 036 90010
9687 Wire Jumper. 3198 036 90010
9688 Wire Jumper. 3198 036 90010
9689 Wire Jumper. 3198 036 90010
9690 Wire Jumper. 3198 036 90010
9691 Wire Jumper. 3198 036 90010
9694 Wire Jumper. 3198 036 90010
9695 Wire Jumper. 3198 036 90010
9697 Wire Jumper. 3198 036 90010
9698 Wire Jumper. 3198 036 90010
9699 Wire Jumper. 3198 036 90010
9821 Wire Jumper. 3198 036 90010
9822 Wire Jumper. 3198 036 90010
9825 Wire Jumper. 3198 036 90010
9828 Wire Jumper. 3198 036 90010
9829 Wire Jumper. 3198 036 90010
9831 Wire Jumper. 3198 036 90010
9832 Wire Jumper. 3198 036 90010
9837 Wire Jumper. 3198 036 90010
9838 Wire Jumper. 3198 036 90010
9839 Wire Jumper. 3198 036 90010
9846 Wire Jumper. 3198 036 90010
9847 Wire Jumper. 3198 036 90010
9848 Wire Jumper. 3198 036 90010
9849 Wire Jumper. 3198 036 90010
9851 Wire Jumper. 3198 036 90010
9855 Wire Jumper. 3198 036 90010
9856 Wire Jumper. 3198 036 90010
9857 Wire Jumper. 3198 036 90010
9858 Wire Jumper. 3198 036 90010
9859 Wire Jumper. 3198 036 90010
9860 Wire Jumper. 3198 036 90010
9862 Wire Jumper. 3198 036 90010
9863 Wire Jumper. 3198 036 90010
9864 Wire Jumper. 3198 036 90010
9865 Wire Jumper. 3198 036 90010
9867 Wire Jumper. 3198 036 90010
9868 Wire Jumper. 3198 036 90010
9869 Wire Jumper. 3198 036 90010
9870 Wire Jumper. 3198 036 90010
9871 Wire Jumper. 3198 036 90010
9873 Wire Jumper. 3198 036 90010
9874 Wire Jumper. 3198 036 90010
9875 Wire Jumper. 3198 036 90010
9876 Wire Jumper. 3198 036 90010
9877 Wire Jumper. 3198 036 90010
9878 Wire Jumper. 3198 036 90010
9901 Wire Jumper. 3198 036 90010
9902 Wire Jumper. 3198 036 90010
9903 Wire Jumper. 3198 036 90010
9904 Wire Jumper. 3198 036 90010
9911 Wire Jumper. 3198 036 90010
9913 Wire Jumper. 3198 036 90010
9914 Wire Jumper. 3198 036 90010
9915 Wire Jumper. 3198 036 90010
9923 Wire Jumper. 3198 036 90010
9991 Wire Jumper. 3198 036 90010
9993 Wire Jumper. 3198 036 90010
9996 Wire Jumper. 3198 036 90010
9997 Wire Jumper. 3198 036 90010
9998 Wire Jumper. 3198 036 90010
CBA Main Chassis Assembly. 3139 187 14441

Channel One Card Parts
Channel One Card Parts

2D 3 Line Comb Filter Parts
2D 3 Line Comb Filter Parts
0266 6 Pin Connector. 2422 025 16609
2401 Cap, 47u, 20%, 16v, Electrolytic . . . 3198 028 24790
2402 Cap, 4u7, 20%, 35v, Electrolytic . . . 3198 028 44780
2403 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2407 Cap, 15p, 5%, 50v, Ceramic 3198 016 31590
2408 Cap, 56p, 5%, 50v, Ceramic 3198 016 35690
2409 Cap, 15p, 5%, 50v, Ceramic 3198 016 31590
2411 Cap, 470n, +80/-20%, 10v, Ceramic. . . 3198 017 44740
2412 Cap, 4n7, 10%, 50v, Ceramic. 3198 017 34720
2413 Cap, 10n, 10%, 50v, Ceramic. 3198 017 31030
2414 Cap, 10n, 10%, 50v, Ceramic. 3198 017 31030
2415 Cap, 10n, 10%, 50v, Ceramic. 3198 017 31030
2416 Cap, 10n, 10%, 50v, Ceramic. 3198 017 31030
2419 Cap, 10n, 10%, 50v, Ceramic. 3198 017 31030
2420 Cap, 180p, 5%, 50v, Ceramic. 3198 016 31810
2425 Cap, 10n, 10%, 50v, Ceramic. 3198 017 31030
2426 Cap, 47u, 20%, 25v, Electrolytic . . . 3198 025 34790
2427 Cap, 10n, 10%, 50v, Ceramic. 3198 017 31030
2428 Cap, 100u, 20%, 25v, Electrolytic. . . 3198 025 31010
2429 Cap, 100u, 20%, 25v, Electrolytic. . . 3198 025 31010
2430 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2431 Cap, 100u, 20%, 25v, Electrolytic. . . 3198 025 31010
2432 Cap, 10n, 10%, 50v, Ceramic. 3198 017 31030
2433 Cap, 10n, 10%, 50v, Ceramic. 3198 017 31030
2434 Cap, 10n, 10%, 50v, Ceramic. 3198 017 31030
2435 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2436 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2440 Cap, 10u, 20%, 16v, Electrolytic . . . 3198 028 21090
2442 Cap, 56p, 5%, 50v, Ceramic 3198 016 35690
2443 Cap, 56p, 5%, 50v, Ceramic 3198 016 35690
2450 Cap, 10u, 20%, 16v, Electrolytic . . . 3198 028 21090
2452 Cap, 56p, 5%, 50v, Ceramic 3198 016 35690
2453 Cap, 56p, 5%, 50v, Ceramic 3198 016 35690
3401 Res, 560 ohm, 5%, 1/16W, Metalized Glas 3198 021 35610
3402 Res, 10K, 5%, 1/16W, Metalized Glass . 3198 021 31030
3403 Res, 1K8, 5%, 1/16W, Metalized Glass . 3198 021 31820
3404 Res, 1K5, 5%, 1/16W, Metalized Glass . 3198 021 31520
3405 Res, 820 ohm, 5%, 1/16W, Metalized Glas 3198 021 38210
3406 Res, 6K8, 5%, 1/16W, Metalized Glass . 3198 021 36820
3407 Res, 1K, 5%, 1/16W, Metalized Glass. . 3198 021 31020
3408 Res, 820 ohm, 5%, 1/16W, Metalized Glas 3198 021 38210
3412 Res, 510K, 5%, 1/10W, Metalized Glass. 2122 118 05951
3419 Res, 820 ohm, 5%, 1/16W, Metalized Glas 3198 021 38210
3425 Res, 10K, 5%, 1/16W, Metalized Glass . 3198 021 31030
3427 Res, 10K, 5%, 1/16W, Metalized Glass . 3198 021 31030
3431 Res, 8K2, 1%, 1/16W, Metalized Glass . 2322 704 68202
3432 Res, 12K, 5%, 1/16W, Metalized Glass . 3198 021 31230
3440 Res, 820 ohm, 5%, 1/16W, Metalized Glas 3198 021 38210
3441 Res, 470 ohm, 5%, 1/16W, Metalized Glas 3198 021 34710
3442 Res, 12K, 5%, 1/16W, Metalized Glass . 3198 021 31230
3443 Res, 2K7, 5%, 1/16W, Metalized Glass . 3198 021 32720
3444 Res, 560 ohm, 5%, 1/16W, Metalized Glas 3198 021 35610

32PT633R37D (continued)

Ref	Description	Part No.
3450	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3451	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3452	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3453	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198 021 32720
3454	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3455	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3456	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3457	Wire Jumper.	3198 036 90010
3458	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4403	Res, Zero ohm, "Chip" Jumper	3198 021 90030
5401	Coil, 10u, 10%	3198 018 31090
5407	Coil, 33u, 5%.	3198 018 13390
5408	Coil, 33u, 20%	3198 018 33390
5421	Inductor, 100 MHz, 120 ohm	3198 018 90070
5425	Coil, 10u, 10%	3198 018 31090
5428	Coil, 10u, 5%.	3198 018 11090
5429	Coil, 10u, 10%	3198 018 31090
5430	Coil, 10u, 10%	3198 018 31090
5440	Coil, 10u, 10%	3198 018 31090
5442	Coil, 22u, 5%.	3198 018 12290
5450	Coil, 10u, 10%	3198 018 31090
5452	Coil, 33u, 5%.	3198 018 13390
7401	Transistor, PNP, BC857B(COL)	3198 010 42150
7402	Transistor, NPN, BC847B(COL)	3198 010 42030
7403	Transistor, NPN, BC847B(COL)	3198 010 42030
7421	IC, TC90A53N	9322 182 18682
7440	Transistor, NPN, BC847B(COL)	3198 010 42030
7444	Transistor, NPN, BC847B(COL)	3198 010 42030
7450	Transistor, NPN, BC847B(COL)	3198 010 42030
7454	Transistor, NPN, BC847B(COL)	3198 010 42030
9401	Wire Jumper.	3198 036 90010
9402	Wire Jumper.	3198 036 90010
9403	Wire Jumper.	3198 036 90010
CBA	2D 3 Line Comb Filter Assembly	3139 177 26561

DAF Panel Parts

DAF Panel Parts

Ref	Description	Part No.
0221	2 Pin Connector.	2422 025 15503
0258	2 Pin Connector.	2422 025 15503
0261	1 Pin Connector.	2422 034 20021
0262	1 Pin Connector.	2422 034 20021
2492	Cap, 390p, 10%, 2000v, Ceramic	2020 558 90482
2493	Cap, 390p, 10%, 2000v, Ceramic	2020 558 90482
3498	Varactor, 1MA/612V, Max 1100V.	2322 592 14217
3499	Varactor, 1MA/612V, Max 1100V.	2322 592 14217
5493	Transformer, Signal, DAF	3128 138 34581
CBA	DAF Panel Assembly	3139 187 10081

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

Ref	Description	Part No.
S 0211	2 Pin Connector.	2422 025 16268
S 0212	2 Pin Connector.	2422 025 16559
0214	5 Pin Connector.	2422 025 06353
1606	Tact Switch.	2422 128 02742
2691	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2698	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
6691	LED, LTL-10234WHCR	9322 185 69682
6692	IR Receiver, TSOP1836UH3V.	9322 127 54667
9001	Wire Jumper.	3198 036 90010
9002	Wire Jumper.	3198 036 90010
CBA	Front Interface Panel Assembly	3139 187 28041

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts

Side Jack Panel Parts

Ref	Description	Part No.
0232	Headphone Jack	2422 026 04747
0250	A/V Jack	2422 026 04815
0251	6 Pin Connector.	2422 025 12482
0254	5 Pin Connector.	2422 025 12481
0255	4 Pin Connector.	2422 025 12479
2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2177	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2179	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
3150	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
4817	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4819	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4821	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4822	Res, Zero ohm, "Chip" Jumper	3198 021 90020
6161	Zener Diode, 6.8 volt.	3198 010 26880
9151	Wire Jumper.	3198 036 90010
9152	Wire Jumper.	3198 036 90010
9153	Wire Jumper.	3198 036 90010
9170	Wire Jumper.	3198 036 90010
CBA	Side Jack Panel Assembly	3139 187 15141

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Ref	Description	Part No.
0215	3 Pin Connector.	2422 025 16601
1091	Tact Switch.	2422 128 02742
1092	Tact Switch.	2422 128 02742
1093	Tact Switch.	2422 128 02742
1094	Tact Switch.	2422 128 02742
3091	Res, 560 ohm, 5%, Metalized Glass. . .	3198 021 35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3093	Res, 560 ohm, 5%, Metalized Glass. . .	3198 021 35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
4085	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4089	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4090	Res, Zero ohm, "Chip" Jumper	3198 021 90030
6091	Diode, Signal.	9340 453 90115
CBA	Top Control Panel Assembly	3139 187 15841

Cabinet & Accessory Parts

Cabinet & Accessory Parts

Ref	Description	Part No.
S AC01	AC Cord.	3135 010 03831
AC03	Anode Lead Spacer (3 Used)	3135 014 04471
AC04	Batteries for Remote Control Transmitte	9299 000 65263
AC05	Cabinet Back	3139 124 44171
AC06	Cabinet Back Screw Cover (2 Used). . .	3139 124 39241
AC07	Canceller Coil	3128 138 60581
AC08	Chassis Tray	3139 124 31324
S AC09	CRT, A80AJZ90X05	9322 188 82682
AC11	DAF Panel Bracket.	3139 124 25402
S AC12	Degaussing Coil.	2422 549 44676
AC13	Front Interface Panel Bracket.	3139 124 32891
AC15	Holder, Degaussing Coil (4 Used) . . .	3135 013 01661
AC17	Owner's Manual	3121 235 20711
AC18	Quick Use Guide.	3121 233 43531
AC19	Side Jack Panel Bracket.	3139 124 37061
AC20	Cabinet Front Assembly	3121 237 53141
AC20A	Cabinet Front.	3139 138 10961
AC20C	Light Guide.	3139 124 39701
AC20D	Nameplate.	3141 050 00141
AC20E	Power Button	3139 138 10881
AC20H	Speaker, 8 ohm, 10W (2 Used)	3139 128 76081
AC20J	Top Control Assembly	3139 138 11451
AC20J1	Top Control Bracket.	3139 124 39802
AC20J2	Top Control Buttons.	3139 124 39812
REMOTE	Remote Control Transmitter, RC19036002/ 01.	3139 228 88003

S = Safety Part   Be sure to use exact replacement part.

32PT663R37A - Manual no. 7638

Main Chassis Parts

Main Chassis Parts

S	Ref	Description	Part No.
	0211	2 Pin Connector	2422 025 16374
	0212	2 Pin Connector	2422 025 16375
	0214	5 Pin Connector	2422 025 12481
	0219	6 Pin Connector	2422 025 12482
	0220	5 Pin Connector	2422 025 04853
	0221	2 Pin Connector	2422 025 15503
	0222	2 Pin Connector	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack	2422 026 04926
	0239	3 Pin Connector	2422 025 16382
	0243	6 Pin Connector	2422 025 04854
	0244	5 Pin Connector	2422 025 04853
	0245	6 Pin Connector	2422 025 04854
	0246	5 Pin Connector	2422 025 12481
S	0254	9 Pin CRT Socket	2422 500 80058
	0267	3 Pin Connector	2412 020 00725
	0268	3 Pin Connector	2412 020 00725
	0269	Jack	2422 026 05182
	0278	3 Pin Connector	2412 020 00725
S	1000	Tuner, V+U PLL	2422 542 90098
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1660	Crystal, 12MHz000	2422 543 01203
	1810	6 Pin Connector	2422 025 16607
	1831	Crystal, Resonator, 18MHz432, 12 Pin, HC49/U A.	2422 543 00842
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852
	2172	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2173	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
	2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2360	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2362	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
	2364	Cap, 27p, 5%, 50v, Ceramic	3198 016 32790
	2365	Cap, 27p, 5%, 50v, Ceramic	3198 016 32790
	2366	Cap, 27p, 5%, 50v, Ceramic	3198 016 32790
	2367	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2368	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2369	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2372	Cap, 10u, 20%, 160v, Electrolytic.	2020 012 93318
	2373	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2375	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2378	Cap, 220p, 5%, 50v, Ceramic.	3198 019 02210
	2379	Cap, 10u, 20%, 100v, Electrolytic.	3198 025 71090
	2380	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2381	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
	2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
S	2448	Cap, 100p, 10%, 500v, Ceramic.	3198 019 41010
	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
	2451	Cap, 22n, 10%, 50v, Polyester.	3198 014 02230
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 390n, 5%, 250v, Metalized Polypropylene.	2022 333 00085
	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
S	2463	Cap, 470p, 10%, 2000v, Ceramic	2020 558 90483
	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene	2222 479 90042
S	2465	Cap, 13n, 5%, 1600v, Polypropylene	2222 375 90157
	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
	2468	Cap, 18n, 10%, 400v, Polyester	2222 347 90222
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91374
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2604	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090

S = Safety Part   Be sure to use exact replacement part.

32PT663R37A (continued)

Safety	Ref	Description	Part No.
	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050
	2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2807	Cap, 220n, +80/-20%, 25v, Ceramic. . .	3198 023 22240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
	2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
	2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
	2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
	2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
	2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
	2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
	2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2837	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
	2840	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2841	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2843	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2844	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2846	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
	2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
	2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
	2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610
	2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910
	2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2902	Cap, 1000u, 20%, 25v, Electrolytic . .	3198 026 31020
	2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
	2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
	2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
	3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
	3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202
	3172	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3180	Res, 68K, 5%, 1/16W, Metalized Glass .	3198 021 36830
	3181	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
	3190	Res, 68K, 5%, 1/16W, Metalized Glass .	3198 021 36830
	3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
	3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
	3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
	3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840
	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3250	Res, 4K7, 5%, 1/6W, Carbon Film. . . .	3198 011 04720
	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
	3258	Res, 180K, 5%, 1/10W, Metalized Glass.	2120 108 91721
	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3360	Res, 39K, 5%, 1/16W, Metalized Glass .	3198 021 33930
	3361	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3362	Res, 39K, 5%, 1/16W, Metalized Glass .	3198 021 33930
	3363	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3367	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
	3368	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
	3369	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3373	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3374	Res, 2R2, 5%, 1/6W, Carbon Film. . . .	3198 011 02280
	3375	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3376	Res, 68K, 5%, 1/6W, Carbon Film. . . .	3198 011 06830
	3377	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3378	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3380	Res, 68K, 5%, 1/16W, Metalized Glass .	3198 021 36830
	3381	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3383	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3384	Res, 2R2, 5%, 1/6W, Carbon Film. . . .	3198 011 02280
	3385	Res, 10K, 5%, 5W, Metal Film	2322 257 41103
S	3386	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
	3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
	3403	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3451	Res, 3R9, 5%, 1/3W, Metal Film	2306 204 03398
	3452	Res, 47K, 1%, 3/5W, Metal Film	2312 915 14703
	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3454	Res, 15K, 1%, 3/5W, Metal Film	2312 915 11503
S	3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
	3456	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3457	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S	3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703

S = Safety Part   Be sure to use exact replacement part.

32PT663R37A (continued)

S	Ref	Description	Part No.
	3468	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3469	Res, 100K, 5%, 1/6W, Carbon Film . . .	3198 011 01040
	3470	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
	3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
	3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S	3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 32290
	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3490	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3491	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
S	3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3565	Res, 220 ohm, 5%, 1W, Metal Film . . .	3198 012 12210
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
S	3591	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3614	Res, 4K7, 5%, 1/6W, Carbon Film. . . .	3198 011 04720
	3615	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3811	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3812	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3813	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3831	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3843	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3901	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198 021 36820
	3903	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3905	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3909	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3910	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3912	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4311	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4312	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4313	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4824	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4837	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4838	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4884	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5202	Wire Jumper.	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5241	Wire Jumper.	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

32PT663R37A (continued)

	Ref	Description	Part No.
	5242	Coil, 10u, 5%.	3198 018 11090
	5341	Coil, 22u.	2422 535 97333
	5342	Coil, 27u, 10%	3198 018 22790
	5376	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5401	Coil, 1mH, 10%	3198 018 71020
S	5445	Transformer, LOT	2422 531 02602
	5451	Coil, 22u, 10%	3198 018 72290
	5452	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
S	5457	Coil, 25u.	2422 535 91028
	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
	5463	Coil, Choke.	3128 138 37021
	5471	Coil, 6u8, 20%	3198 018 76880
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 18u.	2422 535 97332
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS42202-00 B.	2422 531 02562
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5810	Coil, 10u, 10%	3198 018 51090
	5831	Coil, 6u8, 5%.	3198 018 16880
	5832	Coil, 6u8, 5%.	3198 018 16880
	5833	Coil, 6u8, 5%.	3198 018 16880
	5835	Coil, 12u, 10%	3198 018 31290
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316.	3198 010 10630
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630
	6206	Zener Diode, 6.8 volt.	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316.	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6365	Diode, Signal, BAT85	9336 247 60133
	6366	Diode, Signal, BAT85	9336 247 60133
	6367	Diode, Signal, BAV99	3198 010 10620
	6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002
	6401	Zener Diode, 47 volt	3198 010 24790
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148.	3198 010 10010
	6448	Zener Diode, 6.2 volt.	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6453	Zener Diode, 6.8 volt.	3198 020 56880
	6460	Diode, Rect, BY228/24.	9340 559 50112
	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
	6462	Zener Diode, 9.1 volt.	9331 177 80133
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316.	3198 010 10630
	6468	Diode, Signal, BAS316.	3198 010 10630
	6469	Diode, Rect, BYD33J.	9337 234 20133
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 18 volt	3198 010 21890
	6481	Zener Diode, 5.6 volt.	3198 010 25680
	6482	Zener Diode, 9.1 volt.	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYD33J.	9337 234 20133
	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6487	Diode, Rect, BYD33D.	9337 234 00133
	6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6490	Diode, Rect, BYD33J.	9337 234 20133
	6500	Diode, Bridge Rect, GBU4JL-7002.	9322 132 55667
	6520	Diode, Rect, BYD33D.	9337 234 00133
	6523	Diode, Signal, 1N4148.	3198 010 10010
	6524	Diode, Rect, 1N5062.	3198 010 10120
	6525	Diode, Rect, 1N5062.	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt.	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500.	9340 555 59127
	6563	Diode, Signal, BAS316.	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148.	3198 010 10010
	6569	Diode, Signal, BAS316.	3198 010 10630
	6570	Zener Diode, 6.8 volt.	3198 020 56880
	6580	Diode, Signal, BAS316.	3198 010 10630
	6582	Diode, Rect, STPS10L60D.	9322 175 70667
	6831	Diode, Signal, 1N4148.	3198 010 10010
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7000	IC, TDA8941P/N1.	9352 628 51112
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7102	Transistor, PNP, BC857B(COL)	3198 010 42150
	7103	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9588H/N1/3I/1298.	9352 742 85557
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7360	Transistor, NPN, BC847B(COL)	3198 010 42030
	7366	Transistor, PNP, 2SA965.	9322 167 18676
	7369	Transistor, PNP, BC857B(COL)	3198 010 42150
	7373	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7380	Transistor, NPN, 2SC2235	9322 167 19676
	7382	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7400	Power FET, STP3NC60FP.	9322 157 37687
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7450	Transistor, PNP, PDTA114ET	3198 010 44010
	7460	Transistor, NPN, BU4508DX.	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2.	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1.	9352 673 56112
	7521	Power FET, FQPF9N50.	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, L78L33ACZ.	9322 134 92676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C08-WBN6.	9322 154 38682
	7606	Transistor, NPN, PDTC143ZT	9340 547 00215
	7802	IC, HEF4053BT.	9333 729 60653
	7803	IC, HEF4053BT.	9333 729 60653
	7804	Transistor, NPN, BC847B(COL)	3198 010 42030
	7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682
	7901	IC, AN7580	9322 166 29682
	7903	Transistor, NPN, BC847B(COL)	3198 010 42030
	9001	Wire Jumper.	3198 036 90010
	9101	Wire Jumper.	3198 036 90010
	9102	Wire Jumper.	3198 036 90010
	9103	Wire Jumper.	3198 036 90010
	9104	Wire Jumper.	3198 036 90010
	9123	Wire Jumper.	3198 036 90010
	9160	Wire Jumper.	3198 036 90010
	9171	Wire Jumper.	3198 036 90010
	9173	Wire Jumper.	3198 036 90010
	9175	Wire Jumper.	3198 036 90010
	9176	Wire Jumper.	3198 036 90010
	9178	Wire Jumper.	3198 036 90010
	9179	Wire Jumper.	3198 036 90010
	9181	Wire Jumper.	3198 036 90010
	9182	Wire Jumper.	3198 036 90010
	9183	Wire Jumper.	3198 036 90010
	9192	Wire Jumper.	3198 036 90010
	9193	Wire Jumper.	3198 036 90010
	9311	Wire Jumper.	3198 036 90010
	9312	Wire Jumper.	3198 036 90010
	9313	Wire Jumper.	3198 036 90010
	9314	Wire Jumper.	3198 036 90010
	9406	Wire Jumper.	3198 036 90010
	9407	Wire Jumper.	3198 036 90010
	9408	Wire Jumper.	3198 036 90010
	9409	Wire Jumper.	3198 036 90010
	9410	Wire Jumper.	3198 036 90010
	9411	Wire Jumper.	3198 036 90010
	9412	Wire Jumper.	3198 036 90010
	9413	Wire Jumper.	3198 036 90010
	9414	Wire Jumper.	3198 036 90010
	9415	Wire Jumper.	3198 036 90010
	9416	Wire Jumper.	3198 036 90010
	9417	Wire Jumper.	3198 036 90010
	9418	Wire Jumper.	3198 036 90010
	9419	Wire Jumper.	3198 036 90010
	9420	Wire Jumper.	3198 036 90010
	9421	Wire Jumper.	3198 036 90010
	9422	Wire Jumper.	3198 036 90010
	9424	Wire Jumper.	3198 036 90010
	9425	Wire Jumper.	3198 036 90010
	9426	Wire Jumper.	3198 036 90010
	9427	Wire Jumper.	3198 036 90010
	9453	Wire Jumper.	3198 036 90010
	9460	Wire Jumper.	3198 036 90010
	9463	Wire Jumper.	3198 036 90010
	9500	Wire Jumper.	3198 036 90010
	9501	Wire Jumper.	3198 036 90010
	9503	Wire Jumper.	3198 036 90010
	9506	Wire Jumper.	3198 036 90010
	9507	Wire Jumper.	3198 036 90010
	9511	Wire Jumper.	3198 036 90010
	9512	Wire Jumper.	3198 036 90010
	9513	Wire Jumper.	3198 036 90010
	9514	Wire Jumper.	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

32PT663R37A (continued)

Ref	Description	Part No.
9515	Wire Jumper	3198 036 90010
9516	Wire Jumper	3198 036 90010
9518	Wire Jumper	3198 036 90010
9520	Wire Jumper	3198 036 90010
9521	Wire Jumper	3198 036 90010
9522	Wire Jumper	3198 036 90010
9524	Wire Jumper	3198 036 90010
9528	Wire Jumper	3198 036 90010
9530	Wire Jumper	3198 036 90010
9611	Coil, 27u, 10%	3198 018 22790
9612	Wire Jumper	3198 036 90010
9613	Wire Jumper	3198 036 90010
9614	Wire Jumper	3198 036 90010
9615	Wire Jumper	3198 036 90010
9618	Wire Jumper	3198 036 90010
9619	Wire Jumper	3198 036 90010
9620	Wire Jumper	3198 036 90010
9621	Wire Jumper	3198 036 90010
9622	Wire Jumper	3198 036 90010
9623	Wire Jumper	3198 036 90010
9624	Wire Jumper	3198 036 90010
9626	Wire Jumper	3198 036 90010
9627	Wire Jumper	3198 036 90010
9628	Wire Jumper	3198 036 90010
9629	Wire Jumper	3198 036 90010
9631	Wire Jumper	3198 036 90010
9632	Wire Jumper	3198 036 90010
9633	Wire Jumper	3198 036 90010
9637	Wire Jumper	3198 036 90010
9638	Wire Jumper	3198 036 90010
9639	Wire Jumper	3198 036 90010
9640	Wire Jumper	3198 036 90010
9641	Wire Jumper	3198 036 90010
9642	Wire Jumper	3198 036 90010
9643	Wire Jumper	3198 036 90010
9648	Wire Jumper	3198 036 90010
9650	Wire Jumper	3198 036 90010
9651	Wire Jumper	3198 036 90010
9652	Wire Jumper	3198 036 90010
9654	Wire Jumper	3198 036 90010
9655	Wire Jumper	3198 036 90010
9656	Wire Jumper	3198 036 90010
9657	Wire Jumper	3198 036 90010
9658	Wire Jumper	3198 036 90010
9659	Wire Jumper	3198 036 90010
9660	Wire Jumper	3198 036 90010
9661	Wire Jumper	3198 036 90010
9662	Wire Jumper	3198 036 90010
9663	Wire Jumper	3198 036 90010
9664	Wire Jumper	3198 036 90010
9665	Wire Jumper	3198 036 90010
9666	Wire Jumper	3198 036 90010
9667	Wire Jumper	3198 036 90010
9668	Wire Jumper	3198 036 90010
9669	Wire Jumper	3198 036 90010
9670	Wire Jumper	3198 036 90010
9671	Wire Jumper	3198 036 90010
9672	Coil, 22u, 10%	3198 018 22290
9674	Wire Jumper	3198 036 90010
9675	Wire Jumper	3198 036 90010
9676	Wire Jumper	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper	3198 036 90010
9680	Wire Jumper	3198 036 90010
9681	Wire Jumper	3198 036 90010
9682	Wire Jumper	3198 036 90010
9683	Wire Jumper	3198 036 90010
9685	Wire Jumper	3198 036 90010
9686	Wire Jumper	3198 036 90010
9687	Wire Jumper	3198 036 90010
9688	Wire Jumper	3198 036 90010
9689	Wire Jumper	3198 036 90010
9690	Wire Jumper	3198 036 90010
9691	Wire Jumper	3198 036 90010
9694	Wire Jumper	3198 036 90010
9695	Wire Jumper	3198 036 90010
9697	Wire Jumper	3198 036 90010
9698	Wire Jumper	3198 036 90010
9699	Wire Jumper	3198 036 90010
9821	Wire Jumper	3198 036 90010
9822	Wire Jumper	3198 036 90010
9825	Wire Jumper	3198 036 90010
9828	Wire Jumper	3198 036 90010
9829	Wire Jumper	3198 036 90010
9831	Wire Jumper	3198 036 90010
9832	Wire Jumper	3198 036 90010
9837	Wire Jumper	3198 036 90010
9838	Wire Jumper	3198 036 90010
9839	Wire Jumper	3198 036 90010
9846	Wire Jumper	3198 036 90010
9847	Wire Jumper	3198 036 90010
9848	Wire Jumper	3198 036 90010
9849	Wire Jumper	3198 036 90010
9851	Wire Jumper	3198 036 90010
9855	Wire Jumper	3198 036 90010
9856	Wire Jumper	3198 036 90010
9857	Wire Jumper	3198 036 90010
9858	Wire Jumper	3198 036 90010
9859	Wire Jumper	3198 036 90010
9860	Wire Jumper	3198 036 90010
9862	Wire Jumper	3198 036 90010
9863	Wire Jumper	3198 036 90010
9864	Wire Jumper	3198 036 90010
9865	Wire Jumper	3198 036 90010
9867	Wire Jumper	3198 036 90010
9868	Wire Jumper	3198 036 90010
9869	Wire Jumper	3198 036 90010
9870	Wire Jumper	3198 036 90010
9871	Wire Jumper	3198 036 90010
9873	Wire Jumper	3198 036 90010
9874	Wire Jumper	3198 036 90010
9875	Wire Jumper	3198 036 90010
9876	Wire Jumper	3198 036 90010
9877	Wire Jumper	3198 036 90010
9878	Wire Jumper	3198 036 90010
9901	Wire Jumper	3198 036 90010
9902	Wire Jumper	3198 036 90010
9903	Wire Jumper	3198 036 90010
9904	Wire Jumper	3198 036 90010
9911	Wire Jumper	3198 036 90010
9913	Wire Jumper	3198 036 90010
9914	Wire Jumper	3198 036 90010
9915	Wire Jumper	3198 036 90010
9923	Wire Jumper	3198 036 90010
9991	Wire Jumper	3198 036 90010
9993	Wire Jumper	3198 036 90010
9996	Wire Jumper	3198 036 90010
9997	Wire Jumper	3198 036 90010
9998	Wire Jumper	3198 036 90010
CBA	Main Chassis Assembly	3139 188 02181

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

Ref	Description	Part No.
0266	6 Pin Connector	2422 025 16609
2401	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2402	Cap, 4u7, 20%, 35v, Electrolytic	3198 028 44780
2403	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2407	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2408	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2409	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2411	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
2412	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2413	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2414	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2415	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2416	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2419	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2420	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
2425	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2426	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2427	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2428	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2429	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2430	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2431	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2432	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2433	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2434	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2435	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2436	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2440	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
2442	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2443	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2450	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
2452	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2453	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
3401	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3402	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3403	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3404	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3405	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3406	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3407	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3408	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3412	Res, 510K, 5%, 1/10W, Metalized Glass.	2122 118 05951
3419	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3425	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3427	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3431	Res, 8K2, 1%, 1/16W, Metalized Glass	2322 704 68202
3432	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3440	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210

32PT663R37A (continued)

3441	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3442	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3443	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198 021 32720
3444	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3450	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3451	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3452	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3453	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198 021 32720
3454	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3455	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3456	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3457	Wire Jumper.	3198 036 90010
3458	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4403	Res, Zero ohm, "Chip" Jumper	3198 021 90030
5401	Coil, 10u, 10%	3198 018 31090
5407	Coil, 33u, 5%.	3198 018 13390
5408	Coil, 33u, 20%	3198 018 33390
5421	Inductor, 100 MHz, 120 ohm	3198 018 90070
5425	Coil, 10u, 10%	3198 018 31090
5428	Coil, 10u, 5%.	3198 018 11090
5429	Coil, 10u, 10%	3198 018 31090
5430	Coil, 10u, 10%	3198 018 31090
5440	Coil, 10u, 10%	3198 018 31090
5442	Coil, 22u, 5%.	3198 018 12290
5450	Coil, 10u, 10%	3198 018 31090
5452	Coil, 33u, 5%.	3198 018 13390
7401	Transistor, PNP, BC857B(COL)	3198 010 42150
7402	Transistor, NPN, BC847B(COL)	3198 010 42030
7403	Transistor, NPN, BC847B(COL)	3198 010 42030
7421	IC, TC90A53N	9322 182 18682
7440	Transistor, NPN, BC847B(COL)	3198 010 42030
7444	Transistor, NPN, BC847B(COL)	3198 010 42030
7450	Transistor, NPN, BC847B(COL)	3198 010 42030
7454	Transistor, NPN, BC847B(COL)	3198 010 42030
9401	Wire Jumper.	3198 036 90010
9402	Wire Jumper.	3198 036 90010
9403	Wire Jumper.	3198 036 90010
CBA	2D 3 Line Comb Filter Assembly	3139 177 26561

DAF Panel Parts

DAF Panel Parts

0221	2 Pin Connector.	2422 025 15503
0258	2 Pin Connector.	2422 025 15503
0261	1 Pin Connector.	2422 034 20021
0262	1 Pin Connector.	2422 034 20021
2492	Cap, 390p, 10%, 2000v, Ceramic	2020 558 90482
2493	Cap, 390p, 10%, 2000v, Ceramic	2020 558 90482
3498	Varactor, 1MA/612V, Max 1100V.	2322 592 14217
3499	Varactor, 1MA/612V, Max 1100V.	2322 592 14217
5493	Transformer, Signal, DAF	3128 138 34581
CBA	DAF Panel Assembly	3139 187 10081

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

S 0211	2 Pin Connector.	2422 025 16268
S 0212	2 Pin Connector.	2422 025 16559
0214	5 Pin Connector.	2422 025 06353
1606	Tact Switch.	2422 128 02742
2691	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2698	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
6691	LED, LTL-10234WHCR	9322 185 69682
6692	IR Receiver, TSOP1836UH3V.	9322 127 54667
9001	Wire Jumper.	3198 036 90010
9002	Wire Jumper.	3198 036 90010
CBA	Front Interface Panel Assembly	3139 187 28041

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb ly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422 026 04747
0250	A/V Jack	2422 026 04815
0251	6 Pin Connector.	2422 025 12482
0254	5 Pin Connector.	2422 025 12481
0255	4 Pin Connector.	2422 025 12479
2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2177	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2179	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
3150	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
4817	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4819	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4821	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4822	Res, Zero ohm, "Chip" Jumper	3198 021 90020
6161	Zener Diode, 6.8 volt.	3198 010 26880
9151	Wire Jumper.	3198 036 90010
9152	Wire Jumper.	3198 036 90010
9153	Wire Jumper.	3198 036 90010
9170	Wire Jumper.	3198 036 90010
CBA	Side Jack Panel Assembly	3139 187 15141

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

0215	3 Pin Connector.	2422 025 16601
1091	Tact Switch.	2422 128 02742
1092	Tact Switch.	2422 128 02742
1093	Tact Switch.	2422 128 02742
1094	Tact Switch.	2422 128 02742
3091	Res, 560 ohm, 5%, Metalized Glass. . .	3198 021 35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3093	Res, 560 ohm, 5%, Metalized Glass. . .	3198 021 35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
4085	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4089	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4090	Res, Zero ohm, "Chip" Jumper	3198 021 90030
6091	Diode, Signal.	9340 453 90115
CBA	Top Control Panel Assembly	3139 187 15841

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	3135 010 03831
AC03	Anode Lead Spacer (3 Used)	3135 014 04471
AC04	Batteries for Remote Control Transmitte	9299 000 65263
AC05	Cabinet Back	3139 124 44171
AC06	Cabinet Back Screw Cover (2 Used). . .	3139 124 39241
AC07	Canceller Coil	3128 138 60581
AC08	Chassis Tray	3139 124 31324
S AC09	CRT, A80ERF042X14.	9301 927 10539
S AC12	Degaussing Coil.	2422 549 44676
AC13	Front Interface Panel Bracket.	3139 124 32891
AC15	Holder, Degaussing Coil (4 Used) . . .	3135 013 01661
AC17	Owner's Manual	3121 235 20711
AC18	Quick Use Guide.	3121 233 43531
AC19	Side Jack Panel Bracket.	3139 124 37061
AC20	Cabinet Front Assembly	3121 237 53321
AC20A	Cabinet Front.	3139 177 65811
AC20C	Light Guide.	3139 124 39701
AC20D	Nameplate.	3141 050 00141
AC20E	Power Button	3139 138 10881
AC20J	Top Control Assembly	3139 138 11451
AC20J1	Top Control Bracket.	3139 124 39802
AC20J2	Top Control Buttons.	3139 124 39812
REMOTE	Remote Control Transmitter, RC19036002/ 01.	3139 228 88003

S = Safety Part   Be sure to use exact replacement part.

32PW633R85C - Manual no. 7638

Main Chassis Parts

S	Ref	Description	Part No.
		Main Chassis Parts	
	0127	Socket Fuse	2422 088 00271
	0129	NTC Holder	3139 120 10151
	0136	IC-Spring	3104 301 22081
	0137	Spring	3139 121 24583
	0138	IC-Spring	3104 301 22081
	0139	Spring for Bracket	3122 121 24786
	0140	Spring	3139 121 24583
	0141	IC-Spring	3104 301 22081
	0152	Cable, DIPMate, 6 Pin, 560mm	3139 121 08951
	0153	Cable, 5 Pin, 560mm	3139 121 09041
	0211	2 Pin Connector	2422 025 16374
	0212	2 Pin Connector	2422 025 16375
	0214	5 Pin Connector	2422 025 12481
	0219	6 Pin Connector	2422 025 12482
	0220	5 Pin Connector	2422 025 04853
	0221	2 Pin Connector	2422 025 15503
	0222	2 Pin Connector	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack	2422 026 04926
	0239	3 Pin Connector	2422 025 16382
	0243	6 Pin Connector	2422 025 04854
	0244	5 Pin Connector	2422 025 04853
	0245	6 Pin Connector	2422 025 04854
	0246	5 Pin Connector	2422 025 12481
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector	2412 020 00725
	0268	3 Pin Connector	2412 020 00725
	0269	Jack	2422 026 05182
	0278	3 Pin Connector	2412 020 00725
S	1000	Tuner, V+U, PLL	2422 542 90108
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1400	Relay, 5 Amp, 12V	2422 132 07543
S	1500	Fuse, 4A, 250V, IEC	2422 086 10914
S	1515	Relay, 5 Amp, 12V	2422 132 07444
	1660	Crystal, 12MHz000	2422 543 01203
	1810	6 Pin Connector	2422 025 16607
	1831	Crystal, Resonator, 18MHz432, 12 Pin, HC49/U A	2422 543 00842
	2004	Cap, 47n, 10%, 50v, Ceramic	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2143	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2150	Cap, 150n, +80/-20%, 16v, Ceramic	2238 786 19852
	2172	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2173	Cap, 220p, 5%, 50v, Ceramic	3198 016 32210
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2209	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2216	Cap, 2u2, 20%, 10v, Electrolytic	2020 012 93728
	2217	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2241	Cap, 1n5, 10%, 50v, Ceramic	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2243	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2247	Cap, 2u2, 20%, 10v, Electrolytic	2020 012 93728
	2248	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic	3198 016 05610
	2344	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
S	2346	Cap, 470p, 10%, 2000v, Ceramic	2020 558 90483
	2360	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
	2362	Cap, 220p, 5%, 50v, Ceramic	3198 016 32210
	2364	Cap, 27p, 5%, 50v, Ceramic	3198 016 32790
	2365	Cap, 27p, 5%, 50v, Ceramic	3198 016 32790
	2366	Cap, 27p, 5%, 50v, Ceramic	3198 016 32790
	2367	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
	2368	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2369	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2372	Cap, 10u, 20%, 160v, Electrolytic	2020 012 93318
	2373	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
	2375	Cap, 560p, 5%, 50v, Ceramic	3198 016 05610
	2378	Cap, 220p, 5%, 50v, Ceramic	3198 019 02210
	2379	Cap, 10u, 20%, 100v, Electrolytic	3198 025 71090
	2380	Cap, 560p, 5%, 50v, Ceramic	3198 016 05610
	2381	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
	2401	Cap, 2u2, 20%, 100v, Electrolytic	2020 021 91331
	2402	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic	3198 016 03310
	2420	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2421	Cap, 470p, 5%, 50v, Ceramic	3198 016 34710
	2441	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic	2020 021 91139
	2451	Cap, 22n, 10%, 50v, Polyester	3198 014 02230
	2454	Cap, 68n, 5%, 250v, Metalized Polypropylene	2222 479 90133
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 470n, 5%, 250v, Metalized Polypropylene	2022 333 00086
	2459	Cap, 680p, 10%, 500v, Ceramic	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
S	2463	Cap, 390p, 10%, 2000v, Ceramic	2020 558 90482
S	2465	Cap, 13n, 5%, 1600v, Polypropylene	2020 301 90254
	2467	Cap, 9n1, 5%, 1000v, Polypropylene	2222 375 90424
	2468	Cap, 9n1, 5%, 1000v, Polypropylene	2222 375 90424
	2469	Cap, 430n, 5%, 250v, Metalized Polypropylene	2022 333 00164
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2482	Cap, 33n, 10%, 250v, Polyester	2222 347 90213
	2485	Cap, 4u7, 20%, 250v, Electrolytic	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2490	Cap, 2u2, 20%, 100v, Electrolytic	2020 021 91331
	2491	Cap, 1n, 10%, 500v, Ceramic	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220

S = Safety Part   Be sure to use exact replacement part.

32PW633R85C (continued)

Ref	Description	Part No.
2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
2540	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
2541	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91374
2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2568	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2590	Cap, 330n, +80/-20%, 25v, Ceramic	2222 910 19856
2601	Cap, 220n, +80/-20%, 25v, Ceramic	3198 023 22240
2602	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
2604	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2606	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2608	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2611	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2618	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
2619	Cap, 1u, +80/-20%, 16v, Ceramic	3198 017 21050
2802	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
2807	Cap, 220n, +80/-20%, 25v, Ceramic	3198 023 22240
2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2816	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2834	Cap, 470p, 5%, 50v, Ceramic	3198 016 34710
2835	Cap, 220p, 5%, 50v, Ceramic	3198 016 32210
2836	Cap, 1n5, 10%, 50v, Ceramic	3198 017 31520
2837	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
2840	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
2841	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2842	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
2843	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2844	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2845	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
2846	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
2849	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
2850	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
2852	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
2854	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2857	Cap, 150p, 5%, 50v, Ceramic	3198 016 31510
2860	Cap, 180p, 5%, 50v, Ceramic	3198 016 31810
2894	Cap, 220p, 5%, 50v, Ceramic	3198 016 32210
2895	Cap, 560p, 5%, 25v, Ceramic	3198 016 35610
2897	Cap, 390p, 5%, 50v, Ceramic	3198 016 33910
2898	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2902	Cap, 1000u, 20%, 25v, Electrolytic	3198 026 31020
2903	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
2904	Cap, 470n, +80/-20%, 16v, Ceramic	3198 017 24740
2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2906	Cap, 470n, +80/-20%, 16v, Ceramic	3198 017 24740
2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2908	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass	3198 021 32240
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film	3198 011 01510
3124	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film	3198 011 01510
3126	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film	3198 011 01510
3134	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3149	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3150	Res, 150K, 5%, 1/16W, Metalized Glass	3198 021 31540
3154	Res, 5K6, 5%, 1/6W, Carbon Film	3198 011 05620
3156	Res, 10K, 5%, 1/6W, Carbon Film	3198 011 01030
3157	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3158	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3159	Res, 1K2, 1%, 1/8W, Metalized Glass	2322 734 61202
3172	Res, 6K8, 5%, 1/6W, Carbon Film	3198 011 06820
3180	Res, 68K, 5%, 1/16W, Metalized Glass	3198 021 36830
3181	Res, 120K, 5%, Metalized Glass	2322 702 60124
3190	Res, 68K, 5%, 1/16W, Metalized Glass	3198 021 36830
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film	3198 011 02230
3205	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
3206	Res, 220K, 5%, 1/16W, Metalized Glass	3198 021 32240
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film	3198 011 05610
3217	Res, 330K, 5%, 1/16W, Metalized Glass	3198 021 33340
3218	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film	3198 011 05610
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3241	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3242	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film	3198 011 08210
3245	Res, 39K, 1%, 1/16W, Metalized Glass	2322 704 63903
3246	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3247	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3248	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film	3198 011 08210
3250	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
3257	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3258	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040
3259	Res, 470K, 5%, 1/16W, Metalized Glass	3198 021 34740
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film	3198 013 01020
3340	Res, 10 ohm, 5%, 1/2W, Metal Film	2306 207 03109
3341	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3342	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3343	Res, 1K5, 20%, 1/2W, Carbon Film	3198 013 01520
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
S 3345	Varactor, 1MA/50V, Max 115V	2322 593 13507
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3360	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3361	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3362	Res, 39K, 5%, 1/16W, Metalized Glass	3198 021 33930
3363	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3367	Res, 10K, 5%, 1/6W, Carbon Film	3198 011 01030
3368	Res, 220 ohm, 5%, 1/6W, Carbon Film	3198 011 02210
3369	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3373	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
3374	Res, 2R2, 5%, 1/6W, Carbon Film	3198 011 02280
3375	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3376	Res, 68K, 5%, 1/6W, Carbon Film	3198 011 06830
3377	Res, 470 ohm, 5%, 1/6W, Carbon Film	3198 011 04710
3378	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
3380	Res, 68K, 5%, 1/16W, Metalized Glass	3198 021 36830
3381	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3383	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
3384	Res, 2R2, 5%, 1/6W, Carbon Film	3198 011 02280
3385	Res, 10K, 5%, 5W, Metal Film	2322 257 41103
S 3386	Res, 10 ohm, 5%, 1/3W, Metal Film	2306 204 03109
3400	Res, 330 ohm, 5%, 1/6W, Carbon Film	3198 011 03310
3401	Res, 82K, 5%, 1/6W, Carbon Film	3198 011 08230
3403	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3405	Res, 4R7, 5%, 1/6W, Carbon Film	3198 011 04780
3406	Res, 4R7, 5%, 1/6W, Carbon Film	3198 011 04780
3407	Res, 4R7, 5%, 1/6W, Carbon Film	3198 011 04780
3408	Res, 10K, 5%, 1/6W, Carbon Film	3198 011 01030
3410	Res, 10K, 5%, 1/6W, Carbon Film	3198 011 01030
3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3443	Res, 1M, 5%, 1/16W, Metalized Glass	3198 021 31050
3445	Res, 15K, 5%, 1/6W, Carbon Film	3198 011 01530

S = Safety Part   Be sure to use exact replacement part.

	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3451	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
S	3452	Res, 5K6, 1%, 3/5W, Metal Film	2312 915 15602
	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
S	3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
	3456	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3457	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S	3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
	3468	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
	3470	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
	3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3473	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
	3481	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
	3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S	3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 32290
	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3489	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3491	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198 021 53320
	3492	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
S	3493	Res, 2R2, 5%, 1/3W, Metal Film	2306 204 03228
	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
S	3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
S	3523	Res, 47 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03479
	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
	3527	Res, 0R15, 5%, 3/5W, Metal Film. . . .	3198 012 11570
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 33K, 5%, 1/10W, Metalized Glass .	3198 021 53330
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 8K2, 5%, 1/10W, Metalized Glass .	3198 021 58220
S	3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
S	3591	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3614	Res, 4K7, 5%, 1/6W, Carbon Film. . . .	3198 011 04720
	3615	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
	3617	Res, 4K7, 5%, 1/6W, Carbon Film. . . .	3198 011 04720
	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3619	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3811	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3812	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3813	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3831	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3843	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3901	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198 021 36820
	3903	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3905	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3909	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3910	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3912	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4311	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4312	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4313	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4824	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4837	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4838	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020

S = Safety Part   Be sure to use exact replacement part.

	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4884	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%	3198 018 18270
	5201	Coil, 6u8, 5%	3198 018 16880
	5202	Wire Jumper	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5241	Wire Jumper	3198 036 90010
	5242	Coil, 10u, 5%	3198 018 11090
	5341	Coil, 22u	2422 535 97333
	5342	Coil, 27u, 10%	3198 018 22790
	5376	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5400	Coil, 11u7	2422 535 91027
S	5445	Transformer, LOT	2422 531 02612
	5451	Coil, 22u, 10%	3198 018 72290
	5452	Fixed, Inductor, 100MHz, 80 ohm	3198 018 90020
	5453	Coil, 22u, 5%	3198 018 12290
S	5457	Coil, 42u	2422 535 94865
S	5461	Transformer, SD10207-00 B	2422 531 02568
	5464	Coil, Bridge, C946-01 Y	2422 531 02419
	5471	Coil, 6u8, 20%	3198 018 76880
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 10u, 10%	2422 535 97328
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS42204-00 B	2422 531 02563
	5521	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5561	Coil, 27u, 5%	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R	3198 018 90010
	5602	Coil, 5u6, 5%	3198 018 15680
	5603	Coil, 5u6, 5%	3198 018 15680
	5604	Coil, 5u6, 5%	3198 018 15680
	5810	Coil, 10u, 10%	3198 018 51090
	5831	Coil, 6u8, 5%	3198 018 16880
	5832	Coil, 6u8, 5%	3198 018 16880
	5833	Coil, 6u8, 5%	3198 018 16880
	5835	Coil, 12u, 10%	3198 018 31290
	6001	Zener Diode, 33 volt	3198 010 23390
	6150	Diode, Signal, BAS316	3198 010 10630
	6201	Diode, Signal, BAS316	3198 010 10630
	6202	Diode, Signal, BAS316	3198 010 10630
	6206	Zener Diode, 6.8 volt	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6365	Diode, Signal, BAT85	9336 247 60133
	6366	Diode, Signal, BAT85	9336 247 60133
	6367	Diode, Signal, BAV99	3198 010 10620
	6400	Res, 1K, 1%, 3/5W, Metal Film	2312 915 11002
	6401	Zener Diode, 68 volt	3198 010 26890
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148	3198 010 10010
	6448	Zener Diode, 6.2 volt	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6452	Diode, Signal, BAS316	3198 010 10630
	6453	Zener Diode, 5.6 volt	3198 020 55680
	6460	Diode, Rect, DG3-7005L	9336 436 10682
	6461	Diode, Rect, RGP30J-L7004	9338 617 60682
	6462	Zener Diode, 12 volt	3198 010 21290
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316	3198 010 10630
	6468	Diode, Signal, BAS316	3198 010 10630
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt	3198 010 25680
	6482	Zener Diode, 9.1 volt	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYV95C	9335 001 80133
	6486	Diode, Rect, EGP20DL-5100	9322 164 42682
	6487	Diode, Rect, BYV95A	9335 000 90133
	6488	Diode, Rect, EGP20DL-5100	9322 164 42682
	6490	Diode, Rect, BYV95C	9335 001 80133
	6500	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6520	Diode, Rect, BYV95A	9335 000 90133
	6523	Diode, Signal, 1N4148	3198 010 10010
	6524	Diode, Rect, 1N5062	3198 010 10120
	6525	Diode, Rect, 1N5062	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500	9340 555 59127
	6563	Diode, Signal, BAS316	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148	3198 010 10010
	6569	Diode, Signal, BAS316	3198 010 10630
	6570	Zener Diode, 6.8 volt	3198 020 56880
	6580	Diode, Signal, BAS316	3198 010 10630
	6582	Diode, Rect, STPS10L60D	9322 175 70667
	6831	Diode, Signal, 1N4148	3198 010 10010
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7000	IC, TDA8941P/N1	9352 628 51112
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7102	Transistor, PNP, BC857B(COL)	3198 010 42150
	7103	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9588H/N1/3I/1298	9352 742 85557
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7360	Transistor, NPN, BC847B(COL)	3198 010 42030
	7366	Transistor, PNP, 2SA965	9322 167 18676
	7369	Transistor, PNP, BC857B(COL)	3198 010 42150
	7373	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7380	Transistor, NPN, 2SC2235	9322 167 19676
	7382	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7400	Power FET, STP3NC60FP	9322 157 37687
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7444	Transistor, NPN, BC547B(COL)	3198 020 40030
	7450	Transistor, PNP, PDTA114ET	3198 010 44010
	7460	Transistor, NPN, BU4508DX	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1	9352 673 56112
	7521	Power FET, FQPF9N50	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, L78L33ACZ	9322 134 92676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C08-WBN6	9322 154 38682
	7606	Transistor, NPN, PDTC143ZT	9340 547 00215
	7802	IC, HEF4053BT	9333 729 60653
	7803	IC, HEF4053BT	9333 729 60653
	7804	Transistor, NPN, BC847B(COL)	3198 010 42030
	7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682
	7901	IC, AN7580	9322 166 29682
	7903	Transistor, NPN, BC847B(COL)	3198 010 42030
	9001	Wire Jumper	3198 036 90010
	9101	Wire Jumper	3198 036 90010
	9102	Wire Jumper	3198 036 90010
	9103	Wire Jumper	3198 036 90010
	9104	Wire Jumper	3198 036 90010
	9123	Wire Jumper	3198 036 90010
	9160	Wire Jumper	3198 036 90010
	9171	Wire Jumper	3198 036 90010
	9173	Wire Jumper	3198 036 90010
	9175	Wire Jumper	3198 036 90010
	9176	Wire Jumper	3198 036 90010
	9178	Wire Jumper	3198 036 90010
	9179	Wire Jumper	3198 036 90010
	9181	Wire Jumper	3198 036 90010
	9182	Wire Jumper	3198 036 90010
	9183	Wire Jumper	3198 036 90010
	9192	Wire Jumper	3198 036 90010
	9193	Wire Jumper	3198 036 90010
	9311	Wire Jumper	3198 036 90010
	9312	Wire Jumper	3198 036 90010
	9313	Wire Jumper	3198 036 90010
	9314	Wire Jumper	3198 036 90010
	9406	Wire Jumper	3198 036 90010
	9407	Wire Jumper	3198 036 90010
	9408	Wire Jumper	3198 036 90010
	9409	Wire Jumper	3198 036 90010
	9410	Wire Jumper	3198 036 90010
	9411	Wire Jumper	3198 036 90010
	9412	Wire Jumper	3198 036 90010
	9413	Wire Jumper	3198 036 90010
	9414	Wire Jumper	3198 036 90010
	9415	Wire Jumper	3198 036 90010
	9416	Wire Jumper	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

32PW633R85C (continued)

Ref	Description	Part No.
9417	Wire Jumper.	3198 036 90010
9418	Wire Jumper.	3198 036 90010
9419	Wire Jumper.	3198 036 90010
9420	Wire Jumper.	3198 036 90010
9421	Wire Jumper.	3198 036 90010
9422	Wire Jumper.	3198 036 90010
9425	Wire Jumper.	3198 036 90010
9427	Wire Jumper.	3198 036 90010
9453	Wire Jumper.	3198 036 90010
9462	Wire Jumper.	3198 036 90010
9464	Wire Jumper.	3198 036 90010
9500	Wire Jumper.	3198 036 90010
9501	Wire Jumper.	3198 036 90010
9503	Wire Jumper.	3198 036 90010
9506	Wire Jumper.	3198 036 90010
9507	Wire Jumper.	3198 036 90010
9511	Wire Jumper.	3198 036 90010
9512	Wire Jumper.	3198 036 90010
9513	Wire Jumper.	3198 036 90010
9514	Wire Jumper.	3198 036 90010
9515	Wire Jumper.	3198 036 90010
9516	Wire Jumper.	3198 036 90010
9518	Wire Jumper.	3198 036 90010
9520	Wire Jumper.	3198 036 90010
9521	Wire Jumper.	3198 036 90010
9522	Wire Jumper.	3198 036 90010
9524	Wire Jumper.	3198 036 90010
9528	Wire Jumper.	3198 036 90010
9530	Wire Jumper.	3198 036 90010
9611	Coil, 27u, 10%	3198 018 22790
9612	Wire Jumper.	3198 036 90010
9613	Wire Jumper.	3198 036 90010
9614	Wire Jumper.	3198 036 90010
9615	Wire Jumper.	3198 036 90010
9618	Wire Jumper.	3198 036 90010
9619	Wire Jumper.	3198 036 90010
9620	Wire Jumper.	3198 036 90010
9621	Wire Jumper.	3198 036 90010
9622	Wire Jumper.	3198 036 90010
9623	Wire Jumper.	3198 036 90010
9624	Wire Jumper.	3198 036 90010
9626	Wire Jumper.	3198 036 90010
9627	Wire Jumper.	3198 036 90010
9628	Wire Jumper.	3198 036 90010
9629	Wire Jumper.	3198 036 90010
9631	Wire Jumper.	3198 036 90010
9632	Wire Jumper.	3198 036 90010
9633	Wire Jumper.	3198 036 90010
9635	Wire Jumper.	3198 036 90010
9636	Wire Jumper.	3198 036 90010
9637	Wire Jumper.	3198 036 90010
9638	Wire Jumper.	3198 036 90010
9640	Wire Jumper.	3198 036 90010
9641	Wire Jumper.	3198 036 90010
9642	Wire Jumper.	3198 036 90010
9643	Wire Jumper.	3198 036 90010
9648	Wire Jumper.	3198 036 90010
9650	Wire Jumper.	3198 036 90010
9651	Wire Jumper.	3198 036 90010
9652	Wire Jumper.	3198 036 90010
9654	Wire Jumper.	3198 036 90010
9655	Wire Jumper.	3198 036 90010
9656	Wire Jumper.	3198 036 90010
9657	Wire Jumper.	3198 036 90010
9658	Wire Jumper.	3198 036 90010
9659	Wire Jumper.	3198 036 90010
9660	Wire Jumper.	3198 036 90010
9661	Wire Jumper.	3198 036 90010
9662	Wire Jumper.	3198 036 90010
9663	Wire Jumper.	3198 036 90010
9664	Wire Jumper.	3198 036 90010
9665	Wire Jumper.	3198 036 90010
9666	Wire Jumper.	3198 036 90010
9667	Wire Jumper.	3198 036 90010
9668	Wire Jumper.	3198 036 90010
9669	Wire Jumper.	3198 036 90010
9670	Wire Jumper.	3198 036 90010
9671	Wire Jumper.	3198 036 90010
9672	Coil, 22u, 10%	3198 018 22290
9674	Wire Jumper.	3198 036 90010
9675	Wire Jumper.	3198 036 90010
9676	Wire Jumper.	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper.	3198 036 90010
9680	Wire Jumper.	3198 036 90010
9681	Wire Jumper.	3198 036 90010
9682	Wire Jumper.	3198 036 90010
9683	Wire Jumper.	3198 036 90010
9685	Wire Jumper.	3198 036 90010
9686	Wire Jumper.	3198 036 90010
9687	Wire Jumper.	3198 036 90010
9688	Wire Jumper.	3198 036 90010
9689	Wire Jumper.	3198 036 90010
9690	Wire Jumper.	3198 036 90010
9691	Wire Jumper.	3198 036 90010
9694	Wire Jumper.	3198 036 90010
9695	Wire Jumper.	3198 036 90010
9697	Wire Jumper.	3198 036 90010
9698	Wire Jumper.	3198 036 90010
9699	Wire Jumper.	3198 036 90010
9821	Wire Jumper.	3198 036 90010
9822	Wire Jumper.	3198 036 90010
9825	Wire Jumper.	3198 036 90010
9828	Wire Jumper.	3198 036 90010
9829	Wire Jumper.	3198 036 90010
9831	Wire Jumper.	3198 036 90010
9832	Wire Jumper.	3198 036 90010
9837	Wire Jumper.	3198 036 90010
9838	Wire Jumper.	3198 036 90010
9839	Wire Jumper.	3198 036 90010
9846	Wire Jumper.	3198 036 90010
9847	Wire Jumper.	3198 036 90010
9848	Wire Jumper.	3198 036 90010
9849	Wire Jumper.	3198 036 90010
9851	Wire Jumper.	3198 036 90010
9855	Wire Jumper.	3198 036 90010
9856	Wire Jumper.	3198 036 90010
9857	Wire Jumper.	3198 036 90010
9858	Wire Jumper.	3198 036 90010
9859	Wire Jumper.	3198 036 90010
9860	Wire Jumper.	3198 036 90010
9862	Wire Jumper.	3198 036 90010
9863	Wire Jumper.	3198 036 90010
9864	Wire Jumper.	3198 036 90010
9865	Wire Jumper.	3198 036 90010
9867	Wire Jumper.	3198 036 90010
9868	Wire Jumper.	3198 036 90010
9869	Wire Jumper.	3198 036 90010
9870	Wire Jumper.	3198 036 90010
9871	Wire Jumper.	3198 036 90010
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9876	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9878	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010
9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9923	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9998	Wire Jumper.	3198 036 90010
CBA	Main Chassis Assembly.	3141 058 59081

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

Ref	Description	Part No.
0266	6 Pin Connector.	2422 025 16609
2401	Cap, 47u, 20%, 16v, Electrolytic . . .	3198 028 24790
2402	Cap, 4u7, 20%, 35v, Electrolytic . . .	3198 028 44780
2403	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2407	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2408	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2409	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2411	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
2412	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2413	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2414	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2415	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2416	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2419	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2420	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
2425	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2426	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
2427	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2428	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2429	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2430	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2431	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2432	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2433	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2434	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2435	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2436	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2440	Cap, 10u, 20%, 16v, Electrolytic . . .	3198 028 21090
2442	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690

	Ref	Description	Part No.
	2443	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
	2450	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
	2452	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
	2453	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
	3401	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
	3402	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3403	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
	3404	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
	3405	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
	3406	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
	3407	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
	3408	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
	3412	Res, 510K, 5%, 1/10W, Metalized Glass.	2122 118 05951
	3419	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
	3425	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3427	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
	3431	Res, 8K2, 1%, 1/16W, Metalized Glass	2322 704 68202
	3432	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
	3440	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
	3441	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3442	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
	3443	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
	3444	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
	3450	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
	3451	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3452	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
	3453	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
	3454	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
	3455	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
	3456	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3457	Wire Jumper.	3198 036 90010
	3458	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4403	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	5401	Coil, 10u, 10%	3198 018 31090
	5407	Coil, 33u, 5%.	3198 018 13390
	5408	Coil, 33u, 20%	3198 018 33390
	5421	Inductor, 100 MHz, 120 ohm	3198 018 90070
	5425	Coil, 10u, 10%	3198 018 31090
	5428	Coil, 10u, 5%.	3198 018 11090
	5429	Coil, 10u, 10%	3198 018 31090
	5430	Coil, 10u, 10%	3198 018 31090
	5440	Coil, 10u, 10%	3198 018 31090
	5442	Coil, 22u, 5%.	3198 018 12290
	5450	Coil, 10u, 10%	3198 018 31090
	5452	Coil, 33u, 5%.	3198 018 13390
	7401	Transistor, PNP, BC857B(COL)	3198 010 42150
	7402	Transistor, NPN, BC847B(COL)	3198 010 42030
	7403	Transistor, NPN, BC847B(COL)	3198 010 42030
	7421	IC, TC90A53N	9322 182 18682
	7440	Transistor, NPN, BC847B(COL)	3198 010 42030
	7444	Transistor, NPN, BC847B(COL)	3198 010 42030
	7450	Transistor, NPN, BC847B(COL)	3198 010 42030
	7454	Transistor, NPN, BC847B(COL)	3198 010 42030
	9401	Wire Jumper.	3198 036 90010
	9402	Wire Jumper.	3198 036 90010
	9403	Wire Jumper.	3198 036 90010
	CBA	2D 3 Line Comb Filter Assembly	3139 177 26561

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

	Ref	Description	Part No.
S	0211	2 Pin Connector.	2422 025 16268
S	0212	2 Pin Connector.	2422 025 16559
	0214	5 Pin Connector.	2422 025 06353
	1606	Tact Switch.	2422 128 02742
	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2692	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
	2693	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
	2694	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
	2695	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
	2698	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
S	3500	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322 242 13335
S	3501	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322 242 13335
	3685	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
	3691	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
	3693	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
	6691	LED, LTL-10234WHCR	9322 185 69682
	6692	IR Receiver, TSOP1836UH3V.	9322 127 54667
	9001	Wire Jumper.	3198 036 90010
	9002	Wire Jumper.	3198 036 90010
	CBA	Front Interface Panel Assembly	3139 177 26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

	Ref	Description	Part No.
	0232	Headphone Jack	2422 026 04747
	0250	A/V Jack	2422 026 04815
	0251	6 Pin Connector.	2422 025 12482
	0254	5 Pin Connector.	2422 025 12481
	0255	4 Pin Connector.	2422 025 12479
	2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2176	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
	2177	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2178	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
	2179	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
	3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
	3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
	3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
	3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
	4817	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4819	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4821	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4822	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6161	Zener Diode, 6.8 volt.	3198 010 26880
	9151	Wire Jumper.	3198 036 90010
	9152	Wire Jumper.	3198 036 90010
	9153	Wire Jumper.	3198 036 90010
	9170	Wire Jumper.	3198 036 90010
	CBA	Side Jack Panel Assembly	3139 187 15141

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

	Ref	Description	Part No.
	0215	3 Pin Connector.	2422 025 16601
	1091	Tact Switch.	2422 128 02742
	1092	Tact Switch.	2422 128 02742
	1093	Tact Switch.	2422 128 02742
	1094	Tact Switch.	2422 128 02742
	3091	Res, 560 ohm, 5%, Metalized Glass.	3198 021 35610
	3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
	3093	Res, 560 ohm, 5%, Metalized Glass.	3198 021 35610
	3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
	3095	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
	3096	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
	4085	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4089	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4090	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	6091	Diode, Signal.	9340 453 90115
	CBA	Top Control Panel Assembly	3139 187 15841

Cabinet & Accessory Parts

Cabinet & Accessory Parts

	Ref	Description	Part No.
S	AC01	AC Cord.	3135 010 03831
	AC03	Anode Lead Spacer (3 Used)	3135 014 04471
	AC04	Batteries for Remote Control Transmitte	9299 000 65263
	AC05	Cabinet Back	3139 124 46431
	AC06	Cabinet Back Screw Cover (2 Used).	3139 124 45431
	AC07	Canceller Coil	3128 138 60581
	AC08	Chassis Tray	3139 124 31325
S	AC09	CRT, W76ERF022X013	9301 888 30314
S	AC12	Degaussing Coil.	2422 549 45797
	AC13	Front Interface Panel Bracket.	3139 124 32891
	AC15	Holder, Degaussing Coil (4 Used)	3135 013 01661
	AC17	Owner's Manual	3121 235 21391
	AC19	Side Jack Panel Bracket.	3139 124 37061
	AC20	Cabinet Front Assembly	3121 237 53521
	AC20A	Cabinet Front.	3139 124 43361
	AC20C	Light Guide.	3139 124 39701
	AC20D	Nameplate.	3141 050 00161
	AC20E	Power Button	3139 138 10881
	AC20H	Speaker, 8 ohm, 10W (2 Used)	3139 128 76081
	AC20J	Top Control Assembly	3139 177 56381
	AC32	Yoke Wedge (2 Used).	3135 013 00311
	REMOTE	Remote Control Transmitter, RC19036002/01A.	3139 238 04313

32ST220P/17 - Manual no. 7638

Main Chassis Parts

S	Ref	Description	Part No.
		Main Chassis Parts	
	0127	Socket Fuse.	2422 088 00271
	0129	NTC Holder	3139 120 10151
	0136	IC-Spring.	3104 301 22081
	0137	Spring	3139 121 24583
	0138	IC-Spring.	3104 301 22081
	0139	Spring for Bracket	3122 121 24786
	0140	Spring	3139 121 24583
	0141	IC-Spring.	3104 301 22081
	0152	Cable, DIPMate, 6 Pin, 560mm	3104 301 08411
	0153	Cable, 5 Pin, 560mm.	3139 121 09041
	0211	2 Pin Connector.	2422 025 16269
	0212	2 Pin Connector.	2422 025 16375
	0213	2 Pin Connector.	2422 025 16374
	0217	6 Pin Connector.	2422 025 12482
	0218	A/V Jack	2422 026 04742
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0222	2 Pin Connector.	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0227	6 Pin Connector.	2422 025 15849
	0229	3 Pin Connector.	2412 020 00725
	0240	7 Pin Connector.	2422 025 11244
	0242	7 Pin Connector.	2422 025 17042
	0243	6 Pin Connector.	2422 025 04854
	0244	5 Pin Connector.	2422 025 04853
	0245	6 Pin Connector.	2422 025 04854
	0251	3 Pin Connector.	2412 020 00725
S	0254	9 Pin CRT Socket	2422 500 80076
	0259	5 Pin Connector.	2422 025 15848
	0262	3 Pin Connector.	2422 025 16937
	0267	3 Pin Connector.	2412 020 00725
	0280	4 Pin Connector.	2422 025 15847
S	1000	Tuner, V+U, PLL	2422 542 90108
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1600	Tact Switch.	2422 128 02742
	1601	Tact Switch.	2422 128 02742
	1602	Tact Switch.	2422 128 02742
	1603	Tact Switch.	2422 128 02742
	1606	Tact Switch.	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1810	6 Pin Connector.	2422 025 16607
	1831	Crystal, Resonator, 18MHz432, 12 Pin, HC49/U A.	2422 543 00842
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2123	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2125	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	2127	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
	2128	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2181	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2182	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2183	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2209	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
	2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
	2451	Cap, 15n, 10%, 50v, Polyester.	3198 014 01530
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 470n, 5%, 250v, Metalized Polypropylene.	2022 333 00086
	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
S	2463	Cap, 1n2, 10%, 2000v, Ceramic.	2020 558 90488
	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene	2222 479 90042
S	2465	Cap, 13n, 5%, 1600v, Polypropylene	2020 301 90254
	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
	2468	Cap, 10n, 10%, 400v, Polyester	2222 347 90218
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020

S = Safety Part   Be sure to use exact replacement part.

32ST220P/17 (continued)

Ref	Description	Part No.
2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2608	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2611	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2616	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050
2691	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2807	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2810	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
2837	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
2840	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2841	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2843	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2844	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2846	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2910	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320
2911	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3121	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3122	Res, 680 ohm, 5%, 1/6W, Carbon Film. .	3198 011 06810
3123	Res, 680 ohm, 5%, 1/6W, Carbon Film. .	3198 011 06810
3125	Res, 680 ohm, 5%, 1/6W, Carbon Film. .	3198 011 06810
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3182	Wire Jumper.	3198 036 90010
3184	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3185	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3186	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3187	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
3206	Res, 270K, 5%, 1/16W, Metalized Glass.	2322 702 60274
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3223	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
3403	Res, 100K, 5%, 1/6W, Carbon Film . . .	3198 011 01040
3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3451	Res, 2R7, 5%, 1/3W, Metal Film	2306 204 03278
S 3452	Res, 5K6, 1%, 3/5W, Metal Film	2312 915 15602
3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3468	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3470	Res, 390K, 5%, 1/8W, Metalized Glass .	2322 730 61394
3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
3472	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
3473	Res, 5R6, 1%, 3/5W, Metal Film	2312 915 15608
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
3481	Res, 15K, 1%, 3/5W, Metal Film	2312 915 11503
3482	Res, 6K8, 1%, 3/5W, Metal Film	2312 915 16802
3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 33390
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
S 3493	Res, 2R2, 5%, 1/3W, Metal Film	2306 204 03228
3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3498	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335

S = Safety Part   Be sure to use exact replacement part.

32ST220P/17 (continued)

S	Ref	Description	Part No.
	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S	3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
S	3558	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198 021 53320
	3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3811	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3812	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3813	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3831	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3843	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4101	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4102	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4104	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4126	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4128	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4181	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4604	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4824	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4884	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5202	Wire Jumper.	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5241	Wire Jumper.	3198 036 90010
	5242	Coil, 10u, 5%.	3198 018 11090
	5342	Coil, 22u.	2422 535 97333
	5401	Coil, 1mH, 10%	3198 018 71020
S	5445	Transformer, PSLOT	3128 138 21421
	5451	Coil, 33u, 10%	3198 018 73390
	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5457	Coil, Linear, DC12	3128 138 55881
	5461	Transformer, Signal Driver, SC10027-00	2422 531 02478
	5463	Coil, Choke.	3128 138 37021
	5471	Coil, 3u3, 20%	3198 018 73380
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 4u7, 5%.	2422 535 94213
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04.	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010

S = Safety Part   Be sure to use exact replacement part.

32ST220P/17 (continued)

	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5810	Coil, 10u, 10%	3198 018 51090
	5831	Coil, 6u8, 5%.	3198 018 16880
	5832	Coil, 6u8, 5%.	3198 018 16880
	5833	Coil, 6u8, 5%.	3198 018 16880
	5835	Coil, 12u, 10%	3198 018 31290
	6001	Zener Diode, 33 volt	3198 010 23390
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630
	6206	Zener Diode, 6.8 volt.	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316.	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002
	6401	Zener Diode, 47 volt	3198 010 24790
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148.	3198 010 10010
	6448	Zener Diode, 6.2 volt.	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6460	Diode, Rect, DG3-7005L	9336 436 10682
	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
	6462	Zener Diode, 9.1 volt.	9331 177 80133
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316.	3198 010 10630
	6468	Diode, Signal, BAS316.	3198 010 10630
	6469	Diode, Rect, BYV95C.	9335 001 80133
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt.	3198 010 25680
	6482	Zener Diode, 9.1 volt.	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYV95C.	9335 001 80133
	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6487	Diode, Rect, BYV95A.	9335 000 90133
	6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667
	6520	Diode, Rect, BYV95A.	9335 000 90133
	6523	Diode, Signal, 1N4148.	3198 010 10010
	6524	Diode, Rect, 1N5062.	3198 010 10120
	6525	Diode, Rect, 1N5062.	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt.	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500.	9340 555 59127
	6561	Diode, Rect, SB340L-7010	9322 128 18682
	6563	Diode, Signal, BAS316.	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148.	3198 010 10010
	6569	Diode, Signal, BAS316.	3198 010 10630
	6570	Zener Diode, 6.8 volt.	3198 020 56880
	6580	Diode, Signal, BAS316.	3198 010 10630
	6681	Diode, Signal, BAT85	9336 247 60133
	6691	LED, LTL-10234WHCR	9322 185 69682
	6692	IR Receiver.	9322 127 54667
	6831	Diode, Signal, 1N4148.	3198 010 10010
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9588H/N1/3I	4835 310 57626
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7400	Power FET, STP3NC60FP.	9322 157 37687
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7460	Transistor, NPN, BU4508DX.	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2.	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1.	9352 673 56112
	7521	Power FET, FQPF9N50.	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, LE33CZ	9322 106 11676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C16-WBN6.	9322 147 25682
	7606	Transistor, NPN, PDTC143ZT	9340 547 00215
	7802	IC, HEF4053BT.	9333 729 60653
	7803	IC, HEF4053BT.	9333 729 60653
	7804	Transistor, NPN, BC847B(COL)	3198 010 42030
	7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682
	7901	IC, AN7522N PH	9322 181 41682
	9001	Wire Jumper.	3198 036 90010
	9104	Wire Jumper.	3198 036 90010
	9171	Wire Jumper.	3198 036 90010
	9173	Wire Jumper.	3198 036 90010
	9175	Wire Jumper.	3198 036 90010
	9181	Wire Jumper.	3198 036 90010
	9182	Wire Jumper.	3198 036 90010
	9183	Wire Jumper.	3198 036 90010
	9192	Wire Jumper.	3198 036 90010
	9193	Wire Jumper.	3198 036 90010
	9311	Wire Jumper.	3198 036 90010
	9312	Wire Jumper.	3198 036 90010
	9406	Wire Jumper.	3198 036 90010
	9407	Wire Jumper.	3198 036 90010
	9408	Wire Jumper.	3198 036 90010
	9409	Wire Jumper.	3198 036 90010
	9410	Wire Jumper.	3198 036 90010
	9411	Wire Jumper.	3198 036 90010
	9412	Wire Jumper.	3198 036 90010
	9413	Wire Jumper.	3198 036 90010
	9414	Wire Jumper.	3198 036 90010
	9415	Wire Jumper.	3198 036 90010
	9416	Wire Jumper.	3198 036 90010
	9417	Wire Jumper.	3198 036 90010
	9418	Wire Jumper.	3198 036 90010
	9419	Wire Jumper.	3198 036 90010
	9421	Wire Jumper.	3198 036 90010
	9422	Wire Jumper.	3198 036 90010
	9423	Wire Jumper.	3198 036 90010
	9424	Wire Jumper.	3198 036 90010
	9425	Wire Jumper.	3198 036 90010
	9426	Wire Jumper.	3198 036 90010
	9427	Wire Jumper.	3198 036 90010
	9453	Wire Jumper.	3198 036 90010
	9460	Wire Jumper.	3198 036 90010
	9463	Wire Jumper.	3198 036 90010
	9500	Wire Jumper.	3198 036 90010
	9501	Wire Jumper.	3198 036 90010
	9503	Wire Jumper.	3198 036 90010
	9506	Wire Jumper.	3198 036 90010
	9507	Wire Jumper.	3198 036 90010
	9510	Wire Jumper.	3198 036 90010
	9511	Wire Jumper.	3198 036 90010
	9512	Wire Jumper.	3198 036 90010
	9513	Wire Jumper.	3198 036 90010
	9514	Wire Jumper.	3198 036 90010
	9515	Wire Jumper.	3198 036 90010
	9516	Wire Jumper.	3198 036 90010
	9518	Wire Jumper.	3198 036 90010
	9520	Wire Jumper.	3198 036 90010
	9521	Wire Jumper.	3198 036 90010
	9522	Wire Jumper.	3198 036 90010
	9524	Wire Jumper.	3198 036 90010
	9528	Wire Jumper.	3198 036 90010
	9530	Wire Jumper.	3198 036 90010
	9611	Coil, 27u, 10%	3198 018 22790
	9612	Wire Jumper.	3198 036 90010
	9613	Wire Jumper.	3198 036 90010
	9614	Wire Jumper.	3198 036 90010
	9615	Wire Jumper.	3198 036 90010
	9616	Wire Jumper.	3198 036 90010
	9618	Wire Jumper.	3198 036 90010
	9619	Wire Jumper.	3198 036 90010
	9622	Wire Jumper.	3198 036 90010
	9623	Wire Jumper.	3198 036 90010
	9624	Wire Jumper.	3198 036 90010
	9626	Wire Jumper.	3198 036 90010
	9627	Wire Jumper.	3198 036 90010
	9628	Wire Jumper.	3198 036 90010
	9629	Wire Jumper.	3198 036 90010
	9631	Wire Jumper.	3198 036 90010
	9632	Wire Jumper.	3198 036 90010
	9634	Wire Jumper.	3198 036 90010
	9637	Wire Jumper.	3198 036 90010
	9638	Wire Jumper.	3198 036 90010
	9639	Wire Jumper.	3198 036 90010
	9640	Wire Jumper.	3198 036 90010
	9641	Wire Jumper.	3198 036 90010
	9642	Wire Jumper.	3198 036 90010
	9643	Wire Jumper.	3198 036 90010
	9647	Wire Jumper.	3198 036 90010
	9648	Wire Jumper.	3198 036 90010
	9650	Wire Jumper.	3198 036 90010
	9651	Wire Jumper.	3198 036 90010
	9652	Wire Jumper.	3198 036 90010
	9654	Wire Jumper.	3198 036 90010
	9655	Wire Jumper.	3198 036 90010
	9656	Wire Jumper.	3198 036 90010
	9657	Wire Jumper.	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

32ST220P/17 (continued)

Ref	Description	Part No.
9658	Wire Jumper.	3198 036 90010
9659	Wire Jumper.	3198 036 90010
9660	Wire Jumper.	3198 036 90010
9661	Wire Jumper.	3198 036 90010
9662	Wire Jumper.	3198 036 90010
9663	Wire Jumper.	3198 036 90010
9664	Wire Jumper.	3198 036 90010
9665	Wire Jumper.	3198 036 90010
9666	Wire Jumper.	3198 036 90010
9667	Wire Jumper.	3198 036 90010
9668	Wire Jumper.	3198 036 90010
9669	Wire Jumper.	3198 036 90010
9670	Wire Jumper.	3198 036 90010
9671	Wire Jumper.	3198 036 90010
9672	Coil, 22u, 10%	3198 018 22290
9674	Wire Jumper.	3198 036 90010
9675	Wire Jumper.	3198 036 90010
9676	Wire Jumper.	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper.	3198 036 90010
9680	Wire Jumper.	3198 036 90010
9681	Wire Jumper.	3198 036 90010
9682	Wire Jumper.	3198 036 90010
9685	Wire Jumper.	3198 036 90010
9686	Wire Jumper.	3198 036 90010
9687	Wire Jumper.	3198 036 90010
9688	Wire Jumper.	3198 036 90010
9689	Wire Jumper.	3198 036 90010
9690	Wire Jumper.	3198 036 90010
9691	Wire Jumper.	3198 036 90010
9694	Wire Jumper.	3198 036 90010
9695	Wire Jumper.	3198 036 90010
9697	Wire Jumper.	3198 036 90010
9698	Wire Jumper.	3198 036 90010
9699	Wire Jumper.	3198 036 90010
9821	Wire Jumper.	3198 036 90010
9822	Wire Jumper.	3198 036 90010
9825	Wire Jumper.	3198 036 90010
9828	Wire Jumper.	3198 036 90010
9829	Wire Jumper.	3198 036 90010
9831	Wire Jumper.	3198 036 90010
9832	Wire Jumper.	3198 036 90010
9837	Wire Jumper.	3198 036 90010
9838	Wire Jumper.	3198 036 90010
9839	Wire Jumper.	3198 036 90010
9846	Wire Jumper.	3198 036 90010
9847	Wire Jumper.	3198 036 90010
9849	Wire Jumper.	3198 036 90010
9851	Wire Jumper.	3198 036 90010
9856	Wire Jumper.	3198 036 90010
9858	Wire Jumper.	3198 036 90010
9859	Wire Jumper.	3198 036 90010
9860	Wire Jumper.	3198 036 90010
9862	Wire Jumper.	3198 036 90010
9863	Wire Jumper.	3198 036 90010
9864	Wire Jumper.	3198 036 90010
9865	Wire Jumper.	3198 036 90010
9867	Wire Jumper.	3198 036 90010
9868	Wire Jumper.	3198 036 90010
9869	Wire Jumper.	3198 036 90010
9870	Wire Jumper.	3198 036 90010
9871	Wire Jumper.	3198 036 90010
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9876	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9878	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010
9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9905	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9919	Wire Jumper.	3198 036 90010
9920	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9993	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9997	Wire Jumper.	3198 036 90010
9998	Wire Jumper.	3198 036 90010
CBA	SP/LS Module (Vertical) (ITV).	3139 127 27374
CBA	EPS Module (ITV)	3139 137 22961
CBA	Main Chassis Assembly.	3139 188 04091
CBA	Interface Panel (ITV).	3139 188 04541

Ref	Description	Part No.
0266	6 Pin Connector.	2422 025 16609
2401	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2402	Cap, 4u7, 20%, 35v, Electrolytic	3198 028 44780
2403	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2407	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2408	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2409	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2411	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
2412	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2413	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2414	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2415	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2416	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2419	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2420	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
2425	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2426	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2427	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2428	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2429	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2430	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2431	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2432	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2433	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2434	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2435	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2436	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2440	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
2442	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2443	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2450	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
2452	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2453	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
3401	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3402	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3403	Res, 1K8, 5%, 1/16W, Metalized Glass .	3198 021 31820
3404	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3405	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3406	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198 021 36820
3407	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3408	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3412	Res, 510K, 5%, 1/10W, Metalized Glass.	2122 118 05951
3419	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3425	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3427	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3431	Res, 8K2, 1%, 1/16W, Metalized Glass .	2322 704 68202
3432	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3440	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3441	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3442	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3443	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198 021 32720
3444	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3450	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3451	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3452	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3453	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198 021 32720
3454	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3455	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3456	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3457	Wire Jumper.	3198 036 90010
3458	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4403	Res, Zero ohm, "Chip" Jumper	3198 021 90030
5401	Coil, 10u, 10%	3198 018 31090
5407	Coil, 33u, 5%.	3198 018 13390
5408	Coil, 33u, 20%	3198 018 33390
5421	Inductor, 100 MHz, 120 ohm	3198 018 90070
5425	Coil, 10u, 10%	3198 018 31090
5428	Coil, 10u, 5%.	3198 018 11090
5429	Coil, 10u, 10%	3198 018 31090
5430	Coil, 10u, 10%	3198 018 31090
5440	Coil, 10u, 10%	3198 018 31090
5442	Coil, 22u, 5%.	3198 018 12290
5450	Coil, 10u, 10%	3198 018 31090
5452	Coil, 33u, 5%.	3198 018 13390
7401	Transistor, PNP, BC857B(COL)	3198 010 42150
7402	Transistor, NPN, BC847B(COL)	3198 010 42030
7403	Transistor, NPN, BC847B(COL)	3198 010 42030
7421	IC, TC90A53N	9322 182 18682
7440	Transistor, NPN, BC847B(COL)	3198 010 42030
7444	Transistor, NPN, BC847B(COL)	3198 010 42030
7450	Transistor, NPN, BC847B(COL)	3198 010 42030
7454	Transistor, NPN, BC847B(COL)	3198 010 42030
9401	Wire Jumper.	3198 036 90010
9402	Wire Jumper.	3198 036 90010
9403	Wire Jumper.	3198 036 90010
CBA	2D 3 Line Comb Filter Assembly	3139 177 26561

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

32ST220P/17 (continued)

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

	Ref	Description	Part No.
S	AC01	AC Cord.	3135 010 04323
	AC02	AC Cord Strain Relief.	3135 010 02841
	AC03	Anode Lead Spacer (3 Used)	3135 014 04471
	AC05	Cabinet Back	3139 124 45221
	AC08	Chassis Tray	3139 124 31325
S	AC09	CRT, A80QCF340X34(N)	9301 904 59463
	AC10	Customer Control Buttons	3139 124 26472
S	AC12	Degaussing Coil.	2422 549 45334
	AC15	Holder, Degaussing Coil (4 Used) . . .	3135 013 01661
	AC16	Jack Panel Bracket	3139 124 45161
	AC17	ITV Safety/Warranty Instructions . . .	3135 125 21431
	AC20	Cabinet Front Assembly	3121 237 53561
	AC20A	Cabinet Front.	3135 127 50031
	AC20C	Light Guide.	3139 124 26461
	AC20D	Nameplate.	3135 015 03571
	AC20E	Power Button	3139 124 26444
	AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00401
	AC26	EPS Bracket.	3135 014 09221
	AC28	ITV Card Slot Cover.	3139 124 30571

32ST230P/35 - Manual no. 7638

Main Chassis Parts

S	Ref	Description	Part No.
		Main Chassis Parts	
	0127	Socket Fuse.	2422 088 00271
	0129	NTC Holder	3139 120 10151
	0136	IC-Spring.	3104 301 22081
	0137	Spring	3139 121 24583
	0138	IC-Spring.	3104 301 22081
	0139	Spring for Bracket	3122 121 24786
	0140	Spring	3139 121 24583
	0141	IC-Spring.	3104 301 22081
	0152	Cable, DIPMate, 6 Pin, 560mm	3104 301 08411
	0153	Cable, 5 Pin, 560mm.	3139 121 09041
	0211	2 Pin Connector.	2422 025 16269
	0212	2 Pin Connector.	2422 025 16375
	0213	2 Pin Connector.	2422 025 16374
	0217	6 Pin Connector.	2422 025 12482
	0218	A/V Jack	2422 026 04742
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0222	2 Pin Connector.	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0227	6 Pin Connector.	2422 025 15849
	0229	3 Pin Connector.	2412 020 00725
	0240	7 Pin Connector.	2422 025 11244
	0242	7 Pin Connector.	2422 025 17042
	0243	6 Pin Connector.	2422 025 04854
	0244	5 Pin Connector.	2422 025 04853
	0245	6 Pin Connector.	2422 025 04854
	0251	3 Pin Connector.	2412 020 00725
S	0254	9 Pin CRT Socket	2422 500 80076
	0259	5 Pin Connector.	2422 025 15848
	0262	3 Pin Connector.	2422 025 16937
	0267	3 Pin Connector.	2412 020 00725
	0280	4 Pin Connector.	2422 025 15847
S	1000	Tuner, V+U, PLL	2422 542 90108
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1600	Tact Switch.	2422 128 02742
	1601	Tact Switch.	2422 128 02742
	1602	Tact Switch.	2422 128 02742
	1603	Tact Switch.	2422 128 02742
	1606	Tact Switch.	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1810	6 Pin Connector.	2422 025 16607
	1831	Crystal, Resonator, 18MHz432, 12 Pin, HC49/U A.	2422 543 00842
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2123	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2125	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	2127	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
	2128	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2181	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2182	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2183	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2209	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
	2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
	2451	Cap, 15n, 10%, 50v, Polyester.	3198 014 01530
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 470n, 5%, 250v, Metalized Polypropylene.	2022 333 00086
	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
S	2463	Cap, 1n2, 10%, 2000v, Ceramic.	2020 558 90488
	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene	2222 479 90042
S	2465	Cap, 13n, 5%, 1600v, Polypropylene	2020 301 90254
	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
	2468	Cap, 10n, 10%, 400v, Polyester	2222 347 90218
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010

S = Safety Part   Be sure to use exact replacement part.

32ST230P/35 (continued)

Ref	Description	Part No.
2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2616	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
2807	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2816	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
2837	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
2840	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
2841	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2842	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
2843	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2844	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2845	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
2846	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2902	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2904	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2906	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2908	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2910	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320
2911	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3121	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
3122	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810
3123	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810
3125	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3134	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3182	Wire Jumper.	3198 036 90010
3184	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3185	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3186	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3187	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230
3206	Res, 270K, 5%, 1/16W, Metalized Glass.	2322 702 60274
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890

Ref	Description	Part No.
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
3218	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3223	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3241	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230
3242	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
3245	Res, 39K, 1%, 1/16W, Metalized Glass	2322 704 63903
3246	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3248	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
3250	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3257	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060
3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020
3340	Res, 10 ohm, 5%, 1/2W, Metal Film.	2306 207 03109
S 3341	Res, 1 ohm, 5%, 1/3W, MF for A80QCF340X 34.	2306 204 03108
S 3342	Res, 1 ohm, 5%, 1/3W, MF for A80ECK340X 34.	2306 204 03108
S 3342	Res, 2R7 ohm, 5%, 1/3W, MF for A80ECK33 0X34	2306 204 03278
3343	Res, 1K5, 20%, 1/2W, Carbon Film	3198 013 01520
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3400	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
3401	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3403	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3405	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
3406	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
3408	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3410	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3443	Res, 1M, 5%, 1/16W, Metalized Glass.	3198 021 31050
3445	Res, 15K, 5%, 1/6W, Carbon Film.	3198 011 01530
3446	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620
3447	Res, 180 ohm, 5%, 1/6W, Carbon Film.	3198 011 01810
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
3449	Res, 68 ohm, 5%, 1/6W, Carbon Film	3198 011 06890
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3451	Res, 2R7, 5%, 1/3W, Metal Film	2306 204 03278
S 3452	Res, 5K6, 1%, 3/5W, Metal Film	2312 915 15602
3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film	3198 012 26880
3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S 3459	Res, 15K, 5%, 1 1/3W, Metal Film	3198 012 21530
3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3468	Res, 180 ohm, 5%, 1/6W, Carbon Film.	3198 011 01810
3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320
3470	Res, 390K, 5%, 1/8W, Metalized Glass	2322 730 61394
3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
3472	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
3473	Res, 5R6, 1%, 3/5W, Metal Film	2312 915 15608
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3479	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2122 101 02083
3481	Res, 15K, 1%, 3/5W, Metal Film	2312 915 11503
3482	Res, 6K8, 1%, 3/5W, Metal Film	2312 915 16802
3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film.	3198 012 33390
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3492	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
S 3493	Res, 2R2, 5%, 1/3W, Metal Film	2306 204 03228
3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3495	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230

S = Safety Part   Be sure to use exact replacement part.

S	Ref	Description	Part No.
	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3498	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S	3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
S	3558	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198 021 53320
	3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3811	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3812	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3813	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3831	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010

S	Ref	Description	Part No.
	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3843	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4101	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4102	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4104	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4126	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4128	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4181	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4604	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4824	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4884	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5202	Wire Jumper.	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5241	Wire Jumper.	3198 036 90010
	5242	Coil, 10u, 5%.	3198 018 11090
	5342	Coil, 22u for A80QCF340X34	2422 535 97333
	5342	Coil, 47u for A80QCF330X34	3198 018 24790
	5401	Coil, 1mH, 10%	3198 018 71020
S	5445	Transformer, PSLOT	3128 138 21421
	5451	Coil, 33u, 10%	3198 018 73390
	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5457	Coil, Linear, DC12	3128 138 55881
	5461	Transformer, Signal Driver, SC10027-00	2422 531 02478
	5463	Coil, Choke.	3128 138 37021
	5471	Coil, 3u3, 20%	3198 018 73380
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 4u7, 5%.	2422 535 94213

S = Safety Part   Be sure to use exact replacement part.

32ST230P/35 (continued)

	Ref	Description	Part No.
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04.	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5810	Coil, 10u, 10%	3198 018 51090
	5831	Coil, 6u8, 5%.	3198 018 16880
	5832	Coil, 6u8, 5%.	3198 018 16880
	5833	Coil, 6u8, 5%.	3198 018 16880
	5835	Coil, 12u, 10%	3198 018 31290
	6001	Zener Diode, 33 volt	3198 010 23390
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630
	6206	Zener Diode, 6.8 volt.	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316.	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002
	6401	Zener Diode, 47 volt	3198 010 24790
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148.	3198 010 10010
	6448	Zener Diode, 6.2 volt.	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6460	Diode, Rect, DG3-7005L	9336 436 10682
	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
	6462	Zener Diode, 9.1 volt.	9331 177 80133
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316.	3198 010 10630
	6468	Diode, Signal, BAS316.	3198 010 10630
	6469	Diode, Rect, BYV95C.	9335 001 80133
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt.	3198 010 25680
	6482	Zener Diode, 9.1 volt.	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYV95C.	9335 001 80133
	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6487	Diode, Rect, BYV95A.	9335 000 90133
	6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667
	6520	Diode, Rect, BYV95A.	9335 000 90133
	6523	Diode, Signal, 1N4148.	3198 010 10010
	6524	Diode, Rect, 1N5062.	3198 010 10120
	6525	Diode, Rect, 1N5062.	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt.	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500.	9340 555 59127
	6561	Diode, Rect, SB340L-7010	9322 128 18682
	6563	Diode, Signal, BAS316.	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148.	3198 010 10010
	6569	Diode, Signal, BAS316.	3198 010 10630
	6570	Zener Diode, 6.8 volt.	3198 020 56880
	6580	Diode, Signal, BAS316.	3198 010 10630
	6681	Diode, Signal, BAT85	9336 247 60133
	6691	LED, LTL-10234WHCR	9322 185 69682
	6692	IR Receiver.	9322 127 54667
	6831	Diode, Signal, 1N4148.	3198 010 10010
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9588H/N1/3I	4835 310 57626
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7400	Power FET, STP3NC60FP.	9322 157 37687
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7460	Transistor, NPN, BU4508DX.	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2.	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1.	9352 673 56112
	7521	Power FET, FQPF9N50.	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, LE33CZ	9322 106 11676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C16-WBN6.	9322 147 25682
	7606	Transistor, NPN, PDTC143ZT	9340 547 00215
	7802	IC, HEF4053BT.	9333 729 60653
	7803	IC, HEF4053BT.	9333 729 60653
	7804	Transistor, NPN, BC847B(COL)	3198 010 42030
	7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682
	7901	IC, AN7522N PH	9322 181 41682
	9001	Wire Jumper.	3198 036 90010
	9104	Wire Jumper.	3198 036 90010
	9171	Wire Jumper.	3198 036 90010
	9173	Wire Jumper.	3198 036 90010
	9175	Wire Jumper.	3198 036 90010
	9181	Wire Jumper.	3198 036 90010
	9182	Wire Jumper.	3198 036 90010
	9183	Wire Jumper.	3198 036 90010
	9192	Wire Jumper.	3198 036 90010
	9193	Wire Jumper.	3198 036 90010
	9311	Wire Jumper.	3198 036 90010
	9312	Wire Jumper.	3198 036 90010
	9406	Wire Jumper.	3198 036 90010
	9407	Wire Jumper.	3198 036 90010
	9408	Wire Jumper.	3198 036 90010
	9409	Wire Jumper.	3198 036 90010
	9410	Wire Jumper.	3198 036 90010
	9411	Wire Jumper.	3198 036 90010
	9412	Wire Jumper.	3198 036 90010
	9413	Wire Jumper.	3198 036 90010
	9414	Wire Jumper.	3198 036 90010
	9415	Wire Jumper.	3198 036 90010
	9416	Wire Jumper.	3198 036 90010
	9417	Wire Jumper.	3198 036 90010
	9418	Wire Jumper.	3198 036 90010
	9419	Wire Jumper.	3198 036 90010
	9421	Wire Jumper.	3198 036 90010
	9422	Wire Jumper.	3198 036 90010
	9423	Wire Jumper.	3198 036 90010
	9424	Wire Jumper.	3198 036 90010
	9425	Wire Jumper.	3198 036 90010
	9426	Wire Jumper.	3198 036 90010
	9427	Wire Jumper.	3198 036 90010
	9453	Wire Jumper.	3198 036 90010
	9460	Wire Jumper.	3198 036 90010
	9463	Wire Jumper.	3198 036 90010
	9500	Wire Jumper.	3198 036 90010
	9501	Wire Jumper.	3198 036 90010
	9503	Wire Jumper.	3198 036 90010
	9506	Wire Jumper.	3198 036 90010
	9507	Wire Jumper.	3198 036 90010
	9510	Wire Jumper.	3198 036 90010
	9511	Wire Jumper.	3198 036 90010
	9512	Wire Jumper.	3198 036 90010
	9513	Wire Jumper.	3198 036 90010
	9514	Wire Jumper.	3198 036 90010
	9515	Wire Jumper.	3198 036 90010
	9516	Wire Jumper.	3198 036 90010
	9518	Wire Jumper.	3198 036 90010
	9520	Wire Jumper.	3198 036 90010
	9521	Wire Jumper.	3198 036 90010
	9522	Wire Jumper.	3198 036 90010
	9524	Wire Jumper.	3198 036 90010
	9528	Wire Jumper.	3198 036 90010
	9530	Wire Jumper.	3198 036 90010
	9611	Coil, 27u, 10%	3198 018 22790
	9612	Wire Jumper.	3198 036 90010
	9613	Wire Jumper.	3198 036 90010
	9614	Wire Jumper.	3198 036 90010
	9615	Wire Jumper.	3198 036 90010
	9616	Wire Jumper.	3198 036 90010
	9618	Wire Jumper.	3198 036 90010
	9619	Wire Jumper.	3198 036 90010
	9622	Wire Jumper.	3198 036 90010
	9623	Wire Jumper.	3198 036 90010
	9624	Wire Jumper.	3198 036 90010
	9626	Wire Jumper.	3198 036 90010
	9627	Wire Jumper.	3198 036 90010
	9628	Wire Jumper.	3198 036 90010
	9629	Wire Jumper.	3198 036 90010
	9631	Wire Jumper.	3198 036 90010
	9632	Wire Jumper.	3198 036 90010
	9634	Wire Jumper.	3198 036 90010
	9637	Wire Jumper.	3198 036 90010
	9638	Wire Jumper.	3198 036 90010
	9639	Wire Jumper.	3198 036 90010
	9640	Wire Jumper.	3198 036 90010
	9641	Wire Jumper.	3198 036 90010
	9642	Wire Jumper.	3198 036 90010
	9643	Wire Jumper.	3198 036 90010
	9647	Wire Jumper.	3198 036 90010
	9648	Wire Jumper.	3198 036 90010
	9650	Wire Jumper.	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

Ref	Description	Part No.
9651	Wire Jumper.	3198 036 90010
9652	Wire Jumper.	3198 036 90010
9654	Wire Jumper.	3198 036 90010
9655	Wire Jumper.	3198 036 90010
9656	Wire Jumper.	3198 036 90010
9657	Wire Jumper.	3198 036 90010
9658	Wire Jumper.	3198 036 90010
9659	Wire Jumper.	3198 036 90010
9660	Wire Jumper.	3198 036 90010
9661	Wire Jumper.	3198 036 90010
9662	Wire Jumper.	3198 036 90010
9663	Wire Jumper.	3198 036 90010
9664	Wire Jumper.	3198 036 90010
9665	Wire Jumper.	3198 036 90010
9666	Wire Jumper.	3198 036 90010
9667	Wire Jumper.	3198 036 90010
9668	Wire Jumper.	3198 036 90010
9669	Wire Jumper.	3198 036 90010
9670	Wire Jumper.	3198 036 90010
9671	Wire Jumper.	3198 036 90010
9672	Coil, 22u, 10%	3198 018 22290
9674	Wire Jumper.	3198 036 90010
9675	Wire Jumper.	3198 036 90010
9676	Wire Jumper.	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper.	3198 036 90010
9680	Wire Jumper.	3198 036 90010
9681	Wire Jumper.	3198 036 90010
9682	Wire Jumper.	3198 036 90010
9685	Wire Jumper.	3198 036 90010
9686	Wire Jumper.	3198 036 90010
9687	Wire Jumper.	3198 036 90010
9688	Wire Jumper.	3198 036 90010
9689	Wire Jumper.	3198 036 90010
9690	Wire Jumper.	3198 036 90010
9691	Wire Jumper.	3198 036 90010
9694	Wire Jumper.	3198 036 90010
9695	Wire Jumper.	3198 036 90010
9697	Wire Jumper.	3198 036 90010
9698	Wire Jumper.	3198 036 90010
9699	Wire Jumper.	3198 036 90010
9821	Wire Jumper.	3198 036 90010
9822	Wire Jumper.	3198 036 90010
9825	Wire Jumper.	3198 036 90010
9828	Wire Jumper.	3198 036 90010
9829	Wire Jumper.	3198 036 90010
9831	Wire Jumper.	3198 036 90010
9832	Wire Jumper.	3198 036 90010
9837	Wire Jumper.	3198 036 90010
9838	Wire Jumper.	3198 036 90010
9839	Wire Jumper.	3198 036 90010
9846	Wire Jumper.	3198 036 90010
9847	Wire Jumper.	3198 036 90010
9849	Wire Jumper.	3198 036 90010
9851	Wire Jumper.	3198 036 90010
9856	Wire Jumper.	3198 036 90010
9858	Wire Jumper.	3198 036 90010
9859	Wire Jumper.	3198 036 90010
9860	Wire Jumper.	3198 036 90010
9862	Wire Jumper.	3198 036 90010
9863	Wire Jumper.	3198 036 90010
9864	Wire Jumper.	3198 036 90010
9865	Wire Jumper.	3198 036 90010
9867	Wire Jumper.	3198 036 90010
9868	Wire Jumper.	3198 036 90010
9869	Wire Jumper.	3198 036 90010
9870	Wire Jumper.	3198 036 90010
9871	Wire Jumper.	3198 036 90010
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9876	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9878	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010
9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9905	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9919	Wire Jumper.	3198 036 90010
9920	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9993	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9997	Wire Jumper.	3198 036 90010
9998	Wire Jumper.	3198 036 90010
CBA	Scan 4 Card Assembly	3121 237 53761
CBA	SP/LS Module (Vertical) (ITV).	3139 127 27374
CBA	EPS Module (ITV)	3139 137 22961
CBA	Main Chassis Assembly.	3139 188 04091
CBA	Interface Panel (ITV).	3139 188 04541

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

Ref	Description	Part No.
0266	6 Pin Connector.	2422 025 16609
2401	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2402	Cap, 4u7, 20%, 35v, Electrolytic	3198 028 44780
2403	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2407	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2408	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2409	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2411	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
2412	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2413	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2414	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2415	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2416	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2419	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2420	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
2425	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2426	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2427	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2428	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2429	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2430	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2431	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2432	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2433	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2434	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2435	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2436	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2440	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
2442	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2443	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2450	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
2452	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2453	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
3401	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3402	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3403	Res, 1K8, 5%, 1/16W, Metalized Glass .	3198 021 31820
3404	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3405	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3406	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198 021 36820
3407	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3408	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3412	Res, 510K, 5%, 1/10W, Metalized Glass.	2122 118 05951
3419	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3425	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3427	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3431	Res, 8K2, 1%, 1/16W, Metalized Glass .	2322 704 68202
3432	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3440	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3441	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3442	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3443	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198 021 32720
3444	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3450	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3451	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3452	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3453	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198 021 32720
3454	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3455	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3456	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3457	Wire Jumper.	3198 036 90010
3458	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4403	Res, Zero ohm, "Chip" Jumper	3198 021 90030
5401	Coil, 10u, 10%	3198 018 31090
5407	Coil, 33u, 5%.	3198 018 13390
5408	Coil, 33u, 20%	3198 018 33390
5421	Inductor, 100 MHz, 120 ohm	3198 018 90070
5425	Coil, 10u, 10%	3198 018 31090
5428	Coil, 10u, 5%.	3198 018 11090
5429	Coil, 10u, 10%	3198 018 31090
5430	Coil, 10u, 10%	3198 018 31090
5440	Coil, 10u, 10%	3198 018 31090
5442	Coil, 22u, 5%.	3198 018 12290
5450	Coil, 10u, 10%	3198 018 31090
5452	Coil, 33u, 5%.	3198 018 13390
7401	Transistor, PNP, BC857B(COL)	3198 010 42150
7402	Transistor, NPN, BC847B(COL)	3198 010 42030
7403	Transistor, NPN, BC847B(COL)	3198 010 42030
7421	IC, TC90A53N	9322 182 18682
7440	Transistor, NPN, BC847B(COL)	3198 010 42030
7444	Transistor, NPN, BC847B(COL)	3198 010 42030
7450	Transistor, NPN, BC847B(COL)	3198 010 42030

Ref	Description	Part No.
7454	Transistor, NPN, BC847B(COL)	3198 010 42030
9401	Wire Jumper.	3198 036 90010
9402	Wire Jumper.	3198 036 90010
9403	Wire Jumper.	3198 036 90010
CBA	2D 3 Line Comb Filter Assembly	3139 177 26561

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Ref	Description	Part No.
1000	F-Connector.	2422 031 10792
1001	Socket, Cinch, 1 Pin	2422 026 05003
1002	5 Pin Connector.	2422 025 12708
2000	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
2001	Cap, 39p, 5%, 50v, Ceramic	3198 016 03990
2002	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
2003	Cap, 39p, 5%, 50v, Ceramic	3198 016 03990
2004	Cap, 100n, 10%, 25v, Ceramic	2238 910 15649
2005	Cap, 270p, 5%, 50v, Ceramic.	3198 016 02710
2006	Cap, 390p, 5%, 50v, Ceramic.	3198 016 03910
2007	Cap, 33p, 5%, 50v, Ceramic	3198 016 03390
2008	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
2009	Cap, 10p, 5%, 50v, Ceramic	3198 016 01090
2010	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
2011	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2012	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2013	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
2014	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
2015	Cap, 47p, 5%, 50v, Ceramic	3198 016 04790
3000	Res, 10k, 5%	3198 021 51030
3001	Res, 10k, 5%	3198 021 51030
3002	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
3003	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
3004	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
3005	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
3006	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
3007	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
3008	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
3009	Res, 47k, 5%	3198 021 54730
3011	Res, 10k, 5%	3198 021 51030
3012	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198 021 54790
5000	Fixed Inductor, 0.15uH, 10%.	3198 018 31570
5001	Fixed Inductor, 0.15uH, 10%.	3198 018 31570
5002	Fixed Inductor, 0.68uH, 10%.	3198 018 36870
5003	Fixed Inductor, 2.2uH, 5%.	2422 535 96509
5004	Fixed Inductor, 10uH, 10%.	3198 018 31090
5005	Inductor, Fixed 22U, 20%	3198 018 32290
5006	Fixed Inductor, 4.7uH., 10%.	3198 018 34780
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6002	Diode, Signal, BAS216.	9340 255 30115
7000	IC, NE592/N8	9337 334 80602
7001	Transistor, Signal, BC847B	9335 895 90215
CBA	Net 1 Panel (part of Scan 4 Card Assembly).	3135 127 10151

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Ref	Description	Part No.
1000	Connector, 15 Pin.	2422 025 16857
1001	Crystal, Resonator, 20M140	2422 543 01196
1002	SOC MDIN H 4P F YKF51 B	2422 026 05133
1003	SOC CINCH H 4P F WHRD B	2422 026 04402
1005	Resonator Crystal, 14M31818, 20P	2422 543 00904
1010	Connector, 32 Pin.	3135 010 03541
1011	Crystal, Resonator, 12MHz, 20 Pin.	2422 543 00488
1012	Connector, 5 Pin	2422 025 12708
2000	Cap, 1u, 20%, 50v, Electrolytic.	3198 030 81080
2001	Cap, 82p, 5%, 50v, Ceramic	3198 016 08290
2002	Cap, 47p, 5%, 50v, Ceramic	3198 016 04790
2003	Cap, 15p, 5%, 50v, Ceramic	3198 016 01590
2004	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
2005	Cap, 1u, 20%, 50v, Electrolytic.	3198 030 81080
2006	Cap, 82p, 5%, 50v, Ceramic	3198 016 08290
2007	Cap, 47p, 5%, 50v, Ceramic	3198 016 04790
2008	Cap, 47p, 5%, 50v, Ceramic	3198 016 04790
2009	Cap, 150p, 5%, 50v, Ceramic.	3198 016 01510
2010	Cap, 1u, 20%, 50v, Electrolytic.	3198 030 81080
2011	Cap, 270p, 5%, 50v, Ceramic.	3198 016 02710
2012	Cap, 15p, 5%, 50v, Ceramic	3198 016 01590
2013	Cap, 47p, 5%, 50v, Ceramic	3198 016 04790
2014	Cap, 150p, 5%, 50v, Ceramic.	3198 016 01510
2015	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
2016	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
2017	Cap, 10u, 20%, 25V, Electrolytic	2020 004 90288
2018	Cap, 270p, 5%, 50v, Ceramic.	3198 016 02710
2019	Cap, 15p, 5%, 50v, Ceramic	3198 016 01590
2020	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
2021	Cap, 47p, 5%, 50v, Ceramic	3198 016 04790
2022	Cap, 150p, 5%, 50v, Ceramic.	3198 016 01510
2023	Cap, 270p, 5%, 50v, Ceramic.	3198 016 02710
2024	Cap, 82p, 5%, 50v, Ceramic	3198 016 08290
2025	Cap, 47p, 5%, 50v, Ceramic	3198 016 04790
2026	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
2059	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
2060	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2061	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2062	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2063	Cap, 4u7, +80/-20%, 10v, Ceramic	2020 552 96305
2064	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2065	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2066	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2067	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2068	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
2071	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2072	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2073	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2074	Cap, 4u7, 20%, 35v, Electrolytic	3198 030 74780
2075	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2076	Cap, 4u7, 20%, 35v, Electrolytic	3198 030 74780
2077	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2078	Cap, 4u7, 20%, 35v, Electrolytic	3198 030 74780
2079	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
2080	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2081	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2082	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2083	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2084	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2085	Cap, 4u7, 20%, 35v, Electrolytic	3198 030 74780
2086	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
2087	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2088	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2089	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2090	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2091	Cap, 4u7, 20%, 35v, Electrolytic	3198 030 74780
2092	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
2093	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2094	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2095	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2096	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2097	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2098	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2099	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710
2100	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2101	Cap, 1u, 20%, 35v, Electrolytic.	2020 004 90282
2102	Cap, 1u, 20%, 35v, Electrolytic.	2020 004 90282
2106	Cap, 1u, 20%, 50v, Electrolytic.	3198 030 81080
2107	Cap, 1u, 20%, 50v, Electrolytic.	3198 030 81080
2111	Cap, 1u, 20%, 50v, Electrolytic.	3198 030 81080
2112	Cap, 1u, 20%, 50v, Electrolytic.	3198 030 81080
2113	Cap, 1u, 20%, 50v, Electrolytic.	3198 030 81080
2114	Cap, 470u, 20%, 25v, Electrolytic.	2020 012 93457
2115	Cap, 10u, 20%, 10v, Electrolytic	3198 032 34130
2116	Cap, 10u, 20%, 10v, Electrolytic	3198 032 34130
2118	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
2119	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
2120	Cap, 680p, 10%, 50v, Ceramic	3198 017 06810
2121	Cap, 680p, 10%, 50v, Ceramic	3198 017 06810
2122	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2123	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2124	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2125	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2126	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2127	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2129	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2130	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2131	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2132	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2134	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2135	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2136	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
2137	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
2139	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2140	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2141	Cap, 180p, 5%, 50v, Ceramic.	3198 016 01810
2142	Cap, 180p, 5%, 50v, Ceramic.	3198 016 01810
3001	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3002	Res, 220 ohm, 5%, 1/10W, Metalized Glas	3198 021 52210
3003	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050

32ST230P/35 (continued)

```
3004   Res, 100 ohm, 5%, 1/10W, Metalized Glas 3198 021 51010
3005   Res, 75 ohm, 5%, 1/10W, Metalized Glass 3198 021 57590
3006   Res, 1K8, 5%, 1/10W, Metalized Glass .  3198 021 51820
3007   Res, 4K7, 5%, 1/10W, Metalized Glass .  3198 021 54720
3008   Res, 150K, 5%, 1/10W, Metalized Glass.  3198 021 51540
3009   Res, 13K, 5%, 1/8W, Metalized Glass. .  2322 730 61133
3010   Res, 10K, 5%, 1/10W, Metalized Glass .  3198 021 51030
3011   Res, 100 ohm, 5%, 1/10W, Metalized Glas 3198 021 51010
3012   Res, 560 ohm, 5%, 1/10W, Metalized Glas 3198 021 55610
3013   Res, 4K7, 5%, 1/10W, Metalized Glass .  3198 021 54720
3014   Res, 150K, 5%, 1/10W, Metalized Glass.  3198 021 51540
3015   Res, 13K, 5%, 1/8W, Metalized Glass. .  2322 730 61133
3016   Res, 10K, 5%, 1/10W, Metalized Glass .  3198 021 51030
3017   Res, 560 ohm, 5%, 1/10W, Metalized Glas 3198 021 55610
3018   Res, 100 ohm, 5%, 1/10W, Metalized Glas 3198 021 51010
3019   Res, 4K7, 5%, 1/10W, Metalized Glass .  3198 021 54720
3020   Res, 150K, 5%, 1/10W, Metalized Glass.  3198 021 51540
3021   Res, 13K, 5%, 1/8W, Metalized Glass. .  2322 730 61133
3022   Res, 10K, 5%, 1/10W, Metalized Glass .  3198 021 51030
3023   Res, 560 ohm, 5%, 1/10W, Metalized Glas 3198 021 55610
3024   Res, 100 ohm, 5%, 1/10W, Metalized Glas 3198 021 51010
3025   Res, 22K, 5%, 1/10W, Metalized Glass .  3198 021 52230
3026   Res, 22K, 5%, 1/10W, Metalized Glass .  3198 021 52230
3027   Res, 22K, 5%, 1/10W, Metalized Glass .  3198 021 52230
3028   Res, 1K, 5%, 1/10W, Metalized Glass. .  3198 021 51020
3029   Res, 22K, 5%, 1/10W, Metalized Glass .  3198 021 52230
3030   Res, 22K, 5%, 1/10W, Metalized Glass .  3198 021 52230
3031   Res, 22K, 5%, 1/10W, Metalized Glass .  3198 021 52230
3033   Res, 100 ohm, 5%, 1/10W, Metalized Glas 3198 021 51010
3049   Res, 75 ohm, 5%, 1/10W, Metalized Glass 3198 021 57590
3052   Res, 100 ohm, 5%, 1/10W, Metalized Glas 3198 021 51010
3053   Res, 100 ohm, 5%, 1/10W, Metalized Glas 3198 021 51010
3056   Res, 1K5, 5%, 1/10W, Metalized Glass .  3198 021 51520
3057   Res, 75 ohm, 5%, 1/10W, Metalized Glass 3198 021 57590
3058   Res, 390 ohm, 5%, 1/10W, Metalized Glas 3198 021 53910
3059   Res, 100 ohm, 5%, 1/10W, Metalized Glas 3198 021 51010
3060   Res, 1K, 5%, 1/10W, Metalized Glass. .  3198 021 51020
3061   Res, 1M, 5%, 1/10W, Metalized Glass. .  3198 021 51050
3062   Res, 220 ohm, 5%, 1/10W, Metalized Glas 3198 021 52210
3063   Res, 820 ohm, 5%, 1/10W, Metalized Glas 3198 021 58210
3064   Res, 220 ohm, 5%, 1/10W, Metalized Glas 3198 021 52210
3065   Res, Network, 33 ohm X 4, 5%, SM AVR24  2350 035 10339
3066   Res, Network, 33 ohm X 4, 5%, SM AVR24  2350 035 10339
3073   Res, Network, 33 ohm X 4, 5%, SM AVR24  2350 035 10339
3074   Res, Network, 33 ohm X 4, 5%, SM AVR24  2350 035 10339
3082   Res, Network, 33 ohm X 4, 5%, SM AVR24  2350 035 10339
3085   Res, Network, 33 ohm X 4, 5%, SM AVR24  2350 035 10339
3089   Res, 1K, 5%, 1/10W, Metalized Glass. .  3198 021 51020
3090   Res, Network, 33 ohm X 4, 5%, SM AVR24  2350 035 10339
3091   Res, Network, 33 ohm X 4, 5%, SM AVR24  2350 035 10339
3097   Res, 150 ohm, 5%, 1/10W, Metalized Glas 3198 021 51510
3099   Res, 10K, 5%, 1/10W, Metalized Glass .  3198 021 51030
3100   Res, 10K, 5%, 1/10W, Metalized Glass .  3198 021 51030
3101   Res, 10K, 5%, 1/10W, Metalized Glass .  3198 021 51030
3102   Res, 75 ohm, 5%, 1/10W, Metalized Glass 3198 021 57590
3103   Res, 1K, 5%, 1/10W, Metalized Glass. .  3198 021 51020
3104   Res, 1K, 5%, 1/10W, Metalized Glass. .  3198 021 51020
3105   Res, 150 ohm, 5%, 1/10W, Metalized Glas 3198 021 51510
3106   Res, 270 ohm, 5%, 1/10W, Metalized Glas 3198 021 52710
3108   Res, 4K7, 5%, 1/10W, Metalized Glass .  3198 021 54720
3109   Res, 4K7, 5%, 1/10W, Metalized Glass .  3198 021 54720
3110   Res, 4K7, 5%, 1/10W, Metalized Glass .  3198 021 54720
3111   Res, 4K7, 5%, 1/10W, Metalized Glass .  3198 021 54720
3112   Res, 4K7, 5%, 1/10W, Metalized Glass .  3198 021 54720
3113   Res, 22K, 5%, 1/10W, Metalized Glass .  3198 021 52230
3114   Res, 2K7, 5%, 1/10W, Metalized Glass .  3198 021 52720
3116   Res, 1K8, 5%, 1/10W, Metalized Glass .  3198 021 51820
3117   Res, 22K, 5%, 1/10W, Metalized Glass .  3198 021 52230
3118   Res, 6K8, 5%, 1/10W, Metalized Glass .  3198 021 56820
3119   Res, 100K, 5%, 1/10W, Metalized Glass.  3198 021 51040
3120   Res, 1K, 5%, 1/10W, Metalized Glass. .  3198 021 51020
3121   Res, 1K, 5%, 1/10W, Metalized Glass. .  3198 021 51020
3122   Res, 1K, 5%, 1/10W, Metalized Glass. .  3198 021 51020
3124   Res, 910 ohm, 1%, 1/8W, Metalized Glass 2322 734 69101
3129   Res, 100 ohm, 5%, 1/10W, Metalized Glas 3198 021 51010
3130   Res, 100 ohm, 5%, 1/10W, Metalized Glas 3198 021 51010
3132   Res, 100K, 5%, 1/10W, Metalized Glass.  3198 021 51040
3133   Res, 100K, 5%, 1/10W, Metalized Glass.  3198 021 51040
3135   Res, 22K, 5%, 1/10W, Metalized Glass .  3198 021 52230
3136   Res, 100 ohm, 5%, 1/10W, Metalized Glas 3198 021 51010
3137   Res, 100 ohm, 5%, 1/10W, Metalized Glas 3198 021 51010
3138   Res, 100 ohm, 5%, 1/10W, Metalized Glas 3198 021 51010
3139   Res, 100 ohm, 5%, 1/10W, Metalized Glas 3198 021 51010
3140   Res, 1K5, 5%, 1/10W, Metalized Glass .  3198 021 51520
3141   Res, 1K, 5%, 1/10W, Metalized Glass. .  3198 021 51020
3142   Res, 1K5, 5%, 1/10W, Metalized Glass .  3198 021 51520
3143   Res, 100 ohm, 5%, 1/10W, Metalized Glas 3198 021 51010
4004   Res, Zero ohm, 'Chip' Jumper . . . . .  3198 021 90020
4005   Res, Zero ohm, 'Chip' Jumper . . . . .  3198 021 90020
4006   Res, Zero ohm, 'Chip' Jumper . . . . .  3198 021 90020
4007   Res, Zero ohm, 'Chip' Jumper . . . . .  3198 021 90020
4008   Res, Zero ohm, 'Chip' Jumper . . . . .  3198 021 90020
  5001   Coil, 820n . . . . . . . . . . . . . .  3198 018 38270
  5002   Coil, 1u2. . . . . . . . . . . . . . .  3198 018 31280
  5003   Coil, 1u2. . . . . . . . . . . . . . .  3198 018 31280
  5004   Coil, 1u2. . . . . . . . . . . . . . .  3198 018 31280
  5010   Coil, 820n . . . . . . . . . . . . . .  3198 018 38270
  5012   Coil, 820n . . . . . . . . . . . . . .  3198 018 38270
  5014   Res, 75 ohm, 5%, 1/10W, Metalized Glass 3198 021 57590
  5015   Inductor, Fixed, 100MHz, 30 ohm. . . .  3198 018 90060
  5016   Inductor, Fixed, 100MHz, 30 ohm. . . .  3198 018 90060
  5017   Inductor, Fixed, 100MHz, 30 ohm. . . .  3198 018 90060
  5018   Inductor, Fixed, 100MHz, 30 ohm. . . .  3198 018 90060
  5019   Inductor, Fixed, 100MHz, 30 ohm. . . .  3198 018 90060
  5020   Inductor, Fixed, 100MHz, 30 ohm. . . .  3198 018 90060
  5021   Coil, 82u. . . . . . . . . . . . . . .  2422 535 95408
  5023   Inductor, Fixed, 100MHz, 30 ohm. . . .  3198 018 90060
  5024   Coil, 1u8. . . . . . . . . . . . . . .  3198 018 31880
  6001   Diode, Signal, BAV99 . . . . . . . . .  3198 010 10620
  6002   Diode, Signal, BAV99 . . . . . . . . .  3198 010 10620
  6003   Diode, Signal, BAV99 . . . . . . . . .  3198 010 10620
  6004   Diode, Signal, BAV99 . . . . . . . . .  3198 010 10620
  6005   Diode, Signal, BAV99 . . . . . . . . .  3198 010 10620
  6006   Diode, Signal, BAV99 . . . . . . . . .  3198 010 10620
  6009   Diode, Signal, BAV99 . . . . . . . . .  3198 010 10620
  6010   Diode, Signal, BAV99 . . . . . . . . .  3198 010 10620
  6011   Diode, Signal, BAS16WS . . . . . . . .  9322 031 99685
  6012   Diode, Signal, BAS16WS . . . . . . . .  9322 031 99685
  6013   Diode, Signal, BAS16WS . . . . . . . .  9322 031 99685
  6014   Diode, Signal, BAS16WS . . . . . . . .  9322 031 99685
  6015   Diode, Signal, BAS16WS . . . . . . . .  9322 031 99685
  6016   Diode, Signal, BAS16WS . . . . . . . .  9322 031 99685
  6017   Diode, Rect,  MBRS140. . . . . . . . .  9322 070 26668
  6018   Zener Diode, 6.8 volt. . . . . . . . .  9340 386 40115
  6019   Diode, Signal, BAS316. . . . . . . . .  3198 010 10630
  7000   F.E.T. Signal, BSN20 . . . . . . . . .  9340 125 00235
  7001   IC, LM393D . . . . . . . . . . . . . .  9339 575 30668
  7002   IC, LM393D . . . . . . . . . . . . . .  9339 575 30668
  7003   Transistor, NPN, BC847B. . . . . . . .  3198 010 42030
  7004   Transistor, NPN, BC847B. . . . . . . .  3198 010 42030
  7005   Transistor, NPN, BC847B. . . . . . . .  3198 010 42030
  7006   Transistor, PNP, BC857B. . . . . . . .  3198 010 42150
  7007   FET Signal, BSN20. . . . . . . . . . .  9340 125 00235
  7010   FET Signal, BSN20. . . . . . . . . . .  9340 125 00235
  7011   IC, FS401AC. . . . . . . . . . . . . .  9322 107 99671
  7012   IC, HY57V161610DTC-10. . . . . . . . .  9322 161 58668
  7013   FET Signal, BSN20. . . . . . . . . . .  9340 125 00235
  7014   IC SM P87C51RD+4A SCAN 4 . . . . . . .  3135 120 50111
  7016   IC, 74HC4066D. . . . . . . . . . . . .  9337 144 20653
  7018   IC, M24C04-WMN6. . . . . . . . . . . .  9322 122 33668
  7020   Transistor, PNP, BC857B. . . . . . . .  3198 010 42150
  7021   Transistor, NPN, BC847B. . . . . . . .  3198 010 42030
  7022   IC, MC33269D-3.3 . . . . . . . . . . .  9322 106 88668
  7023   IC, MC33269D-3.3 . . . . . . . . . . .  9322 106 88668
  7024   IC, LM2596S-ADJ. . . . . . . . . . . .  9322 130 86685
  7028   FET Signal, BSH103 . . . . . . . . . .  9340 547 13215
  7036   FET Signal, BSH103 . . . . . . . . . .  9340 547 13215
  7037   Transistor, NPN, BC847B. . . . . . . .  3198 010 42030
  CBA    Scan 4 Card (part of Scan 4 Card Assemb
         ly). . . . . . . . . . . . . . . . . .  3135 127 10281
```

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

```
         Cabinet & Accessory Parts
S AC01   AC Cord. . . . . . . . . . . . . . . .  3135 010 04323
  AC02   AC Cord Strain Relief. . . . . . . . .  3135 010 02841
  AC03   Anode Lead Spacer (3 Used) . . . . . .  3135 014 04471
  AC04   Batteries for Remote Control Transmitte 9299 000 65263
  AC05   Cabinet Back . . . . . . . . . . . . .  3139 124 45221
  AC08   Chassis Tray . . . . . . . . . . . . .  3139 124 31325
S AC09   CRT, A80QCF340X34(N) . . . . . . . . .  9301 904 59463
  AC10   Customer Control Buttons . . . . . . .  3139 124 26472
S AC12   Degaussing Coil. . . . . . . . . . . .  2422 549 45334
  AC15   Holder, Degaussing Coil (4 Used) . . .  3135 013 01661
  AC16   Jack Panel Bracket . . . . . . . . . .  3139 124 45161
  AC17   Owner's Manual, Scan 4 Card. . . . . .  3135 125 21341
  AC17   ITV Safety/Warranty Instructions . . .  3135 125 21431
  AC20   Cabinet Front Assembly . . . . . . . .  3121 237 53561
  AC20A  Cabinet Front. . . . . . . . . . . . .  3135 127 50031
  AC20C  Light Guide. . . . . . . . . . . . . .  3139 124 26461
  AC20D  Nameplate. . . . . . . . . . . . . . .  3135 015 03571
  AC20E  Power Button . . . . . . . . . . . . .  3139 124 26444
  AC20H  Speaker, 16 ohm, 5W (2 Used) . . . . .  2422 264 00401
  AC26   EPS Bracket. . . . . . . . . . . . . .  3135 014 09221
  AC30   Scan 3 VGA Adapter . . . . . . . . . .  3135 017 07401
  AC31   Scan 4 Card Cover. . . . . . . . . . .  3139 124 47461
```

S = Safety Part   Be sure to use exact replacement part.

32ST230P/35 (continued)

REMOTE Remote Control Transmitter, RC2572/01. 3139 228 88691

S = Safety Part   Be sure to use exact replacement part.

36ST220P/35 - Manual no. 7638

Main Chassis Parts

S	Ref	Description	Part No.
		Main Chassis Parts	
	0127	Socket Fuse.	2422 088 00271
	0129	NTC Holder	3139 120 10151
	0136	IC-Spring.	3104 301 22081
	0137	Spring	3139 121 24583
	0138	IC-Spring.	3104 301 22081
	0139	Spring for Bracket	3122 121 24786
	0140	Spring	3139 121 24583
	0141	IC-Spring.	3104 301 22081
	0152	Cable, DIPMate, 6 Pin, 560mm	3104 301 08411
	0153	Cable, 5 Pin, 560mm.	3139 121 09041
	0211	2 Pin Connector.	2422 025 16269
	0212	2 Pin Connector.	2422 025 16375
	0213	2 Pin Connector.	2422 025 16374
	0217	6 Pin Connector.	2422 025 12482
	0218	A/V Jack	2422 026 04742
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0222	2 Pin Connector.	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0227	6 Pin Connector.	2422 025 15849
	0229	3 Pin Connector.	2412 020 00725
	0240	7 Pin Connector.	2422 025 11244
	0242	7 Pin Connector.	2422 025 17042
	0243	6 Pin Connector.	2422 025 04854
	0244	5 Pin Connector.	2422 025 04853
	0245	6 Pin Connector.	2422 025 04854
	0251	3 Pin Connector.	2412 020 00725
S	0254	10 Pin CRT Socket.	2422 500 80079
	0259	5 Pin Connector.	2422 025 15848
	0262	3 Pin Connector.	2422 025 16937
	0267	3 Pin Connector.	2412 020 00725
	0280	4 Pin Connector.	2422 025 15847
S	1000	Tuner, V+U, PLL	2422 542 90108
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1600	Tact Switch.	2422 128 02742
	1601	Tact Switch.	2422 128 02742
	1602	Tact Switch.	2422 128 02742
	1603	Tact Switch.	2422 128 02742
	1606	Tact Switch.	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1810	6 Pin Connector.	2422 025 16607
	1831	Crystal, Resonator, 18MHz432, 12 Pin, HC49/U A.	2422 543 00842
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2123	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2125	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	2127	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
	2128	Res, 75 ohm, 10%, 5%, 1/10W, Metalized Glass	3198 021 57590
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2181	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2182	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2183	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2209	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
	2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
	2451	Cap, 15n, 10%, 50v, Polyester.	3198 014 01530
	2452	Cap, 180p, 5%, 50v, Ceramic.	3198 016 01810
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2456	Cap, 560n, 5%, 250v, Metalized Polypropylene.	2022 333 00088
	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
S	2463	Cap, 390p, 10%, 2000v, Ceramic	2020 558 90482
	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene	2222 479 90042
S	2465	Cap, 15n, 5%, 1600v, Polypropylene	2020 301 90255
	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
	2468	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010

S = Safety Part   Be sure to use exact replacement part.

36ST220P/35 (continued)

Ref	Description	Part No.
2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2608	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2611	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2616	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050
2691	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2807	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2810	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
2837	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
2840	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2841	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2843	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2844	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2846	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2910	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320
2911	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3121	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3122	Res, 680 ohm, 5%, 1/6W, Carbon Film. .	3198 011 06810
3123	Res, 680 ohm, 5%, 1/6W, Carbon Film. .	3198 011 06810
3125	Res, 680 ohm, 5%, 1/6W, Carbon Film. .	3198 011 06810
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3182	Wire Jumper.	3198 036 90010
3184	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3185	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3186	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3187	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
3206	Res, 270K, 5%, 1/16W, Metalized Glass.	2322 702 60274
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3223	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840
3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S 3341	Res, 1 ohm, 5%, 1/3W, MF for A80QCF340X 34.	2306 204 03108
S 3341	Res, 2R7 ohm, 5%, 1/3W, MF for A80QCF33 0X34	2306 204 03278
S 3342	Res, 1 ohm, 5%, 1/3W, MF for A80ECK340X 34.	2306 204 03108
S 3342	Res, 2R7 ohm, 5%, 1/3W, MF for A80ECK33 0X34	2306 204 03278
3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
3403	Res, 100K, 5%, 1/6W, Carbon Film . . .	3198 011 01040
3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S 3451	Res, 8R2, 5%, Metal Film	2306 204 03828
S 3452	Res, 5K6, 1%, 3/5W, Metal Film	2312 915 15602
3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3468	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3470	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3473	Res, 5R6, 1%, 3/5W, Metal Film	2312 915 15608
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 33390
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688

S = Safety Part   Be sure to use exact replacement part.

	Ref	Description	Part No.
	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S	3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
S	3558	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198 021 53320
	3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3811	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3812	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3813	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3831	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3843	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4101	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4102	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4104	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4126	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4128	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4181	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4604	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4824	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4884	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5202	Wire Jumper.	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5241	Wire Jumper.	3198 036 90010
	5242	Coil, 10u, 5%.	3198 018 11090
	5341	Coil, 22u.	2422 535 97333
	5342	Coil, 22u for A80QCF340X34	2422 535 97333
	5342	Coil, 47u for A80QCF330X34	3198 018 24790
	5401	Coil, 1mH, 10%	3198 018 71020
S	5445	Transformer, PSLOT	3128 138 21421
	5451	Coil, 33u, 10%	3198 018 73390
	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5457	Coil, Linear, DC12	3128 138 55881
	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
	5463	Coil, Choke.	3128 138 37021
	5471	Coil, 4u7, 20%	3198 018 74780

S = Safety Part   Be sure to use exact replacement part.

36ST220P/35 (continued)

S	Ref	Description	Part No.
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 39u, 10%	2422 535 97336
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04.	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5810	Coil, 10u, 10%	3198 018 51090
	5831	Coil, 6u8, 5%.	3198 018 16880
	5832	Coil, 6u8, 5%.	3198 018 16880
	5833	Coil, 6u8, 5%.	3198 018 16880
	5835	Coil, 12u, 10%	3198 018 31290
	6001	Zener Diode, 33 volt	3198 010 23390
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630
	6206	Zener Diode, 6.8 volt.	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316.	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002
	6401	Zener Diode, 47 volt	3198 010 24790
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148.	3198 010 10010
	6448	Zener Diode, 6.2 volt.	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6460	Diode, Rect, DG3-7005L	9336 436 10682
	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
	6462	Zener Diode, 9.1 volt.	9331 177 80133
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316.	3198 010 10630
	6468	Diode, Signal, BAS316.	3198 010 10630
	6469	Diode, Rect, BYV95C.	9335 001 80133
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt.	3198 010 25680
	6482	Zener Diode, 9.1 volt.	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYV95C.	9335 001 80133
	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6487	Diode, Rect, BYV95A.	9335 000 90133
	6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667
	6520	Diode, Rect, BYV95A.	9335 000 90133
	6523	Diode, Signal, 1N4148.	3198 010 10010
	6524	Diode, Rect, 1N5062.	3198 010 10120
	6525	Diode, Rect, 1N5062.	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt.	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500.	9340 555 59127
	6561	Diode, Rect, SB340L-7010	9322 128 18682
	6563	Diode, Signal, BAS316.	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148.	3198 010 10010
	6569	Diode, Signal, BAS316.	3198 010 10630
	6570	Zener Diode, 6.8 volt.	3198 020 56880
	6580	Diode, Signal, BAS316.	3198 010 10630
	6681	Diode, Signal, BAT85	9336 247 60133
	6691	LED, LTL-10234WHCR	9322 185 69682
	6692	IR Receiver.	9322 127 54667
	6831	Diode, Signal, 1N4148.	3198 010 10010
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9588H/N1/3I	4835 310 57626
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7400	Power FET, IR.	9322 053 35687
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7460	Transistor, NPN, BU4508DX.	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2.	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1.	9352 673 56112
	7521	Power FET, FQPF9N50.	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, LE33CZ	9322 106 11676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C16-WBN6.	9322 147 25682
	7606	Transistor, NPN, PDTC143ZT	9340 547 00215
	7802	IC, HEF4053BT.	9333 729 60653
	7803	IC, HEF4053BT.	9333 729 60653
	7804	Transistor, NPN, BC847B(COL)	3198 010 42030
	7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682
	7901	IC, AN7522N PH	9322 181 41682
	9001	Wire Jumper.	3198 036 90010
	9104	Wire Jumper.	3198 036 90010
	9171	Wire Jumper.	3198 036 90010
	9173	Wire Jumper.	3198 036 90010
	9175	Wire Jumper.	3198 036 90010
	9181	Wire Jumper.	3198 036 90010
	9182	Wire Jumper.	3198 036 90010
	9183	Wire Jumper.	3198 036 90010
	9192	Wire Jumper.	3198 036 90010
	9193	Wire Jumper.	3198 036 90010
	9311	Wire Jumper.	3198 036 90010
	9312	Wire Jumper.	3198 036 90010
	9406	Wire Jumper.	3198 036 90010
	9407	Wire Jumper.	3198 036 90010
	9408	Wire Jumper.	3198 036 90010
	9409	Wire Jumper.	3198 036 90010
	9410	Wire Jumper.	3198 036 90010
	9411	Wire Jumper.	3198 036 90010
	9412	Wire Jumper.	3198 036 90010
	9413	Wire Jumper.	3198 036 90010
	9414	Wire Jumper.	3198 036 90010
	9415	Wire Jumper.	3198 036 90010
	9416	Wire Jumper.	3198 036 90010
	9417	Wire Jumper.	3198 036 90010
	9418	Wire Jumper.	3198 036 90010
	9419	Wire Jumper.	3198 036 90010
	9421	Wire Jumper.	3198 036 90010
	9422	Wire Jumper.	3198 036 90010
	9423	Wire Jumper.	3198 036 90010
	9424	Wire Jumper.	3198 036 90010
	9425	Wire Jumper.	3198 036 90010
	9426	Wire Jumper.	3198 036 90010
	9427	Wire Jumper.	3198 036 90010
	9453	Wire Jumper.	3198 036 90010
	9460	Wire Jumper.	3198 036 90010
	9463	Wire Jumper.	3198 036 90010
	9500	Wire Jumper.	3198 036 90010
	9501	Wire Jumper.	3198 036 90010
	9503	Wire Jumper.	3198 036 90010
	9506	Wire Jumper.	3198 036 90010
	9507	Wire Jumper.	3198 036 90010
	9510	Wire Jumper.	3198 036 90010
	9511	Wire Jumper.	3198 036 90010
	9512	Wire Jumper.	3198 036 90010
	9513	Wire Jumper.	3198 036 90010
	9514	Wire Jumper.	3198 036 90010
	9515	Wire Jumper.	3198 036 90010
	9516	Wire Jumper.	3198 036 90010
	9518	Wire Jumper.	3198 036 90010
	9520	Wire Jumper.	3198 036 90010
	9521	Wire Jumper.	3198 036 90010
	9522	Wire Jumper.	3198 036 90010
	9524	Wire Jumper.	3198 036 90010
	9528	Wire Jumper.	3198 036 90010
	9530	Wire Jumper.	3198 036 90010
	9611	Coil, 27u, 10%	3198 018 22790
	9612	Wire Jumper.	3198 036 90010
	9613	Wire Jumper.	3198 036 90010
	9614	Wire Jumper.	3198 036 90010
	9615	Wire Jumper.	3198 036 90010
	9616	Wire Jumper.	3198 036 90010
	9618	Wire Jumper.	3198 036 90010
	9619	Wire Jumper.	3198 036 90010
	9622	Wire Jumper.	3198 036 90010
	9623	Wire Jumper.	3198 036 90010
	9624	Wire Jumper.	3198 036 90010
	9626	Wire Jumper.	3198 036 90010
	9627	Wire Jumper.	3198 036 90010
	9628	Wire Jumper.	3198 036 90010
	9629	Wire Jumper.	3198 036 90010
	9631	Wire Jumper.	3198 036 90010
	9632	Wire Jumper.	3198 036 90010
	9634	Wire Jumper.	3198 036 90010
	9637	Wire Jumper.	3198 036 90010
	9638	Wire Jumper.	3198 036 90010
	9639	Wire Jumper.	3198 036 90010
	9640	Wire Jumper.	3198 036 90010
	9641	Wire Jumper.	3198 036 90010
	9642	Wire Jumper.	3198 036 90010
	9643	Wire Jumper.	3198 036 90010
	9647	Wire Jumper.	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

36ST220P/35 (continued)

9648	Wire Jumper.	3198 036 90010
9650	Wire Jumper.	3198 036 90010
9651	Wire Jumper.	3198 036 90010
9652	Wire Jumper.	3198 036 90010
9654	Wire Jumper.	3198 036 90010
9655	Wire Jumper.	3198 036 90010
9656	Wire Jumper.	3198 036 90010
9657	Wire Jumper.	3198 036 90010
9658	Wire Jumper.	3198 036 90010
9659	Wire Jumper.	3198 036 90010
9660	Wire Jumper.	3198 036 90010
9661	Wire Jumper.	3198 036 90010
9662	Wire Jumper.	3198 036 90010
9663	Wire Jumper.	3198 036 90010
9664	Wire Jumper.	3198 036 90010
9665	Wire Jumper.	3198 036 90010
9666	Wire Jumper.	3198 036 90010
9667	Wire Jumper.	3198 036 90010
9668	Wire Jumper.	3198 036 90010
9669	Wire Jumper.	3198 036 90010
9670	Wire Jumper.	3198 036 90010
9671	Wire Jumper.	3198 036 90010
9672	Coil, 22u, 10%	3198 018 22290
9674	Wire Jumper.	3198 036 90010
9675	Wire Jumper.	3198 036 90010
9676	Wire Jumper.	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper.	3198 036 90010
9680	Wire Jumper.	3198 036 90010
9681	Wire Jumper.	3198 036 90010
9682	Wire Jumper.	3198 036 90010
9685	Wire Jumper.	3198 036 90010
9686	Wire Jumper.	3198 036 90010
9687	Wire Jumper.	3198 036 90010
9688	Wire Jumper.	3198 036 90010
9689	Wire Jumper.	3198 036 90010
9690	Wire Jumper.	3198 036 90010
9691	Wire Jumper.	3198 036 90010
9694	Wire Jumper.	3198 036 90010
9695	Wire Jumper.	3198 036 90010
9697	Wire Jumper.	3198 036 90010
9698	Wire Jumper.	3198 036 90010
9699	Wire Jumper.	3198 036 90010
9821	Wire Jumper.	3198 036 90010
9822	Wire Jumper.	3198 036 90010
9825	Wire Jumper.	3198 036 90010
9828	Wire Jumper.	3198 036 90010
9829	Wire Jumper.	3198 036 90010
9831	Wire Jumper.	3198 036 90010
9832	Wire Jumper.	3198 036 90010
9837	Wire Jumper.	3198 036 90010
9838	Wire Jumper.	3198 036 90010
9839	Wire Jumper.	3198 036 90010
9846	Wire Jumper.	3198 036 90010
9847	Wire Jumper.	3198 036 90010
9849	Wire Jumper.	3198 036 90010
9851	Wire Jumper.	3198 036 90010
9856	Wire Jumper.	3198 036 90010
9858	Wire Jumper.	3198 036 90010
9859	Wire Jumper.	3198 036 90010
9860	Wire Jumper.	3198 036 90010
9862	Wire Jumper.	3198 036 90010
9863	Wire Jumper.	3198 036 90010
9864	Wire Jumper.	3198 036 90010
9865	Wire Jumper.	3198 036 90010
9867	Wire Jumper.	3198 036 90010
9868	Wire Jumper.	3198 036 90010
9869	Wire Jumper.	3198 036 90010
9870	Wire Jumper.	3198 036 90010
9871	Wire Jumper.	3198 036 90010
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9876	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9878	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010
9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9905	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9919	Wire Jumper.	3198 036 90010
9920	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9993	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9997	Wire Jumper.	3198 036 90010
9998	Wire Jumper.	3198 036 90010

CBA	SP/LS Module (Vertical) (ITV).	3139 127 27374
CBA	EPS Module (ITV)	3139 137 22961
CBA	Main Chassis Assembly.	3139 187 26761
CBA	Interface Panel (ITV).	3139 188 04541

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

0266	6 Pin Connector.	2422 025 16609
2401	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2402	Cap, 4u7, 20%, 35v, Electrolytic	3198 028 44780
2403	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2407	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2408	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2409	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2411	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
2412	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2413	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2414	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2415	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2416	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2419	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2420	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
2425	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2426	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2427	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2428	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2429	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2430	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2431	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2432	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2433	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2434	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2435	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2436	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2440	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
2442	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2443	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2450	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
2452	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2453	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
3401	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3402	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3403	Res, 1K8, 5%, 1/16W, Metalized Glass .	3198 021 31820
3404	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3405	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3406	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198 021 36820
3407	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3408	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3412	Res, 510K, 5%, 1/10W, Metalized Glass.	2122 118 05951
3419	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3425	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3427	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3431	Res, 8K2, 1%, 1/16W, Metalized Glass .	2322 704 68202
3432	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3440	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3441	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3442	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3443	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198 021 32720
3444	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3450	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3451	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3452	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3453	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198 021 32720
3454	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3455	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3456	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3457	Wire Jumper.	3198 036 90010
3458	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4403	Res, Zero ohm, "Chip" Jumper	3198 021 90030
5401	Coil, 10u, 10%	3198 018 31090
5407	Coil, 33u, 5%.	3198 018 13390
5408	Coil, 33u, 20%	3198 018 33390
5421	Inductor, 100 MHz, 120 ohm	3198 018 90070
5425	Coil, 10u, 10%	3198 018 31090
5428	Coil, 10u, 5%.	3198 018 11090
5429	Coil, 10u, 10%	3198 018 31090
5430	Coil, 10u, 10%	3198 018 31090
5440	Coil, 10u, 10%	3198 018 31090
5442	Coil, 22u, 5%.	3198 018 12290
5450	Coil, 10u, 10%	3198 018 31090
5452	Coil, 33u, 5%.	3198 018 13390
7401	Transistor, PNP, BC857B(COL)	3198 010 42150
7402	Transistor, NPN, BC847B(COL)	3198 010 42030
7403	Transistor, NPN, BC847B(COL)	3198 010 42030
7421	IC, TC90A53N	9322 182 18682
7440	Transistor, NPN, BC847B(COL)	3198 010 42030
7444	Transistor, NPN, BC847B(COL)	3198 010 42030

36ST220P/35 (continued)

7450	Transistor, NPN, BC847B(COL)	3198 010 42030
7454	Transistor, NPN, BC847B(COL)	3198 010 42030
9401	Wire Jumper.	3198 036 90010
9402	Wire Jumper.	3198 036 90010
9403	Wire Jumper.	3198 036 90010
CBA	2D 3 Line Comb Filter Assembly	3139 177 26561

DAF Panel Parts
DAF Panel Parts

DVD Eject Panel Parts
DVD Eject Panel Parts

DVD Interface Panel Parts
DVD Interface Panel Parts

Front Interface Panel Parts
Front Interface Panel Parts

ITV Front Jack Panel Parts
ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)
Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)
Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts
Side Jack Panel Parts

Subwoofer Panel Parts
Subwoofer Panel Parts

Top Control Panel Parts
Top Control Panel Parts

Cabinet & Accessory Parts
Cabinet & Accessory Parts

S AC01	AC Cord.	3135 010 04323
AC02	AC Cord Strain Relief.	3135 010 02841
AC03	Anode Lead Spacer (3 Used)	3135 014 04471
AC05	Cabinet Back	3139 124 45211
AC08	Chassis Tray	3139 124 31325
S AC09	CRT, A90AKB50X07(V).	9322 186 37682
AC10	Customer Control Buttons	3139 124 26472
S AC12	Degaussing Coil.	2422 549 43972
AC15	Holder, Degaussing Coil (4 Used) . . .	3135 013 01651
AC16	Jack Panel Bracket	3139 124 45161
AC17	ITV Safety/Warranty Instructions . . .	3135 125 21431
AC20	Cabinet Front Assembly	3121 237 52412
AC20A	Cabinet Front.	3135 127 50041
AC20C	Light Guide.	3139 124 26461
AC20D	Nameplate.	3135 015 03571
AC20E	Power Button	3139 124 26444
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00401
AC26	EPS Bracket.	3135 014 09221
AC28	ITV Card Slot Cover.	3139 124 30571
ITV	Institutional Interconnect Device (Model 36ST230P/35 Only).	00SC N4N FN/35

36ST230P/35 - Manual no. 7638

Main Chassis Parts

Safety	Ref.	Description	Part No.
		Main Chassis Parts	
	0127	Socket Fuse.	2422 088 00271
	0129	NTC Holder	3139 120 10151
	0136	IC-Spring.	3104 301 22081
	0137	Spring	3139 121 24583
	0138	IC-Spring.	3104 301 22081
	0139	Spring for Bracket	3122 121 24786
	0140	Spring	3139 121 24583
	0141	IC-Spring.	3104 301 22081
	0152	Cable, DIPMate, 6 Pin, 560mm	3104 301 08411
	0153	Cable, 5 Pin, 560mm.	3139 121 09041
	0211	2 Pin Connector.	2422 025 16269
	0212	2 Pin Connector.	2422 025 16375
	0213	2 Pin Connector.	2422 025 16374
	0217	6 Pin Connector.	2422 025 12482
	0218	A/V Jack	2422 026 04742
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0222	2 Pin Connector.	2422 025 10646
	0223	A/V Jack	2422 026 05236
	0225	SVHS Jack.	2422 026 04926
	0227	6 Pin Connector.	2422 025 15849
	0229	3 Pin Connector.	2412 020 00725
	0240	7 Pin Connector.	2422 025 11244
	0242	7 Pin Connector.	2422 025 17042
	0243	6 Pin Connector.	2422 025 04854
	0244	5 Pin Connector.	2422 025 04853
	0245	6 Pin Connector.	2422 025 04854
	0251	3 Pin Connector.	2412 020 00725
S	0254	10 Pin CRT Socket.	2422 500 80079
	0259	5 Pin Connector.	2422 025 15848
	0262	3 Pin Connector.	2422 025 16937
	0267	3 Pin Connector.	2412 020 00725
	0280	4 Pin Connector.	2422 025 15847
S	1000	Tuner, V+U, PLL	2422 542 90108
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1600	Tact Switch.	2422 128 02742
	1601	Tact Switch.	2422 128 02742
	1602	Tact Switch.	2422 128 02742
	1603	Tact Switch.	2422 128 02742
	1606	Tact Switch.	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1810	6 Pin Connector.	2422 025 16607
	1831	Crystal, Resonator, 18MHz432, 12 Pin, HC49/U A.	2422 543 00842
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2123	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2125	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	2127	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
	2128	Res, 75 ohm, 10%, 5%, 1/10W, Metalized Glass	3198 021 57590
	2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2181	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2182	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2183	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2209	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
	2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
	2451	Cap, 15n, 10%, 50v, Polyester.	3198 014 01530
	2452	Cap, 180p, 5%, 50v, Ceramic.	3198 016 01810
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2456	Cap, 560n, 5%, 250v, Metalized Polypropylene.	2022 333 00088
	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
S	2463	Cap, 390p, 10%, 2000v, Ceramic	2020 558 90482
	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene	2222 479 90042
S	2465	Cap, 15n, 5%, 1600v, Polypropylene	2020 301 90255
	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
	2468	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010

S = Safety Part   Be sure to use exact replacement part.

36ST230P/35 (continued)

Ref	Description	Part No.
2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2608	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2611	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2616	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050
2691	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2807	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2810	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
2837	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
2840	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2841	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2843	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2844	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
2846	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740
2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2910	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320
2911	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3121	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3122	Res, 680 ohm, 5%, 1/6W, Carbon Film. .	3198 011 06810
3123	Res, 680 ohm, 5%, 1/6W, Carbon Film. .	3198 011 06810
3125	Res, 680 ohm, 5%, 1/6W, Carbon Film. .	3198 011 06810
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3182	Wire Jumper.	3198 036 90010
3184	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3185	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3186	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3187	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
3206	Res, 270K, 5%, 1/16W, Metalized Glass.	2322 702 60274
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890

S	Ref	Description	Part No.
	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
	3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
	3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3223	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840
	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S	3341	Res, 1 ohm, 5%, 1/3W, MF for A80QCF340X 34.	2306 204 03108
S	3341	Res, 2R7 ohm, 5%, 1/3W, MF for A80QCF33 0X34	2306 204 03278
S	3342	Res, 1 ohm, 5%, 1/3W, MF for A80ECK340X 34.	2306 204 03108
S	3342	Res, 2R7 ohm, 5%, 1/3W, MF for A80ECK33 0X34	2306 204 03278
	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
	3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
	3403	Res, 100K, 5%, 1/6W, Carbon Film . . .	3198 011 01040
	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3451	Res, 8R2, 5%, Metal Film	2306 204 03828
S	3452	Res, 5K6, 1%, 3/5W, Metal Film	2312 915 15602
	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
S	3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S	3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
	3468	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
	3470	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3473	Res, 5R6, 1%, 3/5W, Metal Film	2312 915 15608
	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
	3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S	3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 33390
	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688

S = Safety Part   Be sure to use exact replacement part.

36ST230P/35 (continued)

S	Ref	Description	Part No.
	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S	3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
S	3558	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198 021 53320
	3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
	3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
	3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
	3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3811	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3812	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3813	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
	3831	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3843	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
	3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4101	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4102	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4104	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4126	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4128	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4181	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4604	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4824	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4884	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	5001	Coil, 27u, 10%	3198 018 22790
	5002	Coil, 820n, 10%.	3198 018 18270
	5201	Coil, 6u8, 5%.	3198 018 16880
	5202	Wire Jumper.	3198 036 90010
	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5241	Wire Jumper.	3198 036 90010
	5242	Coil, 10u, 5%.	3198 018 11090
	5341	Coil, 22u.	2422 535 97333
	5342	Coil, 22u for A80QCF340X34	2422 535 97333
	5342	Coil, 47u for A80QCF330X34	3198 018 24790
	5401	Coil, 1mH, 10%	3198 018 71020
S	5445	Transformer, PSLOT	3128 138 21421
	5451	Coil, 33u, 10%	3198 018 73390
	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
	5457	Coil, Linear, DC12	3128 138 55881
	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
	5463	Coil, Choke.	3128 138 37021
	5471	Coil, 4u7, 20%	3198 018 74780

S = Safety Part   Be sure to use exact replacement part.

36ST230P/35 (continued)

	Ref	Description	Part No.
	5472	Coil, 3u3, 10%	3198 018 23380
	5480	Coil, 39u, 10%	2422 535 97336
S	5501	Mains Filter	2422 549 43432
S	5520	Transformer, SS39009-04.	2422 531 02459
	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5561	Coil, 27u, 5%.	2422 535 95366
	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
	5602	Coil, 5u6, 5%.	3198 018 15680
	5603	Coil, 5u6, 5%.	3198 018 15680
	5604	Coil, 5u6, 5%.	3198 018 15680
	5810	Coil, 10u, 10%	3198 018 51090
	5831	Coil, 6u8, 5%.	3198 018 16880
	5832	Coil, 6u8, 5%.	3198 018 16880
	5833	Coil, 6u8, 5%.	3198 018 16880
	5835	Coil, 12u, 10%	3198 018 31290
	6001	Zener Diode, 33 volt	3198 010 23390
	6201	Diode, Signal, BAS316.	3198 010 10630
	6202	Diode, Signal, BAS316.	3198 010 10630
	6206	Zener Diode, 6.8 volt.	3198 020 56880
	6331	Diode, Signal, BAV21	3198 010 10070
	6332	Diode, Signal, BAS316.	3198 010 10630
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002
	6401	Zener Diode, 47 volt	3198 010 24790
	6445	Zener Diode, 10 volt	3198 020 51090
	6447	Diode, Signal, 1N4148.	3198 010 10010
	6448	Zener Diode, 6.2 volt.	9331 668 30133
	6449	Diode, Signal, BAV99	3198 010 10620
	6460	Diode, Rect, DG3-7005L	9336 436 10682
	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
	6462	Zener Diode, 9.1 volt.	9331 177 80133
	6465	Diode, Signal, BAV21	3198 010 10070
	6466	Diode, Signal, BAV21	3198 010 10070
	6467	Diode, Signal, BAS316.	3198 010 10630
	6468	Diode, Signal, BAS316.	3198 010 10630
	6469	Diode, Rect, BYV95C.	9335 001 80133
	6470	Diode, Signal, BAV99	3198 010 10620
	6476	Zener Diode, 15 volt	3198 010 21590
	6481	Zener Diode, 5.6 volt.	3198 010 25680
	6482	Zener Diode, 9.1 volt.	9331 177 80133
	6483	Zener Diode, 33 volt	3198 010 23390
	6485	Diode, Rect, BYV95C.	9335 001 80133
	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6487	Diode, Rect, BYV95A.	9335 000 90133
	6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
	6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667
	6520	Diode, Rect, BYV95A.	9335 000 90133
	6523	Diode, Signal, 1N4148.	3198 010 10010
	6524	Diode, Rect, 1N5062.	3198 010 10120
	6525	Diode, Rect, 1N5062.	3198 010 10120
	6526	Zener Diode, 22 volt	3198 020 52290
	6540	Zener Diode, 6.2 volt.	9331 668 30133
	6541	Zener Diode, 10 volt	3198 020 51090
	6560	Diode, Rect, BYV29X-500.	9340 555 59127
	6561	Diode, Rect, SB340L-7010	9322 128 18682
	6563	Diode, Signal, BAS316.	3198 010 10630
	6565	Diode, Signal, BAV70	9331 849 10215
	6566	Diode, Signal, 1N4148.	3198 010 10010
	6569	Diode, Signal, BAS316.	3198 010 10630
	6570	Zener Diode, 6.8 volt.	3198 020 56880
	6580	Diode, Signal, BAS316.	3198 010 10630
	6681	Diode, Signal, BAT85	9336 247 60133
	6691	LED, LTL-10234WHCR	9322 185 69682
	6692	IR Receiver.	9322 127 54667
	6831	Diode, Signal, 1N4148.	3198 010 10010
	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
	7200	IC, TDA9588H/N1/3I	4835 310 57626
	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
	7330	IC, TDA6107JF/N3	9352 713 37112
	7400	Power FET, IR.	9322 053 35687
	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
	7460	Transistor, NPN, BU4508DX.	9340 550 92127
	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
	7462	Transistor, NPN, PDTC143ZT	9340 547 00215
	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
	7471	IC, TDA8359J/N2.	9352 701 64112
	7480	Transistor, NPN, BD135	3198 020 41010
	7482	Transistor, NPN, BD135	3198 020 41010
S	7515	Optical Coupler, TCET1103(G)	9322 140 14667
	7520	IC, TEA1507P/N1.	9352 673 56112
	7521	Power FET, FQPF9N50.	9322 187 16687
	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
	7541	Transistor, NPN, PDTC114ET	9340 310 10215
	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
	7560	IC, LE33CZ	9322 106 11676
	7561	Transistor, NPN, PDTC143ZT	9340 547 00215
	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
	7602	IC, M24C16-WBN6.	9322 147 25682
	7606	Transistor, NPN, PDTC143ZT	9340 547 00215
	7802	IC, HEF4053BT.	9333 729 60653
	7803	IC, HEF4053BT.	9333 729 60653
	7804	Transistor, NPN, BC847B(COL)	3198 010 42030
	7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682
	7901	IC, AN7522N PH	9322 181 41682
	9001	Wire Jumper.	3198 036 90010
	9104	Wire Jumper.	3198 036 90010
	9171	Wire Jumper.	3198 036 90010
	9173	Wire Jumper.	3198 036 90010
	9175	Wire Jumper.	3198 036 90010
	9181	Wire Jumper.	3198 036 90010
	9182	Wire Jumper.	3198 036 90010
	9183	Wire Jumper.	3198 036 90010
	9192	Wire Jumper.	3198 036 90010
	9193	Wire Jumper.	3198 036 90010
	9311	Wire Jumper.	3198 036 90010
	9312	Wire Jumper.	3198 036 90010
	9406	Wire Jumper.	3198 036 90010
	9407	Wire Jumper.	3198 036 90010
	9408	Wire Jumper.	3198 036 90010
	9409	Wire Jumper.	3198 036 90010
	9410	Wire Jumper.	3198 036 90010
	9411	Wire Jumper.	3198 036 90010
	9412	Wire Jumper.	3198 036 90010
	9413	Wire Jumper.	3198 036 90010
	9414	Wire Jumper.	3198 036 90010
	9415	Wire Jumper.	3198 036 90010
	9416	Wire Jumper.	3198 036 90010
	9417	Wire Jumper.	3198 036 90010
	9418	Wire Jumper.	3198 036 90010
	9419	Wire Jumper.	3198 036 90010
	9421	Wire Jumper.	3198 036 90010
	9422	Wire Jumper.	3198 036 90010
	9423	Wire Jumper.	3198 036 90010
	9424	Wire Jumper.	3198 036 90010
	9425	Wire Jumper.	3198 036 90010
	9426	Wire Jumper.	3198 036 90010
	9427	Wire Jumper.	3198 036 90010
	9453	Wire Jumper.	3198 036 90010
	9460	Wire Jumper.	3198 036 90010
	9463	Wire Jumper.	3198 036 90010
	9500	Wire Jumper.	3198 036 90010
	9501	Wire Jumper.	3198 036 90010
	9503	Wire Jumper.	3198 036 90010
	9506	Wire Jumper.	3198 036 90010
	9507	Wire Jumper.	3198 036 90010
	9510	Wire Jumper.	3198 036 90010
	9511	Wire Jumper.	3198 036 90010
	9512	Wire Jumper.	3198 036 90010
	9513	Wire Jumper.	3198 036 90010
	9514	Wire Jumper.	3198 036 90010
	9515	Wire Jumper.	3198 036 90010
	9516	Wire Jumper.	3198 036 90010
	9518	Wire Jumper.	3198 036 90010
	9520	Wire Jumper.	3198 036 90010
	9521	Wire Jumper.	3198 036 90010
	9522	Wire Jumper.	3198 036 90010
	9524	Wire Jumper.	3198 036 90010
	9528	Wire Jumper.	3198 036 90010
	9530	Wire Jumper.	3198 036 90010
	9611	Coil, 27u, 10%	3198 018 22790
	9612	Wire Jumper.	3198 036 90010
	9613	Wire Jumper.	3198 036 90010
	9614	Wire Jumper.	3198 036 90010
	9615	Wire Jumper.	3198 036 90010
	9616	Wire Jumper.	3198 036 90010
	9618	Wire Jumper.	3198 036 90010
	9619	Wire Jumper.	3198 036 90010
	9622	Wire Jumper.	3198 036 90010
	9623	Wire Jumper.	3198 036 90010
	9624	Wire Jumper.	3198 036 90010
	9626	Wire Jumper.	3198 036 90010
	9627	Wire Jumper.	3198 036 90010
	9628	Wire Jumper.	3198 036 90010
	9629	Wire Jumper.	3198 036 90010
	9631	Wire Jumper.	3198 036 90010
	9632	Wire Jumper.	3198 036 90010
	9634	Wire Jumper.	3198 036 90010
	9637	Wire Jumper.	3198 036 90010
	9638	Wire Jumper.	3198 036 90010
	9639	Wire Jumper.	3198 036 90010
	9640	Wire Jumper.	3198 036 90010
	9641	Wire Jumper.	3198 036 90010
	9642	Wire Jumper.	3198 036 90010
	9643	Wire Jumper.	3198 036 90010
	9647	Wire Jumper.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

Ref	Description	Part No.
9648	Wire Jumper.	3198 036 90010
9650	Wire Jumper.	3198 036 90010
9651	Wire Jumper.	3198 036 90010
9652	Wire Jumper.	3198 036 90010
9654	Wire Jumper.	3198 036 90010
9655	Wire Jumper.	3198 036 90010
9656	Wire Jumper.	3198 036 90010
9657	Wire Jumper.	3198 036 90010
9658	Wire Jumper.	3198 036 90010
9659	Wire Jumper.	3198 036 90010
9660	Wire Jumper.	3198 036 90010
9661	Wire Jumper.	3198 036 90010
9662	Wire Jumper.	3198 036 90010
9663	Wire Jumper.	3198 036 90010
9664	Wire Jumper.	3198 036 90010
9665	Wire Jumper.	3198 036 90010
9666	Wire Jumper.	3198 036 90010
9667	Wire Jumper.	3198 036 90010
9668	Wire Jumper.	3198 036 90010
9669	Wire Jumper.	3198 036 90010
9670	Wire Jumper.	3198 036 90010
9671	Wire Jumper.	3198 036 90010
9672	Coil, 22u, 10%	3198 018 22290
9674	Wire Jumper.	3198 036 90010
9675	Wire Jumper.	3198 036 90010
9676	Wire Jumper.	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper.	3198 036 90010
9680	Wire Jumper.	3198 036 90010
9681	Wire Jumper.	3198 036 90010
9682	Wire Jumper.	3198 036 90010
9685	Wire Jumper.	3198 036 90010
9686	Wire Jumper.	3198 036 90010
9687	Wire Jumper.	3198 036 90010
9688	Wire Jumper.	3198 036 90010
9689	Wire Jumper.	3198 036 90010
9690	Wire Jumper.	3198 036 90010
9691	Wire Jumper.	3198 036 90010
9694	Wire Jumper.	3198 036 90010
9695	Wire Jumper.	3198 036 90010
9697	Wire Jumper.	3198 036 90010
9698	Wire Jumper.	3198 036 90010
9699	Wire Jumper.	3198 036 90010
9821	Wire Jumper.	3198 036 90010
9822	Wire Jumper.	3198 036 90010
9825	Wire Jumper.	3198 036 90010
9828	Wire Jumper.	3198 036 90010
9829	Wire Jumper.	3198 036 90010
9831	Wire Jumper.	3198 036 90010
9832	Wire Jumper.	3198 036 90010
9837	Wire Jumper.	3198 036 90010
9838	Wire Jumper.	3198 036 90010
9839	Wire Jumper.	3198 036 90010
9846	Wire Jumper.	3198 036 90010
9847	Wire Jumper.	3198 036 90010
9849	Wire Jumper.	3198 036 90010
9851	Wire Jumper.	3198 036 90010
9856	Wire Jumper.	3198 036 90010
9858	Wire Jumper.	3198 036 90010
9859	Wire Jumper.	3198 036 90010
9860	Wire Jumper.	3198 036 90010
9862	Wire Jumper.	3198 036 90010
9863	Wire Jumper.	3198 036 90010
9864	Wire Jumper.	3198 036 90010
9865	Wire Jumper.	3198 036 90010
9867	Wire Jumper.	3198 036 90010
9868	Wire Jumper.	3198 036 90010
9869	Wire Jumper.	3198 036 90010
9870	Wire Jumper.	3198 036 90010
9871	Wire Jumper.	3198 036 90010
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9876	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9878	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010
9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9905	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9919	Wire Jumper.	3198 036 90010
9920	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9993	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9997	Wire Jumper.	3198 036 90010
9998	Wire Jumper.	3198 036 90010

Ref	Description	Part No.
CBA	SP/LS Module (Vertical) (ITV).	3139 127 27374
CBA	EPS Module (ITV)	3139 137 22961
CBA	Main Chassis Assembly.	3139 187 26761
CBA	Interface Panel (ITV).	3139 188 04541

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

Ref	Description	Part No.
0266	6 Pin Connector.	2422 025 16609
2401	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2402	Cap, 4u7, 20%, 35v, Electrolytic	3198 028 44780
2403	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2407	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2408	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2409	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2411	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
2412	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2413	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2414	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2415	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2416	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2419	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2420	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
2425	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2426	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2427	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2428	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2429	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2430	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2431	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2432	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2433	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2434	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2435	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2436	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2440	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
2442	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2443	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2450	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
2452	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2453	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
3401	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3402	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3403	Res, 1K8, 5%, 1/16W, Metalized Glass .	3198 021 31820
3404	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
3405	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3406	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198 021 36820
3407	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3408	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3412	Res, 510K, 5%, 1/10W, Metalized Glass.	2122 118 05951
3419	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3425	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3427	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3431	Res, 8K2, 1%, 1/16W, Metalized Glass .	2322 704 68202
3432	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3440	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3441	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3442	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3443	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198 021 32720
3444	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3450	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3451	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3452	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3453	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198 021 32720
3454	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3455	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3456	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3457	Wire Jumper.	3198 036 90010
3458	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4403	Res, Zero ohm, "Chip" Jumper	3198 021 90030
5401	Coil, 10u, 10%	3198 018 31090
5407	Coil, 33u, 5%.	3198 018 13390
5408	Coil, 33u, 20%	3198 018 33390
5421	Inductor, 100 MHz, 120 ohm	3198 018 90070
5425	Coil, 10u, 10%	3198 018 31090
5428	Coil, 10u, 5%.	3198 018 11090
5429	Coil, 10u, 10%	3198 018 31090
5430	Coil, 10u, 10%	3198 018 31090
5440	Coil, 10u, 10%	3198 018 31090
5442	Coil, 22u, 5%.	3198 018 12290
5450	Coil, 10u, 10%	3198 018 31090
5452	Coil, 33u, 5%.	3198 018 13390
7401	Transistor, PNP, BC857B(COL)	3198 010 42150
7402	Transistor, NPN, BC847B(COL)	3198 010 42030
7403	Transistor, NPN, BC847B(COL)	3198 010 42030
7421	IC, TC90A53N	9322 182 18682
7440	Transistor, NPN, BC847B(COL)	3198 010 42030
7444	Transistor, NPN, BC847B(COL)	3198 010 42030

36ST230P/35 (continued)

	7450	Transistor, NPN, BC847B(COL)	3198 010 42030
	7454	Transistor, NPN, BC847B(COL)	3198 010 42030
	9401	Wire Jumper.	3198 036 90010
	9402	Wire Jumper.	3198 036 90010
	9403	Wire Jumper.	3198 036 90010
	CBA	2D 3 Line Comb Filter Assembly	3139 177 26561

DAF Panel Parts
DAF Panel Parts

DVD Eject Panel Parts
DVD Eject Panel Parts

DVD Interface Panel Parts
DVD Interface Panel Parts

Front Interface Panel Parts
Front Interface Panel Parts

ITV Front Jack Panel Parts
ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)
Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)
Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts
Side Jack Panel Parts

Subwoofer Panel Parts
Subwoofer Panel Parts

Top Control Panel Parts
Top Control Panel Parts

Cabinet & Accessory Parts
Cabinet & Accessory Parts

S	AC01	AC Cord.	3135 010 04323
	AC02	AC Cord Strain Relief.	3135 010 02841
	AC03	Anode Lead Spacer (3 Used)	3135 014 04471
	AC05	Cabinet Back	3139 124 45211
	AC08	Chassis Tray	3139 124 31325
S	AC09	CRT, A90AKB50X07(V).	9322 186 37682
	AC10	Customer Control Buttons	3139 124 26472
S	AC12	Degaussing Coil.	2422 549 43972
	AC15	Holder, Degaussing Coil (4 Used) . . .	3135 013 01651
	AC16	Jack Panel Bracket	3139 124 45161
	AC17	ITV Safety/Warranty Instructions . . .	3135 125 21431
	AC20	Cabinet Front Assembly	3121 237 52412
	AC20A	Cabinet Front.	3135 127 50041
	AC20C	Light Guide.	3139 124 26461
	AC20D	Nameplate.	3135 015 03571
	AC20E	Power Button	3139 124 26444
	AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00401
	AC26	EPS Bracket.	3135 014 09221
	AC28	ITV Card Slot Cover.	3139 124 30571
	ITV	Institutional Interconnect Device (Mode l 36ST230P/35 Only).	00SC N4N FN/35

MS3252S431 - Manual no. 7638

Main Chassis Parts

S	Ref	Description	Part No.
		Main Chassis Parts	
	0211	2 Pin Connector.	2422 025 16269
	0212	2 Pin Connector.	2422 025 16375
	0219	6 Pin Connector.	2422 025 12482
	0220	5 Pin Connector.	2422 025 04853
	0221	2 Pin Connector.	2422 025 15503
	0222	2 Pin Connector.	2422 025 10646
	0223	6 Pin Cinch Jack	2422 026 05184
	0225	SVHS Jack.	2422 026 04926
	0243	6 Pin Connector.	2422 025 04854
	0244	5 Pin Connector.	2422 025 04853
	0245	6 Pin Connector.	2422 025 04854
	0246	5 Pin Connector.	2422 025 12481
S	0254	9 Pin CRT Socket	2422 500 80076
	0267	3 Pin Connector.	2412 020 00725
S	1000	Tuner, V+U, PLL	2422 542 90108
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC.	2422 086 10914
S	1515	Relay, 5 Amp, 12V.	2422 132 07444
	1600	Tact Switch.	2422 128 02742
	1601	Tact Switch.	2422 128 02742
	1602	Tact Switch.	2422 128 02742
	1603	Tact Switch.	2422 128 02742
	1606	Tact Switch.	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1811	3 Pin Connector.	2412 020 00725
	1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344
	2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
	2209	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
	2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
	2451	Cap, 15n, 10%, 50v, Polyester.	3198 014 01530
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2457	Cap, 470n, 5%, 250v, Metalized Polypropylene.	2022 333 00086
	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
S	2463	Cap, 1n2, 10%, 2000v, Ceramic.	2020 558 90488
	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene	2222 479 90042
S	2465	Cap, 13n, 5%, 1600v, Polypropylene	2020 301 90254
	2468	Cap, 10n, 10%, 400v, Polyester	2222 347 90218
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2803	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2816	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
	2862	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2864	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2865	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2866	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
	2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
	2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
	2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
	2873	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2874	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
	2875	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
	2876	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780

S = Safety Part   Be sure to use exact replacement part.

MS3252S431 (continued)

S	Ref	Description	Part No.
	2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
	2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240
	2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
	2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
	2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
	2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
	2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
	3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
	3206	Res, 270K, 5%, 1/16W, Metalized Glass.	2322 702 60274
	3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
	3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
	3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
	3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
	3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
	3403	Res, 100K, 5%, 1/6W, Carbon Film . . .	3198 011 01040
	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3451	Res, 2R7, 5%, 1/3W, Metal Film	2306 204 03278
S	3452	Res, 5K6, 1%, 3/5W, Metal Film	2312 915 15602
	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
S	3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S	3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
	3468	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
	3470	Res, 390K, 5%, 1/8W, Metalized Glass .	2322 730 61394
	3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
	3472	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
	3473	Res, 5R6, 1%, 3/5W, Metal Film	2312 915 15608
	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
	3481	Res, 15K, 1%, 3/5W, Metal Film	2312 915 11503
	3482	Res, 6K8, 1%, 3/5W, Metal Film	2312 915 16802
	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S	3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 33390
	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
S	3493	Res, 2R2, 5%, 1/3W, Metal Film	2306 204 03228
	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3498	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S	3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220

S = Safety Part   Be sure to use exact replacement part.

MS3252S431 (continued)

Ref	Description	Part No.
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198 021 53320
3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198 021 31530
3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198 021 31220
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4101	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4102	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4104	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4121	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
5001	Coil, 27u, 10%	3198 018 22790
5002	Coil, 820n, 10%.	3198 018 18270
5201	Coil, 6u8, 5%.	3198 018 16880
5202	Wire Jumper.	3198 036 90010
5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
5241	Wire Jumper.	3198 036 90010
5242	Coil, 10u, 5%.	3198 018 11090
5342	Coil, 22u.	2422 535 97333
5401	Coil, 1mH, 10%	3198 018 71020
S 5445	Transformer, PSLOT	3128 138 21421
5451	Coil, 33u, 10%	3198 018 73390
5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
5457	Coil, Linear, DC12	3128 138 55881
5461	Transformer, Signal Driver, SC10027-00	2422 531 02478
5463	Coil, Choke.	3128 138 37021
5471	Coil, 3u3, 20%	3198 018 73380
5472	Coil, 3u3, 10%	3198 018 23380
5480	Coil, 4u7, 5%.	2422 535 94213
S 5501	Mains Filter	2422 549 43432
S 5520	Transformer, SS39009-04.	2422 531 02459
5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5561	Coil, 27u, 5%.	2422 535 95366
5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5602	Coil, 5u6, 5%.	3198 018 15680
5603	Coil, 5u6, 5%.	3198 018 15680
5604	Coil, 5u6, 5%.	3198 018 15680
5861	Coil, 10u, 5%.	3198 018 11090
6001	Zener Diode, 33 volt	3198 010 23390
6201	Diode, Signal, BAS316.	3198 010 10630
6202	Diode, Signal, BAS316.	3198 010 10630
6206	Zener Diode, 6.8 volt.	3198 020 56880
6331	Diode, Signal, BAV21	3198 010 10070
6332	Diode, Signal, BAS316.	3198 010 10630
6333	Diode, Signal, BAV21	3198 010 10070
6335	Diode, Signal, BAV21	3198 010 10070
6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002
6401	Zener Diode, 47 volt	3198 010 24790
6445	Zener Diode, 10 volt	3198 020 51090
6447	Diode, Signal, 1N4148.	3198 010 10010
6448	Zener Diode, 6.2 volt.	9331 668 30133
6449	Diode, Signal, BAV99	3198 010 10620
6460	Diode, Rect, DG3-7005L	9336 436 10682
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
6462	Zener Diode, 9.1 volt.	9331 177 80133
6465	Diode, Signal, BAV21	3198 010 10070
6466	Diode, Signal, BAV21	3198 010 10070
6467	Diode, Signal, BAS316.	3198 010 10630
6468	Diode, Signal, BAS316.	3198 010 10630
6469	Diode, Rect, BYV95C.	9335 001 80133
6470	Diode, Signal, BAV99	3198 010 10620
6476	Zener Diode, 15 volt	3198 010 21590
6481	Zener Diode, 5.6 volt.	3198 010 25680
6482	Zener Diode, 9.1 volt.	9331 177 80133
6483	Zener Diode, 33 volt	3198 010 23390
6485	Diode, Rect, BYV95C.	9335 001 80133
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
6487	Diode, Rect, BYV95A.	9335 000 90133
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
6500	Diode, Bridge Rect, GBU6JL-7002. . . .	9322 138 08667
6520	Diode, Rect, BYV95A.	9335 000 90133
6523	Diode, Signal, 1N4148.	3198 010 10010
6524	Diode, Rect, 1N5062.	3198 010 10120
6525	Diode, Rect, 1N5062.	3198 010 10120
6526	Zener Diode, 22 volt	3198 020 52290

S = Safety Part   Be sure to use exact replacement part.

MS3252S431 (continued)

Ref	Description	Part No.
6540	Zener Diode, 6.2 volt	9331 668 30133
6541	Zener Diode, 10 volt	3198 020 51090
6560	Diode, Rect, BYV29X-500	9340 555 59127
6562	Diode, Rect, EGP20DL-5100	9322 164 42682
6563	Diode, Signal, BAS316	3198 010 10630
6565	Diode, Signal, BAV70	9331 849 10215
6566	Diode, Signal, 1N4148	3198 010 10010
6569	Diode, Signal, BAS316	3198 010 10630
6570	Zener Diode, 6.8 volt	3198 020 56880
6580	Diode, Signal, BAS316	3198 010 10630
6681	Diode, Signal, BAT85	9336 247 60133
6691	LED, LTL-10234WHCR	9322 185 69682
6692	IR Receiver	9322 127 54667
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
7101	Transistor, NPN, BC847B(COL)	3198 010 42030
7200	IC, TDA9588H/N1/3I/1133	9352 731 54557
7201	Transistor, NPN, BC847B(COL)	3198 010 42030
7204	Transistor, PNP, BC857B(COL)	3198 010 42150
7205	Transistor, PNP, BC857B(COL)	3198 010 42150
7330	IC, TDA6107JF/N3	9352 713 37112
7400	Power FET, IR	9322 053 35687
7441	Transistor, PNP, BC857B(COL)	3198 010 42150
7443	Transistor, PNP, BC557B(COL)	3198 020 40110
7460	Transistor, NPN, BU4508DX	9340 550 92127
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
7462	Transistor, NPN, PDTC143ZT	9340 547 00215
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
7471	IC, TDA8359J/N2	9352 701 64112
7480	Transistor, NPN, BD135	3198 020 41010
7482	Transistor, NPN, BD135	3198 020 41010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667
7520	IC, TEA1507P/N1	9352 673 56112
7521	Power FET, FQPF9N50	9322 187 16687
7522	Transistor, NPN, BC847B(COL)	3198 010 42030
7540	Transistor, NPN, BC547B(COL)	3198 020 40030
7541	Transistor, NPN, PDTC114ET	9340 310 10215
7542	Transistor, PNP, BC857B(COL)	3198 010 42150
7560	IC, L78L33ACZ	9322 134 92676
7561	Transistor, NPN, PDTC143ZT	9340 547 00215
7580	Transistor, PNP, BC857B(COL)	3198 010 42150
7602	IC, M24C08-WBN6	9322 154 38682
7606	Transistor, NPN, PDTC143ZT	9340 547 00215
7802	IC, HEF4053BT	9333 729 60653
7861	IC, TDA9853H/V1	9352 671 19557
7891	Transistor, NPN, BC847B(COL)	3198 010 42030
7892	Transistor, NPN, BC847B(COL)	3198 010 42030
7901	IC, AN7522N PH	9322 181 41682
9001	Wire Jumper	3198 036 90010
9104	Wire Jumper	3198 036 90010
9121	Wire Jumper	3198 036 90010
9122	Wire Jumper	3198 036 90010
9171	Wire Jumper	3198 036 90010
9173	Wire Jumper	3198 036 90010
9175	Wire Jumper	3198 036 90010
9176	Wire Jumper	3198 036 90010
9181	Wire Jumper	3198 036 90010
9182	Wire Jumper	3198 036 90010
9183	Wire Jumper	3198 036 90010
9192	Wire Jumper	3198 036 90010
9193	Wire Jumper	3198 036 90010
9311	Wire Jumper	3198 036 90010
9312	Wire Jumper	3198 036 90010
9406	Wire Jumper	3198 036 90010
9407	Wire Jumper	3198 036 90010
9408	Wire Jumper	3198 036 90010
9409	Wire Jumper	3198 036 90010
9410	Wire Jumper	3198 036 90010
9411	Wire Jumper	3198 036 90010
9412	Wire Jumper	3198 036 90010
9413	Wire Jumper	3198 036 90010
9414	Wire Jumper	3198 036 90010
9415	Wire Jumper	3198 036 90010
9416	Wire Jumper	3198 036 90010
9417	Wire Jumper	3198 036 90010
9418	Wire Jumper	3198 036 90010
9419	Wire Jumper	3198 036 90010
9421	Wire Jumper	3198 036 90010
9422	Wire Jumper	3198 036 90010
9423	Wire Jumper	3198 036 90010
9424	Wire Jumper	3198 036 90010
9425	Wire Jumper	3198 036 90010
9426	Wire Jumper	3198 036 90010
9427	Wire Jumper	3198 036 90010
9453	Wire Jumper	3198 036 90010
9460	Wire Jumper	3198 036 90010
9463	Wire Jumper	3198 036 90010
9500	Wire Jumper	3198 036 90010
9501	Wire Jumper	3198 036 90010
9503	Wire Jumper	3198 036 90010
9506	Wire Jumper	3198 036 90010
9507	Wire Jumper	3198 036 90010
9510	Wire Jumper	3198 036 90010
9511	Wire Jumper	3198 036 90010
9512	Wire Jumper	3198 036 90010
9513	Wire Jumper	3198 036 90010
9514	Wire Jumper	3198 036 90010
9515	Wire Jumper	3198 036 90010
9516	Wire Jumper	3198 036 90010
9518	Wire Jumper	3198 036 90010
9520	Wire Jumper	3198 036 90010
9521	Wire Jumper	3198 036 90010
9522	Wire Jumper	3198 036 90010
9524	Wire Jumper	3198 036 90010
9528	Wire Jumper	3198 036 90010
9530	Wire Jumper	3198 036 90010
9611	Coil, 27u, 10%	3198 018 22790
9612	Wire Jumper	3198 036 90010
9613	Wire Jumper	3198 036 90010
9614	Wire Jumper	3198 036 90010
9617	Wire Jumper	3198 036 90010
9618	Wire Jumper	3198 036 90010
9619	Wire Jumper	3198 036 90010
9621	Wire Jumper	3198 036 90010
9622	Wire Jumper	3198 036 90010
9623	Wire Jumper	3198 036 90010
9624	Wire Jumper	3198 036 90010
9626	Wire Jumper	3198 036 90010
9627	Wire Jumper	3198 036 90010
9628	Wire Jumper	3198 036 90010
9629	Wire Jumper	3198 036 90010
9631	Wire Jumper	3198 036 90010
9632	Wire Jumper	3198 036 90010
9637	Wire Jumper	3198 036 90010
9638	Wire Jumper	3198 036 90010
9639	Wire Jumper	3198 036 90010
9640	Wire Jumper	3198 036 90010
9641	Wire Jumper	3198 036 90010
9642	Wire Jumper	3198 036 90010
9643	Wire Jumper	3198 036 90010
9648	Wire Jumper	3198 036 90010
9650	Wire Jumper	3198 036 90010
9651	Wire Jumper	3198 036 90010
9652	Wire Jumper	3198 036 90010
9654	Wire Jumper	3198 036 90010
9655	Wire Jumper	3198 036 90010
9656	Wire Jumper	3198 036 90010
9657	Wire Jumper	3198 036 90010
9658	Wire Jumper	3198 036 90010
9659	Wire Jumper	3198 036 90010
9660	Wire Jumper	3198 036 90010
9663	Wire Jumper	3198 036 90010
9664	Wire Jumper	3198 036 90010
9665	Wire Jumper	3198 036 90010
9666	Wire Jumper	3198 036 90010
9667	Wire Jumper	3198 036 90010
9668	Wire Jumper	3198 036 90010
9669	Wire Jumper	3198 036 90010
9670	Wire Jumper	3198 036 90010
9671	Wire Jumper	3198 036 90010
9672	Coil, 22u, 10%	3198 018 22290
9674	Wire Jumper	3198 036 90010
9675	Wire Jumper	3198 036 90010
9676	Wire Jumper	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper	3198 036 90010
9680	Wire Jumper	3198 036 90010
9681	Wire Jumper	3198 036 90010
9685	Wire Jumper	3198 036 90010
9686	Wire Jumper	3198 036 90010
9687	Wire Jumper	3198 036 90010
9688	Wire Jumper	3198 036 90010
9689	Wire Jumper	3198 036 90010
9690	Wire Jumper	3198 036 90010
9691	Wire Jumper	3198 036 90010
9694	Wire Jumper	3198 036 90010
9695	Wire Jumper	3198 036 90010
9697	Wire Jumper	3198 036 90010
9698	Wire Jumper	3198 036 90010
9699	Wire Jumper	3198 036 90010
9821	Wire Jumper	3198 036 90010
9822	Wire Jumper	3198 036 90010
9825	Wire Jumper	3198 036 90010
9828	Wire Jumper	3198 036 90010
9829	Wire Jumper	3198 036 90010
9831	Wire Jumper	3198 036 90010
9832	Wire Jumper	3198 036 90010
9837	Wire Jumper	3198 036 90010
9838	Wire Jumper	3198 036 90010
9839	Wire Jumper	3198 036 90010
9846	Wire Jumper	3198 036 90010
9847	Wire Jumper	3198 036 90010
9849	Wire Jumper	3198 036 90010
9850	Wire Jumper	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

MS3252S431 (continued)

9851	Wire Jumper.	3198 036 90010
9852	Wire Jumper.	3198 036 90010
9853	Wire Jumper.	3198 036 90010
9856	Wire Jumper.	3198 036 90010
9860	Wire Jumper.	3198 036 90010
9861	Wire Jumper.	3198 036 90010
9862	Wire Jumper.	3198 036 90010
9864	Wire Jumper.	3198 036 90010
9865	Wire Jumper.	3198 036 90010
9868	Wire Jumper.	3198 036 90010
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9891	Wire Jumper.	3198 036 90010
9892	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010
9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9905	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9918	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9993	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9997	Wire Jumper.	3198 036 90010
9998	Wire Jumper.	3198 036 90010
CBA	Main Chassis Assembly.	3141 058 59111

Channel One Card Parts
Channel One Card Parts

2D 3 Line Comb Filter Parts
2D 3 Line Comb Filter Parts

DAF Panel Parts
DAF Panel Parts

DVD Eject Panel Parts
DVD Eject Panel Parts

DVD Interface Panel Parts
DVD Interface Panel Parts

Front Interface Panel Parts
Front Interface Panel Parts

ITV Front Jack Panel Parts
ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)
Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)
Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts
Side Jack Panel Parts

0232	Headphone Jack	2422 026 04747
0250	A/V Jack	2422 026 04815
0251	6 Pin Connector.	2422 025 12482
0254	5 Pin Connector.	2422 025 12481
0255	4 Pin Connector.	2422 025 12479
2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2177	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2179	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
3150	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
4817	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4819	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4821	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4822	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4823	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4824	Res, Zero ohm, "Chip" Jumper	3198 021 90030
6161	Zener Diode, 6.8 volt.	3198 010 26880
9151	Wire Jumper.	3198 036 90010
9152	Wire Jumper.	3198 036 90010
9153	Wire Jumper.	3198 036 90010
9155	Wire Jumper.	3198 036 90010
9170	Wire Jumper.	3198 036 90010
CBA	Side Jack Panel Assembly	3141 058 59161

Subwoofer Panel Parts
Subwoofer Panel Parts

Top Control Panel Parts
Top Control Panel Parts

Cabinet & Accessory Parts
Cabinet & Accessory Parts

S AC01	AC Cord.	3135 010 03831
AC03	Anode Lead Spacer (3 Used)	3135 014 04471
AC04	Batteries for Remote Control Transmitte	9299 000 65263
AC05	Cabinet Back	3139 124 46461
AC08	Chassis Tray	3139 124 31325
S AC09	CRT, A80QCF340X34(N)	9301 904 59463
AC10	Customer Control Buttons	3139 124 32711
S AC12	Degaussing Coil.	2422 549 45334
AC15	Holder, Degaussing Coil (4 Used) . . .	3135 013 01661
AC17	Owner's Manual	3121 235 21161
AC18	Quick Use Guide.	3121 233 44561
AC19	Side Jack Panel Bracket.	3139 124 40481
AC20	Cabinet Front Assembly	3121 237 53361
AC20A	Cabinet Front.	3139 177 70361
AC20C	Light Guide.	3139 124 32681
AC20D	Nameplate.	3135 015 03561
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00371
REMOTE	Remote Control Transmitter, RC2524/17.	3139 228 87491

S = Safety Part   Be sure to use exact replacement part.

MS3652S427 - Manual no. 7638

Main Chassis Parts

S	Ref	Description	Part No.
		Main Chassis Parts	
	0211	2 Pin Connector	2422 025 16269
	0212	2 Pin Connector	2422 025 16375
	0219	6 Pin Connector	2422 025 12482
	0220	5 Pin Connector	2422 025 04853
	0221	2 Pin Connector	2422 025 15503
	0222	2 Pin Connector	2422 025 10646
	0223	6 Pin Cinch Jack	2422 026 05184
	0225	SVHS Jack	2422 026 04926
	0243	6 Pin Connector	2422 025 04854
	0244	5 Pin Connector	2422 025 04853
	0245	6 Pin Connector	2422 025 04854
	0246	5 Pin Connector	2422 025 12481
S	0254	10 Pin CRT Socket	2422 500 80079
	0267	3 Pin Connector	2412 020 00725
S	1000	Tuner, V+U, PLL	2422 542 90108
	1002	SAW Filter, 45.75MHz	2422 549 44518
	1200	Filter, Ceramic, 4MHz5	2422 549 40807
S	1500	Fuse, 4A, 250V, IEC	2422 086 10914
S	1515	Relay, 5 Amp, 12V	2422 132 07444
	1600	Tact Switch	2422 128 02742
	1601	Tact Switch	2422 128 02742
	1602	Tact Switch	2422 128 02742
	1603	Tact Switch	2422 128 02742
	1606	Tact Switch	2422 128 02742
	1660	Crystal, 12MHz000	2422 543 01203
	1811	3 Pin Connector	2412 020 00725
	1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344
	2004	Cap, 47n, 10%, 50v, Ceramic	3198 024 44730
	2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2006	Cap, 470u, 20%, 16v, Electrolytic	3198 025 24710
	2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2008	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
	2009	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2101	Cap, 470n, +80/-20%, 16v, Ceramic	3198 017 24740
	2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
	2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
	2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040
	2209	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2217	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
	2221	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2226	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2227	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
	2228	Cap, 820p, 5%, 25v, Ceramic	3198 016 38210
	2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
	2241	Cap, 1n5, 10%, 50v, Ceramic	3198 017 31520
	2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2243	Cap, 2n2, 10%, 50v, Ceramic	3198 017 32220
	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
	2245	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
	2248	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2249	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2252	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2253	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	2330	Cap, 100n, 10%, 250v, Metalized Polyester	2222 368 90177
	2331	Cap, 10n, +80/-20% 1000v, Ceramic	2020 558 90445
	2340	Cap, 10u, 20%, 250v, Electrolytic	2020 012 93495
	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
	2342	Cap, 560p, 5%, 50v, Ceramic	3198 016 05610
	2343	Cap, 2n2, 10%, 2000v, Ceramic	2020 558 90559
	2344	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 21040
	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
	2402	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
	2405	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2441	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
	2444	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2450	Cap, 47u, 20%, 160v, Electrolytic	2020 021 91139
	2451	Cap, 15n, 10%, 50v, Polyester	3198 014 01530
	2452	Cap, 180p, 5%, 50v, Ceramic	3198 016 01810
	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2456	Cap, 560n, 5%, 250v, Metalized Polypropylene	2022 333 00088
	2458	Cap, 2u2, 20%, 100v, Electrolytic	2020 021 91331
	2459	Cap, 680p, 10%, 500v, Ceramic	3198 019 46810
	2460	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
S	2463	Cap, 390p, 10%, 2000v, Ceramic	2020 558 90482
	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene	2222 479 90042
S	2465	Cap, 15n, 5%, 1600v, Polypropylene	2020 301 90255
	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
	2468	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
	2474	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2475	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2476	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720
	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
	2481	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
	2485	Cap, 4u7, 20%, 250v, Electrolytic	2020 021 90856
	2486	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
	2489	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
	2491	Cap, 1n, 10%, 500v, Ceramic	3198 019 41020
S	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
	2501	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S	2515	Cap, 1n5, 20%, 50v, Ceramic	2020 554 90172
	2520	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S	2523	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
	2527	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
	2540	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2541	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
	2568	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2590	Cap, 330n, +80/-20%, 25v, Ceramic	2222 910 19856
	2601	Cap, 220n, +80/-20%, 25v, Ceramic	3198 023 22240
	2602	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
	2606	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2608	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
	2611	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
	2618	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
	2619	Cap, 1u, +80/-20%, 16v, Ceramic	3198 017 21050
	2691	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
	2802	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2803	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2816	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
	2862	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2864	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2865	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2866	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2867	Cap, 1n8, 10%, 50v, Ceramic	2238 586 15626
	2868	Cap, 150p, 5%, 50v, Ceramic	3198 016 31510
	2869	Cap, 68n, 10%, 50v, Polyester	3198 014 06830
	2870	Cap, 68n, 10%, 50v, Polyester	3198 014 06830
	2871	Cap, 150p, 5%, 50v, Ceramic	3198 016 31510
	2872	Cap, 1n8, 10%, 50v, Ceramic	2238 586 15626
	2873	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2874	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010

S = Safety Part   Be sure to use exact replacement part.

MS3652S427 (continued)

S	Ref	Description	Part No.
	2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
	2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780
	2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
	2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
	2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
	2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
	2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240
	2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
	2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
	2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
	2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
	2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
	2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
	2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642
	2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624
	2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
	2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
	2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310
	3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
	3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
	3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
	3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
	3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
	3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
	3206	Res, 270K, 5%, 1/16W, Metalized Glass.	2322 702 60274
	3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
	3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
	3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
	3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
	3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
	3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840
	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S	3341	Res, 2R7 ohm, 5%, 1/3W, MF for A80QCF33 0X34	2306 204 03278
S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
	3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
	3403	Res, 100K, 5%, 1/6W, Carbon Film . . .	3198 011 01040
	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
S	3451	Res, 8R2, 5%, Metal Film	2306 204 03828
S	3452	Res, 5K6, 1%, 3/5W, Metal Film	2312 915 15602
	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
S	3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
S	3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
	3468	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
	3470	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
	3473	Res, 5R6, 1%, 3/5W, Metal Film	2312 915 15608
	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
	3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
S	3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 33390
	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S	3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
	3507	Surge Protector.	2422 549 43073
	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
S	3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
S	3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
S	3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
	3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220

S = Safety Part   Be sure to use exact replacement part.

MS3652S427 (continued)

Ref	Description	Part No.
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198 021 53320
3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198 021 31530
3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198 021 31220
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4101	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4102	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4104	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4121	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
5001	Coil, 27u, 10%	3198 018 22790
5002	Coil, 820n, 10%.	3198 018 18270
5201	Coil, 6u8, 5%.	3198 018 16880
5202	Wire Jumper.	3198 036 90010
5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
5241	Wire Jumper.	3198 036 90010
5242	Coil, 10u, 5%.	3198 018 11090
5341	Coil, 22u.	2422 535 97333
5342	Coil, 22u.	2422 535 97333
5401	Coil, 1mH, 10%	3198 018 71020
S 5445	Transformer, PSLOT	3128 138 21421
5451	Coil, 33u, 10%	3198 018 73390
5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
5457	Coil, Linear, DC12	3128 138 55881
5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
5463	Coil, Choke.	3128 138 37021
5471	Coil, 4u7, 20%	3198 018 74780
5472	Coil, 3u3, 10%	3198 018 23380
5480	Coil, 39u, 10%	2422 535 97336
S 5501	Mains Filter	2422 549 43432
S 5520	Transformer, SS39009-04.	2422 531 02459
5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5561	Coil, 27u, 5%.	2422 535 95366
5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5602	Coil, 5u6, 5%.	3198 018 15680
5603	Coil, 5u6, 5%.	3198 018 15680
5604	Coil, 5u6, 5%.	3198 018 15680
5861	Coil, 10u, 5%.	3198 018 11090
6001	Zener Diode, 33 volt	3198 010 23390
6201	Diode, Signal, BAS316.	3198 010 10630
6202	Diode, Signal, BAS316.	3198 010 10630
6206	Zener Diode, 6.8 volt.	3198 020 56880
6331	Diode, Signal, BAV21	3198 010 10070
6332	Diode, Signal, BAS316.	3198 010 10630
6333	Diode, Signal, BAV21	3198 010 10070
6335	Diode, Signal, BAV21	3198 010 10070
6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002
6401	Zener Diode, 47 volt	3198 010 24790
6445	Zener Diode, 10 volt	3198 020 51090
6447	Diode, Signal, 1N4148.	3198 010 10010
6448	Zener Diode, 6.2 volt.	9331 668 30133
6449	Diode, Signal, BAV99	3198 010 10620
6460	Diode, Rect, DG3-7005L	9336 436 10682
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
6462	Zener Diode, 9.1 volt.	9331 177 80133
6465	Diode, Signal, BAV21	3198 010 10070
6466	Diode, Signal, BAV21	3198 010 10070
6467	Diode, Signal, BAS316.	3198 010 10630
6468	Diode, Signal, BAS316.	3198 010 10630
6469	Diode, Rect, BYV95C.	9335 001 80133
6470	Diode, Signal, BAV99	3198 010 10620
6476	Zener Diode, 15 volt	3198 010 21590
6481	Zener Diode, 5.6 volt.	3198 010 25680
6482	Zener Diode, 9.1 volt.	9331 177 80133
6483	Zener Diode, 33 volt	3198 010 23390
6485	Diode, Rect, BYV95C.	9335 001 80133
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
6487	Diode, Rect, BYV95A.	9335 000 90133
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
6500	Diode, Bridge Rect, GBU6JL-7002. . . .	9322 138 08667
6520	Diode, Rect, BYV95A.	9335 000 90133

S = Safety Part   Be sure to use exact replacement part.

MS3652S427 (continued)

Ref	Description	Part No.
6523	Diode, Signal, 1N4148	3198 010 10010
6524	Diode, Rect, 1N5062	3198 010 10120
6525	Diode, Rect, 1N5062	3198 010 10120
6526	Zener Diode, 22 volt	3198 020 52290
6540	Zener Diode, 6.2 volt	9331 668 30133
6541	Zener Diode, 10 volt	3198 020 51090
6560	Diode, Rect, BYV29X-500	9340 555 59127
6562	Diode, Rect, EGP20DL-5100	9322 164 42682
6563	Diode, Signal, BAS316	3198 010 10630
6565	Diode, Signal, BAV70	9331 849 10215
6566	Diode, Signal, 1N4148	3198 010 10010
6569	Diode, Signal, BAS316	3198 010 10630
6570	Zener Diode, 6.8 volt	3198 020 56880
6580	Diode, Signal, BAS316	3198 010 10630
6681	Diode, Signal, BAT85	9336 247 60133
6691	LED, LTL-10234WHCR	9322 185 69682
6692	IR Receiver	9322 127 54667
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
7101	Transistor, NPN, BC847B(COL)	3198 010 42030
7200	IC, TDA9588H/N1/3I/1133	9352 731 54557
7201	Transistor, NPN, BC847B(COL)	3198 010 42030
7204	Transistor, PNP, BC857B(COL)	3198 010 42150
7205	Transistor, PNP, BC857B(COL)	3198 010 42150
7330	IC, TDA6107JF/N3	9352 713 37112
7400	Power FET, IR	9322 053 35687
7441	Transistor, PNP, BC857B(COL)	3198 010 42150
7443	Transistor, PNP, BC557B(COL)	3198 020 40110
7460	Transistor, NPN, BU4508DX	9340 550 92127
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
7462	Transistor, NPN, PDTC143ZT	9340 547 00215
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
7471	IC, TDA8359J/N2	9352 701 64112
7480	Transistor, NPN, BD135	3198 020 41010
7482	Transistor, NPN, BD135	3198 020 41010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667
7520	IC, TEA1507P/N1	9352 673 56112
7521	Power FET, FQPF9N50	9322 187 16687
7522	Transistor, NPN, BC847B(COL)	3198 010 42030
7540	Transistor, NPN, BC547B(COL)	3198 020 40030
7541	Transistor, NPN, PDTC114ET	9340 310 10215
7542	Transistor, PNP, BC857B(COL)	3198 010 42150
7560	IC, L78L33ACZ	9322 134 92676
7561	Transistor, NPN, PDTC143ZT	9340 547 00215
7580	Transistor, PNP, BC857B(COL)	3198 010 42150
7602	IC, M24C08-WBN6	9322 154 38682
7606	Transistor, NPN, PDTC143ZT	9340 547 00215
7802	IC, HEF4053BT	9333 729 60653
7861	IC, TDA9853H/V1	9352 671 19557
7891	Transistor, NPN, BC847B(COL)	3198 010 42030
7892	Transistor, NPN, BC847B(COL)	3198 010 42030
7901	IC, AN7522N PH	9322 181 41682
9001	Wire Jumper	3198 036 90010
9104	Wire Jumper	3198 036 90010
9121	Wire Jumper	3198 036 90010
9122	Wire Jumper	3198 036 90010
9171	Wire Jumper	3198 036 90010
9173	Wire Jumper	3198 036 90010
9175	Wire Jumper	3198 036 90010
9176	Wire Jumper	3198 036 90010
9181	Wire Jumper	3198 036 90010
9182	Wire Jumper	3198 036 90010
9183	Wire Jumper	3198 036 90010
9192	Wire Jumper	3198 036 90010
9193	Wire Jumper	3198 036 90010
9311	Wire Jumper	3198 036 90010
9312	Wire Jumper	3198 036 90010
9406	Wire Jumper	3198 036 90010
9407	Wire Jumper	3198 036 90010
9408	Wire Jumper	3198 036 90010
9409	Wire Jumper	3198 036 90010
9410	Wire Jumper	3198 036 90010
9411	Wire Jumper	3198 036 90010
9412	Wire Jumper	3198 036 90010
9413	Wire Jumper	3198 036 90010
9414	Wire Jumper	3198 036 90010
9415	Wire Jumper	3198 036 90010
9416	Wire Jumper	3198 036 90010
9417	Wire Jumper	3198 036 90010
9418	Wire Jumper	3198 036 90010
9419	Wire Jumper	3198 036 90010
9421	Wire Jumper	3198 036 90010
9422	Wire Jumper	3198 036 90010
9423	Wire Jumper	3198 036 90010
9424	Wire Jumper	3198 036 90010
9425	Wire Jumper	3198 036 90010
9426	Wire Jumper	3198 036 90010
9427	Wire Jumper	3198 036 90010
9453	Wire Jumper	3198 036 90010
9460	Wire Jumper	3198 036 90010
9463	Wire Jumper	3198 036 90010
9500	Wire Jumper	3198 036 90010
9501	Wire Jumper	3198 036 90010
9503	Wire Jumper	3198 036 90010
9506	Wire Jumper	3198 036 90010
9507	Wire Jumper	3198 036 90010
9510	Wire Jumper	3198 036 90010
9511	Wire Jumper	3198 036 90010
9512	Wire Jumper	3198 036 90010
9513	Wire Jumper	3198 036 90010
9514	Wire Jumper	3198 036 90010
9515	Wire Jumper	3198 036 90010
9516	Wire Jumper	3198 036 90010
9518	Wire Jumper	3198 036 90010
9520	Wire Jumper	3198 036 90010
9521	Wire Jumper	3198 036 90010
9522	Wire Jumper	3198 036 90010
9524	Wire Jumper	3198 036 90010
9528	Wire Jumper	3198 036 90010
9530	Wire Jumper	3198 036 90010
9611	Coil, 27u, 10%	3198 018 22790
9612	Wire Jumper	3198 036 90010
9613	Wire Jumper	3198 036 90010
9614	Wire Jumper	3198 036 90010
9617	Wire Jumper	3198 036 90010
9618	Wire Jumper	3198 036 90010
9619	Wire Jumper	3198 036 90010
9621	Wire Jumper	3198 036 90010
9622	Wire Jumper	3198 036 90010
9623	Wire Jumper	3198 036 90010
9624	Wire Jumper	3198 036 90010
9626	Wire Jumper	3198 036 90010
9627	Wire Jumper	3198 036 90010
9628	Wire Jumper	3198 036 90010
9629	Wire Jumper	3198 036 90010
9631	Wire Jumper	3198 036 90010
9632	Wire Jumper	3198 036 90010
9637	Wire Jumper	3198 036 90010
9638	Wire Jumper	3198 036 90010
9639	Wire Jumper	3198 036 90010
9640	Wire Jumper	3198 036 90010
9641	Wire Jumper	3198 036 90010
9642	Wire Jumper	3198 036 90010
9643	Wire Jumper	3198 036 90010
9648	Wire Jumper	3198 036 90010
9650	Wire Jumper	3198 036 90010
9651	Wire Jumper	3198 036 90010
9652	Wire Jumper	3198 036 90010
9654	Wire Jumper	3198 036 90010
9655	Wire Jumper	3198 036 90010
9656	Wire Jumper	3198 036 90010
9657	Wire Jumper	3198 036 90010
9658	Wire Jumper	3198 036 90010
9659	Wire Jumper	3198 036 90010
9660	Wire Jumper	3198 036 90010
9663	Wire Jumper	3198 036 90010
9664	Wire Jumper	3198 036 90010
9665	Wire Jumper	3198 036 90010
9666	Wire Jumper	3198 036 90010
9667	Wire Jumper	3198 036 90010
9668	Wire Jumper	3198 036 90010
9669	Wire Jumper	3198 036 90010
9670	Wire Jumper	3198 036 90010
9671	Wire Jumper	3198 036 90010
9672	Coil, 22u, 10%	3198 018 22290
9674	Wire Jumper	3198 036 90010
9675	Wire Jumper	3198 036 90010
9676	Wire Jumper	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper	3198 036 90010
9680	Wire Jumper	3198 036 90010
9681	Wire Jumper	3198 036 90010
9685	Wire Jumper	3198 036 90010
9686	Wire Jumper	3198 036 90010
9687	Wire Jumper	3198 036 90010
9688	Wire Jumper	3198 036 90010
9689	Wire Jumper	3198 036 90010
9690	Wire Jumper	3198 036 90010
9691	Wire Jumper	3198 036 90010
9694	Wire Jumper	3198 036 90010
9695	Wire Jumper	3198 036 90010
9697	Wire Jumper	3198 036 90010
9698	Wire Jumper	3198 036 90010
9699	Wire Jumper	3198 036 90010
9821	Wire Jumper	3198 036 90010
9822	Wire Jumper	3198 036 90010
9825	Wire Jumper	3198 036 90010
9828	Wire Jumper	3198 036 90010
9829	Wire Jumper	3198 036 90010
9831	Wire Jumper	3198 036 90010
9832	Wire Jumper	3198 036 90010
9837	Wire Jumper	3198 036 90010
9838	Wire Jumper	3198 036 90010
9839	Wire Jumper	3198 036 90010

S = Safety Part   Be sure to use exact replacement part.

MS3652S427 (continued)

Ref	Description	Part No.
9846	Wire Jumper.	3198 036 90010
9847	Wire Jumper.	3198 036 90010
9849	Wire Jumper.	3198 036 90010
9850	Wire Jumper.	3198 036 90010
9851	Wire Jumper.	3198 036 90010
9852	Wire Jumper.	3198 036 90010
9853	Wire Jumper.	3198 036 90010
9856	Wire Jumper.	3198 036 90010
9860	Wire Jumper.	3198 036 90010
9861	Wire Jumper.	3198 036 90010
9862	Wire Jumper.	3198 036 90010
9864	Wire Jumper.	3198 036 90010
9865	Wire Jumper.	3198 036 90010
9868	Wire Jumper.	3198 036 90010
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9891	Wire Jumper.	3198 036 90010
9892	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010
9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9905	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9918	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9993	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9997	Wire Jumper.	3198 036 90010
9998	Wire Jumper.	3198 036 90010
CBA	Main Chassis Assembly.	3141 058 59101

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assemb
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assemb
ly)

Side Jack Panel Parts

Side Jack Panel Parts

Ref	Description	Part No.
0232	Headphone Jack	2422 026 04747
0250	A/V Jack	2422 026 04815
0251	6 Pin Connector.	2422 025 12482
0254	5 Pin Connector.	2422 025 12481
0255	4 Pin Connector.	2422 025 12479
2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2177	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2179	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
3150	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
4817	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4819	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4821	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4822	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4823	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4824	Res, Zero ohm, "Chip" Jumper	3198 021 90030
6161	Zener Diode, 6.8 volt.	3198 010 26880
9151	Wire Jumper.	3198 036 90010
9152	Wire Jumper.	3198 036 90010
9153	Wire Jumper.	3198 036 90010
9155	Wire Jumper.	3198 036 90010
9170	Wire Jumper.	3198 036 90010
CBA	Side Jack Panel Assembly	3141 058 59161

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

Ref	Description	Part No.
S AC01	AC Cord.	3135 010 03831
AC03	Anode Lead Spacer (3 Used)	3135 014 04471
AC04	Batteries for Remote Control Transmitte	9299 000 65263
AC05	Cabinet Back	3139 124 44411
AC08	Chassis Tray	3139 124 31325
S AC09	CRT, A90AKB50X07(V).	9322 186 37682
AC10	Customer Control Buttons	3139 124 32721
S AC12	Degaussing Coil.	2422 549 43972
AC15	Holder, Degaussing Coil (4 Used) . . .	3135 013 01651
AC17	Owner's Manual	3121 235 21161
AC18	Quick Use Guide.	3121 233 44561
AC19	Side Jack Panel Bracket.	3139 124 40481
AC20	Cabinet Front Assembly	3121 237 53151
AC20A	Cabinet Front.	3139 177 57161
AC20C	Light Guide.	3139 124 32691
AC20D	Nameplate.	3135 015 03561
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00371
REMOTE	Remote Control Transmitter, RC2524/17.	3139 228 87491

S = Safety Part   Be sure to use exact replacement part.

TO CORRECT REGION CODE PROBLEMS IN 20DV693R01, 27DV693, AND 30DV693 WITH SD5.12 DVD

USE CUSTOMER'S REMOTE

1) Power the TV from an isolation transformer. By remote turn on TV, and press eject button on the remote. This will switch the TV to DVD operation and show the DVD background display. With the DVD tray open and empty, press DVD Menu on the remote.

2) There will be a system status display. Count the lines up from the bottom. The 4th line from the bottom should read 11100400. If not proceed to step 3. If the line is 1110040 go to step 6.

3) Close the empty tray and turn off the TV by remote. Turn on by remote. After TV operation is started press TV/DVD on remote. After the DVD logo is displayed press PLAY 1 5 9.

4) There are now 8 dashes in the lower left of the screen. Enter 1 1 1 0 0 4 0 0. The numbers will appear as entered. After the last number press PLAY on the remote. WAIT! In about 30 seconds the display will go dark and return. This indicates the information entered is accepted.

5) Confirm the correct setup by repeating steps 1 and 2.

6) Play a Region One disc to confirm correct operation.

TO CORRECT REGION CODE PROBLEMS IN 20DV693R02 WITH SD3.1 DVD

USE CUSTOMER'S REMOTE

1) Power the TV. Turn on TV, and switch operation to DVD. Open and close DVD tray to confirm it is empty. This will switch the TV to DVD operation and show the DVD background display. THERE MAY BE NO COLOR! The next steps will correct.

2) Press SYST MENU on remote to display the DVD system menu. It will appear with the cursor at the top left corner of the menu.

3) Press the remote down arrow 4 times. Press right arrow one time. Press down arrow 5 times.

4) On the last press down a hidden display line will appear. It will appear as:

(C) PHILIPS '00-'01 5580 4.17.11 02100810 P140 5.1.14
In this display the number right after the P is the system. If the number is 140 (example: P140) then the system is set already and no action is needed. Skip to step 7.

If the number after P is not 140 but some other number perform the following system setting.

5) Exit the DVD system menu by pressing SYST MENU on the remote. With no disc in the tray (tray closed) press PLAY159 on the remote. A row of lines will appear. Make the following entry with the remote:

1 4 0 0 0 0 0 0 0 0 0 0 PLAY
It may be necessary to repeat this sequence several times to get the following result.

6) In about 3 seconds the DVD background display will become very bright, turn solid blue or black and return to normal blue logo. Wait 10 seconds and repeat steps 2-3-4 to confirm the letter P is followed by the number 140. Power off the TV and unplug.

7) Play a Region One disc to confirm correct operation.